CSS

Presented by

Eng \ Mohamed Ahmed

Day agenda

- CSS definition
- How to write css code
- Name conventions
- First styles in css

What is CSS

css location

CSS simple selectors

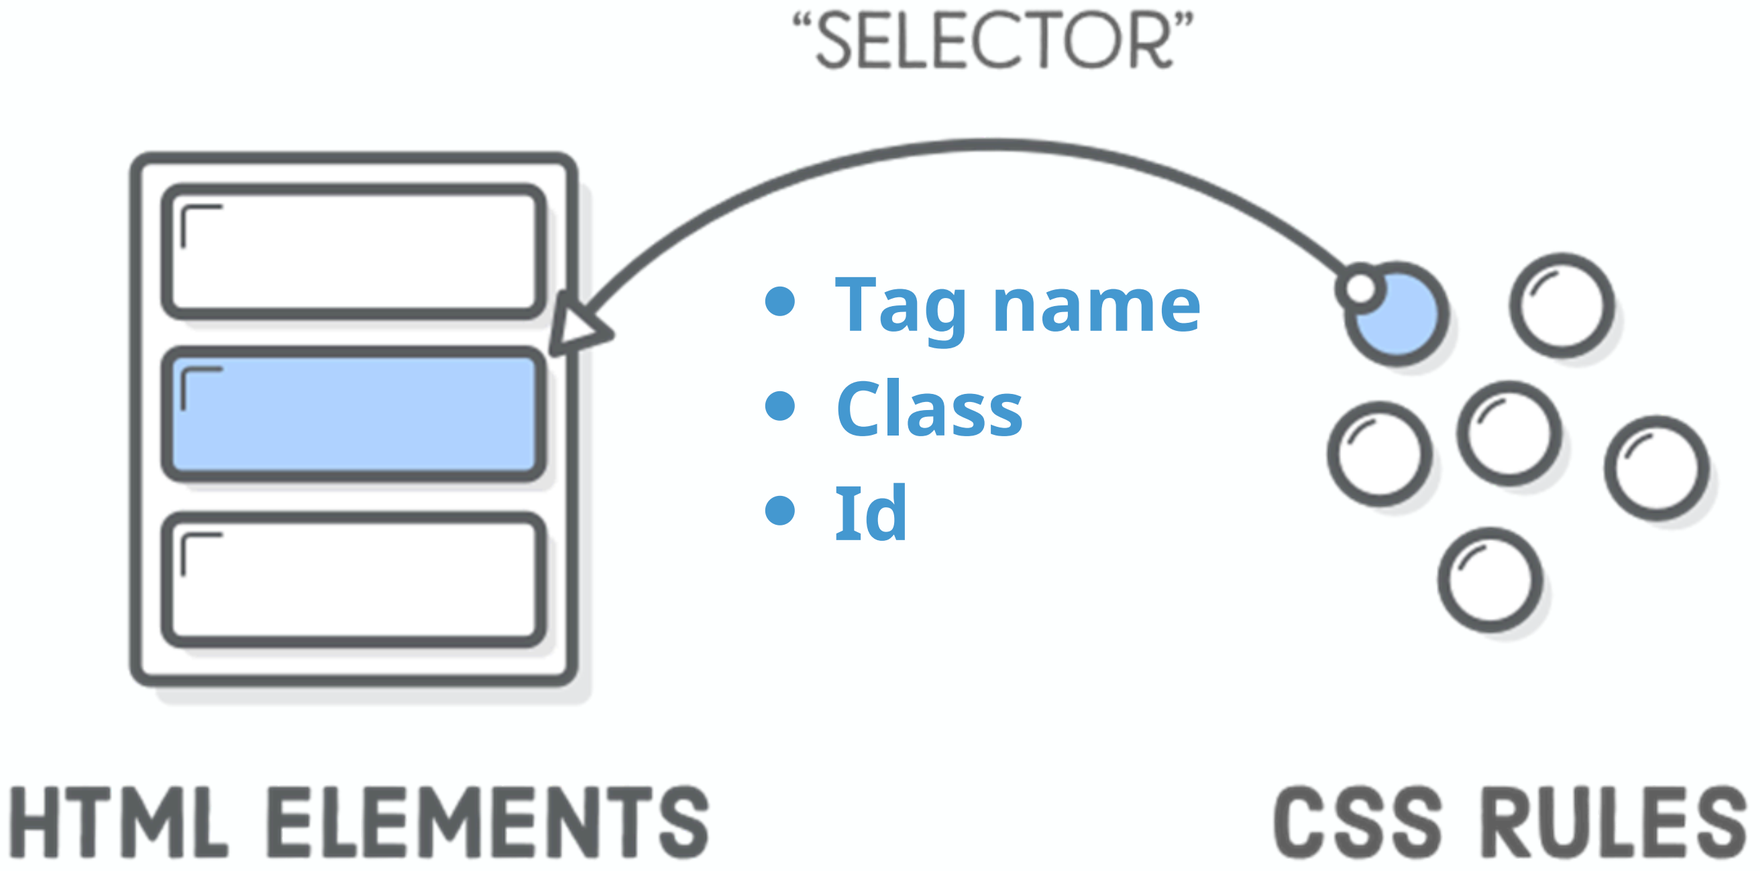

- Tag name
- Class
- Id

Selector specification

Name convention

Pascal case

Kamel case

Kebab case

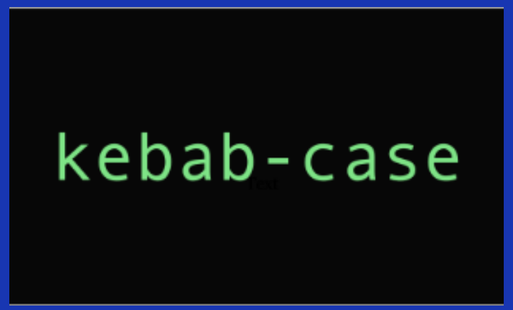

Snake case

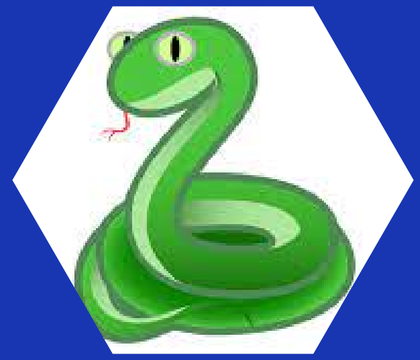

SELECTOR
PROPERTY
VALUE
p { color: blue; }

- **comments in css**
- **css is case sensitive**
- **color**
  - color name
  - HEX code
  - RGB
  - HSL

- **Soft colors sites**
  - flatuicolors.com
  - colorpalettes.net
  - colorhunt.co
  - brandcolors.net

Create three tags and style all with different ways

（ tag & ID & class name ）

Important tips

- case sensitive
- sequential and override
- important
- use one name convention

- **Height (min & max)**
- **Width (min & max)**
  - Measurement units
    - px
    - vh
    - vw
    - %

- **Background-color**
- **font weight**
- **font family**
- **Font size**

Note : calc

em VS rem

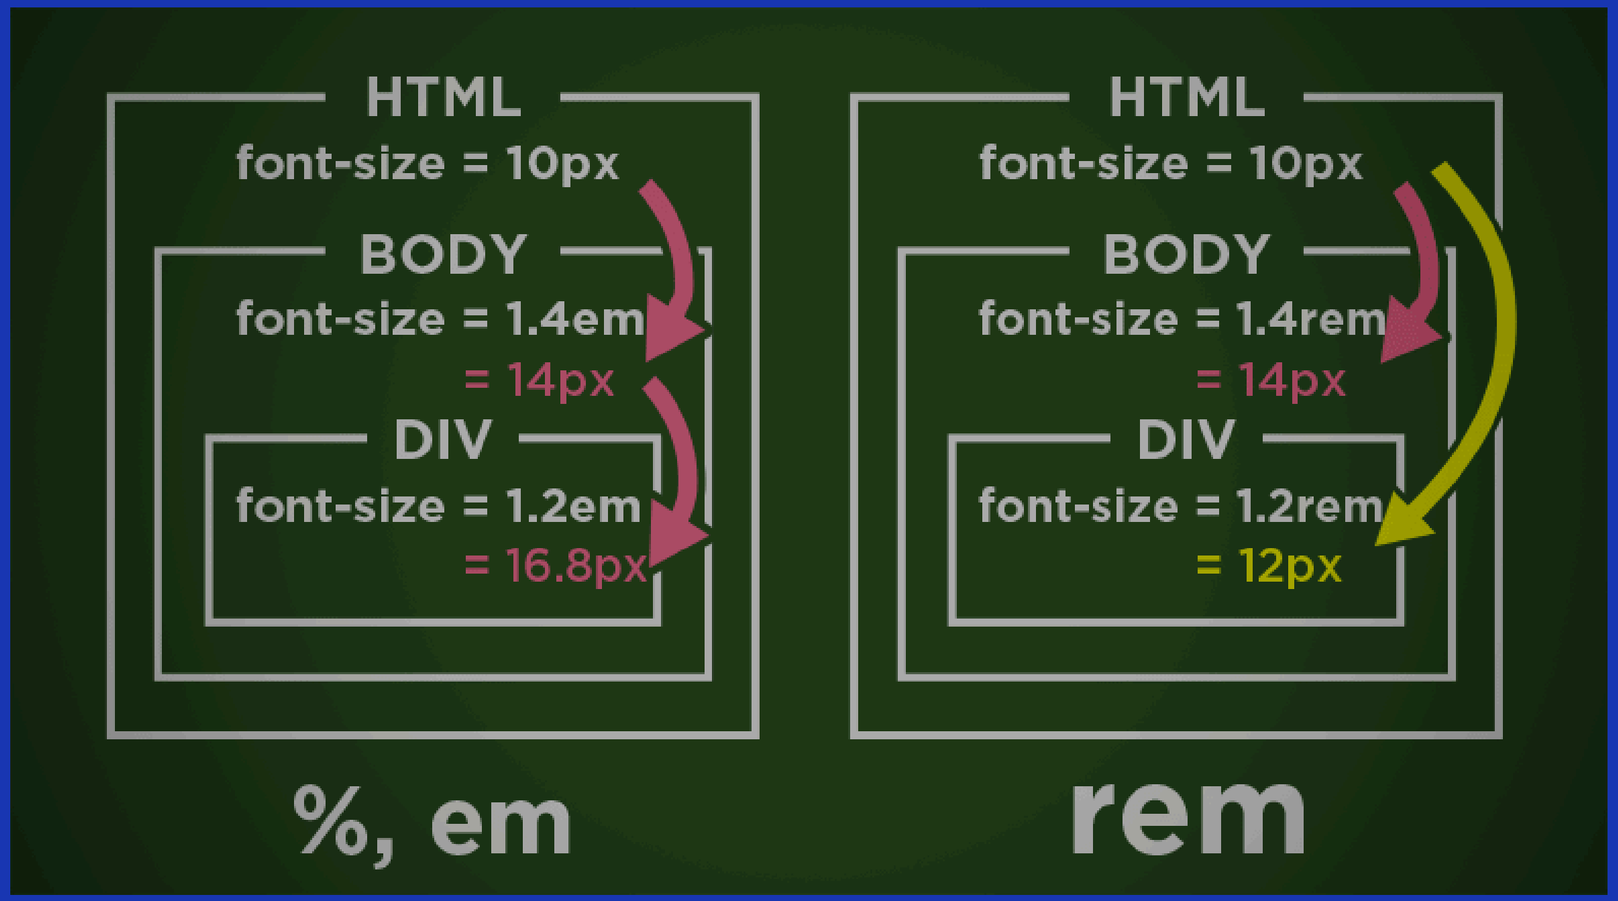
HTML
font-size = 10px
BODY
font-size = 1.4em
= 14px
DIV
font-size = 1.2em
= 16.8px
%, em
HTML
font-size = 10px
BODY
font-size = 1.4rem
= 14px
DIV
font-size = 1.2rem
= 12px
rem

Task

Create a division contains with

- height
- width
- font family
- font size
- font weight
- background-color
- color

You can contact me

Eng \ Mohamed Ahmed

Email

eng.mohamedahmed59@gmail.com

Whats app

01019877975

Facebook

/mohamed.ahmed150

LinkedIn

in/mohamed-ahmed150

Session task

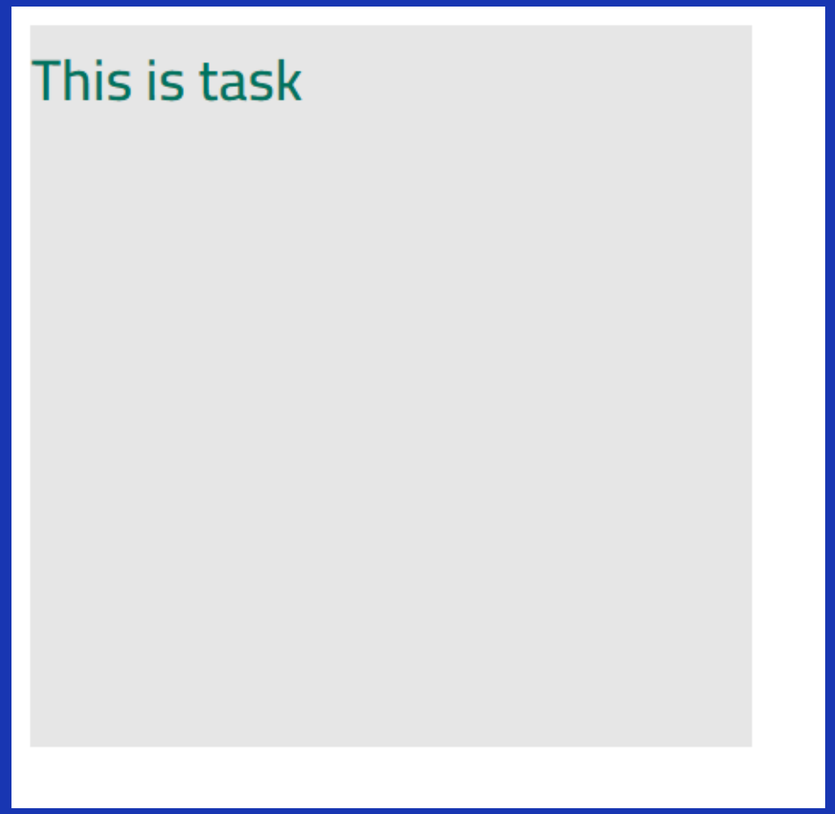

Css course

Session two

Presented by
Eng \ Mohamed Ahmed

Day agenda

- Remaining of simple selectors
- Background
- Border
- Padding & Margin
- Border radius
- Some of advanced selectors

Remaining of simple selectors

Universal selector

*

Grouping selector

div , p

root selector and variables

Image background

1. background-image
2. background-repeat
3. background-attachment
4. background-position
5. background-size

Linear gradient

Radial gradient

Conic Gradient

TASK

- Create a nav with a soft background
- every list item has a color
- then create a section with background image

Border

1. Style
2. Width
3. Color

- All of these have direction
  - top & right & bottom & left
- Shorhand

TASK TWO

- Create a div with a 4 diffrent borders in 4 lines

- Edit the previous task

  by adding a custom border to every list item

Rounded corners

border radius

px OR %

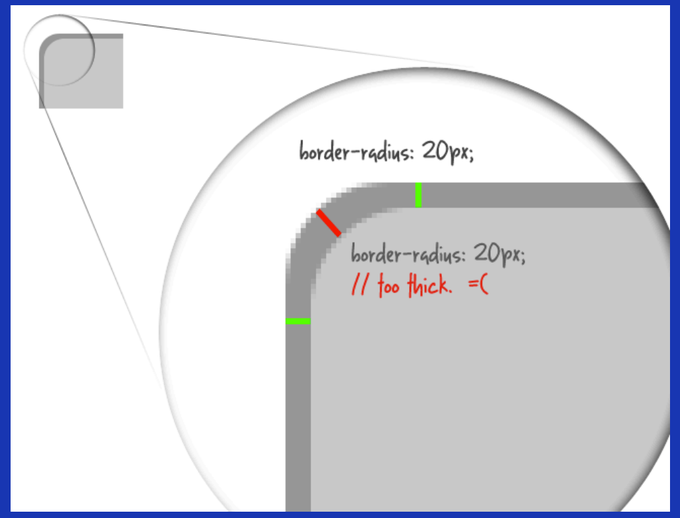

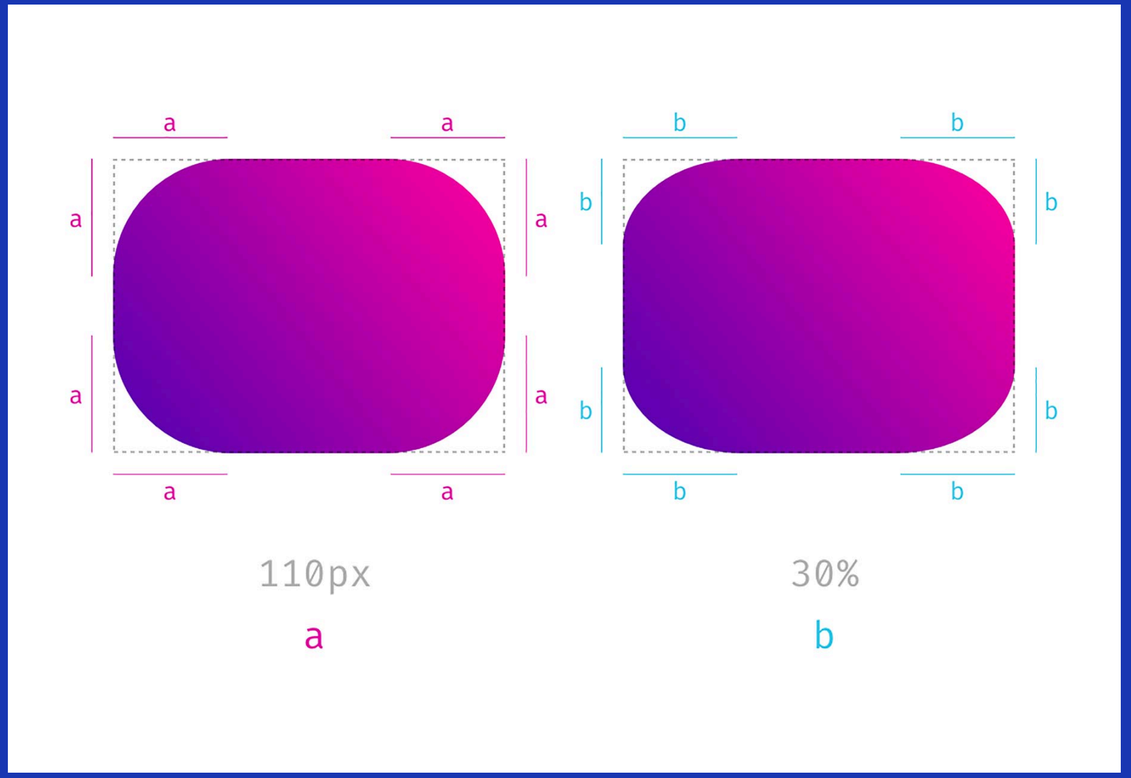

TASK THREE

- Create this shape with border radius

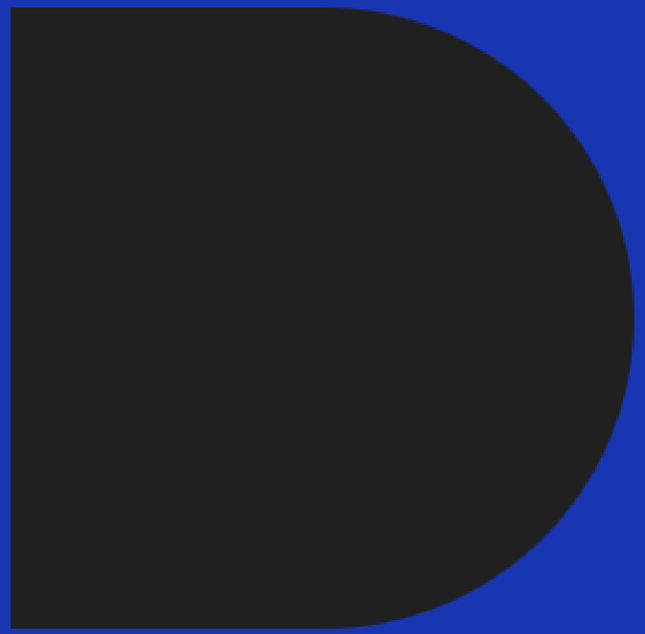

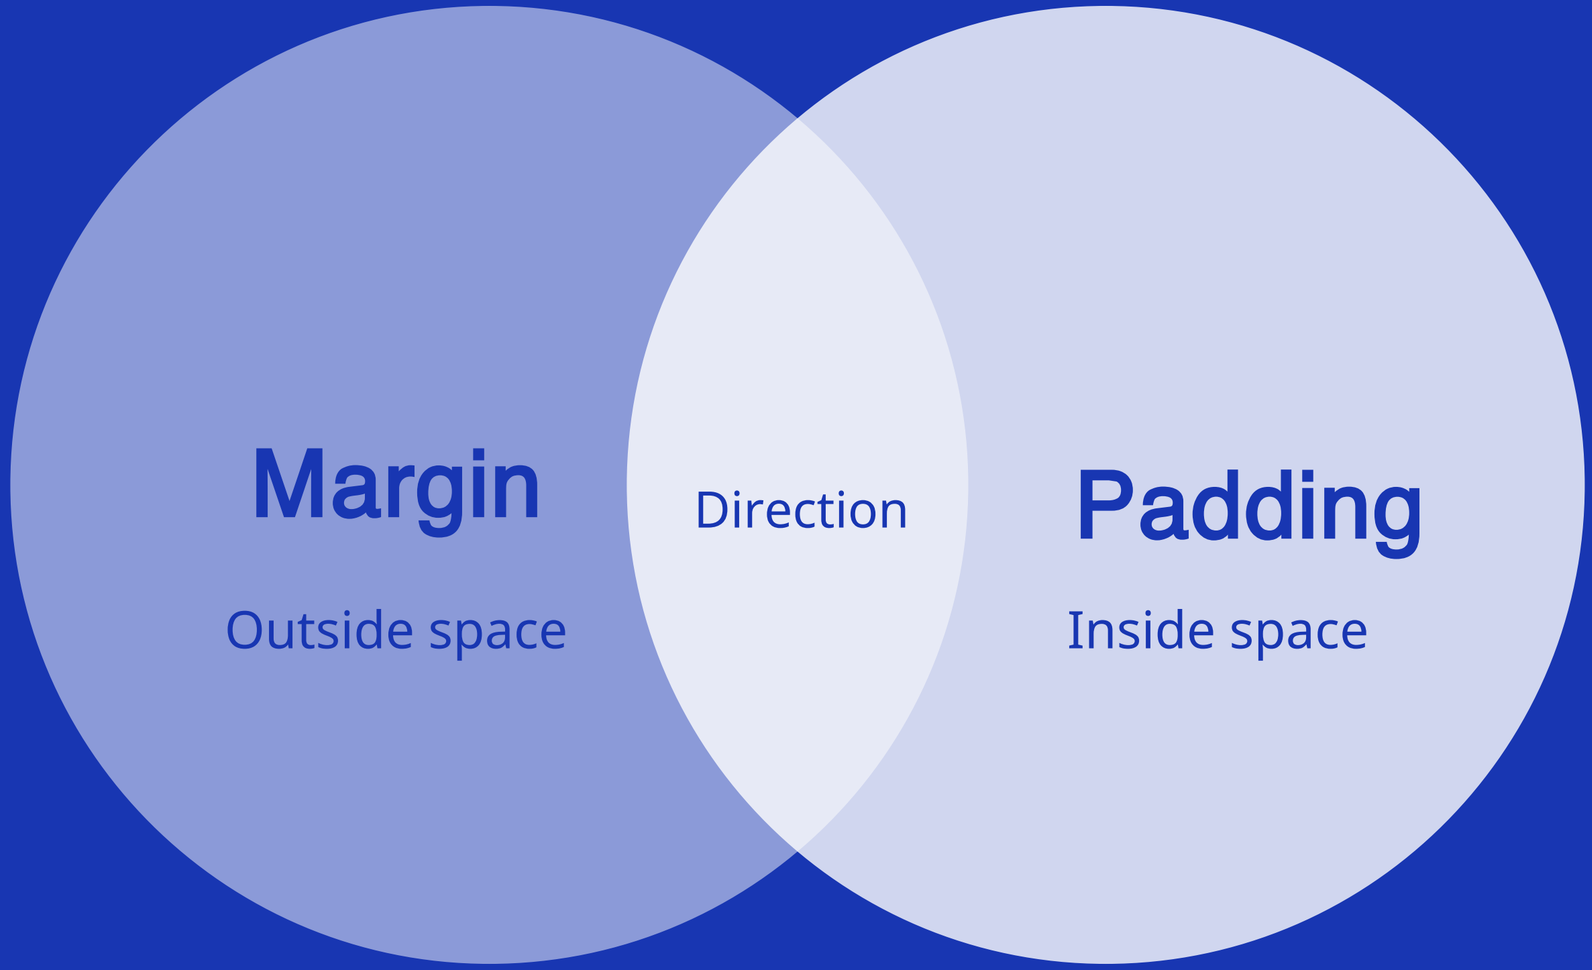

inline start & end

Box modal

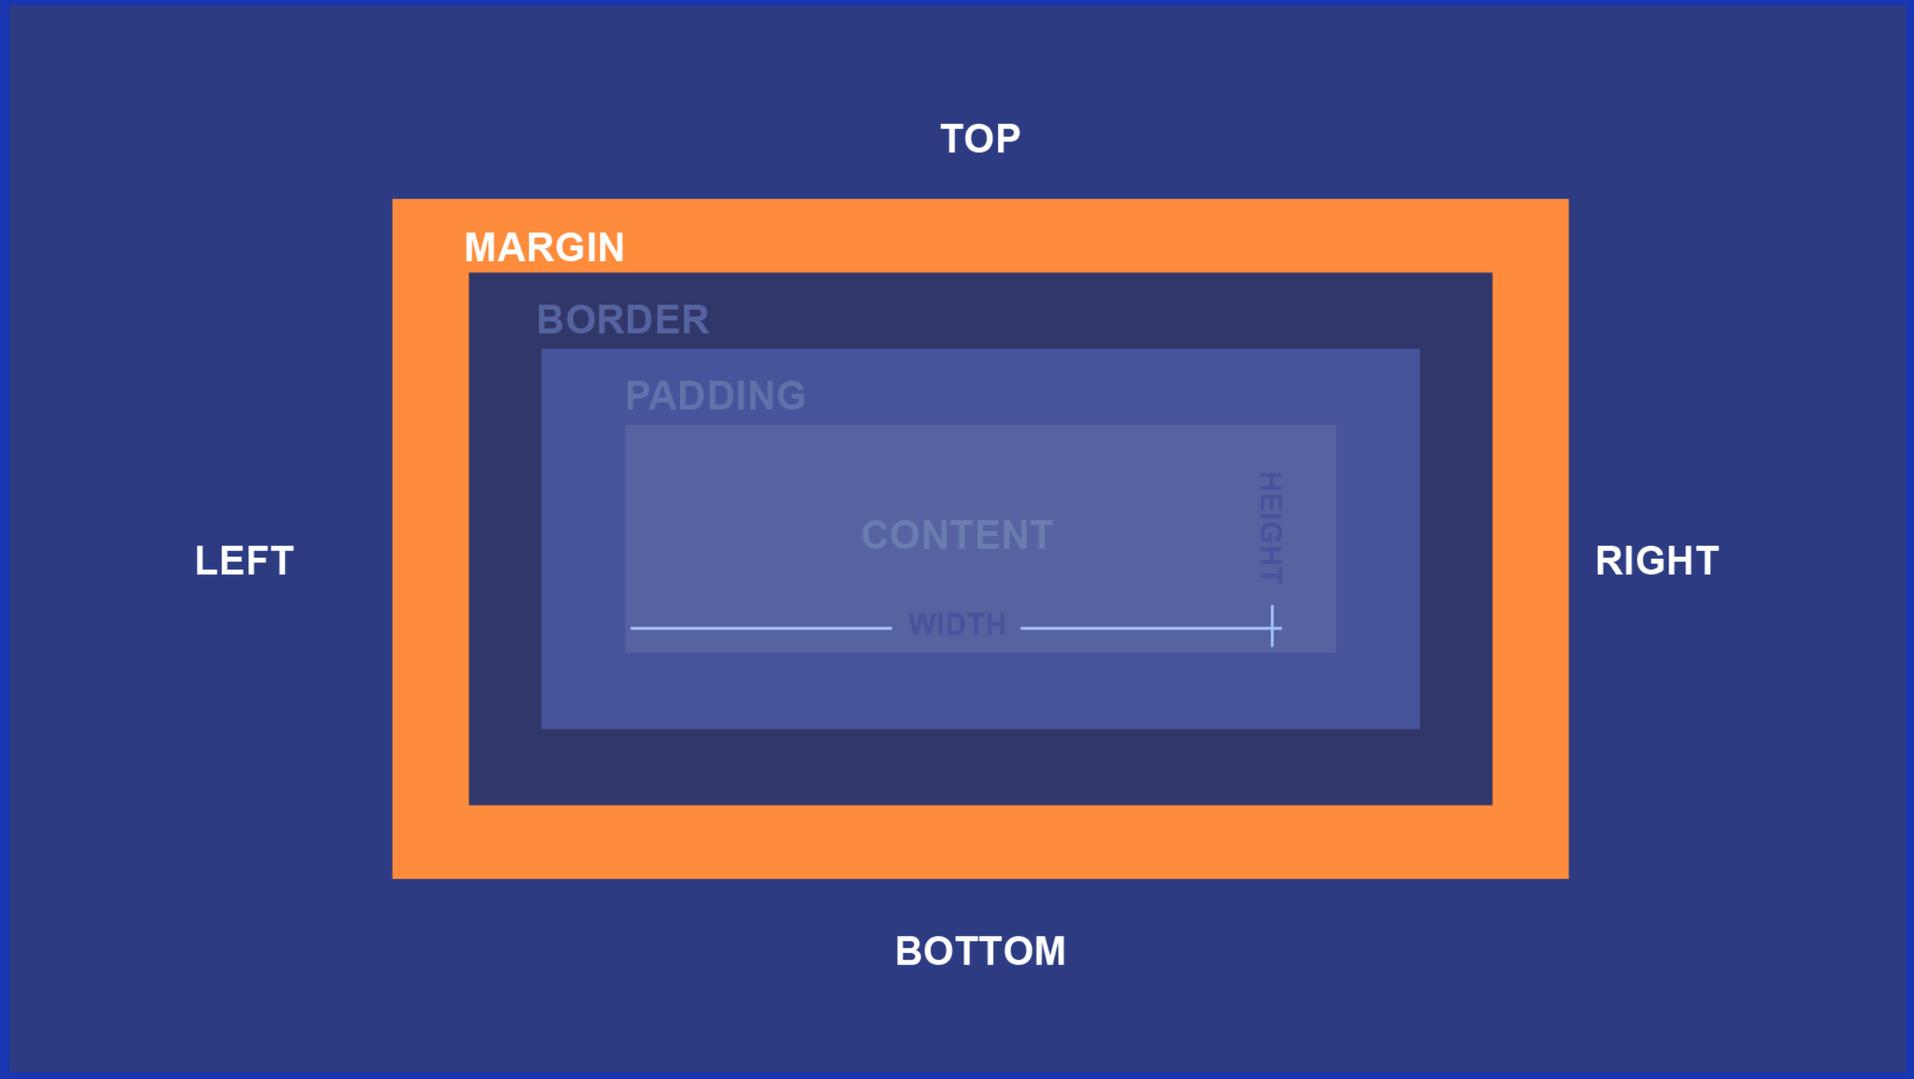
TOP
MARGIN
BORDER
PADDING
CONTENT
HEIGHT
WIDTH
LEFT
RIGHT
BOTTOM

Advanced Selectors

Combinator

Pseudo-class

Pseudo-elements

Attribute

Advanced Selectors

Combinator

Pseudo-class

Pseudo-elements

Attribute

Combinator selector

A combinator is something that explains the relationship between the selectors.

- descendant selector (space)
- child selector (>)
- adjacent sibling selector (+)
- general sibling selector (~)

TASK FOUR

- Create a circle image when user click on it google opened
- Create a box colors (font & background) using color wheel and have all box modal items

You can contact me

Eng \ Mohamed Ahmed

Email

eng.mohamedahmed59@gmail.com

Whats app

01019877975

Facebook

/mohamed.ahmed150

LinkedIn

in/mohamed-ahmed150

SESSION TASK

- Create a form contains of
- field set with border radius 15% *
- legend with font weight bold and any family
- text input and autofocus it
  - remove 3 border *–*
  - input text must NOT be black
- password input

- textarea
  - Add a placeholder
  - make length fixed
- select input
  a. with option group Courses
  b. items are HTML & CSS
  c. with border radius 5px
  d. with soft color background
- submit input

  don't forget labels & placeholders

Css course

Session three

Presented by
Eng \ Mohamed Ahmed

Day agenda

- Remaining advanced selectors
- Font awsomse
- display
- visibilty
- list
- table

Advanced Selectors

Combinator

Pseudo-class

Pseudo-elements

Attribute

Pseudo classes

used to define a special state of an element.

W3 schools

Advanced Selectors

Combinator

Pseudo-class

Pseudo-elements

Attribute

Pseudo element

used to style specified parts of an element.

Notice the double colon notation

- after
- before
- first-letter
- first-line
- marker
- selection

Advanced Selectors

Combinator

Pseudo-class

Pseudo-elements

Attribute

Attribute Selectors

It is possible to style HTML elements that have specific attributes or attribute values.

Important liberary

Display VS Visibility

- none
- block
- inline
- inline-block

- visible
- hidden

List properties

1. list style image
2. list style position
3. list style type
4. list style

Table

1. border
2. border-collapse
3. caption-side

Float and clear

Task

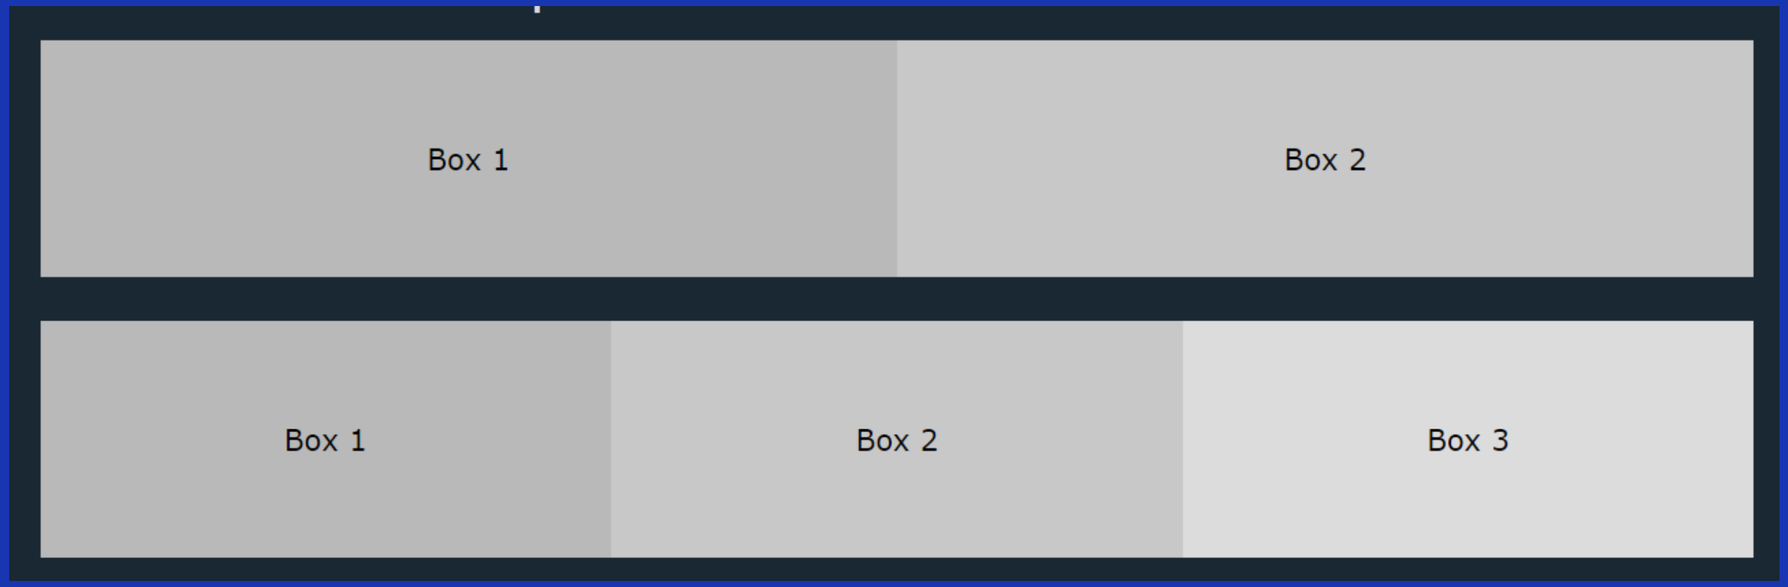

You can contact me

Eng \ Mohamed Ahmed

Email

eng.mohamedahmed59@gmail.com

Whats app

01019877975

Facebook

/mohamed.ahmed150

LinkedIn

in/mohamed-ahmed150

Css course

Session four

Presented by
Eng \ Mohamed Ahmed

Let's create our first website

Day agenda

- Some styles in CSS
- Text
- Spacing
- Text effects
- Font
- 2D & 3D transform

Position

01

static

02

absolute

03

relative

04

fixed

05

sticky

Some css styles

- Z-index
- Overflow (X & Y) & auto
- Opacity
- Outline

Text

- Color
- Alignment
- Decoration
- Transform

Spacing

- text-indent
- line-height
- word-spacing
- letter-spacing
- white space

White space

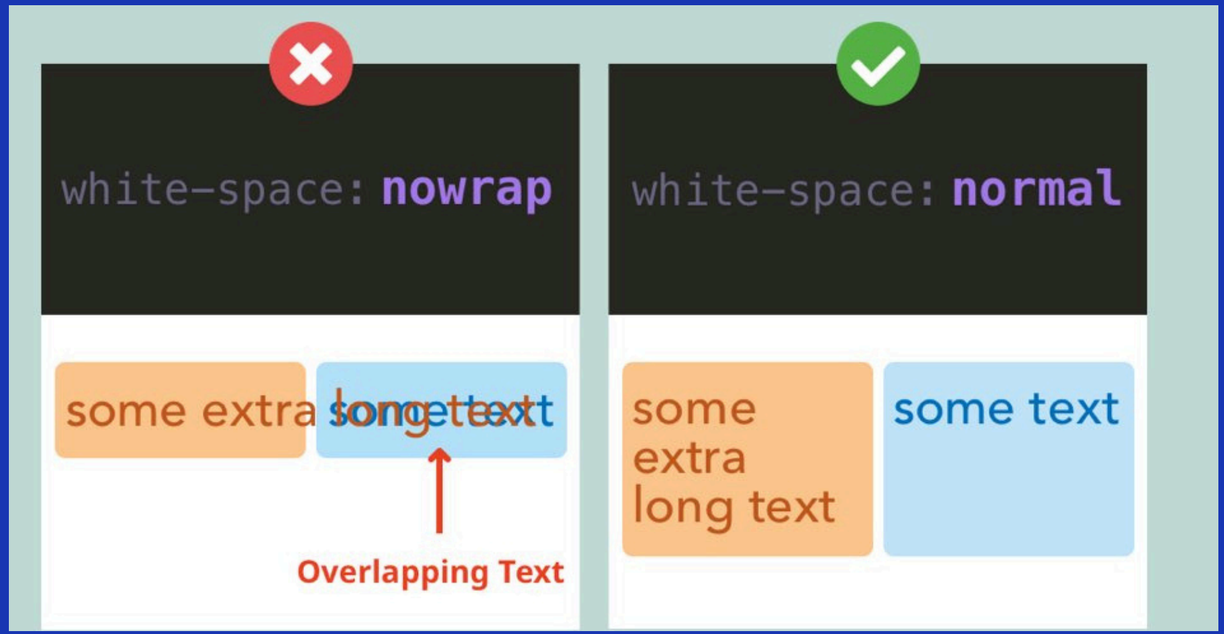
white-space: nowrap
some extra long text
Overlapping Text
white-space: normal
some extra long text
some text

Text effects

- text-overflow (clip & ellipsis)
- word wrap
- word-break
- writing mode

Font

- Font family
- font style (normal & italic)
- Font size
- Font weight

2D Transforms

- Translate
- Rotate
- Scale (X & Y)
- Skew (X & Y)

3D Transforms

- transform-origin
- transform-style: preserve-3d
- perspective
- perspective-origin
- backface-visibility

Css course

Session five

Presented by
Eng \ Mohamed Ahmed

Day agenda

- Some styles in CSS
- Text
- Spacing
- Text effects
- Font
- 2D & 3D transform

Text shadow

Box shadow

transition

animation

media query

Flex

cursor

Scroll behavior

(NEW IN CSS)