Domain-Adversarial Training Under Label Shift Can Silently Invert Out-of-Distribution Detection

Duc-Vinh Tran VINH.TD225538@SIS.HUST.EDU.VN
Quyet-Thang Huynh* THANG.HUYNHQUYET@HUST.EDU.VN
School of Information and Communication Technology, Hanoi University of Science and Technology, Hanoi 100000, Vietnam

Editors: Under Review for MIDL 2027

Abstract

Domain-adversarial training (DANN) is often used to remove site and device shortcuts in medical imaging models, and deployed models are expected to have an out-of-distribution (OOD) monitor that flags unfamiliar inputs. We study how DANN affects such monitors in skin lesion classification, using a lesion-disjoint ISIC 2019 split, smartphone images as the second domain and a dual-encoder model with two backbone families (EfficientNet-B3 and DINOv2-S/14). With gradient reversal, Mahalanobis OOD detection drops from AUROC 0.825 to 0.381 (95% CI $[0.358, 0.404]$) on held-out smartphone images, which then look more in-distribution than the model's own test images. The same happens on three clinical datasets that were not used in training (Fitzpatrick17k 0.405, MED-NODE 0.288, SD-198 0.376), while in-distribution balanced accuracy changes little (paired change -0.009, 95% CI $[-0.026, +0.006]$) and in-distribution ECE stays at 0.20–0.21. Our interventions point to label shift between the two domains as the main driver in this setting. When we change the class mix that the adversary sees, AUROC on the external datasets changes by 0.24–0.37; removing only the two classes absent from the target domain changes it by at most 0.022, and the association remains after adjusting for measured domain leakage. Multi-kernel MMD alignment at similar leakage also inverts detection on the smartphone images, while CORAL does not. DANN moves unfamiliar images toward the majority class. Under label shift, a standard domain probe then shows chance-level leakage, although the domain can still be read within each class. The same models reach an in-distribution balanced accuracy of about 0.48 on eight classes (ERM: 0.558) and show a safety-relevant error pattern, though this is not evidence of clinical impact. The share of melanomas from unseen sources that the classifier calls benign nevus with confidence above 0.9 increases from 13% to 51–81%, and the monitor accepts almost all of these images with or without adaptation. Correcting for the class priors during training recovers detection only in part when the priors are estimated without labels; in a post hoc analysis, priors from 50 labelled target images bring detection to the level obtained with the true priors, at a cost in in-distribution accuracy. In a sweep of 27 single-encoder configurations, no gradient-reversal model reached domain invariance, so these results do not show that every DANN inverts detection. The inversion is shown for one dermatology source–target pair (ISIC→PAD-UFES-20); a second pair (BCN→HAM) did not reproduce it. We recommend checking OOD detection again after domain adaptation and measuring domain leakage within class.

Keywords: domain-adversarial training; out-of-distribution detection; label shift; calibration; skin lesion classification; deployment monitoring

* Corresponding author

© 2027 CC-BY 4.0, D.-V. Tran & Q.-T. Huynh.

1. Introduction

Skin lesion classifiers often learn acquisition artefacts such as ink markings, rulers, dermatoscope type and contributing site, because these correlate with diagnosis in public datasets (Winkler et al., 2019; Bissoto et al., 2020; Daneshjou et al., 2022). A common remedy is to make the representation invariant to the acquisition domain, usually with domain-adversarial training and a gradient reversal layer (Ganin et al., 2016; Bousmalis et al., 2016). Deployed models are also expected to have an out-of-distribution (OOD) monitor, which flags inputs that differ from the training data so that a clinician can review them. We study how invariance training affects this monitor.

We find that it can invert the monitor. As the adversarial weight increases, OOD detection falls below chance. Held-out images from the aligned domain and images from external sources then get scores that look more in-distribution than the model's own test images. Standard evaluation does not show this (Section 4.1), and the domain-leakage probe, which the method is supposed to reduce, goes down. In the same models, melanomas from external sources are predicted as benign nevus with confidence above 0.9 four to six times more often than without adaptation; the monitor accepts almost all of these images with or without adaptation, so the added risk of missing a malignant lesion lies with the classifier.

In our experiments, label shift between the aligned domains is the main driver. ISIC 2019 is 50.8% nevus while the smartphone images used as the second domain are 12.3% nevus. When two domains have different class priors, matching their marginal feature distributions forces the model to misplace the classes of one domain (Zhao et al., 2019; Tachet des Combes et al., 2020). We test what this does to OOD monitoring by changing the class mix that the adversary sees, and we look at where the OOD images end up in feature space.

Contributions.

1. Under a lesion-disjoint split, gradient reversal inverts Mahalanobis OOD detection on held-out smartphone images and on three clinical datasets that were not used in training. This holds for two training recipes, both within 0.08 balanced accuracy of a standard ERM baseline on the same split, and for a dual-encoder model with a DINOv2-S/14 backbone. All models showing this are dual-encoder models; none of 15 single-encoder gradient-reversal configurations on two backbones reached invariance, so the inversion was not tested there.

2. When the class mix seen by the adversary is set to that of the target domain, the inversion on external domains disappears (AUROC difference 0.24–0.37); removing only the two classes absent from the target domain does not remove it. In a regression that adjusts for measured domain leakage the label-shift effect remains, so deeper invariance alone does not account for it.

3. DANN moves images that differ from the source along the domain direction toward the majority class. Under label shift, an unweighted domain probe gives chance-level leakage even though a within-class probe can still read the domain, so we recommend measuring leakage within class.

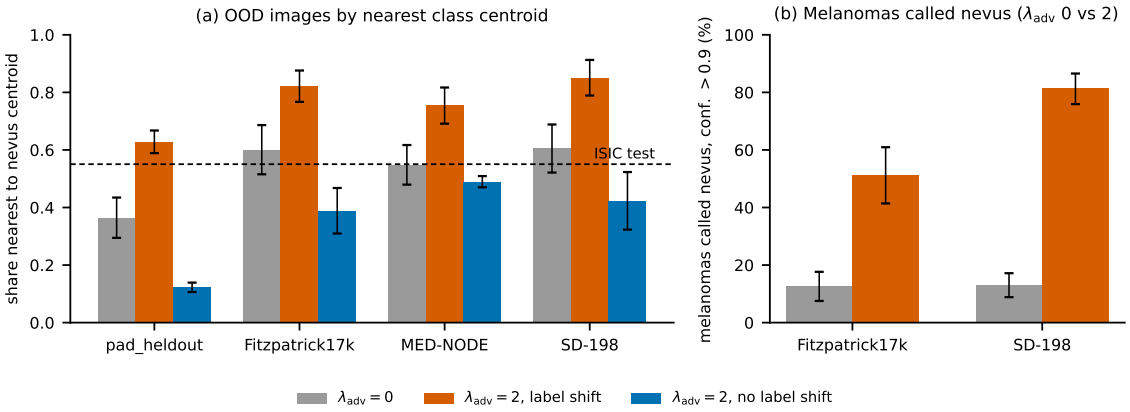


Figure 1: What DANN does to unfamiliar images (main recipe, last checkpoint, measured data). (a) Share of OOD images whose nearest ISIC-train class centroid (class-conditional Mahalanobis on z_ℓ^{norm}) is nevus, mean ± s.d. over seeds of the label-shift runs (Table 3; five seeds, four for $\lambda_{\text{adv}} = 2$ without label shift after excluding the degraded run). Dashed line: the same share for ISIC test images (0.55). (b) Share of melanomas from external datasets predicted nevus with confidence above 0.9, with bootstrap 95% intervals, from the sweep runs (Table 21; 51.1% and 81.4% at $\lambda_{\text{adv}} = 2$); the separately retrained shift-100% runs of Table 3 give 53.0% and 83.2% at $\lambda_{\text{adv}} = 2$. With label shift, DANN moves OOD images into the nevus region; without it, they move away.

4. Importance weighting with label-free prior estimates recovers most of the lost AUROC at $\lambda_{\text{adv}} = 0.5$ without loss of in-distribution accuracy, less at $\lambda_{\text{adv}} = 2$; MED-NODE stays inverted. In a post hoc analysis, priors from 50 labelled target images give point estimates close to those with the true priors, but in-distribution accuracy drops.

2. Related work

Shortcuts and invariance in dermatology. Ink markings shift melanoma predictions (Winkler et al., 2019), classifiers keep competitive ISIC accuracy with the lesion masked out (Bissoto et al., 2020), and performance degrades on darker skin (Daneshjou et al., 2022). Domain-adversarial training (Ganin et al., 2016) and domain separation networks (Bousmalis et al., 2016) are the usual remedies; our dual-encoder model is a domain separation network and is a vehicle for the intervention, not a contribution.

Invariance under label shift. When class priors differ between domains, matching marginal feature distributions cannot also keep the joint error small (Zhao et al., 2019); importance-weighted alignment (IWDAN, IWCDAN) corrects for this with estimated target class priors (Tachet des Combes et al., 2020), which can be estimated without target labels by black-box shift estimation (Lipton et al., 2018) or EM (Saerens et al., 2002). These results concern classification error. We study what the same misalignment does to OOD

monitoring, and show that a standard domain-leakage probe misreports invariance under label shift.

OOD detection after adaptation. Full-spectrum OOD detection (Yang et al., 2023; Zhang et al., 2023) asks that covariate-shifted in-distribution inputs be accepted; our smartphone and clinical images fall in that cell, and Section 5 argues that acceptance is safe only when the model also classifies them. Calibration degrades under shift (Ovadia et al., 2019) and after domain adaptation (Wang et al., 2020). Closest to our observation, Wu et al. report Mahalanobis and ODIN AUROC below 0.5 after adaptation, with rotated MNIST as in-distribution and rotated notMNIST as OOD, with an MMD-based method (DAN) (Wu et al., 2023), as a baseline in a study of continually adaptive detection. We show the inversion on medical images and, in our setting, trace it to label shift.

3. Materials and methods

3.1. Data and splits

ISIC 2019 (Tschandl et al., 2018) (25,331 dermoscopic images, eight classes: MEL, NV, BCC, AK, BKL, DF, VASC, SCC) is the in-distribution source. We split it 64/16/20 into train, validation and test *grouped by* `lesion_id` (20% held out for test, then 20% of the remainder for validation; 16,211 / 4,053 / 5,067 images), because 60% of test images in the image-level split share a lesion with training (Tran, 2027). **PAD-UFES-20** (Pacheco et al., 2020) (2,298 smartphone photographs, six of the eight classes) is the domain the adversary aligns against. No per-image PAD label is used as a target in any loss. PAD class proportions enter training in two places only: to resample or reweight the ISIC images seen by the adversary (Section 3.3, Appendix E) and as importance weights in the IWDAN variants with true or 50-label priors. PAD labels are also used at evaluation, for the class-aware probes and the clinical analysis. We split it by patient into `pad_adv` (1,582 images, 961 patients), seen by the adversarial and context branches, and `pad_heldout` (716 images, 412 patients), never seen.

Unseen domains. Four clinical-photograph datasets enter no part of training: Fitzpatrick17k (Groh et al., 2021) (3,887 images obtained), MED-NODE (Giotis et al., 2015) (170 images: 70 melanoma, 100 nevi), SD-198 (Sun et al., 2016) (6,584 images, 198 conditions) and SCIN (Ward et al., 2024) (10,406 images, 5,033 cases; SCIN Data Use License). All four are used for evaluation only and are not redistributed. SD-198 was obtained from the release linked by its first author; it states no licence, and its images originate from DermQuest (Sun et al., 2016). SCIN is mostly inflammatory conditions; only 0.6% of its images map to the ISIC classes, so we use it only as an OOD set for detection and report it separately; no label-based analysis is done on SCIN. Images are cropped to a lesion-centred box and resized to 224×224.

3.2. Model and training

A dual-encoder model with EfficientNet-B3 backbones produces a lesion latent $z_\ell \in \mathbb{R}^{16}$ (batch-normalised, z_ℓ^{norm}) used for diagnosis through a linear head, and a context latent

$z_c \in \mathbb{R}^{64}$. The objective is

$$\mathcal{L} = \mathcal{L}_{\text{cls}} + \lambda_{\text{ctx}}\mathcal{L}_{\text{ctx}} + \lambda_{\text{adv}}\,\mathcal{L}_{\text{adv}} + \lambda_{\text{orth}}\mathcal{L}_{\text{orth}}, \tag{1}$$

with $\mathcal{L}_{\text{cls}}$ on ISIC only, $\mathcal{L}_{\text{ctx}}$ a domain cross-entropy on z_c, $\mathcal{L}_{\text{adv}}$ a domain cross-entropy on z_ℓ^{norm} behind a gradient reversal layer, and $\mathcal{L}_{\text{orth}}$ a squared-cosine penalty between the latents. AdamW (learning rate 10^{-4}; adversary $\times 30$, classifier $\times 0.2$), 40 epochs, domain-balanced batches. We sweep $\lambda_{\text{adv}} \in \{0, 0.25, 0.5, 1, 2, 4, 8\}$ with everything else fixed (seeds $\{42, 52, 62, 72, 82\}$ at $\lambda_{\text{adv}} \in \{0, 2\}$, $\{42, \ldots, 46\}$ elsewhere). A second recipe (A4: $z_\ell \in \mathbb{R}^{64}$, classifier $\times 1$, class-weighted loss) serves as a robustness check.

Checkpoints. We report the last checkpoint. Validation balanced accuracy (eight classes, chance 0.125) has a lesion-clustered bootstrap SE of 0.023–0.026, and the best-validation and last checkpoints differ by less than one SE, so best-validation selection picks early epochs by noise. Best-validation values are given for comparison.

Competence. In-distribution balanced accuracy at $\lambda_{\text{adv}} = 0$ is 0.481 (main recipe, last checkpoint) and 0.520 (A4), 0.04–0.08 below a standard single-encoder ERM on the same split (0.558 ± 0.022, five seeds). Most of the gap to published ISIC numbers comes from the honest split: separating lesions lowers balanced accuracy by about 0.20, and on the image-level split, where test images share lesions with training, the same model reaches 0.69 (Table 24, leaky split; Appendix R) (Tran, 2027).

3.3. Interventions on label shift

Class mix seen by the adversary. Keeping the classification loss on all of ISIC, we resample only the ISIC images fed to the adversarial branch so that their class mix is ISIC's own (100%, the default), halfway to PAD's (50%), or PAD's (0%, no label shift between the aligned domains), at $\lambda_{\text{adv}} \in \{0.5, 2\}$ with five seeds. Because PAD has no DF or VASC, shift 0% also removes these two classes from the adversary's ISIC stream, so it changes the class set as well as the priors. A six-class control separates the two: it removes only DF and VASC (1.9% of ISIC train) from the adversary's ISIC stream and keeps ISIC's priors over the other six classes (total variation 0.019 from ISIC's mix and 0.579 from PAD's), at $\lambda_{\text{adv}} \in \{0.5, 2\}$ with five seeds. Shift 50% keeps all eight classes.

Importance-weighted alignment. IWDAN and IWCDAN (Tachet des Combes et al., 2020) reweight the source in the adversarial loss by target class priors. In the original method the weights are estimated online during training from unlabelled target predictions; as alternatives we use priors from 50 labelled `pad_adv` images (a few-label setting) and the true `pad_adv` priors (oracle, not deployable). Black-box shift estimates (Lipton et al., 2018) on the final checkpoints serve only as a diagnostic, and an EM estimator (Saerens et al., 2002) failed as implemented and is not used. CDAN (Long et al., 2018) is a class-conditional adversarial baseline.

3.4. Measurements

OOD detection. Class-conditional Mahalanobis with shared covariance (Lee et al., 2018) (primary), k-NN (Sun et al., 2022), maximum cosine to a class centroid, maximum softmax probability (Hendrycks and Gimpel, 2017) and energy (Liu et al., 2020), all fit on ISIC

Table 1: The adversarial-weight sweep (main recipe, lesion-disjoint ISIC split, last checkpoint). Mean ± s.d. over five seeds per λ_{adv} ($\{42, 52, 62, 72, 82\}$ at $\lambda_{\text{adv}} \in \{0, 2\}$, $\{42, \ldots, 46\}$ otherwise). Leakage: linear domain probe on held-out images (chance 0.5). ID: balanced accuracy, eight classes (chance 0.125). Mahalanobis AUROC, OOD positive; k: seeds whose interval lies below 0.5. Bold: inversion criterion met. Best-validation values: Appendix B.

λ_{adv}	leakage	ID bal. acc	`pad_heldout`	k	Fitzpatrick17k	k	MED-NODE	k	SD-198	k	SCIN	k
0	0.842 ± 0.050	0.481 ± 0.016	0.825 ± 0.022	0/5	0.712 ± 0.013	0/5	0.559 ± 0.019	0/5	0.708 ± 0.019	0/5	0.723 ± 0.018	0/5
0.25	0.502 ± 0.002	0.481 ± 0.010	$\mathbf{0.445 \pm 0.022}$	4/5	$\mathbf{0.396 \pm 0.032}$	5/5	$\mathbf{0.308 \pm 0.029}$	5/5	$\mathbf{0.383 \pm 0.036}$	5/5	0.547 ± 0.027	0/5
0.5	0.508 ± 0.010	0.484 ± 0.005	$\mathbf{0.415 \pm 0.016}$	5/5	$\mathbf{0.377 \pm 0.046}$	5/5	$\mathbf{0.309 \pm 0.031}$	5/5	$\mathbf{0.351 \pm 0.039}$	5/5	0.529 ± 0.038	0/5
1	0.505 ± 0.005	0.482 ± 0.017	$\mathbf{0.390 \pm 0.022}$	5/5	$\mathbf{0.388 \pm 0.039}$	5/5	$\mathbf{0.319 \pm 0.018}$	5/5	$\mathbf{0.368 \pm 0.046}$	5/5	0.528 ± 0.037	0/5
2	0.507 ± 0.009	0.472 ± 0.018	$\mathbf{0.381 \pm 0.023}$	5/5	$\mathbf{0.405 \pm 0.031}$	5/5	$\mathbf{0.288 \pm 0.027}$	5/5	$\mathbf{0.376 \pm 0.026}$	5/5	0.551 ± 0.039	0/5
4	0.527 ± 0.035	0.480 ± 0.016	$\mathbf{0.416 \pm 0.034}$	5/5	$\mathbf{0.354 \pm 0.066}$	5/5	$\mathbf{0.300 \pm 0.039}$	5/5	$\mathbf{0.330 \pm 0.049}$	5/5	0.499 ± 0.046	3/5
8	0.520 ± 0.028	0.480 ± 0.018	$\mathbf{0.439 \pm 0.020}$	5/5	$\mathbf{0.383 \pm 0.036}$	5/5	$\mathbf{0.294 \pm 0.043}$	5/5	$\mathbf{0.347 \pm 0.030}$	5/5	0.536 ± 0.028	0/5

train. AUROC treats OOD as the positive class, so 0.5 is chance and values below 0.5 mean OOD images score as more familiar than ID test images. The five scores are functions of the same latent, so they are not independent evidence.

Inversion. A cell is inverted when the 95% cluster-bootstrap interval of the seed-mean Mahalanobis AUROC, and the intervals of at least three seeds, lie below 0.5 (resampling details in Appendix S). Runs with in-distribution balanced accuracy below 0.25 are excluded as degraded and reported.

Domain leakage. Leakage is the balanced accuracy (chance 0.5) of a probe for the source dataset on frozen z_ℓ^{norm}, read in three ways: the linear probe of earlier work, scored against all of PAD; probes on held-out images only (linear, MLP, k-NN); and class-balanced and within-class probes that remove the effect of class mix (Appendix S).

Calibration and diagnosis. Expected calibration error (15 bins) on ISIC test and on `pad_heldout` (six shared classes), and zero-shot balanced accuracy on `pad_heldout`. Out-of-domain ECE is close to mean confidence minus accuracy here, so the two measure much the same thing.

4. Results

4.1. OOD detection inverts while in-distribution metrics stay flat

The sweep. At the last checkpoint, Mahalanobis AUROC on `pad_heldout` falls from 0.825 at $\lambda_{\text{adv}} = 0$ to 0.445 at $\lambda_{\text{adv}} = 0.25$ and stays between 0.381 and 0.445 at every larger weight, meeting the inversion criterion at all six non-zero weights; on Fitzpatrick17k it falls from 0.712 to 0.354–0.405 (Table 1, Figure 2). At $\lambda_{\text{adv}} = 2$ the seed-mean interval is $[0.358, 0.404]$ on `pad_heldout` and $[0.392, 0.419]$ on Fitzpatrick17k. In-distribution balanced accuracy stays within 0.472–0.484 (paired $\lambda_{\text{adv}} = 2$ minus $\lambda_{\text{adv}} = 0$: -0.009, 95% CI $[-0.026, +0.006]$) and in-distribution ECE within 0.202–0.210, while out-of-domain ECE on `pad_heldout` rises from 0.305 to 0.724–0.762. All five scores fall below 0.5 on `pad_heldout` at $\lambda_{\text{adv}} = 2$ (seed means: k-NN 0.400, cosine 0.396, MSP 0.411, energy 0.425); at the

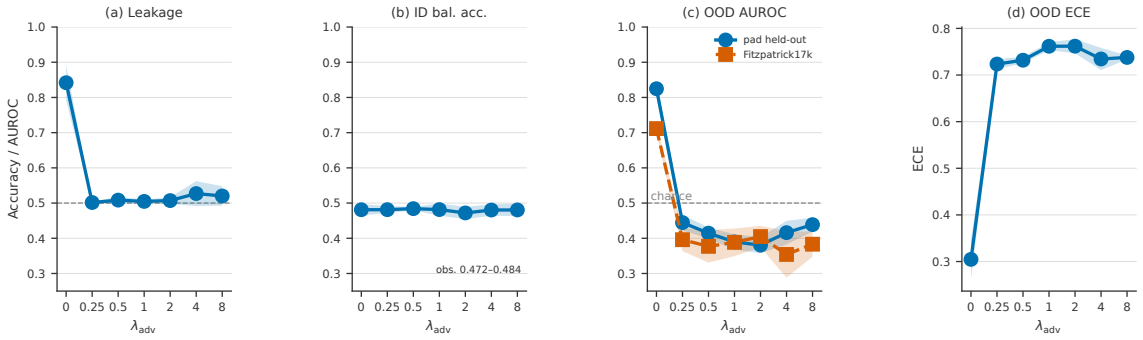


Figure 2: The adversarial-weight sweep at the last checkpoint (main recipe, five seeds; mean ± s.d.). Held-out domain leakage falls to chance and in-distribution balanced accuracy stays flat, while Mahalanobis AUROC on `pad_heldout` and Fitzpatrick17k falls below 0.5 and out-of-domain calibration error rises. Monitoring accuracy and leakage alone would show no problem.

best-validation checkpoint the standard k-th-neighbour k-NN gives the same values as our mean-of-k variant within 0.01. Checkpoint selection is discussed in Section 5.

Unseen domains. The inversion is not confined to the domain the adversary was trained against (Table 2). On three clinical datasets that entered no part of training, Mahalanobis AUROC falls from 0.712 to 0.405 (Fitzpatrick17k), 0.559 to 0.288 (MED-NODE) and 0.708 to 0.376 (SD-198) at $\lambda_{\text{adv}} = 2$, inverted in all five seeds and at every $\lambda_{\text{adv}} \geq 0.25$ on MED-NODE and SD-198. Clustering near-duplicate SD-198 images (6,016 clusters) leaves every interval and verdict unchanged. On SCIN, detection falls from 0.723 to 0.551 without inverting. Label space does not explain this either. When Fitzpatrick17k and SD-198 are split by whether a condition maps to an ISIC class, both parts invert at $\lambda_{\text{adv}} = 2$ (Appendix T).

Second backbone. With DINOv2-S/14 in place of EfficientNet-B3 (dual encoder, five seeds), Mahalanobis AUROC on `pad_heldout` falls from 0.831 ± 0.029 at $\lambda_{\text{adv}} = 0$ to 0.448 ± 0.045 at $\lambda_{\text{adv}} = 2$, with leakage 0.576 ± 0.034; Fitzpatrick17k falls from 0.778 ± 0.016 to 0.472 ± 0.067, and the inversion criterion is met on `pad_heldout` and on all three labelled unseen datasets (Appendix K). This run does not rule out low competence as an explanation: at $\lambda_{\text{adv}} = 0$ the dual model reaches 0.470 ± 0.015 balanced accuracy against 0.565 ± 0.015 for ERM with the same backbone, a gap of 0.095, above our 0.03 margin, and selecting the backbone learning rate on validation did not close it. However, the dual model at $\lambda_{\text{adv}} = 0$ is equally weak and still detects well. Paired by seed, $\lambda_{\text{adv}} = 2$ minus $\lambda_{\text{adv}} = 0$ changes balanced accuracy by -0.009 $[-0.026, +0.006]$ (EfficientNet-B3) and -0.008 $[-0.014, -0.002]$ (DINOv2-S, a fall of less than 0.01), but `pad_heldout` AUROC by -0.444 and -0.383 (Appendix U). At matched accuracy the adversary inverts detection, so low accuracy alone does not cause it. ERM with DINOv2 is already below 0.5 on MED-NODE (0.452 ± 0.033), so MED-NODE is the weakest of the three.

Other splits and recipes. On three further lesion-disjoint splits of ISIC, Mahalanobis AUROC on `pad_heldout` falls from 0.82–0.83 at $\lambda_{\text{adv}} = 0$ to 0.39–0.43 at $\lambda_{\text{adv}} = 2$, and the three labelled unseen datasets fall below 0.5 as well (Appendix Q). A second recipe (A4) also inverts at $\lambda_{\text{adv}} = 0.5$ and $\lambda_{\text{adv}} = 2$ (Table 2). A single-encoder EfficientNet-B3 DANN did not reach invariance on the lesion-level split: in its best configuration ($\lambda_{\text{adv}} = 4$, three seeds, last checkpoint) held-out leakage stayed at 0.699, above our target of 0.552 (the dual-encoder leakage at $\lambda_{\text{adv}} = 2$, 0.502, plus 0.05), and Mahalanobis AUROC on `pad_heldout` was 0.524 $[0.498, 0.550]$, with no seed below 0.5 (0.686 $[0.665, 0.706]$ for the $\lambda_{\text{adv}} = 0$ control). The inversion is therefore untested for this model (Appendix U). We then screened (seed 42, held-out leakage computed without OOD scores) 27 single-encoder configurations on EfficientNet-B3 and DINOv2-S/14, covering gradient reversal with warm-up, fixed λ_{adv} and extra adversary steps, and MK-MMD and CORAL penalties (Appendix O). A run passed if held-out leakage was at most 0.60 and in-distribution balanced accuracy stayed within 0.05 of ERM without degrading (balanced accuracy below 0.25). No gradient-reversal configuration passed (leakage 0.685–0.727 for EfficientNet-B3 and 0.772–0.930 for DINOv2-S/14). The one passing run, MK-MMD at weight 30 on DINOv2-S/14 (leakage 0.600), did not hold over five seeds (0.604 ± 0.018), so the detection test did not take place for single-encoder models. As a descriptive observation only, these MK-MMD models had in-distribution balanced accuracy 0.547 against 0.565 for ERM, and lower Mahalanobis AUROC on `pad_heldout` (0.540 against 0.591) and Fitzpatrick17k (0.519 against 0.704), in the same direction as the matched-competence comparison above.

4.2. Label shift between the aligned domains drives the inversion in this setting

Intervention. Changing the class mix of the ISIC images the adversary sees (Section 3.3) turns the inversion on unseen domains on and off (Table 3): paired by seed, removing the label shift raises AUROC at $\lambda_{\text{adv}} = 2$ by 0.361 (Fitzpatrick17k), 0.243 (MED-NODE) and 0.372 (SD-198); per-level results are in Appendix C. The six-class control stays inverted on all three at $\lambda_{\text{adv}} = 2$ (0.362, 0.312, 0.339) and recovers only 0.063, 0.058 and 0.037 of the AUROC gap between shift 100% and 0% (Appendix D), so the change in class support does not explain the effect. Resampling also changes which ISIC images the adversary sees. When the adversary keeps the unchanged ISIC stream and only its domain loss is reweighted to PAD's class mix, no set meets the inversion criterion at either λ_{adv}; paired by seed, AUROC at $\lambda_{\text{adv}} = 2$ rises by 0.321 (Fitzpatrick17k), 0.211 (MED-NODE), 0.332 (SD-198) and 0.227 (`pad_heldout`) (Appendix E). In this protocol the effect follows the class priors the adversary aligns, not the images it sees; leakage rises here as well (0.757 vs 0.634). Averaged over ID classes rather than pooled, AUROC is already near chance at $\lambda_{\text{adv}} = 0$ and stays below 0.5 with PAD's priors.

Matched leakage. Removing label shift also leaves more domain information in the latent (leakage 0.791 vs 0.634), but a regression of unseen-domain AUROC on label-shift level and leakage keeps a label-shift coefficient of -0.108 to -0.173 at fixed leakage on all three unseen datasets (one point per run; the coefficient rests on 6 cells and 29 runs, Appendix C). This supports the label-shift explanation in the settings tried.

Table 2: Unseen domains: Mahalanobis AUROC at $\lambda_{\text{adv}} = 0$ and $\lambda_{\text{adv}} = 2$ (seed mean, 95% interval at $\lambda_{\text{adv}} = 2$) and the number of seeds whose interval lies below 0.5. Last checkpoint. Intervals: patient (`pad_heldout`), near-duplicate cluster (Fitzpatrick17k, SD-198), case (SCIN), image (MED-NODE). DINOv2: dual-encoder DINOv2-S/14.

recipe	set	$\lambda_{\text{adv}} = 0$	$\lambda_{\text{adv}} = 2$	seeds < 0.5	inverted
main	`pad_heldout`	0.825	0.381 [0.358, 0.404]	5/5	yes
main	Fitzpatrick17k	0.712	0.405 [0.392, 0.419]	5/5	yes
main	MED-NODE	0.559	0.288 [0.263, 0.315]	5/5	yes
main	SD-198	0.708	0.376 [0.362, 0.388]	5/5	yes
main	SCIN	0.723	0.551 [0.538, 0.564]	0/5	no
A4	`pad_heldout`	0.786	0.452 [0.425, 0.478]	4/5	yes
A4	Fitzpatrick17k	0.821	0.458 [0.445, 0.471]	3/5	yes
A4	MED-NODE	0.560	0.298 [0.271, 0.326]	5/5	yes
A4	SD-198	0.799	0.430 [0.419, 0.441]	5/5	yes
A4	SCIN	0.822	0.659 [0.648, 0.670]	0/5	no
DINOv2	`pad_heldout`	0.831	0.448 [0.425, 0.471]	4/5	yes
DINOv2	Fitzpatrick17k	0.778	0.472 [0.459, 0.486]	3/5	yes
DINOv2	MED-NODE	0.580	0.363 [0.335, 0.389]	5/5	yes
DINOv2	SD-198	0.790	0.461 [0.449, 0.474]	4/5	yes
DINOv2	SCIN	0.716	0.551 [0.538, 0.565]	1/5	no

A natural example without DANN. Label shift alone can invert a class-conditional Mahalanobis score: training on BCN and treating the more nevus-heavy HAM as OOD gives AUROC 0.369 at $\lambda_{\text{adv}} = 0$, and reweighting HAM to BCN's class mix brings it to 0.489 (post hoc; Appendix F). In the main setting the OOD sets are *less* nevus-heavy than ISIC, so detection works at $\lambda_{\text{adv}} = 0$, and DANN creates the condition by moving them toward nevus (Figure 1a).

Other alignment objectives. The inversion is not specific to gradient reversal. Replacing the adversary with a multi-kernel MMD penalty (Long et al., 2015) on the same model, at held-out leakage matched to gradient reversal (0.506 vs 0.502) and with in-distribution accuracy within 0.04, inverts detection on `pad_heldout` (0.354 ± 0.022; all five scores 0.34–0.43), as Wu et al. (2023) observed with rotated MNIST and notMNIST. On the unseen datasets it only collapses (Fitzpatrick17k 0.553, MED-NODE 0.523, SD-198 0.535). CORAL alignment at the same leakage leaves detection intact (0.820; 0.788, 0.702, 0.788). In our runs, matching the full feature distribution, adversarially or with kernel MMD, misaligned classes under label shift, and matching second moments did not.

Table 3: Label-shift intervention: Mahalanobis AUROC (main recipe, last checkpoint) by the class mix the adversary sees. Shift 100%: ISIC's own mix; 0%: PAD's mix. Leakage: linear probe on ISIC test against all of PAD, as in earlier work. Shift 0% at $\lambda_{\text{adv}} = 2$: four seeds after excluding one degraded run (in-distribution balanced accuracy $0.139 < 0.25$). These runs are trained separately from the sweep with the same recipe and seeds, so shift 100% differs from Table 1 by run-to-run variation (e.g. 0.368 vs 0.381 on `pad_heldout` at $\lambda_{\text{adv}} = 2$).

λ_{adv}	shift	leakage	`pad_heldout`	Fitzpatrick17k	MED-NODE	SD-198	SCIN
0	–	0.928	0.825	0.712	0.559	0.708	0.723
0.5	0%	0.783	0.498	0.672	0.525	0.664	0.718
0.5	50%	0.637	0.486	0.455	0.312	0.428	0.567
0.5	100%	0.628	0.361	0.385	0.310	0.365	0.534
2	0%	0.791	0.458	0.691	0.541	0.694	0.732
2	50%	0.647	0.469	0.457	0.322	0.432	0.583
2	100%	0.634	0.368	0.340	0.298	0.325	0.519

4.3. Mechanism: misaligned classes behind chance-level leakage

Unfamiliar images move to the majority class. At $\lambda_{\text{adv}} = 2$ with full label shift (Figure 1a), the share of `pad_heldout` images whose nearest class centroid is nevus rises from 0.36 to 0.63, and to 0.75–0.85 on the unseen sets; without label shift it stays at 0.12 and 0.39–0.49. Images of non-nevus classes are pulled into the nevus region: split by true class, non-nevus OOD images fall to AUROC 0.42 (main recipe) and 0.47 (A4), whereas images still nearest a non-nevus centroid stay at 0.62 and 0.64. Let AUROC_c compare all OOD images with the ID test images of class c. Because AUROC averages over ID samples, the pooled AUROC equals $\sum_c \pi_c \, \text{AUROC}_c$, with π_c the share of class c in the ID test set (verified numerically to 10^{-15}). Nevus is half of the ISIC test set, so OOD images placed in the nevus region are enough to push the pooled score below chance.

The displacement follows the domain direction. For each OOD image we measured how far it lies along the direction separating ISIC from PAD in the $\lambda_{\text{adv}} = 0$ model, and how much closer to its nearest ID centroid it moves at $\lambda_{\text{adv}} = 2$. The two correlate on every lesion dataset (Spearman 0.33–0.47), while the deviation orthogonal to that direction does not predict the pull ($|\rho| \leq 0.07$ on four of five sets). Between two $\lambda_{\text{adv}} = 0$ models of different seeds the same correlation is smaller (0.11–0.29); the DANN-specific excess exceeds 0.15 on all four unseen datasets (0.18–0.33) but not on `pad_heldout` (0.057), and is larger in the pre-projection backbone (0.24–0.45 on all five).

Chance-level leakage hides the misalignment. The domain probe of Table 3 (as in earlier work) is scored partly on images the adversary trained on. This is why it reads 0.928 at $\lambda_{\text{adv}} = 0$ against 0.842 for the held-out probe of Table 1. On held-out images a linear probe reads the domain at about chance from $\lambda_{\text{adv}} = 0.25$ on (0.502–0.527 at the last checkpoint, Table 1), but a k-NN probe still reads it (0.55–0.61 from $\lambda_{\text{adv}} = 0.5$ on; best-validation checkpoint, Appendix H), and under label shift an unweighted probe misreports

invariance (Table 4). With full label shift DANN reaches 0.510 on an unweighted held-out probe, yet within each class the domain remains decodable (0.618), more so than in any other condition. Correcting the class mix the adversary aligns (shift 0%, or importance weighting with the true priors) raises the unweighted reading (0.63–0.65) while lowering the within-class one (0.55–0.58). Under label shift, DANN matches the marginal distributions by misaligning classes, as the theory of Zhao et al. (2019) implies; leakage should therefore be measured within class (post hoc).

4.4. Safety-relevant misclassification and mitigation

Melanomas called benign. With a threshold accepting 95% of ISIC validation images, 0.90–1.00 of the malignant images from external datasets are accepted at both $\lambda_{\text{adv}} = 0$ and $\lambda_{\text{adv}} = 2$, so the monitor does not catch them in either case. What changes is the classifier. The share of melanomas predicted nevus with confidence above 0.9 rises from 12.5% [7.5, 17.6] to 51.1% [41.4, 61.0] on Fitzpatrick17k ($n = 83$) and from 12.9% [8.8, 17.2] to 81.4% [75.9, 86.5] on SD-198 ($n = 113$) between $\lambda_{\text{adv}} = 0$ and $\lambda_{\text{adv}} = 2$ (Appendix M); BCC, SCC and AK follow the same pattern (50–87% at $\lambda_{\text{adv}} = 2$). Removing the label shift seen by the adversary (shift 0%) lowers the melanoma share at $\lambda_{\text{adv}} = 2$ from 53.0% to 21.4% on Fitzpatrick17k and from 83.2% to 33.8% on SD-198 (retrained runs of Table 3). For `pad_heldout` as a whole, the Mahalanobis monitor already accepts 91.1% of images as in-distribution at $\lambda_{\text{adv}} = 0$; at $\lambda_{\text{adv}} = 2$ it accepts 96.1% (Appendix M).

No reliable scoring-side fix among the variants tested. Reversing the sign of the score does not help. At $\lambda_{\text{adv}} \geq 0.5$ it reaches only 0.55–0.63 on `pad_heldout` and Fitzpatrick17k with a false-positive rate of 0.84–0.98 at 95% true-positive rate across datasets, and at $\lambda_{\text{adv}} = 0$ it would turn 0.808 into 0.192. Relative Mahalanobis (Ren et al., 2021) and per-class standardised distances stay below 0.5 on all three unseen datasets at $\lambda_{\text{adv}} = 2$. Reversing the score would also help only if one could tell that the model is inverted, and that takes a labelled OOD set. Among the variants we tried, only changes during training, through the class priors used by the adversary, improved detection.

Importance-weighted alignment. With target class priors estimated online without labels, as in the original IWDAN, the estimate stays about 0.5 total variation from the truth and detection recovers only in part (32–45% of the lost AUROC at $\lambda_{\text{adv}} = 2$, 66–76% at $\lambda_{\text{adv}} = 0.5$; MED-NODE stays inverted). With priors from 50 labelled target images, detection on the unseen domains returns to the level obtained with the true priors, but in-distribution balanced accuracy drops from 0.48 to 0.39–0.40 (post hoc). CDAN and IWCDAN stay inverted at $\lambda_{\text{adv}} = 2$; details are in Appendix I.

5. Discussion

Accepting shifted inputs. Full-spectrum OOD detection argues that covariate-shifted inputs should be accepted (Yang et al., 2023). After DANN, our models accept images from external sources more readily than their own test images, but their zero-shot balanced accuracy on these images is only 0.244 at $\lambda_{\text{adv}} = 2$ (chance 0.167). AUROC below 0.5 means that the ranking is reversed: the monitor scores the shifted images as more typical than real in-distribution data. Whether a monitor tolerates shifted inputs is a separate question.

Table 4: Domain leakage on held-out images under three probes, and unseen-domain detection ($\lambda_{\text{adv}} = 2$, main recipe, last checkpoint). Unweighted: as usually reported; class-balanced: both domains reweighted to a common class mix; within-class: class-size-weighted mean of per-class probes. Fitz: Mahalanobis AUROC on Fitzpatrick17k. DANN rows are the runs of Table 3, not the sweep of Table 1.

condition	unweighted	class-balanced	within-class	Fitz
DANN, shift 100%	0.510	0.602	0.618	0.340
DANN, shift 0%	0.630	0.522	0.555	0.691
IWDAN (online)	0.534	0.562	0.597	0.508
IWDAN (50 labels)	0.652	0.545	0.583	0.741
IWDAN (true priors)	0.645	0.549	0.576	0.717

It depends on the acceptance rate at the deployed threshold (0.90–1.00 here, Appendix M) and on the accuracy on the same images, and a claim of tolerance to covariate shift should report both.

Why label shift matters. Zhao et al. (2019) showed that when class priors differ, matching marginal feature distributions cannot keep the classes of both domains in place. Our results show what this does to a distance-based monitor. OOD images that differ from the source along the domain direction are moved into the region of the majority class, and a class-conditional score then treats them as typical. A monitor on features the adversary never sees does not invert: on an ERM EfficientNet-B3 or a frozen ImageNet EfficientNet-B3, no labelled OOD set meets the inversion criterion, while the dual latent of the same $\lambda_{\text{adv}} = 2$ models does (Appendix T). The BCN→HAM case shows that an OOD set with more nevi than the ID set can invert such a score even without DANN. A DANN trained from BCN against HAM (prior total variation 0.36) reached held-out leakage 0.599 at $\lambda_{\text{adv}} = 2$ but did not invert detection on Fitzpatrick17k, MED-NODE or SD-198, so the inversion under DANN rests on one source–target pair (ISIC→PAD-UFES-20). In the main setting the OOD sets have fewer nevi than ISIC, and DANN creates the problem by moving them toward nevus. Without label shift the inversion is only seen on the adversary's target domain, where a smaller within-class pull remains. The same misplacement explains why the unweighted domain probe reaches chance: it measures marginal alignment, not class-conditional alignment. Our experiments do not establish why a plain single-encoder DANN collapses detection to chance instead of inverting it. Our hypothesis is that it never reaches the depth of invariance at which classes are misaligned: even with a stronger adversary its held-out leakage stayed at 0.699 on the lesion-level split, and none of the gradient-reversal configurations in the single-encoder screen went below 0.685 (Appendix O).

Checkpoint selection. We noticed after the sweep that at $\lambda_{\text{adv}} = 0.25$ the last checkpoint is inverted on both `pad_heldout` and Fitzpatrick17k, while best-validation selection picks earlier epochs where the seeds still disagree (seed s.d. 0.121). Validation accuracy does not separate these checkpoints, so a model selected in the usual way may look safe only because training was stopped early.

Recommendations. After a domain-alignment step:

(i) check OOD detection again on images from unseen sources, per class and pooled;

(ii) report domain leakage within class and not only unweighted;

(iii) compare the class priors of the aligned domains and correct for them if they differ: online IWDAN without labels recovered 66–76% of the lost AUROC on `pad_heldout` and Fitzpatrick17k at $\lambda_{\text{adv}} = 0.5$ without loss of in-distribution accuracy (MED-NODE stayed inverted), and a small labelled sample from the target domain brought detection to the true-prior level in a post hoc analysis;

(iv) report results for more than one checkpoint.

6. Limitations

- Scope: dermatology only, one source–target pair; the spread to unseen domains is shown for gradient reversal. BCN→HAM did not reproduce it.
- Other modalities: could not be tested; DANN did not remove hospital information on Camelyon17 while preserving the classifier, and the chest-radiograph OOD set was near chance before adaptation (0.522).
- Architecture: no single-encoder DANN reached invariance with EfficientNet-B3 or DINOv2-S/14 in 27 screened configurations, so the inversion is untested there.
- Competence: in-distribution accuracy is 0.04–0.08 below ERM on the same split (0.095 for DINOv2); an 80-epoch schedule did not close the gap.
- Statistics: MED-NODE and SD-198 are resampled by image; the five scores share one latent.
- Mechanism: a Gaussian toy model with label shift did not reproduce the inversion.
- Warning signals: none computed on in-distribution data alone flagged inverted runs.
- Mitigation: the few-label remedy is post hoc and costs in-distribution accuracy.
- Data: we obtained 3,887 of 16,577 Fitzpatrick17k images; the inversion holds within each skin-type group.

Each point is given in full in Appendix U.

7. Conclusion

We showed that domain-adversarial training can make an OOD monitor rank held-out images from the aligned domain and from external sources as more in-distribution than the model's own test images. In our experiments (one dermatology source–target pair, ISIC→PAD-UFES-20, with a dual-encoder model with EfficientNet-B3 and DINOv2-S/14 backbones), the interventions point to label shift between the domains the adversary aligns as the explanation for the settings we tried. A DANN trained from BCN against HAM did not reproduce the inversion. Single-encoder DANN did not reach invariance in our screen, so the effect is untested there. The adversary moves unfamiliar images toward the

majority class, and the usual leakage probe does not detect this misalignment. Checking OOD detection on unseen sources after adaptation, measuring leakage within class and correcting for class priors are cheap steps. With a small labelled sample from the target domain, the last of these also reduced the problem in a post hoc analysis.

References

Alceu Bissoto, Eduardo Valle, and Sandra Avila. Debiasing skin lesion datasets and models? Not so fast. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops*, 2020.

Konstantinos Bousmalis, George Trigeorgis, Nathan Silberman, Dilip Krishnan, and Dumitru Erhan. Domain separation networks. In *Advances in Neural Information Processing Systems*, 2016.

Roxana Daneshjou, Kailas Vodrahalli, Roberto A. Novoa, Melissa Jenkins, Weixin Liang, Veronica Rotemberg, Justin Ko, Susan M. Swetter, Elizabeth E. Bailey, Olivier Gevaert, Pritam Mukherjee, Michelle Phung, Kiana Yekrang, Bradley Fong, Rachna Sahasrabudhe, Johan A. C. Allerup, Utako Okata-Karigane, James Zou, and Albert S. Chiou. Disparities in dermatology AI performance on a diverse, curated clinical image set. *Science Advances*, 8(32), 2022.

Yaroslav Ganin, Evgeniya Ustinova, Hana Ajakan, Pascal Germain, Hugo Larochelle, François Laviolette, Mario Marchand, and Victor Lempitsky. Domain-adversarial training of neural networks. *Journal of Machine Learning Research*, 17(59):1–35, 2016.

Ioannis Giotis, Nynke Molders, Sander Land, Michael Biehl, Marcel F. Jonkman, and Nicolai Petkov. MED-NODE: A computer-assisted melanoma diagnosis system using non-dermoscopic images. *Expert Systems with Applications*, 42(19):6578–6585, 2015. doi: 10.1016/j.eswa.2015.04.034.

Matthew Groh, Caleb Harris, Luis Soenksen, Felix Lau, Rachel Han, Aerin Kim, Arash Koochek, and Omar Badri. Evaluating deep neural networks trained on clinical images in dermatology with the Fitzpatrick 17k dataset. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops*, 2021.

Dan Hendrycks and Kevin Gimpel. A baseline for detecting misclassified and out-of-distribution examples in neural networks. In *International Conference on Learning Representations*, 2017.

Kimin Lee, Kibok Lee, Honglak Lee, and Jinwoo Shin. A simple unified framework for detecting out-of-distribution samples and adversarial attacks. In *Advances in Neural Information Processing Systems*, 2018.

Zachary C. Lipton, Yu-Xiang Wang, and Alexander J. Smola. Detecting and correcting for label shift with black box predictors. In *Proceedings of the 35th International Conference on Machine Learning*, 2018.

Weitang Liu, Xiaoyun Wang, John D. Owens, and Yixuan Li. Energy-based out-of-distribution detection. In *Advances in Neural Information Processing Systems*, 2020.

Mingsheng Long, Yue Cao, Jianmin Wang, and Michael I. Jordan. Learning transferable features with deep adaptation networks. In *International Conference on Machine Learning*, 2015.

Mingsheng Long, Zhangjie Cao, Jianmin Wang, and Michael I. Jordan. Conditional adversarial domain adaptation. In *Advances in Neural Information Processing Systems*, 2018.

Yaniv Ovadia, Emily Fertig, Jie Ren, Zachary Nado, D. Sculley, Sebastian Nowozin, Joshua V. Dillon, Balaji Lakshminarayanan, and Jasper Snoek. Can you trust your model's uncertainty? Evaluating predictive uncertainty under dataset shift. In *Advances in Neural Information Processing Systems*, 2019.

Andre G. C. Pacheco, Gustavo R. Lima, Amanda S. Salomão, Breno Krohling, Igor P. Biral, Gabriel G. de Angelo, Fábio C. R. Alves Jr, José G. M. Esgario, Alana C. Simora, Pedro B. C. Castro, Felipe B. Rodrigues, Patricia H. L. Frasson, Renato A. Krohling, Helder Knidel, Maria C. S. Santos, Rachel B. do Espírito Santo, Telma L. S. G. Macedo, Tania R. P. Canuto, and Luiz F. S. de Barros. PAD-UFES-20: A skin lesion dataset composed of patient data and clinical images collected from smartphones. *Data in Brief*, 32, 2020.

Jie Ren, Stanislav Fort, Jeremiah Liu, Abhijit Guha Roy, Shreyas Padhy, and Balaji Lakshminarayanan. A simple fix to Mahalanobis distance for improving near-OOD detection. *arXiv preprint arXiv:2106.09022*, 2021.

Marco Saerens, Patrice Latinne, and Christine Decaestecker. Adjusting the outputs of a classifier to new a priori probabilities: A simple procedure. *Neural Computation*, 14(1): 21–41, 2002.

Xiaoxiao Sun, Jufeng Yang, Ming Sun, and Kai Wang. A benchmark for automatic visual classification of clinical skin disease images. In *Computer Vision – ECCV 2016*, Lecture Notes in Computer Science, pages 206–222, 2016. doi: 10.1007/978-3-319-46466-4_13.

Yiyou Sun, Yifei Ming, Xiaojin Zhu, and Yixuan Li. Out-of-distribution detection with deep nearest neighbors. In *International Conference on Machine Learning*, 2022.

Remi Tachet des Combes, Han Zhao, Yu-Xiang Wang, and Geoffrey Gordon. Domain adaptation with conditional distribution matching and generalized label shift. In *Advances in Neural Information Processing Systems*, 2020.

Duc Vinh Tran. Your OOD monitor has seen these patients: Group overlap miscalibrates deployment monitors in medical imaging, 2027. Under review at MIDL 2027.

Philipp Tschandl, Cliff Rosendahl, and Harald Kittler. The HAM10000 dataset, a large collection of multi-source dermatoscopic images of common pigmented skin lesions. *Scientific Data*, 5, 2018. See also Combalia et al., BCN20000, arXiv:1908.02288, 2019, and the ISIC 2019 challenge.

Ximei Wang, Mingsheng Long, Jianmin Wang, and Michael I. Jordan. Transferable calibration with lower bias and variance in domain adaptation. In *Advances in Neural Information Processing Systems*, 2020.

Abbi Ward, Jimmy Li, Julie Wang, et al. Creating an empirical dermatology dataset through crowdsourcing with web search advertisements. *JAMA Network Open*, 7(11):e2446615, 2024. doi: 10.1001/jamanetworkopen.2024.46615.

Julia K. Winkler, Christine Fink, Ferdinand Toberer, Alexander Enk, Teresa Deinlein, Rainer Hofmann-Wellenhof, Luc Thomas, Aimilios Lallas, Andreas Blum, Wilhelm Stolz, and Holger A. Haenssle. Association between surgical skin markings in dermoscopic images and diagnostic performance of a deep learning convolutional neural network for melanoma recognition. *JAMA Dermatology*, 155(10):1135–1141, 2019.

Xinheng Wu, Jie Lu, Zhen Fang, and Guangquan Zhang. Meta OOD learning for continuously adaptive OOD detection. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, 2023. doi: 10.1109/ICCV51070.2023.01773.

Jingkang Yang, Kaiyang Zhou, and Ziwei Liu. Full-spectrum out-of-distribution detection. *International Journal of Computer Vision*, 2023.

Jingyang Zhang, Jingkang Yang, Pengyun Wang, Haoqi Wang, Yueqian Lin, Haoran Zhang, Yiyou Sun, Xuefeng Du, Kaiyang Zhou, Wayne Zhang, Yixuan Li, Ziwei Liu, Yiran Chen, and Hai Li. OpenOOD v1.5: Enhanced benchmark for out-of-distribution detection. *arXiv preprint arXiv:2306.09301*, 2023.

Han Zhao, Remi Tachet des Combes, Kun Zhang, and Geoffrey Gordon. On learning invariant representations for domain adaptation. In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *PMLR*, pages 7523–7532, 2019.

Appendix A. Other alignment objectives and the single-encoder model

All values are Mahalanobis, k-NN, cosine, MSP and energy AUROC on `pad_heldout` (image-level ISIC split, best-validation checkpoint, patient-clustered intervals), so they are comparable with each other but not with the main tables.

MMD at weight 10,000 reaches leakage 0.836 only by reducing in-distribution balanced accuracy to 0.337, so it never reaches the invariance gradient reversal attains with the classifier intact. On the dual-encoder model at matched held-out leakage, multi-kernel MMD does invert detection on `pad_heldout` (Section 4.2). IRM's low MSP and energy values reflect a classifier that has collapsed (balanced accuracy 0.167 at weight 100), not an inversion of the feature scores.

The A4 recipe. With a 64-dimensional latent, unweighted cross-entropy replaced by a class-weighted loss and the last checkpoint (A4), detection again inverts at $\lambda_{\text{adv}} = 0.5$ and $\lambda_{\text{adv}} = 2$ on `pad_heldout` (0.468 $[0.440, 0.495]$; 0.452 $[0.425, 0.478]$) and Fitzpatrick17k (0.444; 0.458), with in-distribution balanced accuracy unchanged (0.520, 0.520, 0.510). On `pad_heldout` all five scores' intervals lie below 0.5; on Fitzpatrick17k k-NN (0.521) and

Table 5: Single-encoder DANN (EfficientNet-B3, one linear head and a domain head; five seeds at $\lambda_{\text{adv}} \in \{0, 2\}$, three elsewhere). Detection collapses to about chance from $\lambda_{\text{adv}} = 0.25$ and does not invert.

λ_{adv}	Mahalanobis	k-NN	cosine	MSP	energy
0	0.700 [0.683, 0.717]	0.935 [0.924, 0.944]	0.875 [0.861, 0.887]	0.857 [0.844, 0.868]	0.901 [0.891, 0.910]
0.25	0.539 [0.514, 0.564]	0.548 [0.526, 0.571]	0.530 [0.508, 0.553]	0.548 [0.529, 0.567]	0.536 [0.515, 0.555]
0.5	0.525 [0.499, 0.549]	0.539 [0.516, 0.561]	0.519 [0.498, 0.542]	0.543 [0.522, 0.563]	0.543 [0.524, 0.561]
1	0.555 [0.530, 0.581]	0.541 [0.519, 0.562]	0.517 [0.495, 0.539]	0.517 [0.497, 0.537]	0.498 [0.479, 0.516]
2	0.521 [0.494, 0.546]	0.542 [0.520, 0.562]	0.514 [0.491, 0.535]	0.540 [0.522, 0.559]	0.529 [0.511, 0.547]
4	0.512 [0.486, 0.538]	0.514 [0.489, 0.539]	0.490 [0.467, 0.512]	0.519 [0.498, 0.540]	0.501 [0.481, 0.521]
8	0.525 [0.502, 0.549]	0.558 [0.536, 0.580]	0.526 [0.505, 0.545]	0.566 [0.545, 0.585]	0.551 [0.531, 0.570]

Table 6: Non-adversarial objectives on the single-encoder model, by weight (three seeds). None inverts detection; MMD lowers it while keeping every score above 0.6.

objective	weight	Mahalanobis	k-NN	cosine	MSP	energy
ERM	–	0.834 [0.819, 0.849]	0.940 [0.929, 0.949]	0.888 [0.874, 0.900]	0.826 [0.813, 0.838]	0.823 [0.809, 0.836]
CORAL	1	0.910 [0.899, 0.920]	0.970 [0.962, 0.977]	0.959 [0.949, 0.967]	0.827 [0.814, 0.839]	0.834 [0.821, 0.847]
CORAL	100	0.998 [0.996, 1.000]	0.998 [0.996, 1.000]	0.999 [0.996, 1.000]	0.944 [0.937, 0.951]	0.629 [0.614, 0.644]
MMD	1	0.811 [0.791, 0.827]	0.930 [0.919, 0.940]	0.853 [0.837, 0.866]	0.815 [0.800, 0.828]	0.804 [0.788, 0.819]
MMD	100	0.724 [0.696, 0.751]	0.791 [0.768, 0.812]	0.668 [0.644, 0.690]	0.729 [0.713, 0.745]	0.663 [0.643, 0.684]
MMD	10000	0.664 [0.650, 0.678]	0.740 [0.725, 0.755]	0.633 [0.617, 0.650]	0.670 [0.650, 0.689]	0.696 [0.678, 0.713]
IRM	1	0.918 [0.905, 0.930]	0.951 [0.940, 0.959]	0.878 [0.865, 0.889]	0.521 [0.498, 0.543]	0.464 [0.440, 0.486]
IRM	100	0.724 [0.713, 0.736]	0.752 [0.738, 0.765]	0.702 [0.690, 0.715]	0.496 [0.482, 0.509]	0.542 [0.528, 0.556]
GroupDRO	1	0.860 [0.843, 0.875]	0.941 [0.930, 0.949]	0.842 [0.828, 0.856]	0.646 [0.627, 0.664]	0.581 [0.558, 0.603]

energy (0.516) only collapse. A plain single-encoder DANN collapses to chance (0.51–0.56, Table 5) without inverting.

Appendix B. Best-validation checkpoint

Table 7: Mahalanobis AUROC on `pad_heldout` at the best-validation checkpoint for the runs of Table 1 (mean ± s.d., five seeds), for comparison; the main tables use the last checkpoint.

λ_{adv}	`pad_heldout` (best-val)
0	0.808 ± 0.027
0.25	0.525 ± 0.121
0.5	0.426 ± 0.008
1	0.387 ± 0.016
2	0.403 ± 0.028
4	0.433 ± 0.020
8	0.454 ± 0.044

Appendix C. Label-shift intervention: full results

Main recipe, last checkpoint; one degraded shift-0% run (in-distribution balanced accuracy 0.139) is excluded. k/n: seeds whose interval lies below 0.5.

The regression uses one point per run ($n = 79$; 80 runs with one degraded run excluded): Mahalanobis AUROC on label-shift level (coded 0, 0.5, 1), unweighted leakage and recipe. Intervals come from a wild cluster bootstrap with Webb weights over the 16 recipe × λ_{adv} × shift cells (2,000 draws). The shift coefficient is identified only from the 6 cells of Table 3 that vary the shift level (2 values of λ_{adv} × 3 shift levels, 29 runs); A4 and the Table 1 runs only extend the leakage range at shift 100%. The regression therefore supports the label-shift explanation in the settings tried and is not an independent causal test.

Intervention by level. Changing the class mix of the ISIC images the adversary sees switches the inversion on unseen domains on and off (Table 3). At $\lambda_{\text{adv}} = 2$, with the adversary's ISIC images resampled to PAD's class mix (shift 0%), Mahalanobis AUROC is 0.691 on Fitzpatrick17k, 0.541 on MED-NODE and 0.694 on SD-198, none inverted; with ISIC's own mix (shift 100%) it is 0.340, 0.298 and 0.325, inverted in every seed. Paired by seed, removing the label shift raises AUROC by 0.361, 0.243 and 0.372. The intermediate level falls between the two on Fitzpatrick17k (0.455 at $\lambda_{\text{adv}} = 0.5$, 0.457 at $\lambda_{\text{adv}} = 2$) and SD-198 (0.428, 0.432); on MED-NODE it is already as low as full shift (0.312, 0.322). At shift 50% the inversion criterion is met on all three labelled unseen datasets at both $\lambda_{\text{adv}} = 0.5$ and $\lambda_{\text{adv}} = 2$ (Fitzpatrick17k 4/5 and 3/5 seeds, MED-NODE 5/5 and 5/5, SD-198 4/5 and 4/5); `pad_heldout` meets it at $\lambda_{\text{adv}} = 2$ (0.469 $[0.448, 0.490]$, 4/5) but not at $\lambda_{\text{adv}} = 0.5$ (interval upper bound 0.508). On `pad_heldout`, the adversary's own target domain, a mild inversion remains without label shift (0.458; paired difference +0.093). One of five shift-0% runs collapsed (in-distribution balanced accuracy 0.139) and is excluded.

Matched leakage. Removing label shift also leaves more domain information in the latent (leakage 0.791 vs 0.634), so the intervention alone does not separate label shift from depth of invariance. A regression of unseen-domain AUROC on label-shift level and leakage, with recipe as a covariate (variance inflation ≈ 1.03), gives label-shift coefficients

Table 8: Mahalanobis AUROC by the class mix seen by the adversary. Shift 50%: five seeds.

set	shift	λ_{adv}	mean ± s.d.	95% CI	k/n	inverted
`pad_heldout`	100%	0	0.825 ± 0.022	[0.810, 0.839]	0/5	not met
`pad_heldout`	100%	0.5	0.361 ± 0.029	[0.338, 0.383]	5/5	met
`pad_heldout`	50%	0.5	0.486 ± 0.047	[0.463, 0.508]	3/5	not met
`pad_heldout`	0%	0.5	0.498 ± 0.025	[0.478, 0.517]	0/5	not met
`pad_heldout`	100%	2	0.368 ± 0.017	[0.344, 0.391]	5/5	met
`pad_heldout`	50%	2	0.469 ± 0.027	[0.448, 0.490]	4/5	met
`pad_heldout`	0%	2	0.458 ± 0.003	[0.438, 0.477]	4/4	met
Fitzpatrick17k	100%	0	0.712 ± 0.013	[0.698, 0.725]	0/5	not met
Fitzpatrick17k	100%	0.5	0.385 ± 0.023	[0.373, 0.398]	5/5	met
Fitzpatrick17k	50%	0.5	0.455 ± 0.115	[0.443, 0.468]	4/5	met
Fitzpatrick17k	0%	0.5	0.672 ± 0.046	[0.661, 0.684]	0/5	not met
Fitzpatrick17k	100%	2	0.340 ± 0.065	[0.328, 0.352]	5/5	met
Fitzpatrick17k	50%	2	0.457 ± 0.062	[0.444, 0.470]	3/5	met
Fitzpatrick17k	0%	2	0.691 ± 0.031	[0.680, 0.702]	0/4	not met
MED-NODE	100%	0	0.559 ± 0.019	[0.531, 0.587]	0/5	not met
MED-NODE	100%	0.5	0.310 ± 0.055	[0.284, 0.337]	5/5	met
MED-NODE	50%	0.5	0.312 ± 0.051	[0.282, 0.344]	5/5	met
MED-NODE	0%	0.5	0.525 ± 0.050	[0.497, 0.554]	1/5	not met
MED-NODE	100%	2	0.298 ± 0.032	[0.271, 0.326]	5/5	met
MED-NODE	50%	2	0.322 ± 0.054	[0.294, 0.353]	5/5	met
MED-NODE	0%	2	0.541 ± 0.027	[0.512, 0.572]	0/4	not met
SD-198	100%	0	0.708 ± 0.019	[0.695, 0.722]	0/5	not met
SD-198	100%	0.5	0.365 ± 0.029	[0.353, 0.377]	5/5	met
SD-198	50%	0.5	0.428 ± 0.104	[0.417, 0.439]	4/5	met
SD-198	0%	0.5	0.664 ± 0.058	[0.653, 0.675]	0/5	not met
SD-198	100%	2	0.325 ± 0.069	[0.315, 0.336]	5/5	met
SD-198	50%	2	0.432 ± 0.047	[0.421, 0.444]	4/5	met
SD-198	0%	2	0.694 ± 0.031	[0.683, 0.704]	0/4	not met
SCIN	100%	0	0.723 ± 0.018	[0.710, 0.736]	0/5	not met
SCIN	100%	0.5	0.534 ± 0.015	[0.521, 0.547]	0/5	not met
SCIN	50%	0.5	0.567 ± 0.080	[0.555, 0.579]	1/5	not met
SCIN	0%	0.5	0.718 ± 0.036	[0.708, 0.729]	0/5	not met
SCIN	100%	2	0.519 ± 0.073	[0.507, 0.532]	1/5	not met
SCIN	50%	2	0.583 ± 0.043	[0.571, 0.595]	0/5	not met
SCIN	0%	2	0.732 ± 0.035	[0.722, 0.742]	0/4	not met

Table 9: Label-shift coefficient at fixed leakage.

set	n	coefficient	95% CI	excludes 0	VIF (leakage)	VIF (recipe)	identifiable
Fitzpatrick17k	79	-0.167	[-0.217, -0.116]	yes	1.03	1.03	yes
MED-NODE	79	-0.108	[-0.150, -0.065]	yes	1.03	1.03	yes
SD-198	79	-0.173	[-0.222, -0.124]	yes	1.03	1.03	yes
`pad_heldout` (not counted)	79	0.034	[-0.062, 0.126]	no	1.03	1.03	yes

of -0.167 $[-0.217, -0.116]$ (Fitzpatrick17k), -0.108 $[-0.150, -0.065]$ (MED-NODE) and -0.173 $[-0.222, -0.124]$ (SD-198) for a change from no shift to full shift at fixed leakage (shift coded 0, 0.5, 1; wild cluster bootstrap with Webb weights over recipe $\times$ λ_{adv} $\times$ shift cells, 2,000 draws). On `pad_heldout` the coefficient is $+0.034$ $[-0.062, +0.126]$. Comparing runs at equal leakage across recipes (A4 at shift 100%, leakage 0.78, against the main recipe at shift 0%, leakage 0.79) gives the same direction ($+0.23$ to $+0.26$).

Appendix D. Six-class control

Shift 0% removes DF and VASC from the adversary's ISIC stream as well as changing the priors. The six-class control removes only DF and VASC and renormalises ISIC's priors over the six shared classes (MEL 0.182, NV 0.518, BCC 0.134, AK 0.035, BKL 0.106, SCC 0.025); the classification loss still uses all eight classes and PAD labels are not used. Recovery is (six-class − shift 100%) / (shift 0% − shift 100%) from the seed means. We read class support as not being the driver if, at $\lambda_{\text{adv}} = 2$, the inversion criterion is met on at least two of the three labelled external datasets and recovery is below 0.25 on each of them. The criterion is met on all three and recovery is 0.037–0.063; $\lambda_{\text{adv}} = 0.5$ points the same way. No six-class run was degraded (in-distribution balanced accuracy 0.467 ± 0.010 at $\lambda_{\text{adv}} = 2$, 0.470 ± 0.010 at $\lambda_{\text{adv}} = 0.5$).

Table 10: Six-class control: Mahalanobis AUROC (mean ± sd over seeds 42, 52, 62, 72, 82; main recipe, last checkpoint). References are the runs of Table 3; shift 0% at $\lambda_{\text{adv}} = 2$ has four seeds after excluding the degraded run. `pad_heldout` and SCIN are reported but not counted.

λ_{adv}	OOD set	six-class	shift 100%	shift 0%	recovery
2	`pad_heldout`	0.372 ± 0.034	0.368 ± 0.017	0.458 ± 0.003	0.050
2	Fitzpatrick17k	0.362 ± 0.032	0.340 ± 0.065	0.691 ± 0.031	0.063
2	MED-NODE	0.312 ± 0.050	0.298 ± 0.032	0.541 ± 0.027	0.058
2	SD-198	0.339 ± 0.039	0.325 ± 0.069	0.694 ± 0.031	0.037
2	SCIN	0.496 ± 0.045	0.519 ± 0.073	0.732 ± 0.035	−0.108
0.5	`pad_heldout`	0.374 ± 0.037	0.361 ± 0.029	0.498 ± 0.025	0.101
0.5	Fitzpatrick17k	0.394 ± 0.043	0.385 ± 0.023	0.672 ± 0.046	0.031
0.5	MED-NODE	0.332 ± 0.036	0.310 ± 0.055	0.525 ± 0.050	0.103
0.5	SD-198	0.384 ± 0.051	0.365 ± 0.029	0.664 ± 0.058	0.063
0.5	SCIN	0.557 ± 0.034	0.534 ± 0.015	0.718 ± 0.036	0.121

Appendix E. Fixed images, reweighted adversary loss

Resampling the adversary's ISIC stream (Table 3) changes both the class priors the adversary aligns and the images it sees. To separate the two, we kept the image schedule of every stream unchanged for each seed and reweighted only the ISIC term of the domain loss, by $w_c = \pi_c^{\text{req}} / \pi_c^{\text{ISIC}}$ normalised to mean one over the stream. The requested mix π^{req} is ISIC's own (prior 100%), PAD's (prior 0%, computed from the `pad_adv` labels at the start of training) or their midpoint (prior 50%). PAD has no DF or VASC, so these two classes get weight zero at prior 0%. The classification loss is unchanged and no per-image PAD label enters any loss. The implementation differs from the IWDAN runs of Appendix I, so the two sets of results are not directly comparable. Main recipe, last checkpoint, seeds $\{42, 52, 62, 72, 82\}$ in every cell; no run was degraded. At prior 100% every weight is one, so these runs repeat the shift-100% runs of Table 3; per-seed results agree exactly at $\lambda_{\text{adv}} \in \{0.5, 2\}$. The $\lambda_{\text{adv}} = 0$ models were retrained for this comparison and differ from the $\lambda_{\text{adv}} = 0$ row of Table 3 by

run-to-run variation (Fitzpatrick17k 0.728 against 0.712); they serve as the reference for all three prior levels.

Table 11: Fixed images, reweighted adversary loss: Mahalanobis AUROC, mean ± s.d. over five seeds. Prior: class mix the ISIC term of the domain loss is reweighted to (100%: ISIC's; 0%: PAD's). Leakage: linear probe on ISIC test against all of PAD, as in Table 3. ID: in-distribution balanced accuracy. Bold: inversion criterion met (intervals in Table 12).

λ_{adv}	prior	leakage	ID bal. acc	`pad_heldout`	Fitzpatrick17k	MED-NODE	SD-198	SCIN
0	–	0.911	0.490 ± 0.009	0.806 ± 0.035	0.728 ± 0.050	0.589 ± 0.025	0.722 ± 0.055	0.714 ± 0.046
0.5	100%	0.628	0.483 ± 0.013	$\mathbf{0.361 \pm 0.029}$	$\mathbf{0.385 \pm 0.023}$	$\mathbf{0.310 \pm 0.055}$	$\mathbf{0.365 \pm 0.029}$	0.534 ± 0.015
0.5	50%	0.621	0.486 ± 0.007	0.488 ± 0.032	$\mathbf{0.458 \pm 0.076}$	$\mathbf{0.332 \pm 0.050}$	$\mathbf{0.447 \pm 0.070}$	0.572 ± 0.070
0.5	0%	0.758	0.483 ± 0.005	0.592 ± 0.026	0.657 ± 0.031	0.505 ± 0.074	0.640 ± 0.034	0.678 ± 0.049
2	100%	0.634	0.486 ± 0.012	$\mathbf{0.368 \pm 0.017}$	$\mathbf{0.340 \pm 0.065}$	$\mathbf{0.298 \pm 0.032}$	$\mathbf{0.325 \pm 0.069}$	0.519 ± 0.073
2	50%	0.630	0.473 ± 0.020	0.494 ± 0.025	$\mathbf{0.434 \pm 0.055}$	$\mathbf{0.323 \pm 0.048}$	$\mathbf{0.436 \pm 0.067}$	0.548 ± 0.066
2	0%	0.757	0.476 ± 0.010	0.595 ± 0.019	0.661 ± 0.032	0.510 ± 0.034	0.657 ± 0.035	0.689 ± 0.030

Table 12: Intervals for Table 11: 95% cluster-bootstrap interval of the seed-mean Mahalanobis AUROC and the number of seeds whose own interval lies below 0.5. The intervals reflect image sampling, not variation between seeds.

λ_{adv}	prior	`pad_heldout`	Fitzpatrick17k	MED-NODE	SD-198	SCIN
0	–	[0.791, 0.820] 0/5	[0.715, 0.741] 0/5	[0.561, 0.617] 0/5	[0.709, 0.735] 0/5	[0.701, 0.727] 0/5
0.5	100%	[0.338, 0.383] 5/5	[0.373, 0.398] 5/5	[0.284, 0.337] 5/5	[0.353, 0.377] 5/5	[0.521, 0.547] 0/5
0.5	50%	[0.466, 0.510] 1/5	[0.446, 0.471] 4/5	[0.304, 0.360] 5/5	[0.436, 0.459] 4/5	[0.559, 0.585] 0/5
0.5	0%	[0.574, 0.611] 0/5	[0.644, 0.669] 0/5	[0.476, 0.533] 2/5	[0.628, 0.653] 0/5	[0.666, 0.690] 0/5
2	100%	[0.344, 0.391] 5/5	[0.328, 0.352] 5/5	[0.271, 0.326] 5/5	[0.315, 0.336] 5/5	[0.507, 0.532] 1/5
2	50%	[0.472, 0.516] 1/5	[0.421, 0.447] 4/5	[0.296, 0.353] 5/5	[0.424, 0.447] 5/5	[0.536, 0.560] 1/5
2	0%	[0.578, 0.613] 0/5	[0.649, 0.673] 0/5	[0.479, 0.541] 1/5	[0.645, 0.669] 0/5	[0.677, 0.701] 0/5

With PAD's priors no set meets the inversion criterion at either λ_{adv}. Paired by seed, AUROC rises over prior 100% by 0.272 ± 0.046 and 0.321 ± 0.079 on Fitzpatrick17k ($\lambda_{\text{adv}} = 0.5$ and 2), 0.194 ± 0.041 and 0.211 ± 0.041 on MED-NODE, 0.275 ± 0.056 and 0.332 ± 0.085 on SD-198, and 0.232 ± 0.036 and 0.227 ± 0.024 on `pad_heldout`. MED-NODE only reaches chance (0.505 and 0.510). The midpoint falls in between, and Fitzpatrick17k, MED-NODE and SD-198 still meet the criterion there, as at shift 50%. Unlike resampling, reweighting also brings `pad_heldout` above chance (0.592 and 0.595, against 0.498 and 0.458 at shift 0%). Leakage is higher with PAD's priors (0.758 and 0.757 against 0.628 and 0.634), as it is under resampling, so these runs do not separate the priors from the depth of invariance. Reweighting also changes the variance of the adversary's gradients, so the two protocols are not equivalent; the conclusion that the priors rather than the images matter holds within this protocol.

Initialisation from ERM. To ask whether a more accurate model still inverts, we also initialised both encoders of the dual model from the seed-matched ERM EfficientNet-B3 backbone (heads random; $\lambda_{\text{adv}} \in \{0, 2\}$, prior 100%, same five seeds). Accuracy did not improve: in-distribution balanced accuracy was 0.491 ± 0.008 at $\lambda_{\text{adv}} = 0$ and 0.484 ± 0.014

at $\lambda_{\text{adv}} = 2$, below ERM minus 0.03 (0.528), with leakage 0.921 ± 0.008 and 0.649 ± 0.021 on the probe of Table 11. These runs therefore do not answer the question, and we do not interpret their detection results.

Class-macro AUROC. The pooled AUROC weights each ID class by its share of the test set (Section 4.3), so nevus dominates it. Table 13 gives the unweighted mean of AUROC_c over the eight ID classes for the same runs. Before adaptation this is near chance on Fitzpatrick17k (0.502), SD-198 (0.496) and SCIN (0.482) and below it on MED-NODE (0.355). OOD images already score as more familiar than the ID test images of the rare classes (Fitzpatrick17k: 0.31–0.35 for AK, DF, VASC and SCC), though not than nevus (0.87). DANN at prior 100% brings the macro value down to 0.15–0.22 on `pad_heldout` and the three labelled unseen sets. With PAD's priors it comes back to 0.456 and 0.463 on Fitzpatrick17k ($\lambda_{\text{adv}} = 0.5$ and 2) and 0.31–0.32 on MED-NODE, near the $\lambda_{\text{adv}} = 0$ level but still below 0.5. So the correction restores roughly what the monitor had before adaptation, and per class that was already weak. The class-level picture is less favourable than the pooled one.

Table 13: Class-macro Mahalanobis AUROC (unweighted mean over the eight ID classes of OOD images against the ID test images of each class) for the runs of Table 11; mean ± s.d. over five seeds.

λ_{adv}	prior	`pad_heldout`	Fitzpatrick17k	MED-NODE	SD-198	SCIN
0	–	0.603 ± 0.053	0.502 ± 0.062	0.355 ± 0.030	0.496 ± 0.069	0.482 ± 0.056
0.5	100%	0.213 ± 0.021	0.216 ± 0.015	0.153 ± 0.037	0.200 ± 0.021	0.331 ± 0.015
0.5	50%	0.319 ± 0.032	0.282 ± 0.078	0.172 ± 0.033	0.274 ± 0.070	0.371 ± 0.077
0.5	0%	0.398 ± 0.016	0.456 ± 0.038	0.313 ± 0.068	0.442 ± 0.039	0.478 ± 0.055
2	100%	0.222 ± 0.009	0.188 ± 0.040	0.148 ± 0.016	0.178 ± 0.045	0.325 ± 0.051
2	50%	0.324 ± 0.030	0.267 ± 0.037	0.174 ± 0.037	0.269 ± 0.047	0.356 ± 0.051
2	0%	0.400 ± 0.018	0.463 ± 0.039	0.318 ± 0.029	0.464 ± 0.041	0.491 ± 0.037

Appendix F. BCN→HAM: label shift without DANN (post hoc)

ISIC 2019 contains two sites, Hospital Clínic Barcelona (BCN) and HAM10000 (HAM), both dermoscopic. Training on BCN with a lesion-disjoint held-out part of HAM as the OOD set, Mahalanobis AUROC is 0.369 $[0.337, 0.402]$ at $\lambda_{\text{adv}} = 0$, below chance in all three seeds, while k-NN gives 0.658 $[0.626, 0.688]$. The reverse direction (HAM→BCN) gives 0.846.

Reweighting HAM to BCN's class mix recovers 92% of the distance to 0.5, no class-matched interval excludes 0.5, and dispersion ratios are close to one. The inversion is therefore a label-shift effect on the pooled score; we cannot exclude a small within-class contribution.

Main-text summary. Label shift alone can invert a class-conditional Mahalanobis score. Training on BCN and treating HAM as OOD, Mahalanobis AUROC is already 0.369 $[0.337, 0.402]$ at $\lambda_{\text{adv}} = 0$, while k-NN gives 0.658. HAM-heldout is 67% nevus against 31% in BCN test; reweighting HAM to BCN's class mix gives 0.489 $[0.453, 0.524]$, and no class-matched AUROC differs from 0.5 (post hoc). In the main setting the OOD sets are

Table 14: BCN→HAM at $\lambda_{\text{adv}} = 0$ (three seeds, lesion-clustered intervals). Class-matched: HAM images of class c against BCN test images of class c. Dispersion: median squared Mahalanobis distance to the image's own class centroid, HAM over BCN.

class	BCN test share	HAM share	class-matched Mahalanobis	class-matched k-NN	dispersion ratio
MEL	0.222	0.118	0.443 [0.362, 0.527]	0.620 [0.540, 0.693]	0.92
NV	0.306	0.667	0.483 [0.418, 0.546]	0.639 [0.584, 0.693]	0.97
BCC	0.215	0.052	0.498 [0.437, 0.561]	0.656 [0.585, 0.729]	0.99
AK	0.077	0.011	0.685 [0.570, 0.792]	0.595 [0.447, 0.733]	1.20
BKL	0.109	0.108	0.526 [0.445, 0.615]	0.623 [0.542, 0.705]	1.01
DF	0.021	0.012	0.577 [0.360, 0.768]	0.717 [0.593, 0.852]	1.05
SCC	0.042	0.020	0.407 [0.275, 0.528]	0.714 [0.594, 0.826]	0.90
pooled, unweighted			0.369 [0.337, 0.402]	0.658 [0.626, 0.688]	
pooled, HAM reweighted to BCN mix			0.489 [0.453, 0.524]		

less nevus-heavy than ISIC, so detection works at $\lambda_{\text{adv}} = 0$; DANN creates the condition by moving them toward nevus.

Appendix G. Domain-direction analysis

For each OOD image, the domain score is its projection on a linear ISIC-versus-`pad_adv` classifier fitted on the $\lambda_{\text{adv}} = 0$ model's features; the pull is the decrease in its Mahalanobis distance to the nearest ID centroid, normalised by the median ID distance of each run, from $\lambda_{\text{adv}} = 0$ to $\lambda_{\text{adv}} = 2$ (matched seeds). The orthogonal control uses the magnitude of the deviation orthogonal to the domain direction. The placebo replaces the $\lambda_{\text{adv}} = 2$ model with a $\lambda_{\text{adv}} = 0$ model of a different seed.

Table 15: Spearman correlation between domain score and pull (latent z_ℓ^{norm}), and the excess over the seed placebo (paired bootstrap). Backbone: pre-projection features.

set	ρ_{dom}	ρ_{orth}	placebo ρ_{dom}	excess (latent)	excess (backbone)
`pad_heldout`	+0.344	−0.068	+0.288	+0.057 [+0.007, +0.105]	+0.331 [+0.283, +0.374]
Fitzpatrick17k	+0.419	−0.066	+0.205	+0.214 [+0.196, +0.232]	+0.383 [+0.364, +0.400]
MED-NODE	+0.433	−0.144	+0.106	+0.327 [+0.243, +0.407]	+0.349 [+0.256, +0.432]
SD-198	+0.467	−0.030	+0.203	+0.264 [+0.250, +0.278]	+0.449 [+0.436, +0.461]
SCIN	+0.333	+0.021	+0.150	+0.183 [+0.172, +0.193]	+0.239 [+0.227, +0.251]

Across λ_{adv} (cross-seed design), the correlation is already present at $\lambda_{\text{adv}} = 0.25$ and is slightly larger at $\lambda_{\text{adv}} = 2$ on four of five sets (differences 0.02–0.08). On the two BCN/HAM directions, the orthogonal deviation also predicts the pull, so the pattern is specific to the cross-modality setting.

Appendix H. Held-out domain probes

Table 16: Domain probes (main recipe, best-validation checkpoint, five seeds; the main tables use the last checkpoint). The first column includes PAD images the adversary trained on.

λ_{adv}	all of PAD (earlier work)	held-out linear	held-out MLP	held-out k-NN
0	0.927	0.827	0.921	0.935
0.25	0.614	0.538	0.547	0.586
0.5	0.581	0.506	0.500	0.548
1	0.563	0.504	0.500	0.560
2	0.555	0.502	0.500	0.578
4	0.636	0.516	0.500	0.570
8	0.663	0.550	0.523	0.608

In the A4 recipe, the held-out linear and MLP probes still read the domain at $\lambda_{\text{adv}} \in \{0.5, 2\}$ (0.66–0.71) although detection inverts, so inversion does not require chance-level leakage. At $\lambda_{\text{adv}} = 0.25$ in the main recipe (observation after the fact, $n = 5$), the one seed whose held-out probe still reads the domain (0.67) does not invert on any set, three of the four seeds at chance invert on all four, and one inverts only on MED-NODE.

Table 17: IWDAN at $\lambda_{\text{adv}} = 2$ and $\lambda_{\text{adv}} = 0.5$ (main recipe, last checkpoint, five seeds) by how the target class priors are obtained. TV: total variation from the true `pad_adv` priors. Leakage: unweighted linear probe on ISIC test against all of PAD; within-class: held-out within-class probe. DANN (no weighting): the shift-100% runs of Table 3.

priors	TV	ID bal. acc	leakage	within-class	`pad`	Fitz	MED	SD
DANN (no weighting)	–	0.48	0.634	0.618	0.368	0.340	0.298	0.325
IWDAN (online)	0.43–0.55	0.48	0.642	0.597	0.513	0.508	0.350	0.488
IWDAN (50 labels)	0.10–0.14	0.39	0.806	0.583	0.619	0.741	0.606	0.734
IWDAN (true priors)	0	0.40	0.780	0.576	0.647	0.717	0.563	0.693
$\lambda_{\text{adv}} = 0.5$								
DANN (no weighting)	–	0.48	0.628	0.618	0.361	0.385	0.310	0.365
IWDAN (online)	0.38–0.47	0.48	0.665	0.588	0.667	0.633	0.447	0.607
IWDAN (50 labels)	0.10–0.14	0.39	0.790	0.584	0.665	0.741	0.642	0.714
IWDAN (true priors)	0	0.40	0.760	0.562	0.680	0.742	0.622	0.741

Appendix I. Importance-weighted alignment by prior estimate

Conditional variants stay inverted (last checkpoint, five seeds unless noted): CDAN 0.378 / 0.420 (`pad_heldout` / Fitzpatrick17k) at $\lambda_{\text{adv}} = 2$ and 0.372 / 0.403 at $\lambda_{\text{adv}} = 0.5$; IWCDAN 0.360 / 0.384 at $\lambda_{\text{adv}} = 2$ and 0.389 / 0.410 at $\lambda_{\text{adv}} = 0.5$. On SCIN, of the 11 cells in this comparison, only IWCDAN at $\lambda_{\text{adv}} = 2$ meets the criterion (0.478 $[0.464, 0.491]$, 3/5); DANN and CDAN at $\lambda_{\text{adv}} = 2$ have upper bounds of 0.532 and 0.522, and IWCDAN at $\lambda_{\text{adv}} = 0.5$ gives 0.536 $[0.523, 0.550]$.

Full account. IWDAN reweights the source in the adversarial loss by estimated target class priors, and how well it works depends on the estimate. With weights updated online from unlabelled target predictions, as in the original method, the implied target priors end 0.43–0.55 (total variation; mean 0.515) from the truth: nevus is down-weighted from 0.51 toward 0.23–0.28, against a true 0.10. IWDAN then keeps leakage at the DANN level (0.642 vs 0.634) and recovers 32% of the lost AUROC on `pad_heldout` (0.513) and 45% on Fitzpatrick17k (0.508), while MED-NODE (0.350) and SD-198 (0.488) stay at or below chance. At $\lambda_{\text{adv}} = 0.5$ the online priors are closer to the truth (total variation 0.38–0.47, mean 0.428) and the same method recovers more: 0.667 on `pad_heldout` and 0.633 on Fitzpatrick17k (66% and 76% of the gap), at leakage 0.665 against 0.628 for DANN, and SD-198 recovers to 0.607 (70%); MED-NODE improves from 0.310 to 0.447 but stays inverted. Unlike the variants with known priors, this costs no in-distribution accuracy (0.482 against 0.483). *EM* estimation (Saerens et al., 2002) failed as implemented, including after a bug fix: in two of five seeds it placed mass on DF and VASC, which are absent from PAD, so its results are not used in any comparison. With priors from 50 *labelled target images* (total variation 0.10–0.14), detection on the unseen domains returns to the level obtained with the true priors (Fitzpatrick17k 0.741 vs 0.717, SD-198 0.734 vs 0.693, MED-NODE 0.606 vs 0.563; `pad_heldout` 0.619 vs 0.647), and within-class leakage is lower than under DANN (0.58 vs 0.62). This is a promising but post hoc mitigation: neither the 50-label nor the true-prior variant meets our leakage criterion, because unweighted leakage rises (0.81 and 0.78

against 0.63), and both cost in-distribution balanced accuracy (0.39–0.40, against 0.48 both under DANN and before adaptation). Read descriptively, detection improves as the prior error falls (0.52: partial; 0.10–0.14: close to the true-prior level; 0: true priors), but a rank-correlation test across estimators did not support this (Spearman -0.33, $[-0.80, +0.28]$), with EM contributing invalid priors. As a diagnostic, black-box shift estimates computed on the final checkpoints were further from the truth (0.65–0.76): their assumption of unchanged class-conditional predictions fails across these domains, with target BCC and AK images predicted as MEL or NV. Label-free prior estimates stay about 0.5 total variation off and recover detection only in part; 50 labels bring the error to 0.10–0.14 and detection close to the true-prior level.

Appendix J. Sign reversal and scoring-side variants

Reversing the Mahalanobis score with the direction chosen on `pad_heldout` at $\lambda_{\text{adv}} = 2$ gives 0.192 at $\lambda_{\text{adv}} = 0$ and 0.546–0.625 on `pad_heldout` and Fitzpatrick17k at $\lambda_{\text{adv}} \geq 0.5$; on MED-NODE it reaches 0.69–0.71; false-positive rates at 95% true-positive rate stay at 0.84–0.98 across datasets. Relative Mahalanobis at $\lambda_{\text{adv}} = 2$: Fitzpatrick17k 0.443, MED-NODE 0.376, SD-198 0.427, `pad_heldout` 0.439; per-class standardised Mahalanobis: 0.478, 0.340, 0.447, 0.424.

Discussion. Reversing the score only helps if one already knows that the model is inverted. At $\lambda_{\text{adv}} = 0$ it would break a working monitor, and at $\lambda_{\text{adv}} \geq 0.5$ most OOD images are still accepted at a 95% ID-acceptance threshold. Relative Mahalanobis, which is less sensitive to class structure, also stays below chance. Among the variants we tried, only changes during training, through the class priors used by the adversary, improved detection.

Appendix K. Second backbone: dual-encoder DINOv2-S/14

Same split, recipe and last-checkpoint rule as Table 1; five seeds; mean ± s.d. Columns after ID bal. acc are Mahalanobis AUROC.

Table 18: Dual-encoder DINOv2-S/14 and ERM with the same backbone. Bold: inversion criterion met.

model	λ_{adv}	leakage	ID bal. acc	`pad_heldout`	Fitzpatrick17k	MED-NODE	SD-198	SCIN
ERM DINOv2	0	0.983 ± 0.002	0.565 ± 0.015	0.591 ± 0.060	0.704 ± 0.059	$\mathbf{0.452 \pm 0.033}$	0.702 ± 0.053	0.781 ± 0.074
dual DINOv2	0	0.947 ± 0.007	0.470 ± 0.015	0.831 ± 0.029	0.778 ± 0.016	0.580 ± 0.030	0.790 ± 0.005	0.716 ± 0.041
dual DINOv2	2	0.576 ± 0.034	0.462 ± 0.022	$\mathbf{0.448 \pm 0.045}$	$\mathbf{0.472 \pm 0.067}$	$\mathbf{0.363 \pm 0.045}$	$\mathbf{0.461 \pm 0.066}$	0.551 ± 0.064

Table 19: Single-encoder DANN with DINOv2-S/14, $\lambda_{\text{adv}} = 2$, five seeds. Leakage stays above the invariance threshold (0.60), so this run does not test the inversion.

leakage	ID bal. acc	`pad_heldout`	Fitzpatrick17k	MED-NODE	SD-198	SCIN
0.884 ± 0.019	0.555 ± 0.023	0.546 ± 0.033	0.476 ± 0.069	0.348 ± 0.047	0.489 ± 0.065	0.539 ± 0.056
ERM DINOv2-S/14 (reference, $\lambda_{\text{adv}} = 0$, same seeds)						
0.983 ± 0.002	0.565 ± 0.015	0.591 ± 0.060	0.704 ± 0.059	0.452 ± 0.033	0.702 ± 0.053	0.781 ± 0.074

Appendix L. Size of the adversary's smartphone set

We subsampled `pad_adv` to 25% and 50% (three seeds each; `pad_heldout` unchanged) as a sensitivity analysis. As `pad_adv` gets smaller, AUROC on `pad_heldout` moves toward 0.5, but leakage rises at the same time, so the two factors cannot be separated. At 25% the inversion criterion is not met with three seeds. Fitzpatrick17k stays inverted in every setting. This is not evidence of a dose-response relation.

Table 20: `pad_adv` size (Mahalanobis AUROC; mean ± s.d.). The 100% row is Table 1.

`pad_adv`	λ_{adv}	leakage	ID bal. acc	`pad_heldout`	Fitzpatrick17k	criterion (`pad`)
25% (407 images)	0	0.898 ± 0.032	0.472 ± 0.019	0.819 ± 0.022	0.724 ± 0.043	above
25%	2	0.632 ± 0.007	0.477 ± 0.002	0.479 ± 0.013	0.407 ± 0.011	not met
50% (802 images)	0	0.912 ± 0.030	0.482 ± 0.010	0.832 ± 0.010	0.713 ± 0.026	above
50%	2	0.575 ± 0.030	0.459 ± 0.022	0.415 ± 0.043	0.397 ± 0.069	met
100% (five seeds)	2	0.507		0.381	0.405	met

Appendix M. Clinical consequence

Threshold: 95% acceptance of ISIC validation images, set per model. Label map: Fitzpatrick17k melanoma, basal cell carcinoma, squamous cell carcinoma and actinic keratosis to MEL, BCC, SCC, AK; SD-198 `Malignant_Melanoma` and `Lentigo_Maligna_Melanoma` to MEL, `Basal_Cell_Carcinoma` to BCC, Bowen's disease and Keratoacanthoma to SCC, and `Actinic_solar_Damage` (actinic keratosis) to AK; other SD-198 classes are excluded. `pad_heldout` has nine melanomas and is not used.

FPR@95TPR on `pad_heldout`. With the threshold at the 95th percentile of ISIC test scores (Mahalanobis, last checkpoint, five seeds), the share of `pad_heldout` images accepted as in-distribution is 0.911 ± 0.060 (CI $[0.882, 0.940]$) at $\lambda_{\text{adv}} = 0$ and 0.961 ± 0.007 (CI $[0.951, 0.970]$) at $\lambda_{\text{adv}} = 2$. The detector is weak even before adaptation. After adaptation it flags 0.039 of these images, fewer than the 5% of in-distribution images it flags by construction.

Table 21: Malignant images from external datasets (main recipe, last checkpoint, five seeds; bootstrap 95% intervals): share accepted by the monitor at the 95% ID threshold, and share predicted NV with confidence above 0.9.

			accepted		predicted NV, conf. > 0.9	
dataset	class	n	$\lambda_{\text{adv}} = 0$	$\lambda_{\text{adv}} = 2$	$\lambda_{\text{adv}} = 0$	$\lambda_{\text{adv}} = 2$
Fitzpatrick17k	MEL	83	0.961 [0.938, 0.981]	0.990 [0.978, 1.000]	0.125 [0.075, 0.176]	0.511 [0.414, 0.610]
Fitzpatrick17k	BCC	257	0.932 [0.915, 0.948]	0.985 [0.977, 0.992]	0.068 [0.047, 0.092]	0.742 [0.702, 0.781]
Fitzpatrick17k	SCC	212	0.896 [0.870, 0.921]	0.946 [0.925, 0.965]	0.069 [0.048, 0.093]	0.498 [0.446, 0.551]
Fitzpatrick17k	AK	24	0.958 [0.925, 0.992]	1.000 [1.000, 1.000]	0.092 [0.033, 0.167]	0.725 [0.583, 0.858]
SD-198	MEL	113	0.963 [0.940, 0.981]	0.979 [0.958, 0.996]	0.129 [0.088, 0.172]	0.814 [0.759, 0.865]
SD-198	BCC	60	0.933 [0.903, 0.960]	0.983 [0.967, 0.997]	0.043 [0.013, 0.077]	0.857 [0.793, 0.913]
SD-198	SCC	119	0.921 [0.887, 0.950]	0.976 [0.958, 0.992]	0.089 [0.061, 0.121]	0.721 [0.659, 0.778]
SD-198	AK	60	0.950 [0.927, 0.973]	0.997 [0.990, 1.000]	0.033 [0.013, 0.053]	0.867 [0.813, 0.917]

Appendix N. Negative results

Warning signals. Thresholds set at the 95th percentile of each statistic over $\lambda_{\text{adv}} = 0$ runs. A centroid-collapse statistic computed on in-distribution data only did not track inversion (sensitivity 0.15–0.38; Spearman with `pad_heldout` AUROC 0.03 and −0.14 for the validation and test versions, over 64 runs). The share of unlabelled deployment images predicted as the majority class tracked it (Spearman −0.77 [−0.85, −0.63] against `pad_heldout` AUROC and −0.75 [−0.85, −0.57] against Fitzpatrick17k AUROC over 64 runs; sensitivity 1.00, specificity 0.75 on twelve non-inverting runs with $\lambda_{\text{adv}} > 0$ under the Fitzpatrick17k label, 0.33 on six under the `pad_heldout` label). **Toy model.** Two-domain Gaussian mixtures with a majority class at 50% in the source and a label-shift level from 0 to 1, with a small encoder and gradient reversal, produced no inversion at any setting (Mahalanobis AUROC 0.57–0.66); leakage in the toy stayed near 0.5–0.58, so it may not reproduce the conditions of the real data.

Appendix O. Single-encoder invariance screen

Each configuration was trained once (seed 42) on the lesion-disjoint split and evaluated at the last checkpoint, and only held-out leakage and in-distribution balanced accuracy were computed; no OOD score was seen at this stage. A run passed if held-out leakage was at most 0.60, in-distribution test balanced accuracy was at least ERM minus 0.05 (0.508 for EfficientNet-B3, 0.515 for DINOv2-S/14), and the run was not degraded (balanced accuracy below 0.25). The gradient-reversal configurations extend those already tried for the lesion-level split: λ_{adv} up to 16 with the Ganin schedule, a fixed λ_{adv} from the first step, and a depth-3 head with k adversary steps per encoder step. MK-MMD and CORAL were applied at weights 3, 10 and 30 on the feature seen by the domain head. The screen used 18.95 GPU-hours (Table 22).

For DINOv2-S/14, CORAL at weights 10 and 30 reached leakage 0.650 and 0.616 only with a degraded classifier (balanced accuracy 0.125). The single passing run was MK-MMD at weight 30 (leakage 0.600, balanced accuracy 0.555). Because no gradient-reversal run passed, the selection rule took this run forward, so the five-seed follow-up tests feature alignment in general and says nothing direct about DANN. Over five seeds its leakage was

Table 22: Single-encoder screen (seed 42). Held-out leakage V1 range and number of runs that passed. The passing run did not hold over five seeds.

Backbone	Objective	Runs	V1 range	Passed
EfficientNet-B3	Gradient reversal	6	0.685–0.727	0
EfficientNet-B3	MK-MMD	3	0.810–0.894	0
EfficientNet-B3	CORAL	3	0.981–0.993	0
DINOv2-S/14	Gradient reversal	9	0.772–0.930	0
DINOv2-S/14	MK-MMD	3	0.600–0.665	1
DINOv2-S/14	CORAL	3	0.616–0.990	0

0.604 ± 0.018, above the 0.60 gate, while the gap to ERM in balanced accuracy was 0.018 (0.565 against 0.547), within the 0.03 allowed. The detection test therefore did not take place. For completeness, the five-seed means were: leakage 0.691 ± 0.030 (ERM 0.983 ± 0.002), Mahalanobis AUROC on `pad_heldout` 0.540 ± 0.017 (ERM 0.591 ± 0.060) and on Fitzpatrick17k 0.519 ± 0.028 (ERM 0.704 ± 0.059). These numbers are descriptive and do not test the hypothesis. The follow-up used 3.64 GPU-hours.

Appendix P. Experiments that did not take place

Camelyon17 by hospital. In the domain-adversarial runs with hospital-disjoint held-out slides, the selected checkpoints were all from the warm-up epoch before gradient reversal took effect (15 of 15 runs), so these runs do not test the hypothesis. In runs whose selected checkpoint followed the warm-up (epochs 6–10), the hospital probe fell by at most 0.044 with in-distribution accuracy ≥ 0.99, and at $\lambda_{\text{adv}} = 300$ the probe fell by 0.081 while out-of-domain accuracy dropped from 0.91 to 0.70. In no setting did DANN remove hospital information while preserving the classifier. **Chest radiographs.** With NIH ChestX-ray14 and pediatric radiographs as the aligned domains, Mahalanobis AUROC on Shenzhen was 0.522 before any adaptation, below our headroom requirement, so we stopped before training adversarial models.

Appendix Q. Other lesion-disjoint splits

Table 23 repeats the main comparison ($\lambda_{\text{adv}} = 0$ vs. $\lambda_{\text{adv}} = 2$) on three further lesion-disjoint ISIC splits, built with split seeds 7, 123 and 2027.

Summary. On three further lesion-disjoint splits of ISIC (three seeds each), Mahalanobis AUROC on `pad_heldout` falls from 0.82–0.83 at $\lambda_{\text{adv}} = 0$ to 0.39–0.43 at $\lambda_{\text{adv}} = 2$ (interval below 0.5 in all nine runs), Fitzpatrick17k and SD-198 fall below 0.5 in every split (0.34–0.41), and MED-NODE drops from 0.49–0.57 to 0.24–0.36; in one split MED-NODE is already at chance before adaptation.

Table 23: Three further lesion-disjoint ISIC splits (main recipe, last checkpoint, three seeds each). ID and leakage: mean ± s.d.; AUROC: seed mean with pooled 95% interval (lesion groups rebuilt per split; patient, cluster, case (SCIN) or image resampling as in the main tables). No run met the degraded-model criterion. At $\lambda_{\text{adv}} = 2$ every interval lies below 0.5 and all three seeds' intervals do in every cell except SCIN, where no cell meets the criterion (1/3 seeds). Leakage: linear probe on held-out images.

split	λ_{adv}	ID bal. acc	leakage	`pad_heldout`	Fitzpatrick17k	MED-NODE	SD-198	SCIN
7	0	0.443 ± 0.008	0.845 ± 0.034	0.835 [0.820, 0.848]	0.713 [0.699, 0.726]	0.491 [0.457, 0.525]	0.724 [0.712, 0.737]	0.733 [0.720, 0.745]
7	2	0.440 ± 0.008	0.509 ± 0.007	0.406 [0.383, 0.430]	0.344 [0.330, 0.358]	0.245 [0.220, 0.271]	0.338 [0.327, 0.349]	0.498 [0.486, 0.511]
123	0	0.449 ± 0.011	0.840 ± 0.028	0.822 [0.807, 0.835]	0.739 [0.725, 0.751]	0.569 [0.535, 0.600]	0.745 [0.733, 0.757]	0.700 [0.686, 0.712]
123	2	0.452 ± 0.025	0.512 ± 0.010	0.431 [0.407, 0.454]	0.408 [0.395, 0.422]	0.324 [0.294, 0.354]	0.392 [0.380, 0.404]	0.508 [0.494, 0.521]
2027	0	0.460 ± 0.023	0.831 ± 0.039	0.827 [0.813, 0.841]	0.715 [0.701, 0.729]	0.544 [0.512, 0.575]	0.706 [0.693, 0.720]	0.734 [0.721, 0.746]
2027	2	0.482 ± 0.007	0.514 ± 0.014	0.393 [0.369, 0.415]	0.376 [0.362, 0.390]	0.357 [0.326, 0.385]	0.348 [0.337, 0.360]	0.541 [0.529, 0.554]

Appendix R. Image-level split (lesion leakage; for reference only)

The following results use the image-level ISIC split common in published work, in which 60% of test images share a lesion with training. They overstate in-distribution accuracy by about 0.20 and must not be compared with the main tables; we include them because earlier versions of this analysis used them.

Table 24: Image-level split (lesion leakage), best-validation checkpoint; leakage is the probe of earlier work. With the two non-adversarial controls. Five seeds at $\lambda_{\text{adv}} \in \{0, 0.25, 1, 2, 8\}$, three at $\lambda_{\text{adv}} \in \{0.5, 4\}$.

λ_{adv}	n	Leakage ↓	ID bal. acc ↑	ID ECE	OOD ECE	OOD AUROC	Fitz. AUROC	X-dom bal. acc
0	5	0.915 ± 0.021	0.692	0.107	0.247	0.843 ± 0.023	0.764 ± 0.038	0.291 ± 0.016
0.25	5	0.571 ± 0.027	0.692	0.100	0.694	0.509 ± 0.023	0.460 ± 0.057	0.295 ± 0.028
0.5	3	0.555 ± 0.029	0.701	0.096	0.724	0.465 ± 0.015	0.449 ± 0.025	0.270 ± 0.034
1	5	0.591 ± 0.035	0.695	0.097	0.735	0.457 ± 0.026	0.414 ± 0.086	0.258 ± 0.012
2	5	0.584 ± 0.027	0.707	0.099	0.746	0.427 ± 0.025	0.391 ± 0.068	0.249 ± 0.030
4	3	0.548 ± 0.035	0.686	0.100	0.726	0.455 ± 0.039	0.431 ± 0.036	0.276 ± 0.025
8	5	0.625 ± 0.045	0.679	0.099	0.713	0.494 ± 0.027	0.474 ± 0.060	0.269 ± 0.023
EffNet-B3 control		0.802	0.683	0.096	—	0.726 ± 0.021	0.649	0.298 ± 0.010
ResNet-50 baseline		0.979	0.655	0.101	—	0.868 ± 0.019	0.994	0.391

Appendix S. Measurement details

Inversion. We call a cell inverted when the cluster-bootstrap 95% CI of the seed-mean Mahalanobis AUROC lies below 0.5 and at least three seeds' own intervals do (all three in cells with three seeds). Bootstrap draws (2,000) resample ISIC test by lesion and OOD sets by patient (`pad_heldout`), near-duplicate cluster (Fitzpatrick17k) or case (SCIN); MED-NODE and SD-198 carry no patient identifiers and are resampled by image, so their intervals may be too narrow. Runs with in-distribution balanced accuracy below 0.25 are excluded as degraded and reported.

Domain leakage. Balanced accuracy (chance 0.5) of a logistic probe for the source dataset on frozen z_ℓ^{norm}. The probe used in earlier work scores ISIC test against all of PAD, including images the adversary trained on. We therefore also report probes on held-out images only (linear, one-hidden-layer MLP, k-NN), a class-balanced probe that reweights both domains to a common class mix, and a within-class probe averaged over classes.

The best-validation checkpoint gives the same picture as the last checkpoint from $\lambda_{\text{adv}} = 0.5$ on, but at $\lambda_{\text{adv}} = 0.25$ it selects an earlier epoch and the inversion is not yet visible (0.525, seed s.d. 0.121; an observation made after the sweep).

Appendix T. Additional checks: label space, monitor features, second pair

Mahalanobis AUROC, five seeds unless stated, inversion criterion as in the main text.

Label space. Fitzpatrick17k and SD-198 images were split by whether the condition maps to an ISIC class (in: 586 and 525; out: 3,241 and 5,950; ambiguous: 60 and 109). At $\lambda_{\text{adv}} = 0$ in/out AUROC is 0.755/0.706 (Fitzpatrick17k) and 0.723/0.708 (SD-198). At $\lambda_{\text{adv}} = 2$ it is 0.341 $[0.322, 0.362]$/0.417 $[0.403, 0.431]$ and 0.302 $[0.283, 0.323]$/0.382 $[0.368, 0.395]$; both parts meet the criterion in 5/5 seeds on both datasets. The in-label part inverts more strongly (paired in$-$out -0.075 and -0.079).

Monitor features. M1 is the dual latent; M2 an ERM EfficientNet-B3 with the same seed; M3 a frozen ImageNet EfficientNet-B3 (one feature bank, independent of λ_{adv}). At $\lambda_{\text{adv}} = 2$, M1 meets the criterion on `pad_heldout`, Fitzpatrick17k, MED-NODE and SD-198 (0.381, 0.405, 0.288, 0.376). M2 meets it on none (0.708, 0.802, 0.518, 0.785), nor does M3 (0.792, 0.953, 0.740, 0.943). Of melanomas the $\lambda_{\text{adv}} = 2$ classifier calls nevus with confidence above 0.9, M1 flags 0.000 (Fitzpatrick17k) and 0.002 (SD-198) at 95% TPR, M2 0.046 and 0.037, M3 0.382 and 0.335.

BCN→HAM with DANN. Total variation of class priors between BCN training and HAM adversary images is 0.361. At $\lambda_{\text{adv}} = 2$ with full label shift, ID balanced accuracy is 0.366 ± 0.017 and leakage 0.599 ± 0.041; no labelled unseen dataset (Fitzpatrick17k, MED-NODE, SD-198) meets the criterion at shift 100% or 0%. HAM-heldout meets it but is the aligned domain and is not counted.

Appendix U. Limitations in detail

Scope. The inversion is shown in dermatology only, and its spread to unseen domains is shown for gradient reversal; multi-kernel MMD inverts detection on the target domain but only collapses it on the unseen datasets. We attempted two other modalities and neither experiment took place: on Camelyon17 no adversarial setting we tried removed hospital information while preserving the classifier, and on chest radiographs the detector was near chance on the OOD set before any adaptation (AUROC 0.522), so there was nothing to invert. **Architecture.** The main results use a dual-encoder model; the A4 recipe changes the latent size and loss, but a plain single-encoder DANN collapses detection to chance without inverting, and whether deeper invariance would invert it is untested: with a stronger adversary (warm-up, higher adversary learning rate, deeper head) its held-out leakage stayed at 0.70, above our target of 0.55, and detection stayed low without inverting (three-seed means

0.52 on `pad_heldout`, 0.62 on Fitzpatrick17k). Without label shift, raising λ_{adv} to 8 brought held-out leakage to chance in only one of five runs; in that run detection on the unseen datasets did not invert, which is consistent with label shift being necessary but rests on a single model. A single-encoder DANN with DINOv2-S/14 at $\lambda_{\text{adv}} = 2$ (five seeds) also stayed above our invariance threshold of 0.60 (leakage 0.884 ± 0.019; ID 0.555 ± 0.023, `pad_heldout` 0.546 ± 0.033, Fitzpatrick17k 0.476 ± 0.069), so the test did not take place for this model either (Table 19). The screen in Appendix O did not change this: no gradient-reversal configuration passed, and the only passing alignment run did not stay below 0.60 over five seeds. **Competence.** Paired differences $\lambda_{\text{adv}} = 2$ minus $\lambda_{\text{adv}} = 0$ (per seed, last checkpoint; seed bootstrap, 2,000 resamples): for EfficientNet-B3, in-distribution balanced accuracy -0.009 $[-0.026, +0.006]$, Mahalanobis AUROC on `pad_heldout` -0.444 $[-0.465, -0.417]$ and on Fitzpatrick17k -0.307 $[-0.334, -0.275]$; for DINOv2-S, balanced accuracy -0.008 $[-0.014, -0.002]$, `pad_heldout` -0.383 $[-0.428, -0.329]$, Fitzpatrick17k -0.306 $[-0.361, -0.244]$, MED-NODE -0.218 $[-0.253, -0.183]$ and SD-198 -0.329 $[-0.372, -0.270]$. A bootstrap over five seeds is coarse. These differences show that the adversary inverts detection at matched accuracy, but the inversion may still require a weak model together with the adversary. In-distribution balanced accuracy is 0.04–0.08 below a standard ERM on the same lesion-disjoint split, and 0.095 below ERM for the DINOv2-S/14 model. To check whether the backbone learning rate caused this gap, we selected it on validation (seed 42): validation balanced accuracy at $\times 0.1$, $\times 0.3$ and $\times 1.0$ was 0.444, 0.402 and 0.236 for the dual model at $\lambda_{\text{adv}} = 0$ and 0.516, 0.504 and 0.418 for ERM. Both chose $\times 0.1$, the setting already used, so the gap is not due to the learning rate. An 80-epoch schedule did not close it either: of two dual recipes at $\lambda_{\text{adv}} = 0$ (two seeds each), the one selected on validation (A7) reached 0.522 on the test set, below ERM minus 0.03 (0.528); ERM at 80 epochs reached 0.557. **Statistics.** MED-NODE and SD-198 carry no patient identifiers and are resampled by image, so their intervals may be too narrow; SCIN is used only as an OOD set because almost none of it maps to the ISIC classes. The five OOD scores are functions of one latent and are not independent evidence. **Mechanism.** A two-domain Gaussian toy model with label shift did not reproduce the inversion, so the conditions we identify may not be sufficient in general. **Second pair.** A DANN trained from BCN against HAM did not reproduce the inversion on the labelled unseen datasets, so the effect is shown for one source–target pair only. **Warning signals.** No statistic computed on in-distribution data alone flagged the inverted runs; the share of deployment images predicted as the majority class tracked inversion (Spearman -0.77 and -0.75 over 64 runs) but needs unlabelled target data. **Mitigation.** The few-label remedy is a post hoc analysis, costs in-distribution accuracy, and did not meet our leakage criterion. **Data.** We obtained 3,887 of 16,577 Fitzpatrick17k images. The host refused the remaining downloads (HTTP 406), so we cannot tell removed images from an unavailable host, and the subset differs from the full set by Fitzpatrick type (total variation 0.257; 0.063 by ISIC-mapped class). As a robustness check, Mahalanobis AUROC by skin type (types 1–2, 3–4 and 5–6; $n = 819$, 2,078, 837) is 0.733, 0.711 and 0.695 at $\lambda_{\text{adv}} = 0$ and 0.423, 0.390 and 0.411 at $\lambda_{\text{adv}} = 2$; reweighting to the full type mix gives 0.719 and 0.415, and reweighting by type and class gives 0.714 and 0.424. At $\lambda_{\text{adv}} = 2$ all three groups and both reweighted versions meet the inversion criterion; the 153 images of unknown type (0.479) do not.