



API CODING CHALLENGE -BACKEND OUTPUT


1.Register user

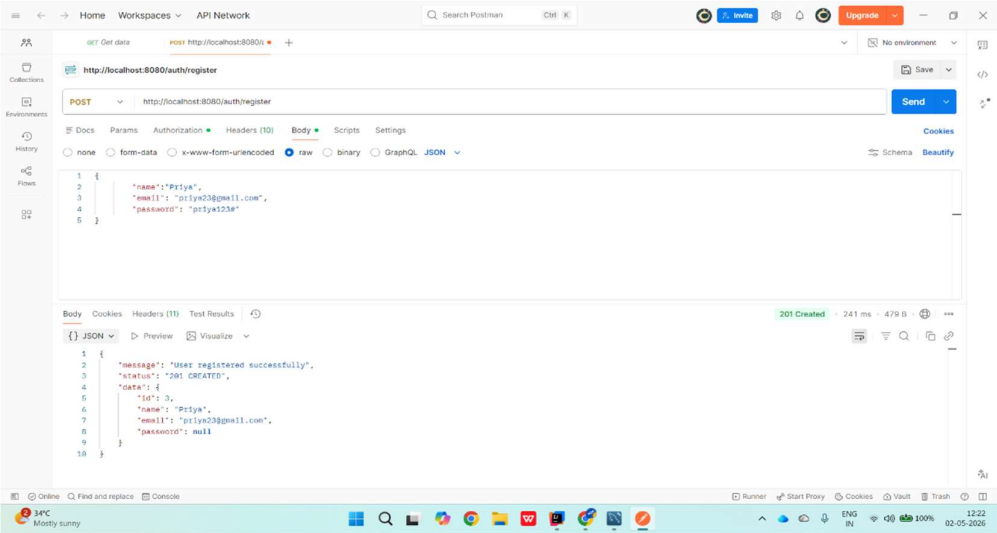


2.user login

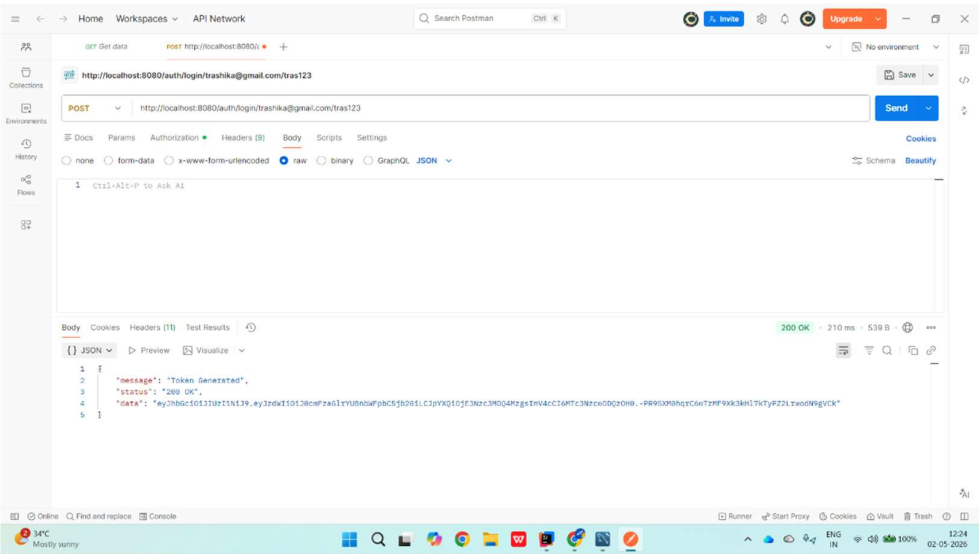

3. Pasting the token in bearer

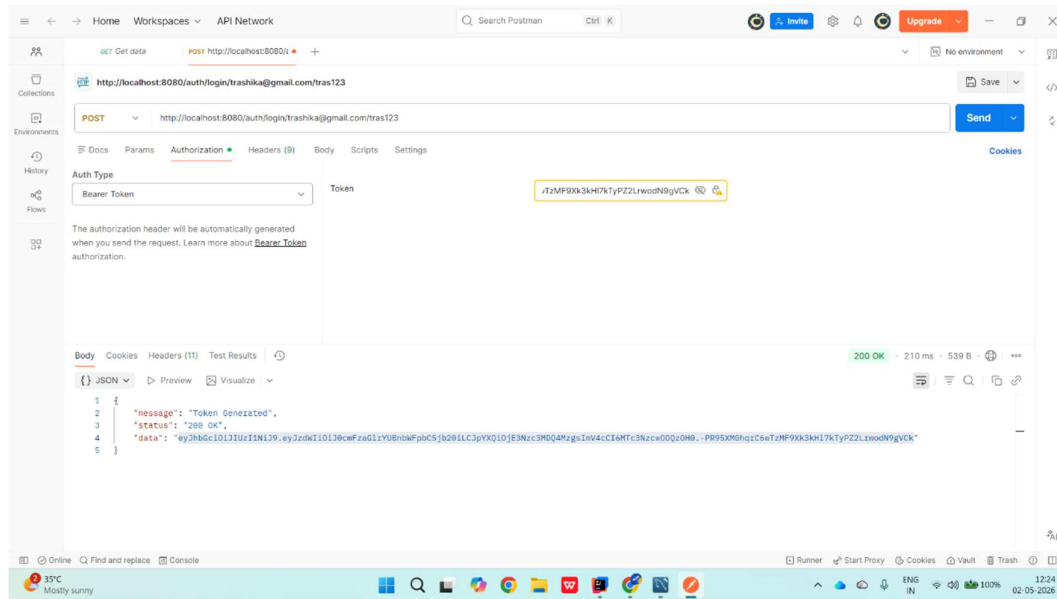

4. showAll books

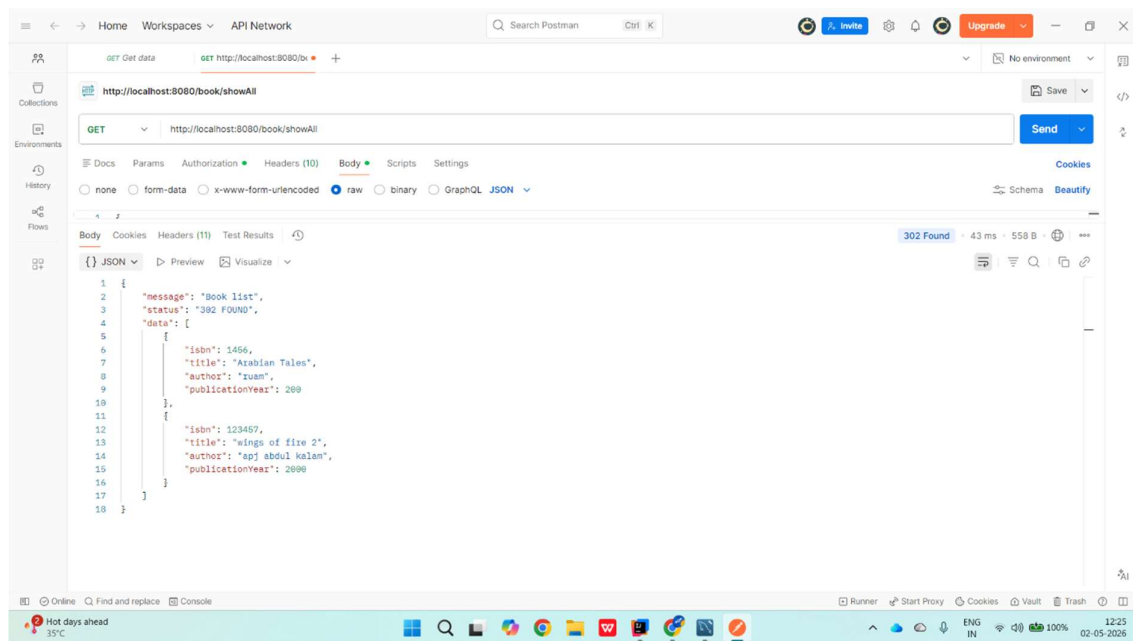

5. Adding a book

The screenshot shows the Postman API client interface. A POST request is configured to `http://localhost:8080/book/addBook`. The request body is a JSON object with the following fields: `isbn` (145634), `title` ("Arabian Tales 3"), `author` ("ruan"), and `publicationYear` (200). The response is a 201 Created status with a JSON body: `{ "message": "Book added!", "status": "201 CREATED", "data": { "isbn": 145634, "title": "Arabian Tales 3", "author": "ruan", "publicationYear": 200 } }`. The interface includes tabs for Docs, Params, Authorization, Headers, Body, Scripts, and Settings. The Body tab is selected, showing the raw JSON data. The response tab shows the 201 Created status and the JSON response body.

6. Search Book by isbn

The screenshot shows the Postman API client interface. A GET request is configured to `http://localhost:8080/book/searchByIsbn/123457`. The response is a 302 Found status with a JSON body: `{ "message": "Book Found!", "status": "302 FOUND", "data": { "isbn": 123457, "title": "wings of fire 2", "author": "apj abdul kalam", "publicationYear": 2000 } }`. The interface includes tabs for Docs, Params, Authorization, Headers, Body, Scripts, and Settings. The Body tab is selected, showing the raw JSON data. The response tab shows the 302 Found status and the JSON response body.

7.Update book by isbn

A screenshot of the Postman API client interface. The top bar shows 'Home Workspaces API Network'. The main area displays a PUT request to 'http://localhost:8080/book/updateBookByIsbn'. The request body is a JSON object with the following fields: 'isbn' (145634), 'title' ('Arabian Tales 3'), 'author' ('zuan & tom'), and 'publicationYear' (200). The response is a 302 Found status with a 56 ms response time and 477 B of data. The response body is a JSON object with the following fields: 'message' ('Book updated'), 'status' ('302 FOUND'), and 'data' (a JSON object with the same fields as the request body). The bottom status bar shows 'Hot weather Now' and the system clock '12:27 02-05-2026'.

```
PUT http://localhost:8080/book/updateBookByIsbn
```

```
{  "isbn": "145634",  "title": "Arabian Tales 3",  "author": "zuan & tom",  "publicationYear": 200}
```

```
{  "message": "Book updated",  "status": "302 FOUND",  "data": {    "isbn": "145634",    "title": "Arabian Tales 3",    "author": "zuan & tom",    "publicationYear": 200  }}
```

8.Delete Book By isbn

A screenshot of the Postman API client interface. The top bar shows 'Home Workspaces API Network'. The main area displays a DELETE request to 'http://localhost:8080/book/deleteBookByIsbn/145634'. The response is a 410 Gone status with a 91 ms response time and 394 B of data. The response body is a JSON object with the following fields: 'message' ('Book removed'), 'status' ('410 GONE'), and 'data' (null). The bottom status bar shows 'Hot weather Now' and the system clock '12:27 02-05-2026'.

```
DELETE http://localhost:8080/book/deleteBookByIsbn/145634
```

```
{  "message": "Book removed",  "status": "410 GONE",  "data": null}
```