


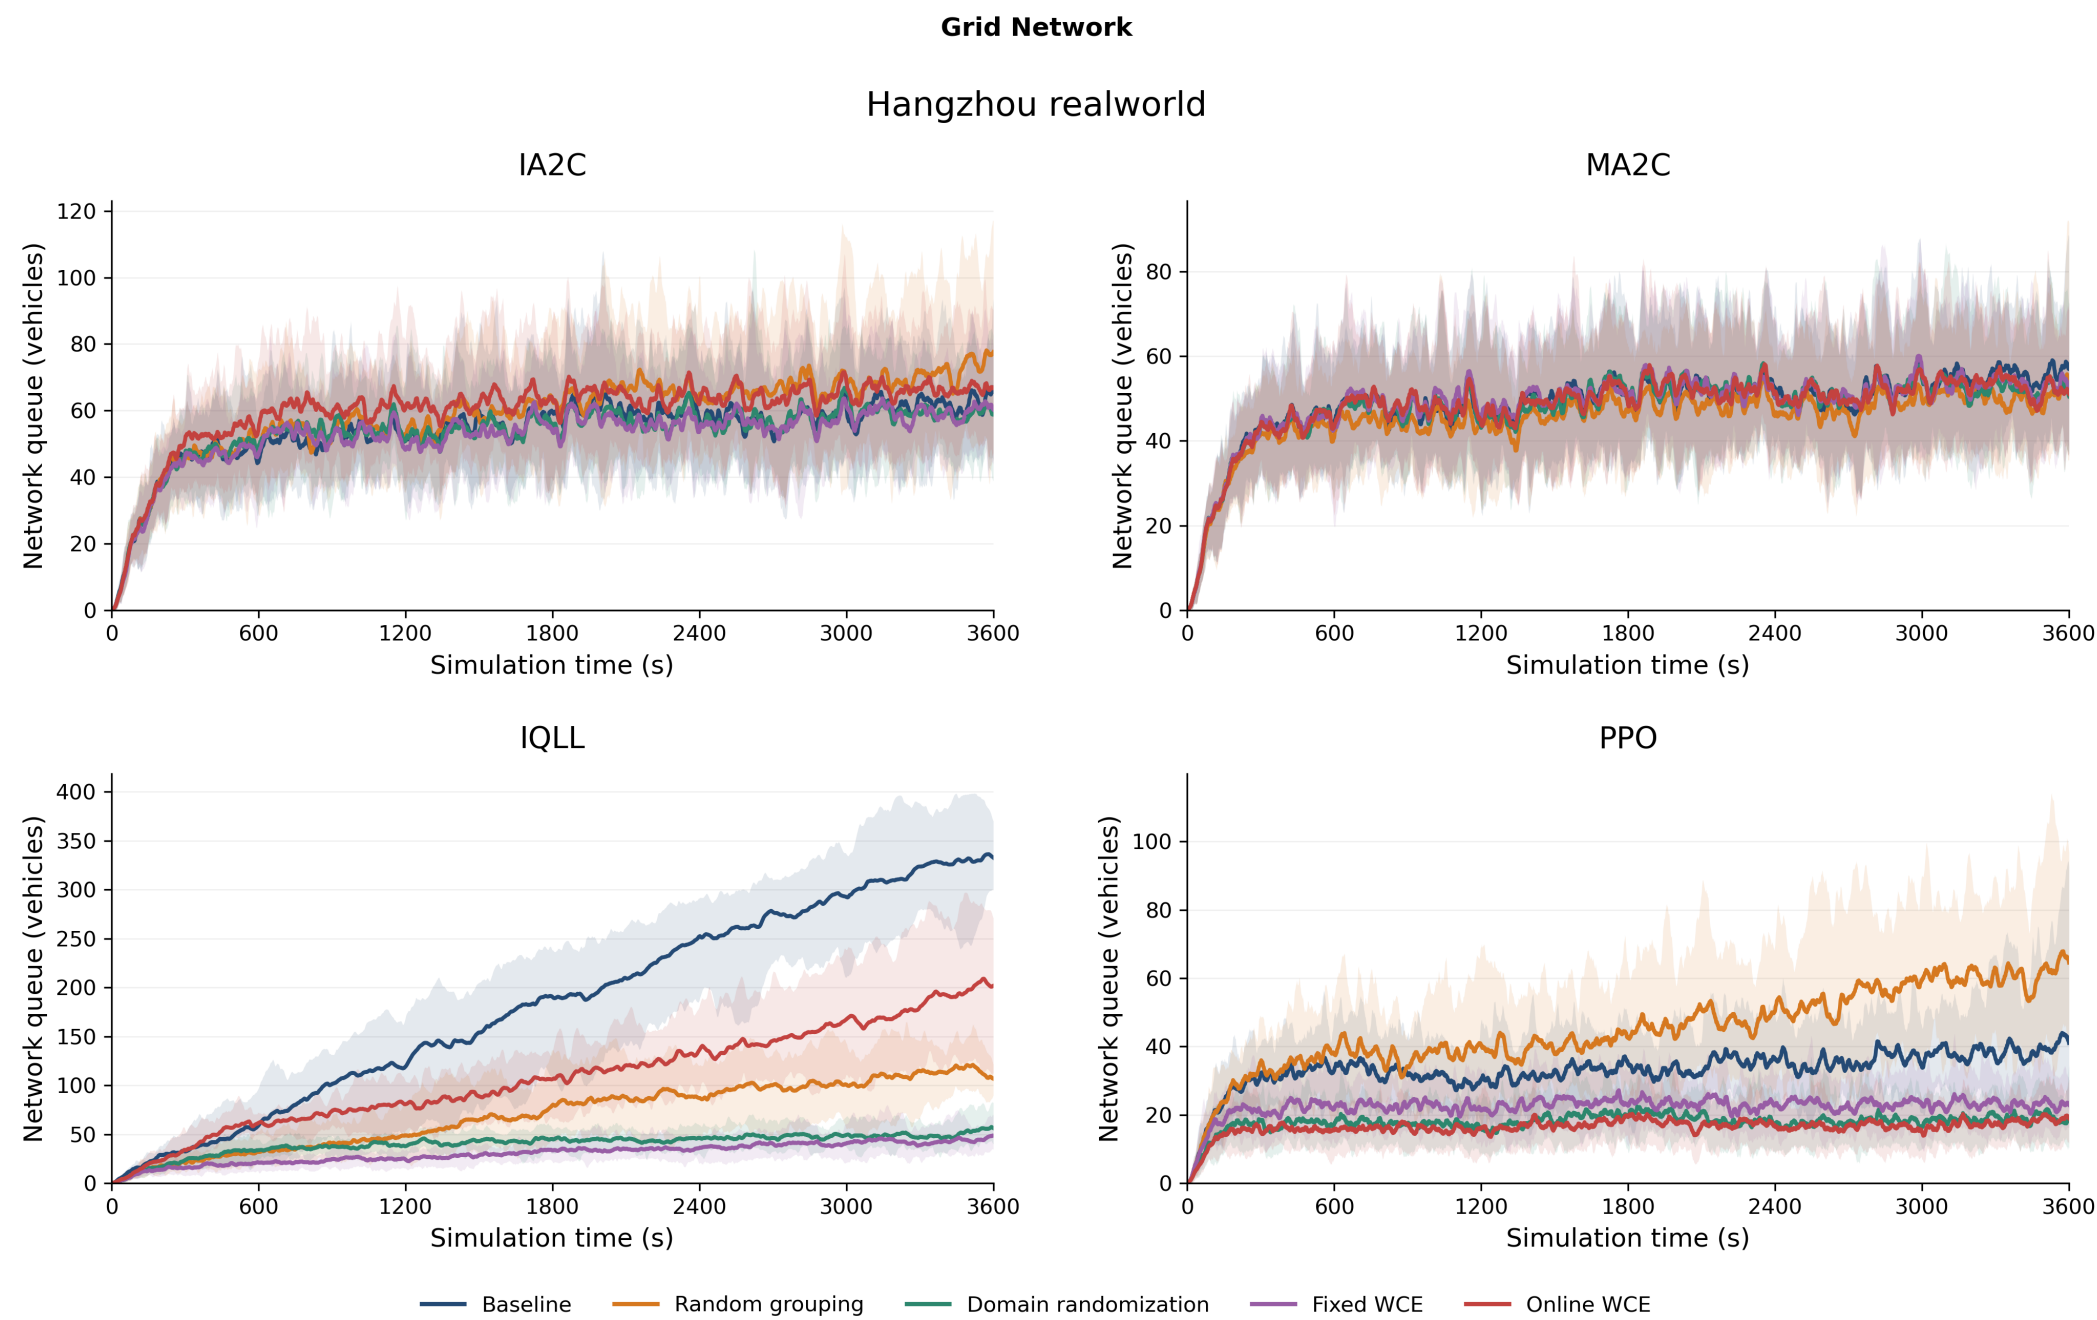

Solid: mean; shading: min-max across 10 runs; EMA = 0.9; training seed = 101.
Each panel uses its own adaptive y-axis range.

Figure 1: Hangzhou realworld - four controllers and five methods.

Table 1: Hangzhou realworld - unsmoothed Mean queue.					
Controller	Baseline	Random grouping	Domain randomization	Fixed WCE	Online WCE
IA2C	54.21	59.19	53.66	52.78	60.13
MA2C	48.70	45.41	48.18	48.82	48.37
IQLL	182.72	69.75	40.47	30.59	108.14
PPO	33.33	44.97	17.91	22.45	16.44

Mean queue (vehicles; lower is better). Bold: lowest unrounded mean within each controller.

n = 10 evaluation runs per controller/method; training seed = 101. Solid: mean; shaded bands: pointwise min-max; EMA = 0.9. Independent y-axis ranges.

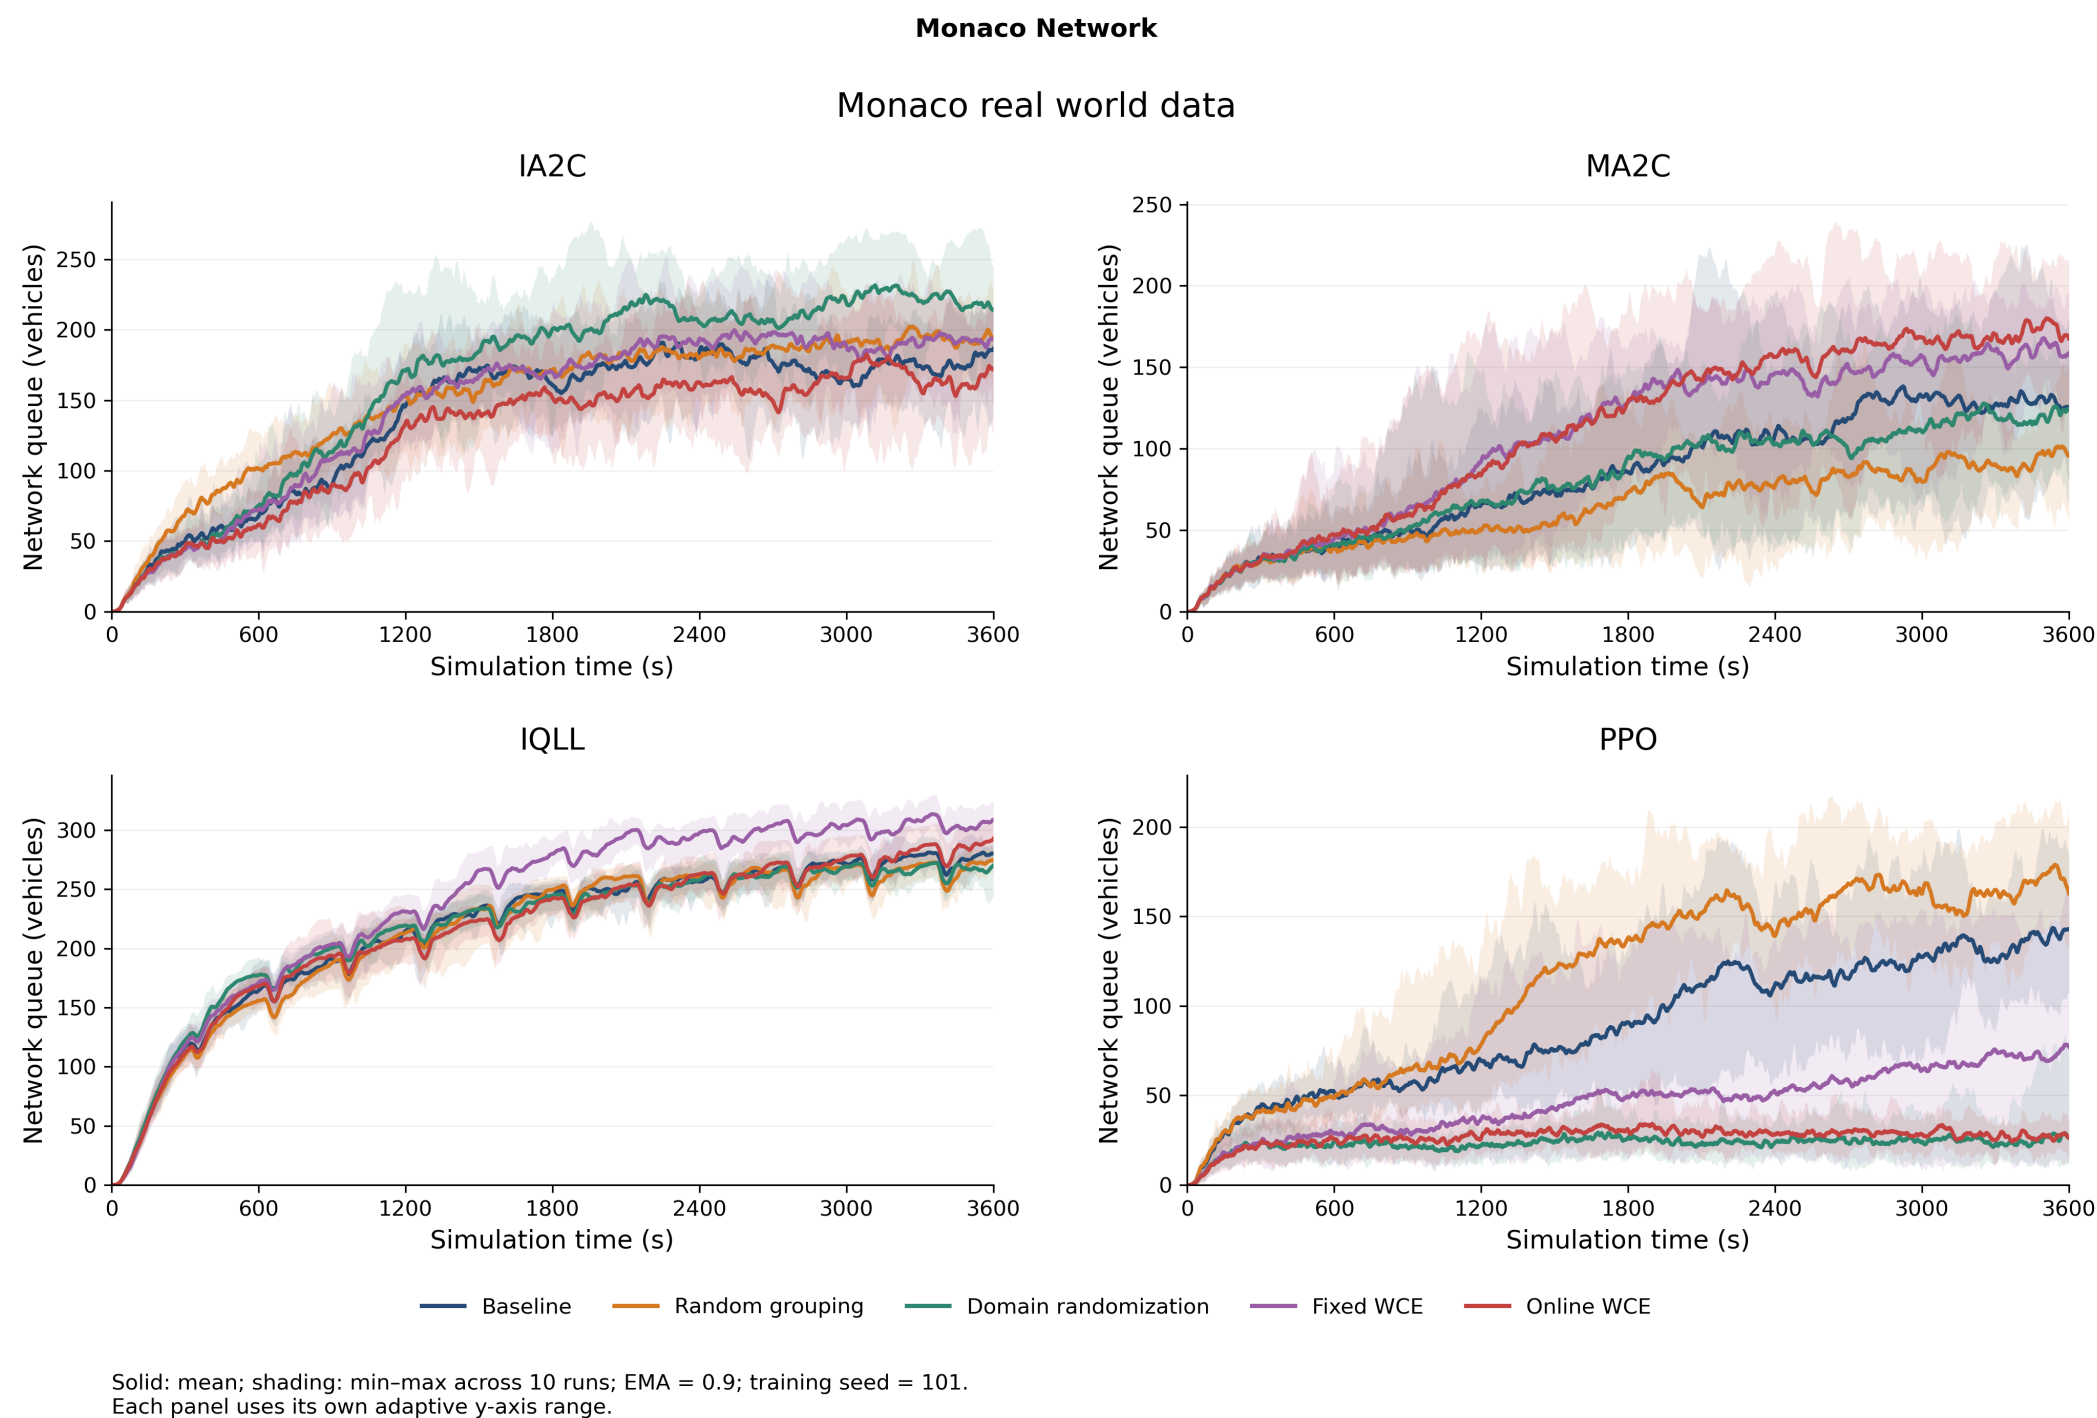


Figure 2: Monaco real world data - four controllers and five methods.

Table 2: Monaco real world data - unsmoothed Mean queue.					
Controller	Baseline	Random grouping	Domain randomization	Fixed WCE	Online WCE
IA2C	139.59	151.30	165.33	147.30	126.15
MA2C	83.66	63.58	80.73	108.21	112.48
IQLL	217.98	214.64	218.25	241.50	216.97
PPO	89.00	115.08	23.13	46.08	26.88

Mean queue (vehicles; lower is better). Bold: lowest unrounded mean within each controller.

n = 10 evaluation runs per controller/method; training seed = 101. Solid: mean; shaded bands: pointwise min-max; EMA = 0.9. Independent y-axis ranges.