



# Requirements and Design for Docks

**Team:** TripleParity

**Client:** Compiax

## Team Members

Francois Mentz

Connor Armand du Plooy

Raymond De Vos

Evert Geldenhuys

Anna-Mari Helberg

Paul Wood

## Contents

|          |  |          |
|----------|--|----------|
| <b>1</b> | <b>System Overview</b>                               | <b>2</b> |
| 1.1      | Purpose . . . . .                                    | 2        |
| 1.2      | Product Scope . . . . .                              | 2        |
| 1.3      | Definitions, acronyms and abbreviations . . . . .    | 2        |
| 1.4      | UML Domain Model . . . . .                           | 3        |
| <b>2</b> | <b>Functional Requirements</b>                       | <b>3</b> |
| 2.1      | Users . . . . .                                      | 3        |
| 2.2      | Subsystems . . . . .                                 | 3        |
| 2.2.1    | Authentication . . . . .                             | 4        |
| 2.2.2    | Webhooks and Docker Events . . . . .                 | 4        |
| 2.2.3    | Stack API Extension for Docker . . . . .             | 4        |
| 2.2.4    | API Proxy for Docker . . . . .                       | 4        |
| 2.2.5    | Frontend <a href="#">Docks</a> API service . . . . . | 4        |
| 2.2.6    | Docker Management Functions . . . . .                | 4        |
| 2.3      | Specific Requirements . . . . .                      | 4        |
| 2.3.1    | WebHooks and Docker Events . . . . .                 | 4        |
| 2.3.2    | Authentication . . . . .                             | 5        |
| 2.3.3    | Stack API Extension for Docker . . . . .             | 5        |
| 2.3.4    | API proxy for Docker . . . . .                       | 5        |
| 2.3.5    | Docker Management Functions . . . . .                | 5        |
| 2.3.6    | Frontend <a href="#">Docks</a> API service . . . . . | 6        |
| <b>3</b> | <b>System</b>  | <b>6</b> |
| 3.1      | Interfaces . . . . .                                 | 6        |
| 3.1.1    | Software Interfaces . . . . .                        | 6        |
| 3.2      | System Configuration . . . . .                       | 6        |
| 3.3      | Architectural Styles . . . . .                       | 7        |

# 1 System Overview

## 1.1 Purpose

Docker is a tool designed to make it easier to create, deploy and run applications using lightweight virtualization. It provides a command line interface (CLI) and RESTful API. Maintaining and deploying applications often involve multiple people. Providing multiple people access to the Docker CLI requires Secure Shell access (SSH) as root to the server running Docker . If the server is secure it will only provide SSH access using public/private keys, which reduces convenience and restricts access to devices that are SSH capable and holds a private key. The Docker API lacks functions which are provided by the CLI, so it cannot be used on its own.

The purpose of [Docks](#) is to provide a secure web user interface for using Docker .

## 1.2 Product Scope

[Docks](#) will provide functionality in three areas

1. Provide a secure\* web user interface that enables using the essential\* functions exposed by the Docker API and CLI.
2. Provide a secure API to allow third party services to integrate with [Docks](#) and use Docker
3. Send real time notifications to system administrators via Slack about important events

## 1.3 Definitions, acronyms and abbreviations

|                       |  |
|-----------------------|--|
| <a href="#">Docks</a> | A system to provide a web user interface and API for using Docker  |
| Docker                | Tool designed to make it easier to create, deploy and run applications using lightweight virtualization  |
| Image                 | “A container is launched by running an image. An image is an executable package that includes everything needed to run an application—the code, a runtime, libraries, environment variables, and configuration files.” |
| Container             | “A container is a runtime instance of an image—what the image becomes in memory when executed (that is, an image with state, or a user process)”   |

## 1.4 UML Domain Model

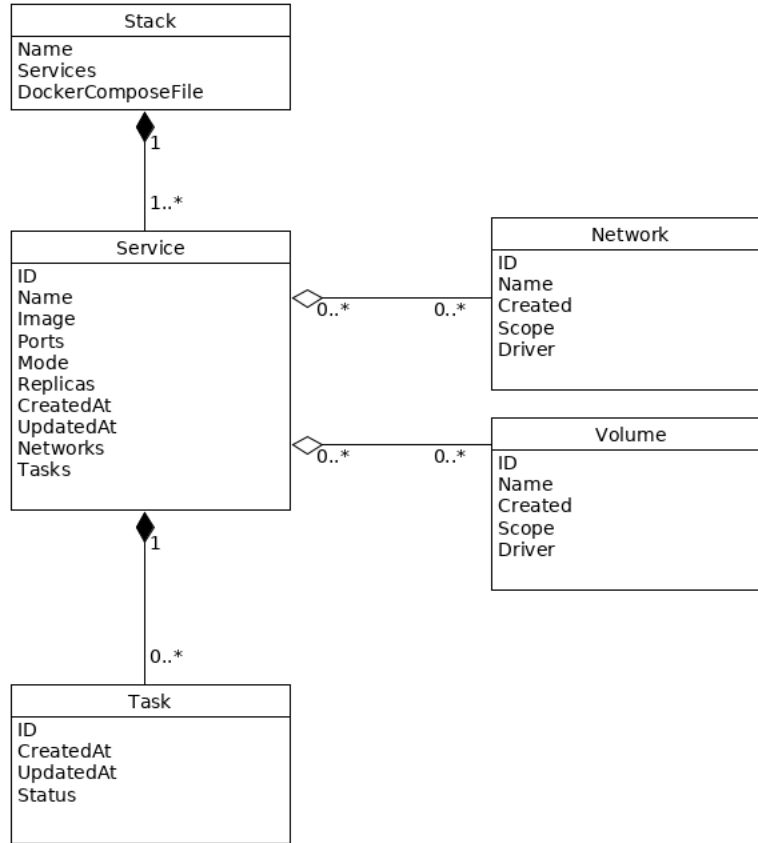


Figure 1: UML Domain Diagram for the Docks System

## 2 Functional Requirements

### 2.1 Users

**Docks** will appeal mainly to software developers and system administrators with fundamental understanding of Docker . **Docks** will allow them to deploy new applications with Docker as well as manage existing applications. With the web user interface they will be able to update and troubleshoot applications using any web browser. They will also be able to give access to the web user interface to other administrators for assisting in management. It is assumed this category of users will have knowledge on configuring applications to be deployed with Docker and the ability to troubleshoot networks and applications.

**Docks** will also appeal to users that are interested in learning how to use Docker . With **Docks** they can deploy pre-configured applications and develop an understanding of the features provided by Docker using the web user interface. It is assumed these users know the basic Docker terminology and can learn from the Docker documentation.

### 2.2 Subsystems

**Docks** consists of two projects with distinct purposes: **Docks** UI which is the web user interface running in the web browser and **Docks** API which is the server running on a Manager Node\*.

**Docks** UI is responsible for displaying information about applications running in Docker , and to provide a convenient interface for sending information to Docker via the **Docks** API.

[Docks](#) API is responsible for providing authenticated access to the Docker API. It also extends the Docker API by providing the ability to deploy Stacks\* and monitor Docker events for sending notifications.

Across these two projects exist a number of subsystems. Their specific requirements will be enumerated

### **2.2.1 Authentication**

The authentication subsystem is responsible for authenticating and authorizing users as well as managing (create, edit, delete) user accounts.

### **2.2.2 Webhooks and Docker Events**

This subsystem is responsible for managing (create, edit, delete) webhooks. It interfaces with the Docker API to listen for events and send relevant data to the stored webhooks. The

### **2.2.3 Stack API Extension for Docker**

The Stack API Extension for Docker is part of the [Docks](#) API. Since Docker lacks an API for managing Stacks, it has to be implemented by the [Docks](#) API. This will enable [Docks](#) UI and third party services to view and manage Docker stacks.

### **2.2.4 API Proxy for Docker**

The API proxy for Docker is part of the [Docks](#) API. It provides authenticated access to the Docker API through the [Docks](#) API. The Docker API is not exposed directly to the world, rather authenticated users may send requests to the [Docks](#) API to be transparently forwarded to the private Docker API.

### **2.2.5 Frontend [Docks](#) API service**

The [Docks](#) API service is part of the frontend ([Docks](#) UI). It acts as the interface between the graphical frontend components and the [Docks](#) HTTP API. This layer of abstraction means that the network logic is hidden from components that need to interact with the [Docks](#) API.

### **2.2.6 Docker Management Functions**

Docker will be managed from the [Docks](#) UI, through the authenticated [Docks](#) API. The user should be able to perform common operations from [Docks](#) UI such as deploying an application and viewing its state.

## **2.3 Specific Requirements**

### **2.3.1 WebHooks and Docker Events**

R1.1. The system shall allow a user to add new outgoing WebHooks

R1.2. The system shall display a list of added WebHooks

R1.3. The system shall allow a user to remove a WebHook

R1.4. The system shall allow a user to specify the type of events to send to the WebHook

R1.5. The system shall monitor all Docker events and send the relevant event data to the respective webhook

R1.6. The system shall send a Slack notification to WebHooks that should receive node events

### **2.3.2 Authentication**

- R2.1. The system shall allow an authorized user to interact with the Docks API
- R2.2. The system shall provide the ability to use two factor authentication as described in RFC 6238
- R2.3. The system shall provide a global administrative account role without restrictions
- R2.4. The system shall provide the following user management features to be used by administrative accounts
  - R2.4.1. Create new administrative user
  - R2.4.2. Remove user
  - R2.4.3. Update user password
  - R2.4.4. Enable and disable two factor authentication

### **2.3.3 Stack API Extension for Docker**

- R3.1. The system shall provide the ability to deploy new stacks given the stack name and docker-compose file
- R3.2. The system shall provide the ability to return deployed stacks along with the number of services in each stack
- R3.3. The system shall provide the ability to update a stack
- R3.4. The system shall provide the ability to remove a stack
- R3.5. The system shall not allow a stack to be created if it already exists
- R3.6. The system shall not allow a stack to be updated if it does not exist
- R3.7. The system shall provide the ability to return the services that are part of a given stack

### **2.3.4 API proxy for Docker**

- R4.1 The system shall only forward requests to the Docker API if the request was made by an authenticated user
- R4.2 The system shall not modify content forwarded from the Docker API to the user
- R4.3 The system shall not modify requests forwarded from the user to the Docker API
- R4.4 The system shall forward error messages from the Docker API to the user

### **2.3.5 Docker Management Functions**

- R5.1. The system shall display all nodes
- R5.2. The system shall display all stacks
- R5.3. The system shall display all services
- R5.4. The system shall display all tasks
- R5.5. The system shall display all networks
- R5.6. The system shall display all volumes
- R5.7. The system shall allow a user to upload a docker-compose file to deploy a Stack
- R5.8. The system shall allow a user to remove a stack from the swarm
- R5.9. The system shall display the tasks that are running in a service
- R5.10. The system shall allow a user to view the log of a service

- R5.11. The system shall allow a user to update a stack using a docker-compose file
- R5.12. The system shall allow a user to delete a volume
- R5.13. The system shall allow a user to delete a network

#### **2.3.6 Frontend Docks API service**

- R6.1. The system shall provide the interface for all requirements stated in the "Docker Management Functions" section above
- R6.2. The system shall provide meaningful error message to the user

## **3 System**

### **3.1 Interfaces**

#### **3.1.1 Software Interfaces**

Since the frontend cannot securely interface with the Docker API, an intermediate interface will be developed (Docks API). The Docks API will communicate between the frontend (Docks-UI) and the Docker API. The Docks API will provide a simplified interface for interacting with the Docker API.

### **3.2 System Configuration**

The Deployment diagram shows the architecture from the device perspective.

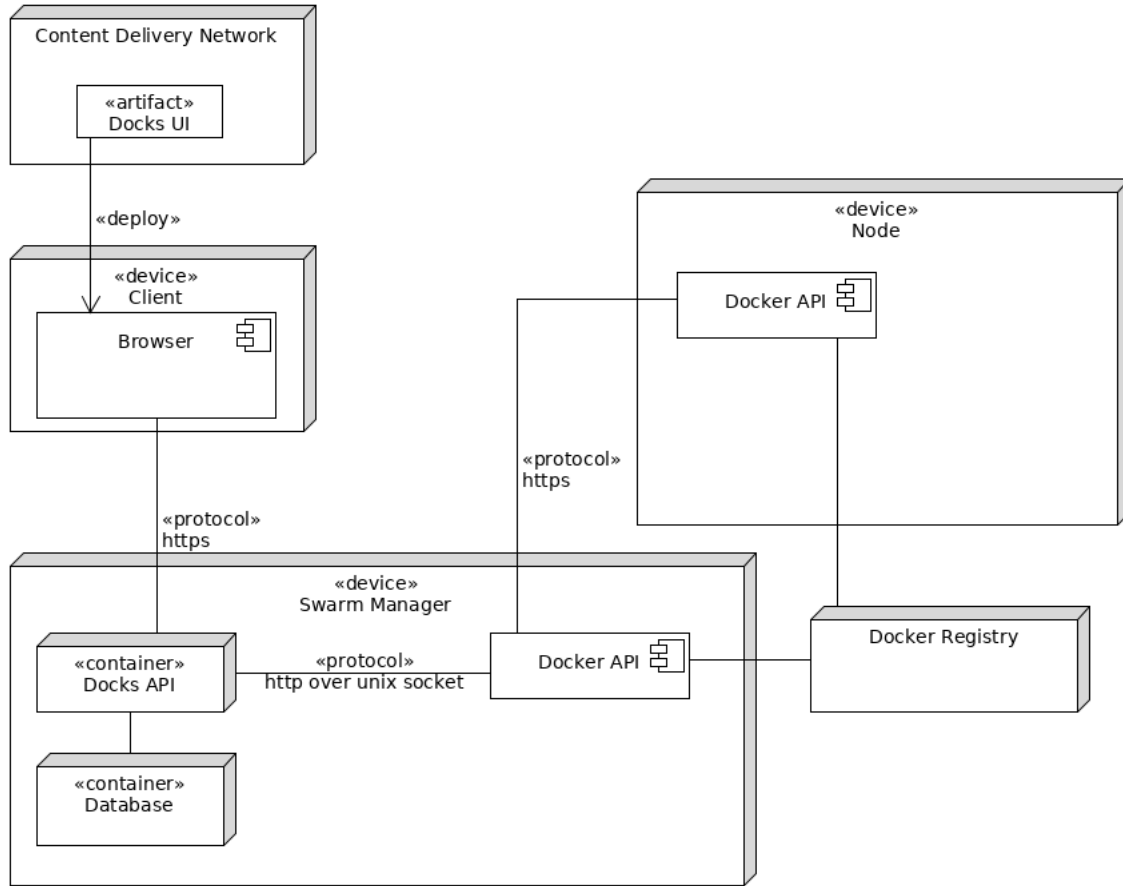


Figure 2: UML Deployment Diagram for the Docks System

### 3.3 Architectural Styles

The User Interface uses the Model View Controller architecture. Nodes and Containers have a data model. The user interacts with the view to manipulate the data model. The view is updated when the data model retrieves data using an N-Tier architecture. The 3-Tier architecture can be seen by the actor interacting with the view, the request is then delegated to the models, which in turn communicate with other objects to retrieve and set the required data from the Docker API server and Docker Swarm.

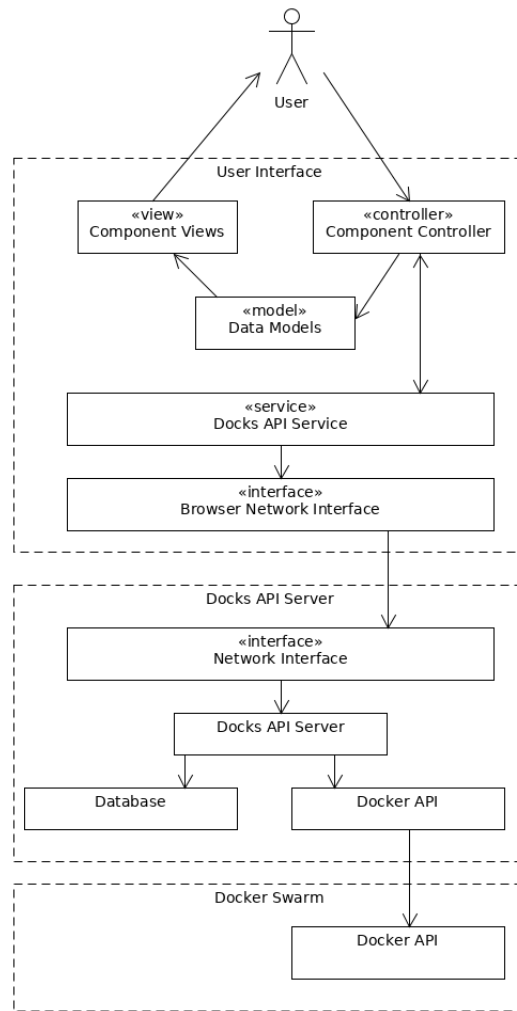


Figure 3: MVC and 3-Tier Architecture diagram for the Docks system