



EXPERIMENT 1:

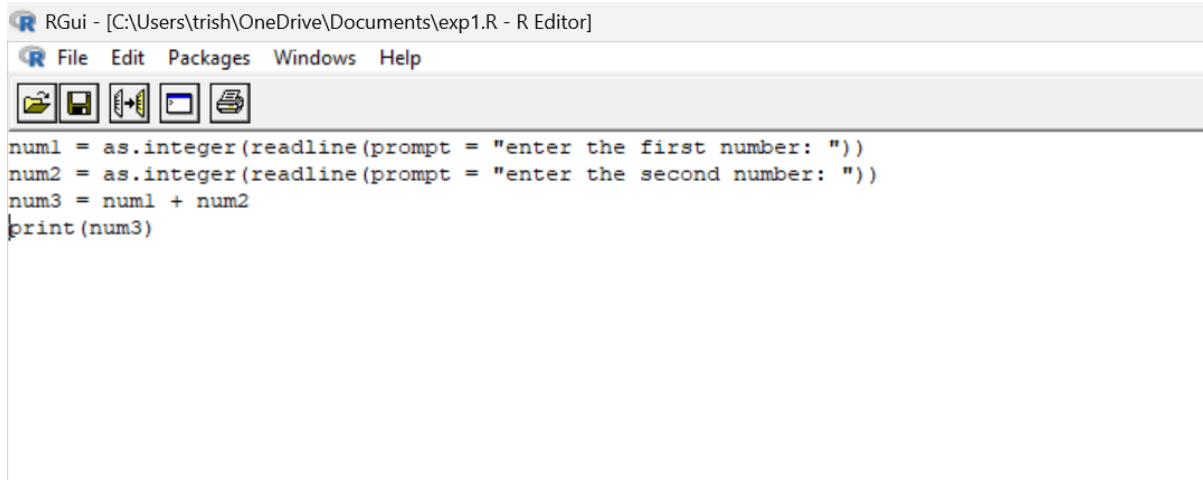

The screenshot shows the RGui editor window with the title bar "RGui - [C:\Users\trish\OneDrive\Documents\exp1.R - R Editor]". The menu bar includes "File", "Edit", "Packages", "Windows", and "Help". The toolbar contains icons for file operations. The script in the editor is as follows:

```
num1 = as.integer(readline(prompt = "enter the first number: "))
num2 = as.integer(readline(prompt = "enter the second number: "))
num3 = num1 + num2
print(num3)
```

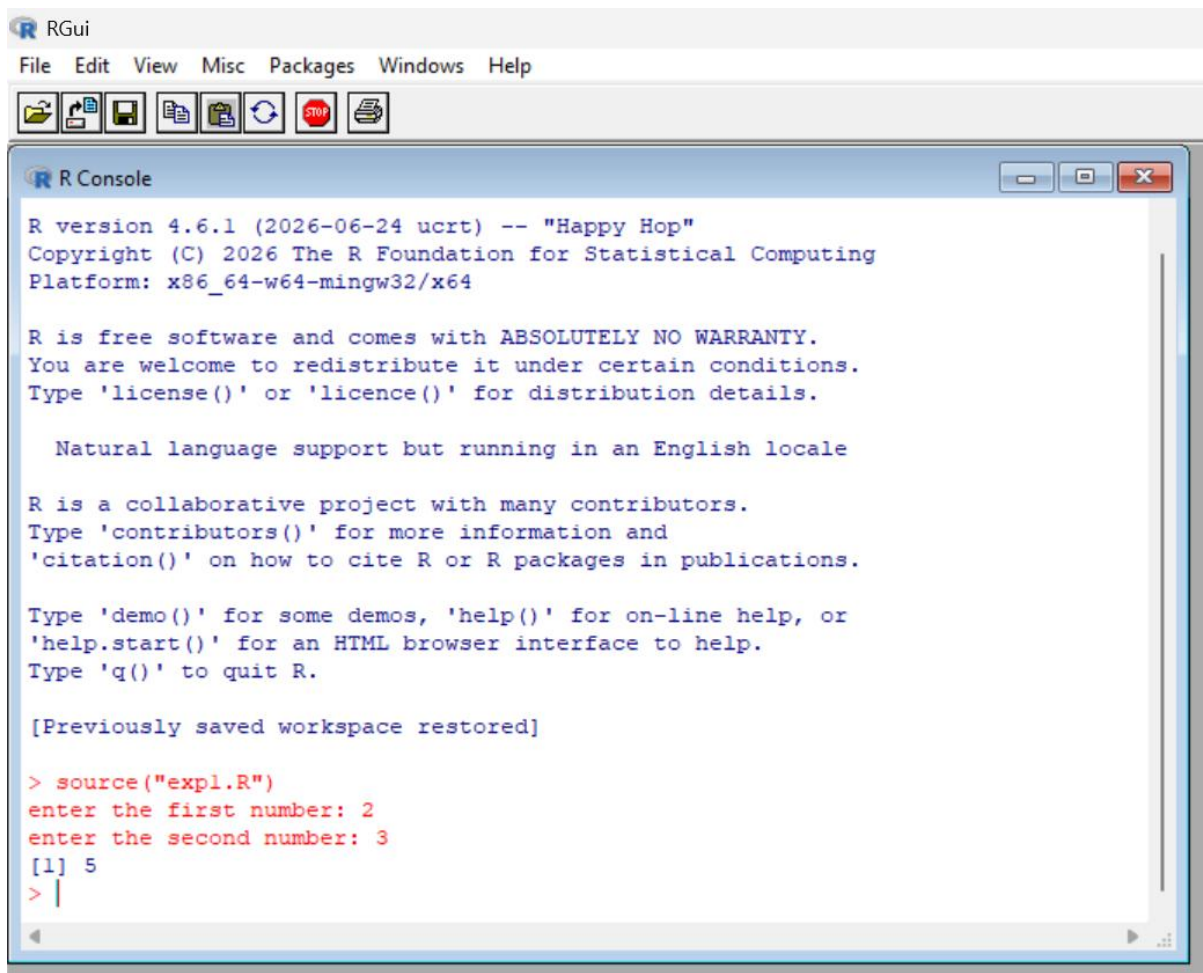

The screenshot shows the RGui console window with the title bar "R Console". The console displays the following output:

```
R version 4.6.1 (2026-06-24 ucrt) -- "Happy Hop"
Copyright (C) 2026 The R Foundation for Statistical Computing
Platform: x86_64-w64-mingw32/x64

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

Natural language support but running in an English locale

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

[Previously saved workspace restored]

> source("exp1.R")
enter the first number: 2
enter the second number: 3
[1] 5
> |
```