
a **The same sender noise produces different patterns of receiving noise**



A common broadcast reduces each community's marginal noise here, while making receiving noise perfectly shared.

This is a conditional routing comparison, with no recomputation of choices and no new simulated trajectories.

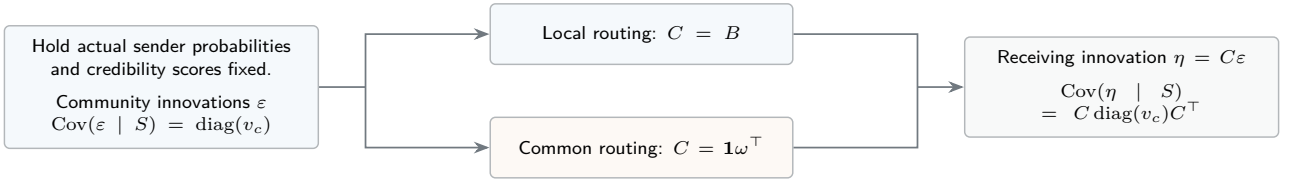