Operator contract
arithmetic, precision, direction, order

Workload domain
shape, batch, strides, placement

Hardware capabilities
capacity, core support, service rates

1 Close regions

stage bits → local domains

Hadamard, N = 16

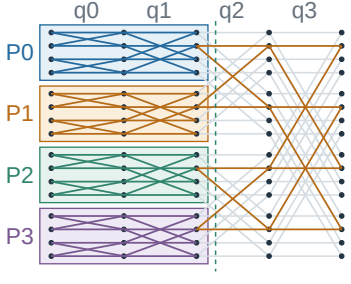

Pairing bits {0,1} → {2,3}

2 Derive handoffs

intersections → predecessors

Every column needs 4 rows



C1 receives {1,5,9,13}

3 Match resources

space/time → resource demand

4 values / local worker

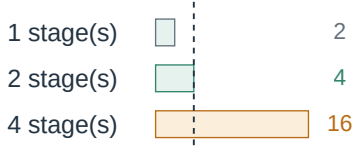

Two workers reuse local slots

Separate 16-word store

4 Place values

ownership → bank + offset

offset = c; bank = r XOR c

b0	b1	b2	b3
0	4	8	12
5	1	13	9
10	14	2	6
15	11	7	3

C1 → addr. {5,4,7,6}

4 banks per access group

5 Execute subgraphs

ready → compute → publish

Reuse two local workers



All P publish before C starts

retain locally → publish boundary

Repeat the construction within bounded storage scopes. Arithmetic labels travel with each region.