Tile-subgraph readiness, handoff, and buffer reuse

A consumer starts after its predecessor packet is ready.

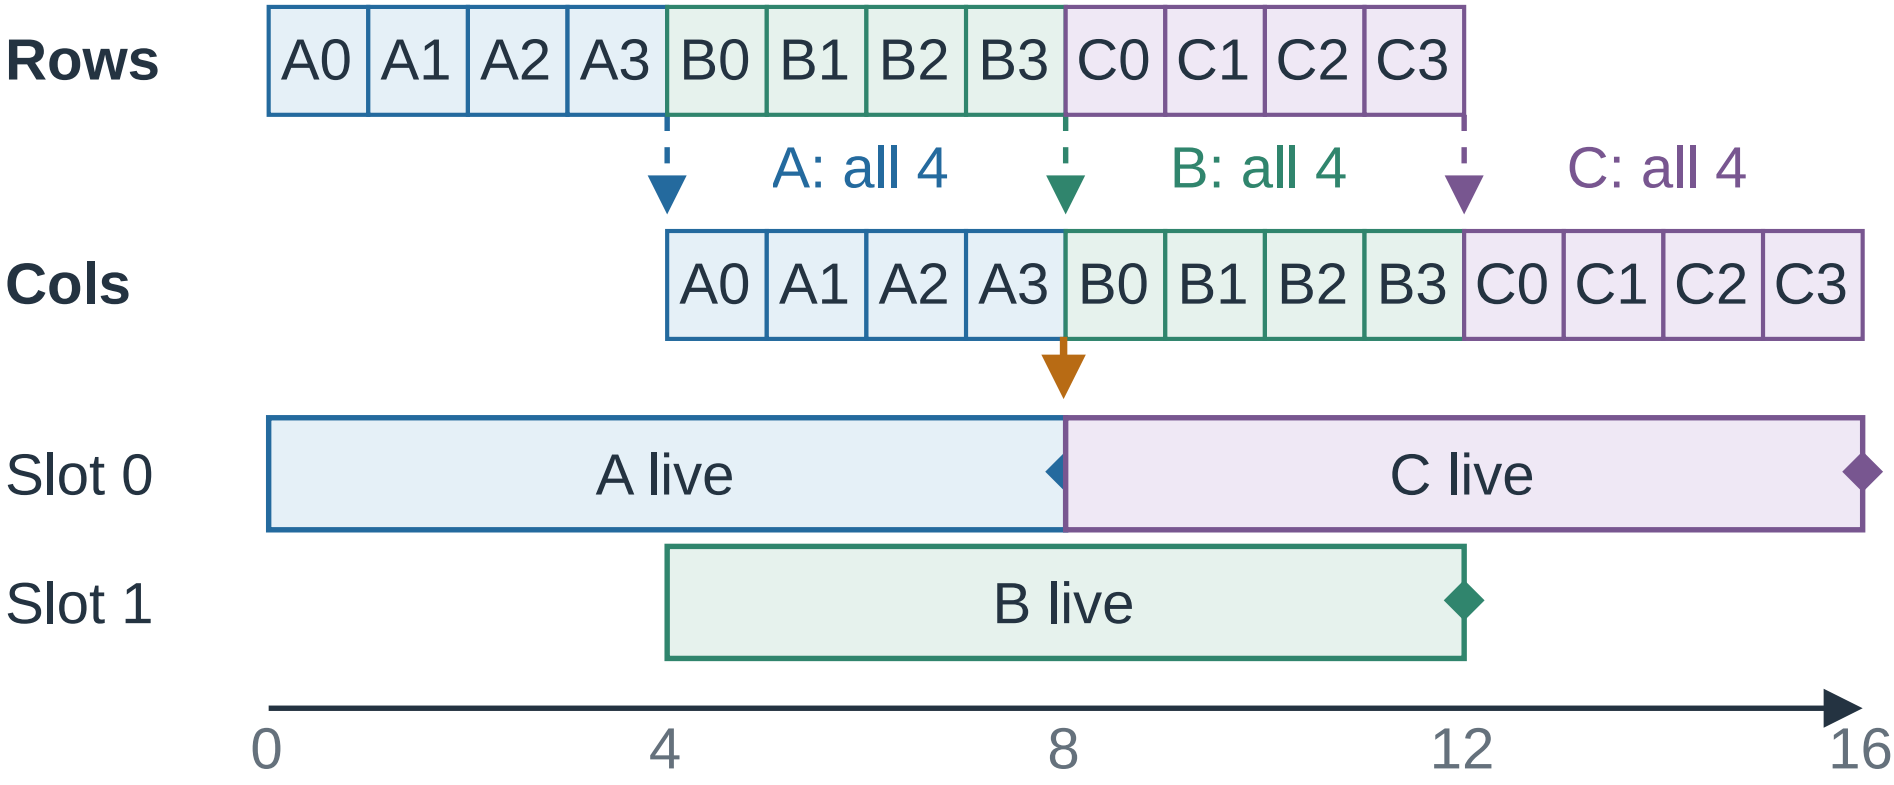

Illustrative time; diamonds release buffer slots.

Within one band: independent tiles, two buffer slots

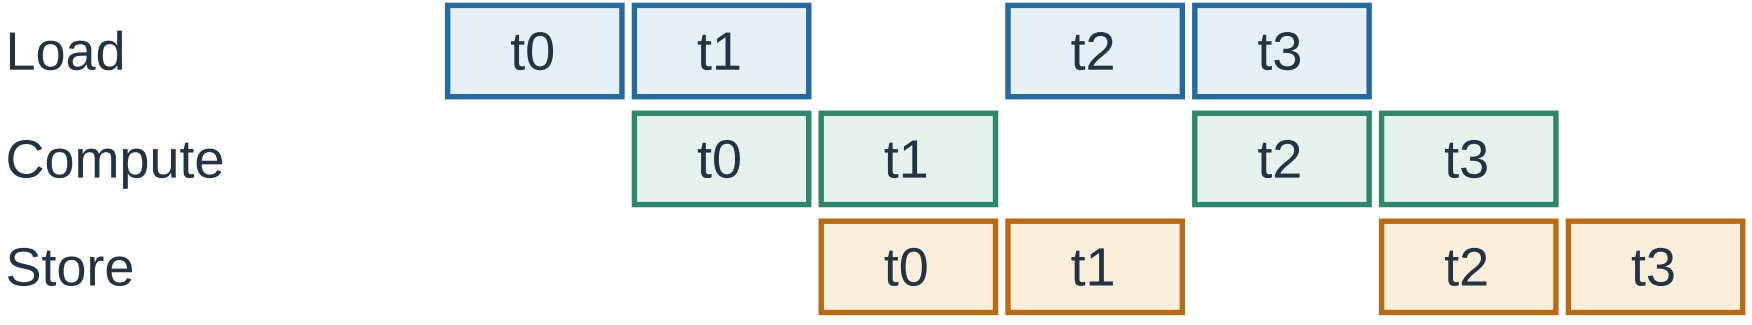

Illustrative service lanes; overlap requires independent resources.