Cost saved by adapting: central vs distributed placement
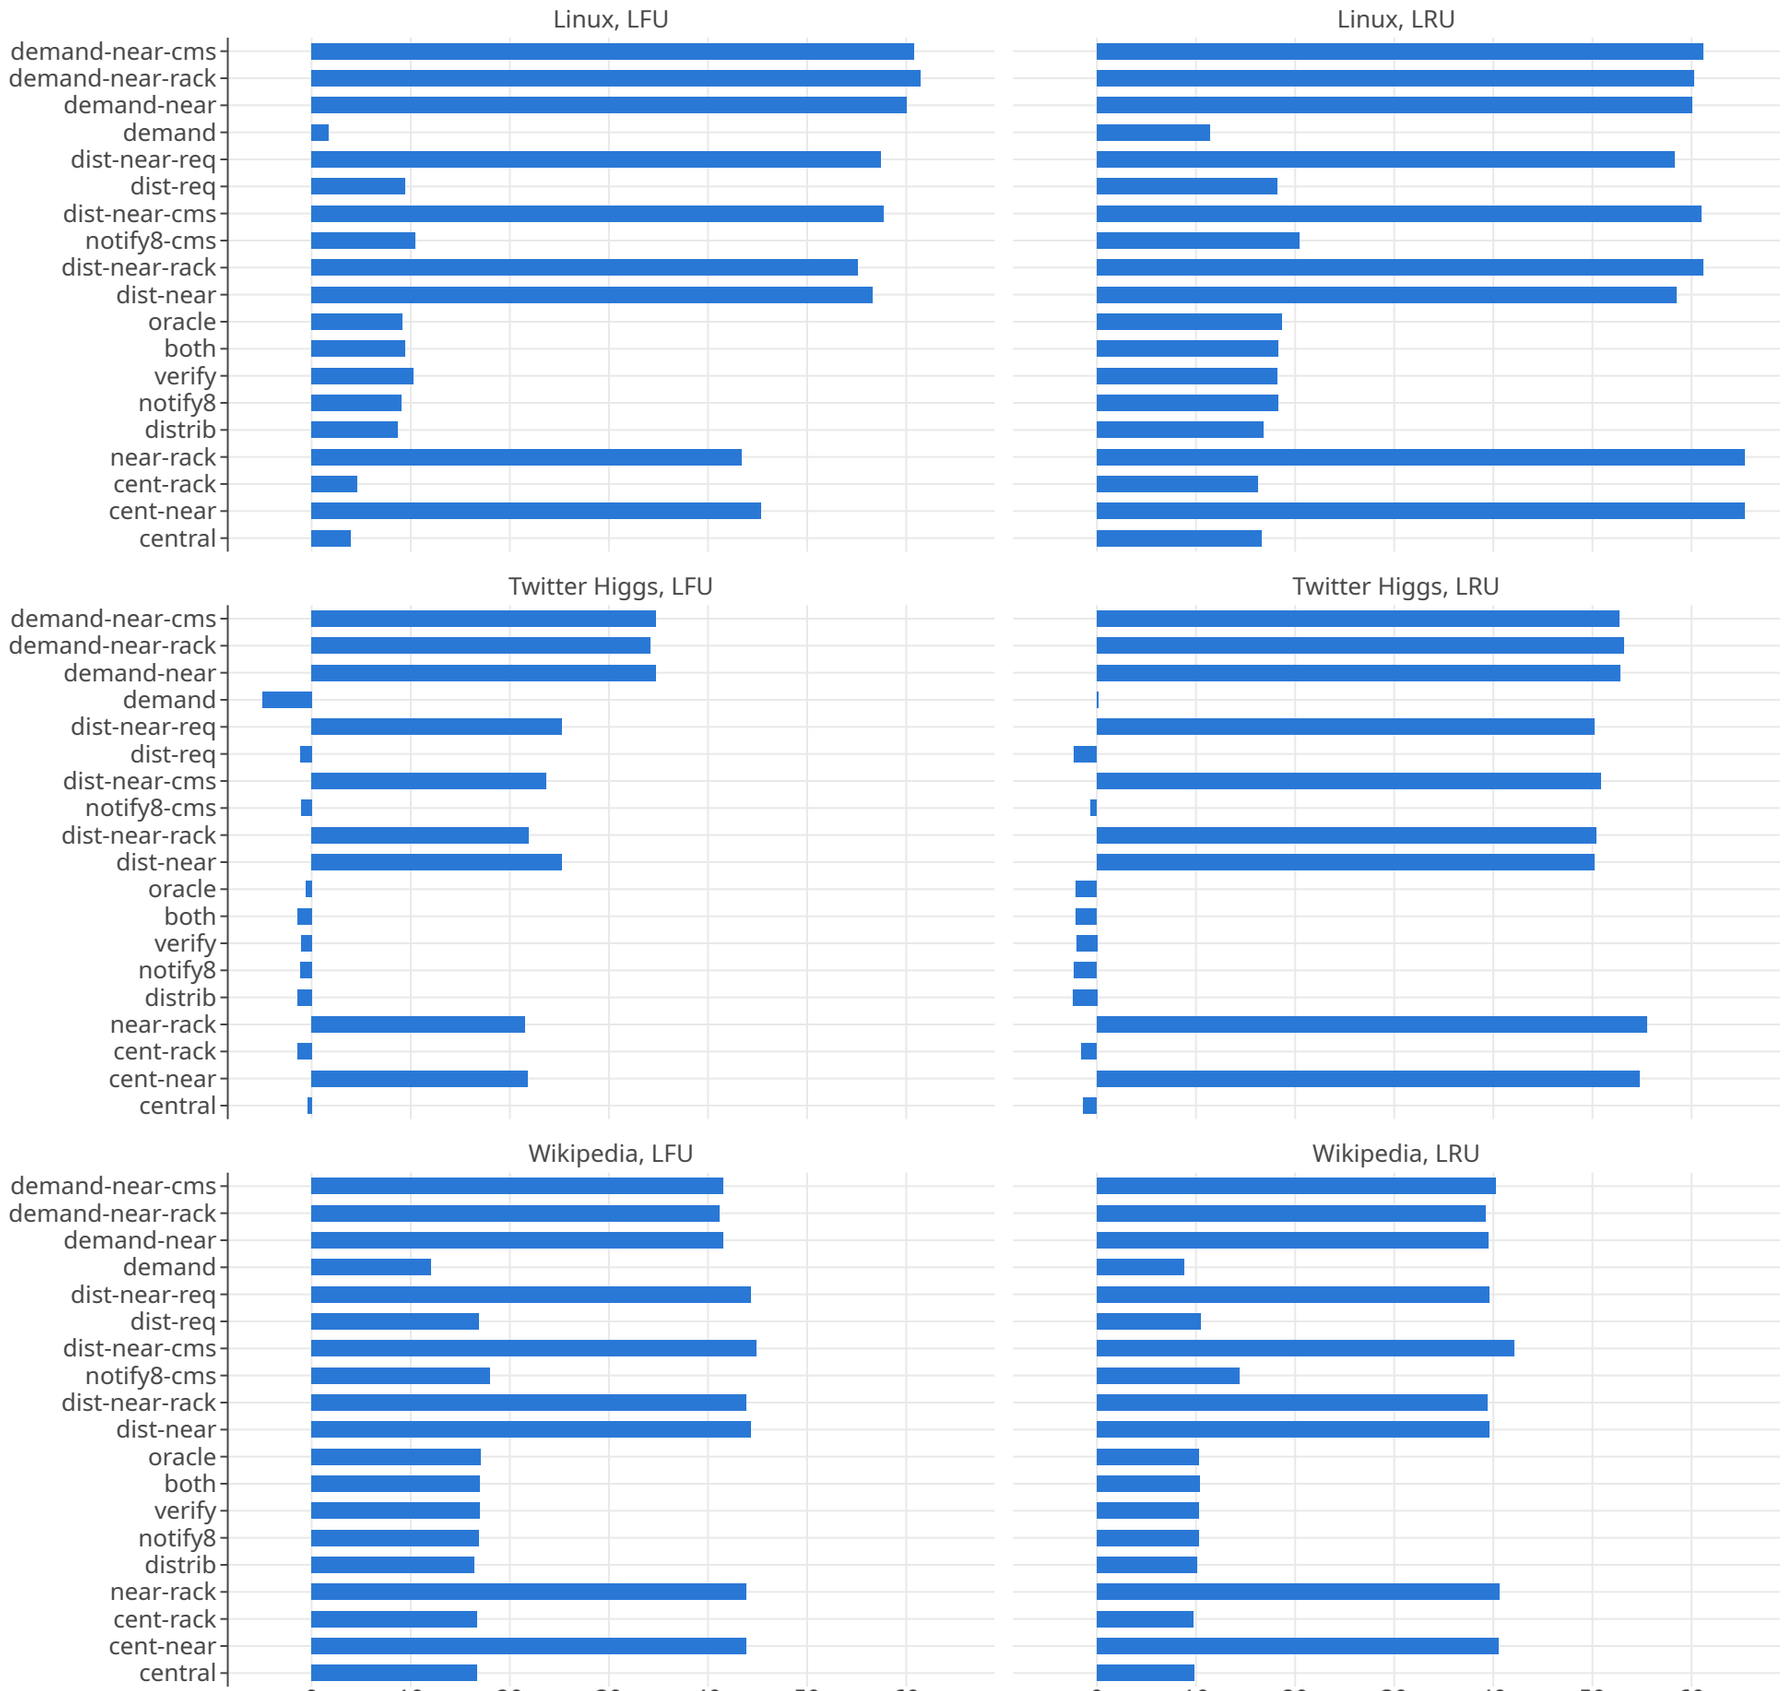
notify8: a moved file tells its 8 heaviest neighbours; verify: check locations first; oracle: exact locations
cent-near / dist-near: central / notify8, and a new file goes beside the file it was reached from
cent-rack / near-rack / dist-near-rack: central / cent-near / dist-near, keeping every file on two racks
notify8-cms / dist-near-cms: notify8 / dist-near, with pairs in a count-min sketch
dist-req / dist-near-req: notify8 / dist-near, and a server that keeps reaching a file may ask for a replica
demand / demand-near / demand-near-rack: no pairs; a replica moves where its requesters' distance rows point
demand-near-cms: demand-near, with the rows in a count-min sketch per server