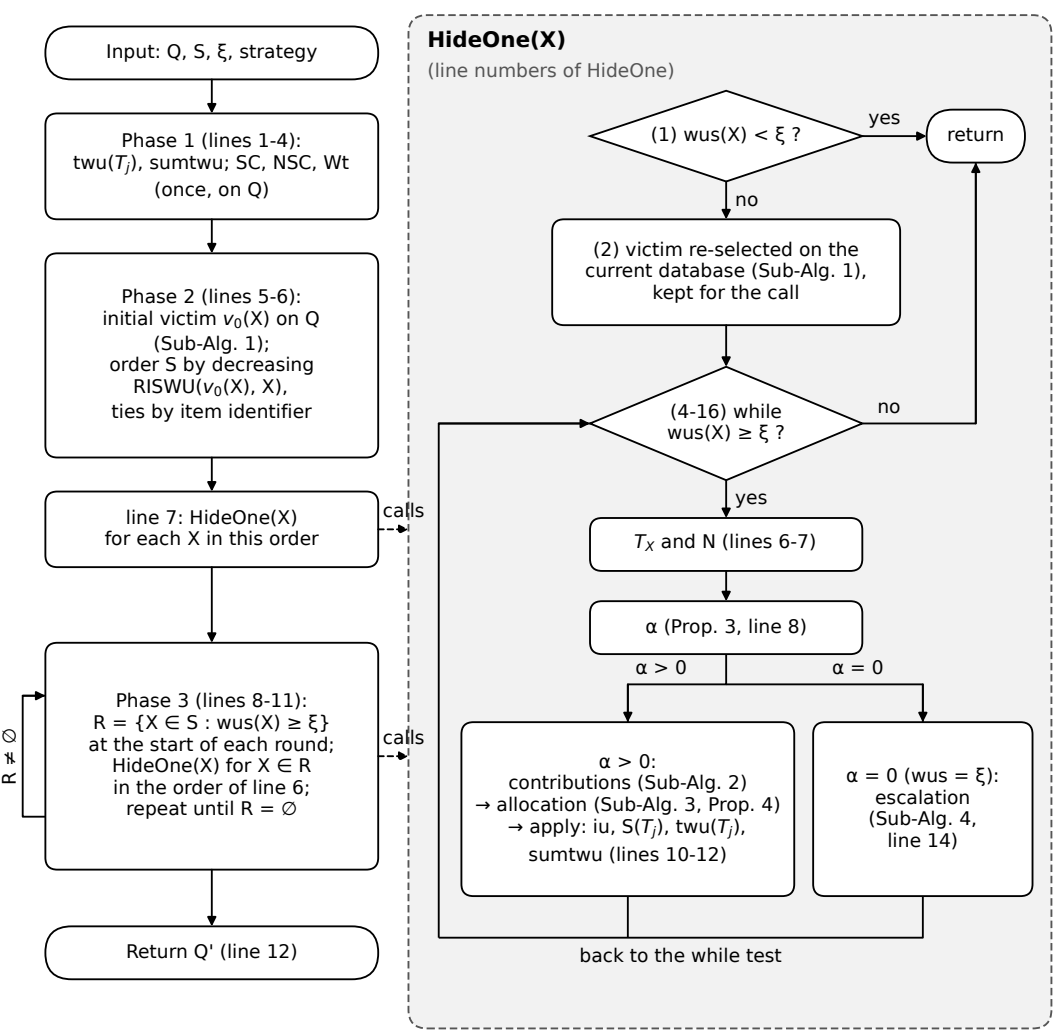
Input: Q, S, ξ, strategy
Phase 1 (lines 1-4):
twu(T_j), sumtwu; SC, NSC, Wt
(once, on Q)
Phase 2 (lines 5-6):
initial victim v_0(X) on Q
(Sub-Alg. 1);
order S by decreasing
RISWU(v_0(X), X),
ties by item identifier
line 7: HideOne(X)
for each X in this order
calls
Phase 3 (lines 8-11):
R = {X ∈ S : wus(X) ≥ ξ}
at the start of each round;
HideOne(X) for X ∈ R
in the order of line 6;
repeat until R = ∅
R ≠ ∅
calls
Return Q' (line 12)
HideOne(X)
(line numbers of HideOne)
(1) wus(X) < ξ ?
yes
return
no
(2) victim re-selected on the
current database (Sub-Alg. 1),
kept for the call
(4-16) while
wus(X) ≥ ξ ?
no
yes
T_X and N (lines 6-7)
α (Prop. 3, line 8)
α > 0
α = 0
α > 0:
contributions (Sub-Alg. 2)
→ allocation (Sub-Alg. 3, Prop. 4)
→ apply: iu, S(T_j), twu(T_j),
sumtwu (lines 10-12)
α = 0 (wus = ξ):
escalation
(Sub-Alg. 4,
line 14)
back to the while test