



# UNDERScore.JS


## CHEAT SHEET

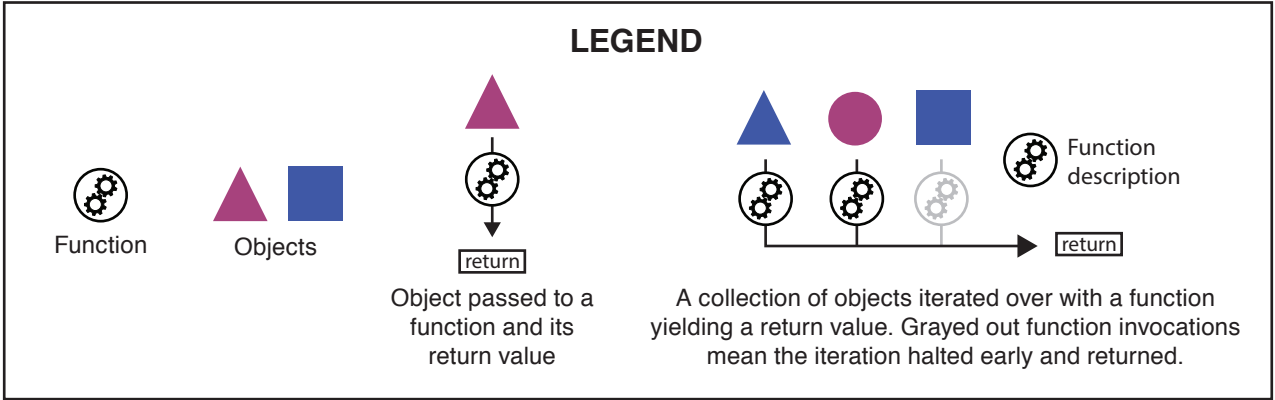


`each(list, iterator, [context])`




`find(list, predicate, [context])`

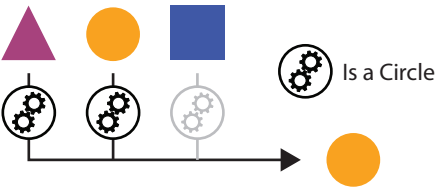


`map(list, iterator, [context])`

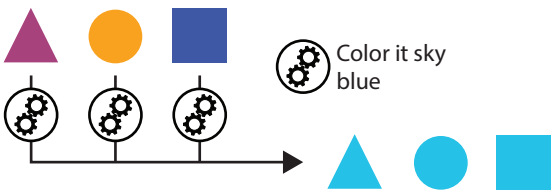


`filter(list, predicate, [context])`

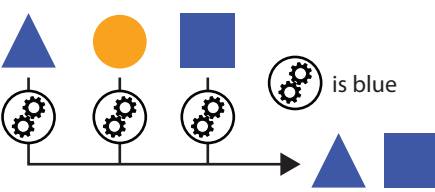


`reduce(list, iterator, memo, [context])`

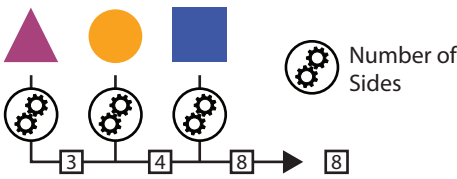


`reject(list, predicate, [context])`

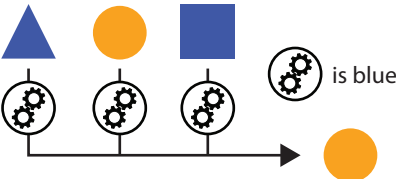

`reduceRight(list, iterator, memo, [context])`

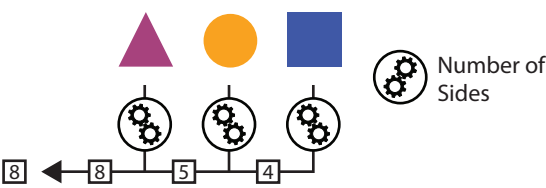


`where(list, properties)`

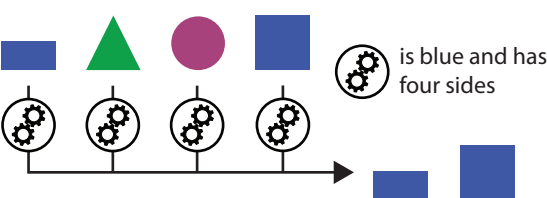

`sample(list, n)`




`findWhere(list, properties)`

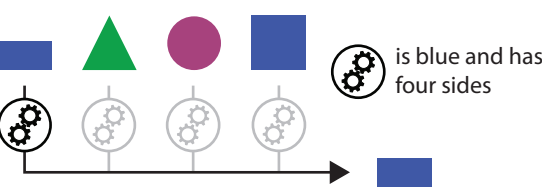


`size(list)`



`every(list, [predicate], [context])`

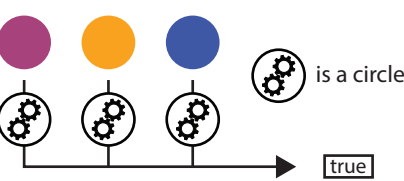


`some(list, [predicate], [context])`

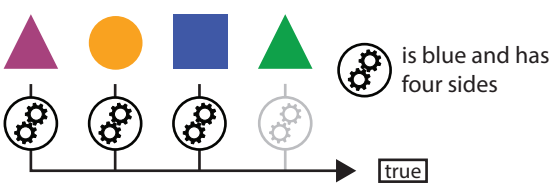

`contains(list, value)`




`max(list, [iterator], [context])`

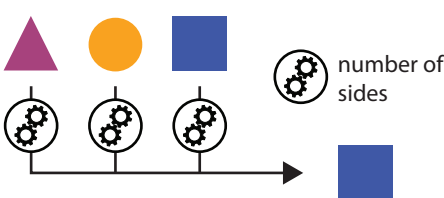


`pluck(list, propertyName)`



`min(list, [iterator], [context])`

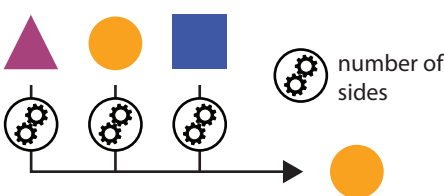

`sortBy(list, iterator, [context])`



`groupBy(list, iterator, [context])`

