

Essentials Vore Plugin. Programming by Tsunombe, Art by Allithemeal and Despacito20
Special thanks to Rayquazanothere for helping me test

Notes - currently not actually a plugin. For now, this will override your script file

INSTALLATION

WHEN RUNNING IN PLAYTEST MODE WAIT FOR THE CONSOLE AND GAME WINDOWS TO POP UP, THEN HOLD CONTROL. THIS WILL MAKE SURE THAT CHANGED FILES GET COMPILED.

IF YOU WANT TO KEEP OLD IMAGES, RENAME THE ONES IN THE SPRITES FOLDERS SO THEY DON'T OVERWRITE

Currently, the best way to install is to drop the files in and let them override. This is absolutely necessary for the Scripts.rxd data file located in the Data file, but for the other files, you can add the changes by hand so as to not interfere with any existing changes you have made. For example, you can go to the bottom of the moves.txt file located in the supplied pbs folder, and add them to the moves.txt file located in the game's actual folder. All you need to do is copy

and paste any attacks starting at STRUGGLE and below into your game's moves.txt. Do the same with the abilities file starting at Predator. .

```
[WITHDRAW]
Name = Withdraw
Type = WATER
Category = Status
Accuracy = 0
TotalPP = 40
Target = User
FunctionCode = RaiseUserDefense1
Description = The user withdraws its body into its hard shell, raising its Defense stat.
#-----
[STRUGGLE]
Name = Struggle
Category = Physical
Power = 50
Type = PRED
Target = NearOther
FunctionCode = None
Flags = CannotMetronome
#-----
[DEVOUR]
Name = Devour
Type = NORMAL
Category = Physical
Power = 1
Accuracy = 90
TotalPP = 20
Target = NearOther
FunctionCode = EatTarget
Flags = Contact,CanProtect,CannotMetronome
Description = Eats target.
#-----
[BELLYPORT]
Name = Bellyport
Type = PSYCHIC
Category = Status
Accuracy = 0
TotalPP = 20
Target = NearOther
FunctionCode = EatTarget
Flags = Contact,CanProtect,CannotMetronome
Description = Teleports target into their stomach. Can't miss.
#-----
[VIPERSTRIKE]
Name = Viper Strike
Type = POISON
Category = Physical
Power = 50
Accuracy = 90
TotalPP = 20
Target = NearOther
FunctionCode = EatTarget
Flags = Contact,CanProtect,CannotMetronome
```

If you would like the pokemon in game to be preds, you will need to **give them the Pred flag** and the **number of weight stages** the pred will have. A vore stage consists of each sprite made for the pokemon, not including the starting sprite. If your pokemon has multiple forms such as Meloetta, include the number of forms the pokemon will have in the **NumOfForms flag**. You do not need to do this for gendered forms, they will have their own rules on how to implement. If you have multiple forms, each form will need the same amount of vore stages. This includes for pokemon with megas. However, you only need to include the number of vore stages that a single one of it's forms will use.

```

Height = 0.6
Weight = 6.5
Color = White
Shape = Bipedal
Category = Staring Melody
Pokedex = Many famous songs have been inspired by the melodies that Meloetta plays.
Generation = 5
Flags = NumOfVoreStages_13,Pred,NumOfForms_2
WildItemCommon = STARPIECE
WildItemUncommon = STARPIECE
WildItemRare = STARPIECE
..

```

In the above example, we have a Meloetta with a Pirouette and Aria form. Each form each has 13 stages, with 26 in total plus the starting aria and pirouette form that are counted as form 0.

If you want to make new pokemon, you will need to add them in yourself, following the format listed above and the format listed in the pokemon essentials wiki. It is also necessary to remake a pokemon if you don't wish to use some of it's existing forms or megas with the vore mod.

The next step is to add your forms, for the most part they don't really need to do much or even describe anything. You do have the option of modifying base stats, so an idea is to make heavier pokemon slower and tankier .

```

#-----
[VORETEST,1]
FormName = Stuffed Form
BaseStats = 68,65,65,40,125,115
..

```


The number of forms you will need depends on what the number of vore stages you made. These will start at the first sprite of your pokemon with a full stomach, then alternate between empty and full stomach sprites until you end with the last sprite of a pokemon with a full stomach. The reason you do it this way is so A pokemon won't visually lose weight on digesting a pokemon.

```


[VORETEST,1]
FormName = Stuffed Form
BaseStats = 68,65,65,40,125,115
#-----
[VORETEST,2]
FormName = Weight Gain Empty Form
BaseStats = 68,65,65,80,145,115
#-----
[VORETEST,3]
FormName = Weight Gain Empty Form
BaseStats = 68,65,75,40,145,115
#-----
[VORETEST,4]
FormName = Weight Gain Empty Form
BaseStats = 78,65,85,80,145,125
#-----
[VORETEST,5]
FormName = Weight Gain Empty Form
BaseStats = 78,65,95,50,145,125
#-----
[VORETEST,6]
FormName = Weight Gain Empty Form
BaseStats = 78,65,105,80,145,145
#-----
[VORETEST,7]
FormName = Weight Gain Empty Form
BaseStats = 78,75,115,60,145,145
#-----
[VORETEST,8]
FormName = Weight Gain Empty Form
BaseStats = 78,75,115,60,145,145
#-----
[VORETEST,9]
FormName = Weight Gain Empty Form
BaseStats = 78,75,125,50,145,155
#-----
[VORETEST,10]
FormName = Weight Gain Empty Form
BaseStats = 78,75,125,50,145,155
#-----
[VORETEST,11]
FormName = Weight Gain Empty Form
BaseStats = 78,75,125,50,145,155
#-----
[VORETEST,12]
FormName = Weight Gain Empty Form
BaseStats = 78,75,155,50,145,155
#-----
[VORETEST,13]
FormName = Weight Gain Empty Form
BaseStats = 78,75,155,50,145,155
#-----

```


How all the forms will look in the files. You can look at the [Pokemon Essentials wiki](#) for what you can change between forms.




VORETEST_
9.png




VORETEST_
8.png




VORETEST_
7.png




VORETEST_
6.png




VORETEST_
5.png



VORETEST_
4.png



VORETEST_
3.png



VORETEST_
2.png



VORETEST_
13.png




VORETEST_
12.png




VORETEST_
11.png



VORETEST_
10.png



VORETEST_
1.png



VORETEST.png

For all of these I have made the pokemon as fakemon under a new name, but you will be able to do this with existing pokemon also.

Once you have the pokemon's form number decided, you can drop the pokemon's sprites into their corresponding Front and Back folder located in the game's Graphics/Pokemon Folder

2. Abilities

I have created a set of abilities that interact with the system. Examples include gaining traits while digesting, gaining weight from eating moves, gaining stats from digesting prey, and much more.

3. Moves

The only way for a predator to eat a prey is through using a move with the EatTarget function code

```
[DEVOUR]
Name = Devour
Type = NORMAL
Category = Physical
Power = 1
Accuracy = 90
TotalPP = 20
Target = NearOther
FunctionCode = EatTarget
Flags = Contact, CanProtect, CannotMetronome
Description = Eats target.
```



Currently I have the move devour as a 1 Damage Physical move, because status moves typically ignore immunities which I find less interesting. I highly recommend making different variations of this move to add flavor to each pred.

```
[BELLYPORT]
Name = Bellyport
Type = PSYCHIC
Category = Status
Accuracy = 0
TotalPP = 20
Target = NearOther
FunctionCode = EatTarget
Flags = Contact, CanProtect, CannotMetronome
Description = Teleports target into their stomach. Can't miss.
```

The one thing you must keep in mind is that moves can only have a single function code, so anything too advanced will need to be coded in yourself

If you go to MoveEffects_SwitchingActing in scripts you can find the command EatTarget. This is where the logic for the move is stored

```

#=====
# Eats target
# traps and damages at end of each round.
#=====
class Battle::Move::EatTarget < Battle::Move
  def nonLethal?(user, target); return true; end
  def pbEffectAgainstTarget(user, target)
    user.pokemon.calc_stats
    return if target.fainted? || target.damageState.substitute
    if target.effects[PBEffects::Eaten] > 0
      @battle.pbDisplay(_INTL("{1} has already been eaten!", target.pbThis))
      return
    elsif user.effects[PBEffects::EatenPrey].size > 0
      @battle.pbDisplay(_INTL("{1} is already full!", user.pbThis))
      return
    elsif target.pokemon.species_data.has_flag?("Apex_Pred")
      @battle.pbDisplay(_INTL("{1} is unable to be eaten!", user.pbThis))
      return
    end
    #CannotMakeTargetFaint
    nonLethal = true
    num_of_turns = target.effects[PBEffects::Trapping] = 4
    target.effects[PBEffects::Trapping] = num_of_turns
    target.effects[PBEffects::TrappingMove] = @id
    target.effects[PBEffects::TrappingUser] = user.index
    # Message
    msg = _INTL("{1} was swallowed by {2}!", target.pbThis, user.pbThis(true))
    case @id
    when :DEVOUR
      msg = _INTL("{1} was swallowed by {2}!", target.pbThis, user.pbThis(true))
    when :BELLYPORT
      msg = _INTL("{2} teleported {1} into their stomach!", target.pbThis, user.pbThis(true))
    when :VIPERSTRIKE
      msg = _INTL("{1} was filled with venom then consumed by {2}!", target.pbThis, user.pbThis(true))
      target.pbPoison(user) if target.pbCanPoison?(user, false, self)
    end
    target.battle.scene.setSpritesVisible(target.index, false)
    target.effects[PBEffects::Eaten] = num_of_turns
    in_array = false
    for i in user.effects[PBEffects::EatenPrey]
      if i == (target.index)

```

Most of this you probably shouldn't touch unless you know what you're doing, but the one thing you can easily change is the display message when the move is used.

If you insert with the format of

when :YOURMOVENAMEALLCAPS

Msg = _INTL("{1} says your message to {2}", target.pbthis, user.pbthis(true))

{1} and {2} correspond to the prey and the pred respectively. Similarly, if you go to the Battle_EndOfRoundPhase

```

if battler.effects[PBEffects::Trapping] == 0
  if move_name == "Devour"
    pbDisplay(_INTL("{2} Spit {1} Back up!", battler.pbThis, trap_user.name))
    trap_user.pbSpitOutPrey(trap_user, switch = false)
    battler.battle.scene.setSpritesVisible(battler.index, true)
    battler.effects[PBEffects::CurrentPred] = -1
    trap_user.effects[PBEffects::EatenPrey].delete(battler.index)
    return
  else # for additional moves if you want to add custom text
    pbDisplay(_INTL("{2} Spit {1} Back up!", battler.pbThis, trap_user.name))
    trap_user.pbSpitOutPrey(trap_user, switch = false)
    battler.battle.scene.setSpritesVisible(battler.index, true)
    battler.effects[PBEffects::CurrentPred] = -1
    trap_user.effects[PBEffects::EatenPrey].delete(battler.index)
    return
  end
end
end

```

You can copy the block and do something like this



```

trap_user = battler.effects[PBEffects::Trapping]
if battler.effects[PBEffects::Trapping] == 0
  if move_name == "Devour"
    pbDisplay(_INTL("{2} Spit {1} Back up!", battler.pbThis, trap_user.name))
    trap_user.pbSpitOutPrey(trap_user, switch = false)
    battler.battle.scene.setSpritesVisible(battler.index, true)
    battler.effects[PBEffects::CurrentPred] = -1
    trap_user.effects[PBEffects::EatenPrey].delete(battler.index)
    return
  elsif move_name == "Move name not caps"
    pbDisplay(_INTL("I changed the message!", battler.pbThis, trap_user.name))
    trap_user.pbSpitOutPrey(trap_user, switch = false)
    battler.battle.scene.setSpritesVisible(battler.index, true)
    battler.effects[PBEffects::CurrentPred] = -1
    trap_user.effects[PBEffects::EatenPrey].delete(battler.index)
    return
  else # for additional moves if you want to add custom text
    pbDisplay(_INTL("{2} Spit {1} Back up!", battler.pbThis, trap_user.name))
    trap_user.pbSpitOutPrey(trap_user, switch = false)
    battler.battle.scene.setSpritesVisible(battler.index, true)
    battler.effects[PBEffects::CurrentPred] = -1
    trap_user.effects[PBEffects::EatenPrey].delete(battler.index)
    return
  end
end
end

```

Gameplay explanation

The Devour system makes the predator eat a prey and does a set amount of damage, currently 1/8 hp and is located in Battle_EndOfRoundPhase

```
anim = TRAPPING_MOVE_COMMON_ANIMATIONS[battler.effects[PBEffects::TrappingMove]
pbCommonAnimation(anim, trap_user)
return if !battler.takesIndirectDamage?
hpLoss = battler.totalhp / 8
if move_name == "Devour"
  pbDisplay(_INTL("{1} is being digested by {2}!", battler.pbThis, trap_user.n
else
  pbDisplay(_INTL("{1} is being digested by {2}!", battler.pbThis, trap_user.n
end
@scene.pbDamageAnimation(battler)
if battler.effects[PBEffects::Trapping] != 0
  battler.pbTakeEffectDamage(hpLoss, false) do |hp_lost|
end
```

While, eaten, a prey has a 20% chance of escaping per turn, but must take 1 turn of digestion damage before the escape is possible

Located in Battler_UseMoveSuccessCheck

```
if @effects[PBEffects::Eaten] > 0
  @effects[PBEffects::Eaten] = @effects[PBEffects::Trapping]
  if @effects[PBEffects::Eaten] <= 0
    return true
  end
  threshold = 20
  minturns = 4
  if !self.hasActiveAbility?(:GUTSLUT)
    @battle.pbDisplay(_INTL("{1} attempts to escape!", pbThis))
    if @battle.pbRandom(100) < threshold and @effects[PBEffects::Eaten] <
      @effects[PBEffects::Eaten] = 0
      @effects[PBEffects::Trapping] = 0
      @battle.pbDisplay(_INTL("{1} Overpowers and breaks out!", pbThis))
      for i in @battle.battlers
        if i.effects[PBEffects::EatenPrey].size > 0
          for x in i.effects[PBEffects::EatenPrey]
            if x == @index
              i.pbSpitOutPrey(i, switch = false)
              @effects[PBEffects::CurrentPred] = -1
              i.battle.scene.setSpritesVisible(@index, true)
              i.effects[PBEffects::EatenPrey].delete(@index)
            end
          end
        end
      end
      return true
    end
  end
end
```

If they don't break free they are forced to use the struggle move located in moves.txt. Currently it is set to not do recoil damage and be normal type, but you can reset it to a recoil move, and should add a new type to your typelist file called typeless that has no weaknesses or resistances if you want to more accurately follow the ingame struggle

If a pokemon does break free, their pred is forced to spend a turn recovering.

On Switching out or fainting, a pokemon will spit out their prey. On digesting a prey they will gain weight. If the prey had a held item, it will be added to the player's bag




Multiple Forms

This game allows for pokemon to have multiple forms, but there are some catches. First, the game defaults a lot of alternative forms for existing pokemon back to the base form after a battle. This will mean that weight after a battle will not stick unless you remove this option.

Whether you delete the block entirely or make it so it returns the current form - 1 is up to the

situation

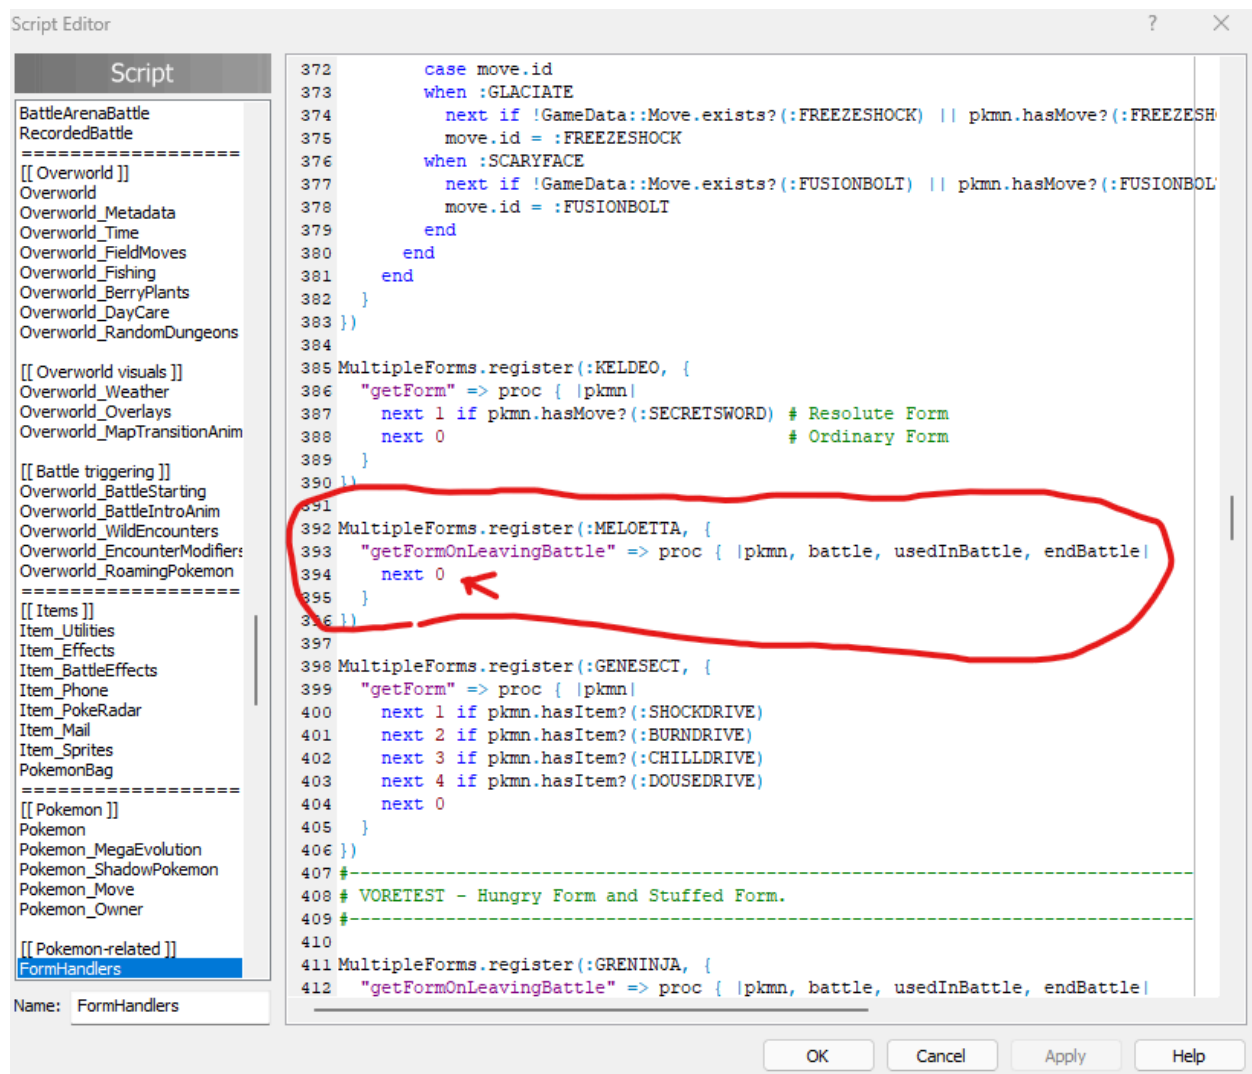

In this case, I would delete this block entirely and have the meloetta keep forms between battles, but it is developer's choice.

Adding new forms

Incredibly easy

```

Name = Meloetta
FormName = Hungry Form
Types = NORMAL,PSYCHIC
BaseStats = 100,77,77,90,128,128
GenderRatio = Genderless
GrowthRate = Slow
BaseExp = 300
EVs = SPECIAL_ATTACK,1,SPECIAL_DEFENSE,1,SPEED,1
CatchRate = 3
Happiness = 100
Abilities = PREDATOR
Moves = 1,DEVOUR,1,RELICSONG,1,CONFUSION,1,SING,6,QUICKATTACK,11,CONFUSION,16,SING,21,TEETERDANCE,26,ACROBATICS,31,PSYBEAM,36,DEVOUR,43,
TutorMoves =
ACROBATICS,ALLYSWITCH,BRICKBREAK,CALMMIND,CHARGEBEAM,CONFIDE,COVET,DAZZLINGGLEAM,DOUBLETEAM,DRAINPUNCH,DREAMEATER,DUALCHOP,ECHOEDVOICE,EN
RASSKNOT,GRAVITY,HEALBELL,HELPINGHAND,HIDDENPOWER,HONECLAWS,HYPERBEAM,HYPVOICE,ICEPUNCH,KNOCKOFF,LASERFOCUS,LASTRESORT,LIGHTSCREEN,LOW
SHOCK,RAINDANCE,RECYCLE,RELICSONG,REST,RETALIATE,RETURN,ROCKSMASH,ROLEPLAY,ROUND,SAFEGUARD,SECRETPOWER,SHADOWBALL,SHADOWCLAW,SHOCKWAVE,S
S,THUNDER,THUNDERBOLT,THUNDERPUNCH,THUNDERWAVE,TOXIC,TRICK,TRICKROOM,UPROAR,UTURN,WONDERROOM,WORKUP,ZENHEADBUTT
EggGroups = Undiscovered
HatchSteps = 30720
Height = 0.6
Weight = 6.5
Color = White
Shape = Bipedal
Category = Staring Melody
Pokedex = Many famous songs have been inspired by the melodies that Meloetta plays. Most of them make people hungry.
Generation = 5
Flags = Intermediate_Weight_Gain,Pred,NumOfForms_2
WildItemCommon = STARPIECE
WildItemUncommon = STARPIECE
WildItemRare = STARPIECE

```

Add NumOfForms_x where x is the number of forms the pokemon will need to switch between
 Pokemon with only their baseform + devour will not need this line added.

Then, add your sprites in following an alternating order like so
 Here I have Aria form on evens and Pirouette on Odds.

RULES

There must be an equal number of sprites between the forms and they must hit the limit that you
 set in the weight gain flag. With Meloetta at 2 Forms with 14 Images per form, that will be 28
 images total. All forms must be added to the forms.txt




Watch out for pokemon with Megas, or other forms that you don't care about
 For gendered forms, just include the female tag at the end of the image file to separate them.
 You will fill out the numofforms as being equal to 1, since the system handles them differently to other alternate forms.

 WOBBUFFET_1_female.png	9/2/2025 1:02 PM	PNG File	2 KB
 WOBBUFFET_2_female.png	9/2/2025 12:37 PM	PNG File	2 KB
 WOBBUFFET_2.png	9/2/2025 12:36 PM	PNG File	2 KB
 WOBBUFFET_1.png	9/2/2025 12:36 PM	PNG File	2 KB

Audio

The system will want sound Effects labelled BURP_x where x is a number starting at 1. You can include as many of these as you like, and it will play one randomly on digestion

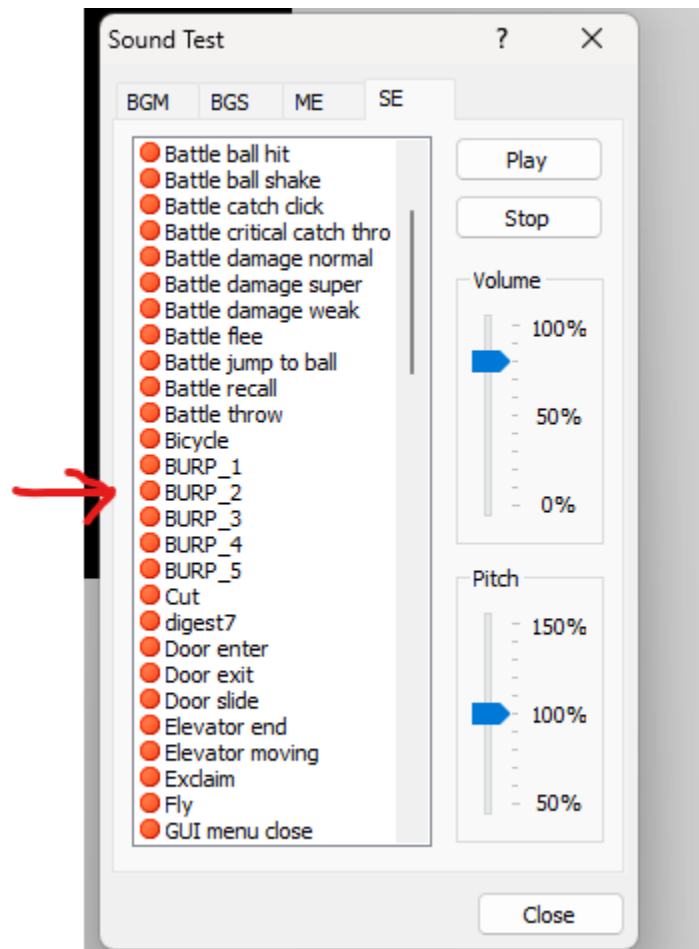

UNTESTED. MIGHT WORK

Player Pred

If you would like the Player to be a pred, you can assign a Pokemon the "Player" flag in the pokemon.txt file. If you combine this with overworld sprites in the metadata.txt file, the player will have different overworld sprites for different weight sizes. You can also use the commands `$player.getweight`, `$player.weightadd(value here)`, and `$player.weightsub(value here)` in events to manually change these sprites. You will need as many versions of these in the metadata.txt file as you have weight change tiers for the pokemon. So if a Pokemon can gain weight 6 times, starting at 0 weight, you'd need to have character sprite sets included in the metadata folder for weights 0, 1, 2, 3, 4, 5, 6. The numbers of the metadata ID DO NOT need to match the ones used for stages. They just need to be in consecutive order. Something like 0, 1, 2, 3, 4, 5, 6 for Male and 7, 8, 9, 10, 11, 12, 13 for Female will work as long as the Male starts the game at ID 0 and the Female starts at ID 6, and both have `NumOfVoreStages_13`. These will change the player ball throw sprite and the sprite on the trainer card also.

MEGA PREDS (I haven't been able to test them yet but some logic is set up for them)

FUN STUFF SECTION

MOVES

Devour - eats target

Bellyport - always accurate psychic devour

Viper Strike - Poison's opponent then eats them

Massage/Struggle - only usable when eaten. If a pokemon with the gutslut is eaten, they won't try to break out and will use massage (reskin of acupressure) on their pred

Belly Slam - doubles in damage if the user ate a prey

Unbirth - reskinned devour with alt text

Giga Bite / Metronom - pick a random vore move (some exceptions)

Role Reversal - Protects user then uses devour if foe makes contact

Safekeeping - Brings prey into their stomach and slowly heals them

Ravenous Hunger - Restores user's hp with digestion damage

Work Off - raises offensive stats by 1. By 2 and loses weight if the user has weight to lose.

Pixie Pounce - priority Devour with lower accuracy

Butt Crush - heavy slam with 30% chance of 2 turn vore

Ass Drop - Dark type high jump kick with 30% chance of 2 turn vore

Tail Strike - 80 Power Dragon type with 30% chance to devour

Fatal Embrace - Water type Breast Vore

Abilities - **NOT NECESSARY TO USE VORE**, but still fun to make

Predator - currently does absolutely nothing. Placeholder

Hunger Drive - gives beast boost on digestion (highest stat raised)

Melodic Churn - gives pokemon Serene Grace while digesting

Apex Pred - The ability just announces that you're an apex pred. what 's really happening is you give the pokemon the flag **Apex_Pred**, right next to where the pred flag is, and the game won't let them be eaten.

Gutslut - acts like lightning rod but for vore attacks. Won't try to escape, and will lightly struggle, giving their pred a massage and a +2 boost to a random stat

Reformer - If digested, they are revived with ½ Hp immediately. Immune to the perma-digestion setting

Noisy Stomach - thematic Soundproof

Soul Absorb - heals hp by ⅓ on digestion

Hefty - gains thick fat at higher weights

Motherly - generates an egg of the opponent on digestion

Protective - reskinned friend guard that can possibly be tossed

Glitchy - Gains random stat increase on digesting a prey

Armor Burst - weak armor on digestion or being hit by fire move.

Tiny Pred - slower digestion and weight loss. Increased accuracy.

Other Goodies

Pokemon lose a weight gain stage about every 200 steps, though holding a leftovers makes them never lose weight. Pokemon with tiny body lose weight $\frac{1}{2}$ as often

Pokemon keep their weight gain after a battle

An item called PREDBALL can be added. Programmed to have boosted capture rate on pokemon with Pred flag

Evolutions based on both the pokemon's weight and total number of prey digested.

In the pokemon.txt make their evolution

Evolutions = EVOLUTIONNAMECAPS, PreyDigested, numberhere

or


Evolutions = EVOLUTIONNAMECAPS, PreyWeightGained, numberhere

Belch has been reworked. You get a charge on eating a prey, and lose it after one use. You cannot stack charges

EXPALL is now able to be controlled on or off using the in-game options menu

Perma Digestion - All Pokemon without the Reformer ability or that aren't Apex Preds will be removed from the game on their digestion and have their poke ball returned to the bag. If you are using the Player as a pokemon, the digestion of the player will result in a gameover. Can be turned on or off in the in-game options menu (Note. This feature is intended to be used alongside a standard Nuzlocke run for flavor. Players can softlock themselves if they lose a pokemon vital for overworld progression and they are unable to catch a new one to continue. This can be avoided by making Hms usable without needing to teach it to a pokemon, or supplying items such as an old rod to the player early and not trapping the player into areas using obstacles like trees, boulders, or rocks with no way to escape)

Player Edible- Can the player be eaten in battle (basically lets player choose if they want to be an Apex Pred)

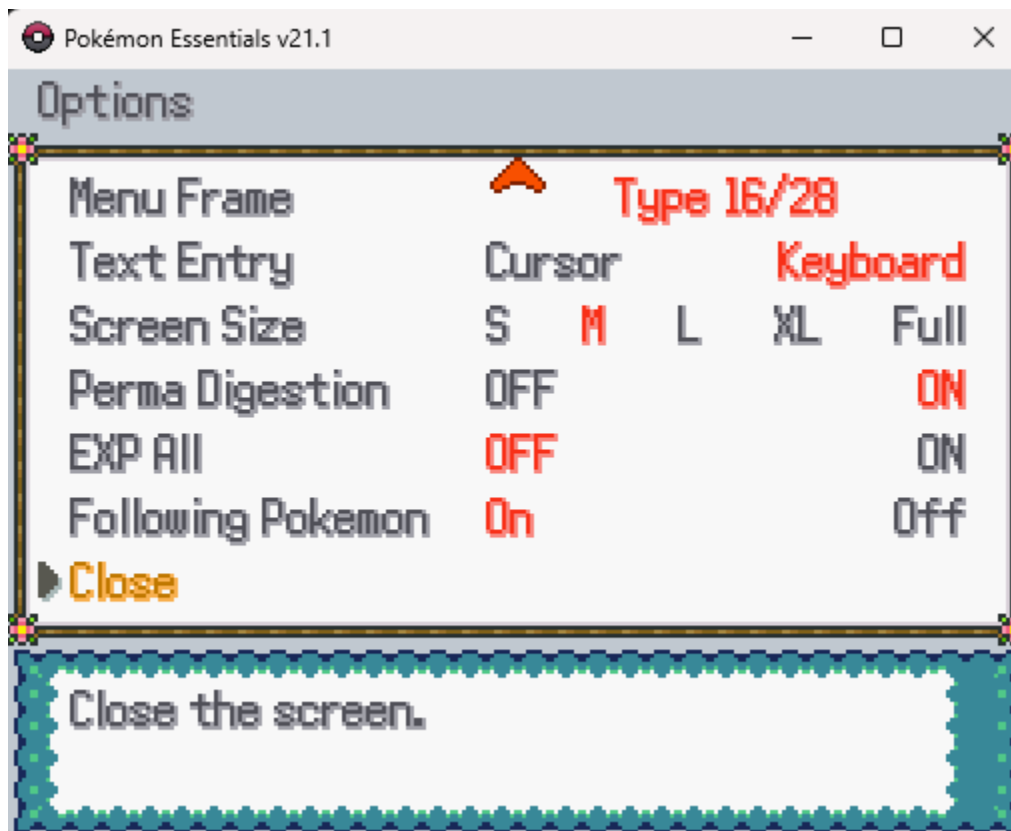

SETTINGS TOGGLES

PLAYER_IS_POKEMON = 1

is player a pokemon

PERMA_DIGESTION_TOGGLE = 1

can the player control the perma-digestion toggle

EXP_ALL_TOGGLE = 1

can player control the EXPALL toggle

PLAYER_WEIGHT_GAIN = 0

Does a player as a pred gain weight

DIGESTION_TURNS = 4

Max turns a pokemon can stay eaten for

DIGESTION_BREAKOUT_CHANCE = 20

Chance for a prey to escape early

```

module Settings
    # The version of your game. It has to adhere to the MAJOR.MINOR.PATCH format.
    GAME_VERSION = "1.0.0"

    # The generation that the battle system follows. Used throughout the battle
    # scripts, and also by some other settings which are used in and out of battle
    # (you can of course change those settings to suit your game).
    # Note that this isn't perfect. Essentials doesn't accurately replicate every
    # single generation's mechanics. It's considered to be good enough. Only
    # generations 5 and later are reasonably supported.
    MECHANICS_GENERATION = 8
    PLAYER_IS_POKEMON = 1
    PERMA_DIGESTION_TOGGLE = 1
    EXP_ALL_TOGGLE = 1
    #=====

```

These are located under the Settings tab in the script but can also be changed with events such as `Settings::EXP_ALL_TOGGLE = 0`

They determine if the player is able to control their game rules. You can set a rule to be the way you want then disable it from being changed in these settings. These settings **DO NOT** control if the settings are on or off, only if the player can access the toggle. To control these rules themselves, you will need to set the rules to either be off (0) or on (1) in the `UI_Options` initialize method

