

Lab 9.3 Make Starter Project

Link:

<https://github.com/google-developer-training/android-basics-kotlin-inventory-app/tree/starter>

Bước 1. Thiết lập phiên bản SDK 35

```
android {  
    namespace = "com.example.inventory"  
    compileSdk = 35  
  
    defaultConfig {  
        applicationId = "com.example.inventory"  
        minSdk = 26  
        targetSdk = 35  
        versionCode = 1  
        versionName = "1.0"
```

Bước 2. Thiết lập các thư viện cần thiết

Cập nhật file project/ build.gradle.kts

// Top-level build file where you can add configuration options common to all sub-projects/modules.

```
plugins {  
    alias(libs.plugins.android.application) apply false  
    alias(libs.plugins.kotlin.android) apply false  
    id("com.android.library") version "8.1.1" apply false  
}
```

Cập nhật file app/build.gradle.kts

```
plugins {  
    alias(libs.plugins.android.application)  
    alias(libs.plugins.kotlin.android)  
    id("androidx.navigation.safeargs.kotlin")
```

```

    id("kotlin-kapt")
}

android {
    namespace = "com.example.inventory"
    compileSdk = 35

    defaultConfig {
        applicationId = "com.example.inventory"
        minSdk = 26
        targetSdk = 35
        versionCode = 1
        versionName = "1.0"

        testInstrumentationRunner = "androidx.test.runner.AndroidJUnitRunner"
    }

    buildTypes {
        release {
            isMinifyEnabled = false
            proguardFiles(
                getDefaultProguardFile("proguard-android-optimize.txt"),
                "proguard-rules.pro"
            )
        }
    }
    compileOptions {
        sourceCompatibility = JavaVersion.VERSION_1_8
        targetCompatibility = JavaVersion.VERSION_1_8
    }
    kotlinOptions {
        jvmTarget = "1.8"
    }

    buildFeatures {
        viewBinding = true
    }
}

dependencies {
    val room_version = "2.6.1"

    implementation("androidx.room:room-runtime:$room_version")


```

```
kapt("androidx.room:room-compiler:$room_version")
implementation("androidx.room:room-ktx:$room_version")
```

```
implementation(libs.androidx.core.ktx)
implementation(libs.androidx.appcompat)
implementation(libs.material)
implementation(libs.androidx.activity)
implementation(libs.androidx.constraintlayout)
testImplementation(libs.junit)
androidTestImplementation(libs.androidx.junit)
androidTestImplementation(libs.androidx.espresso.core)
```

```
implementation("androidx.navigation:navigation-fragment-ktx:2.8.3")
implementation("androidx.navigation:navigation-ui-ktx:2.8.3")
}
```

Bước 3. Thêm ItemListFragment

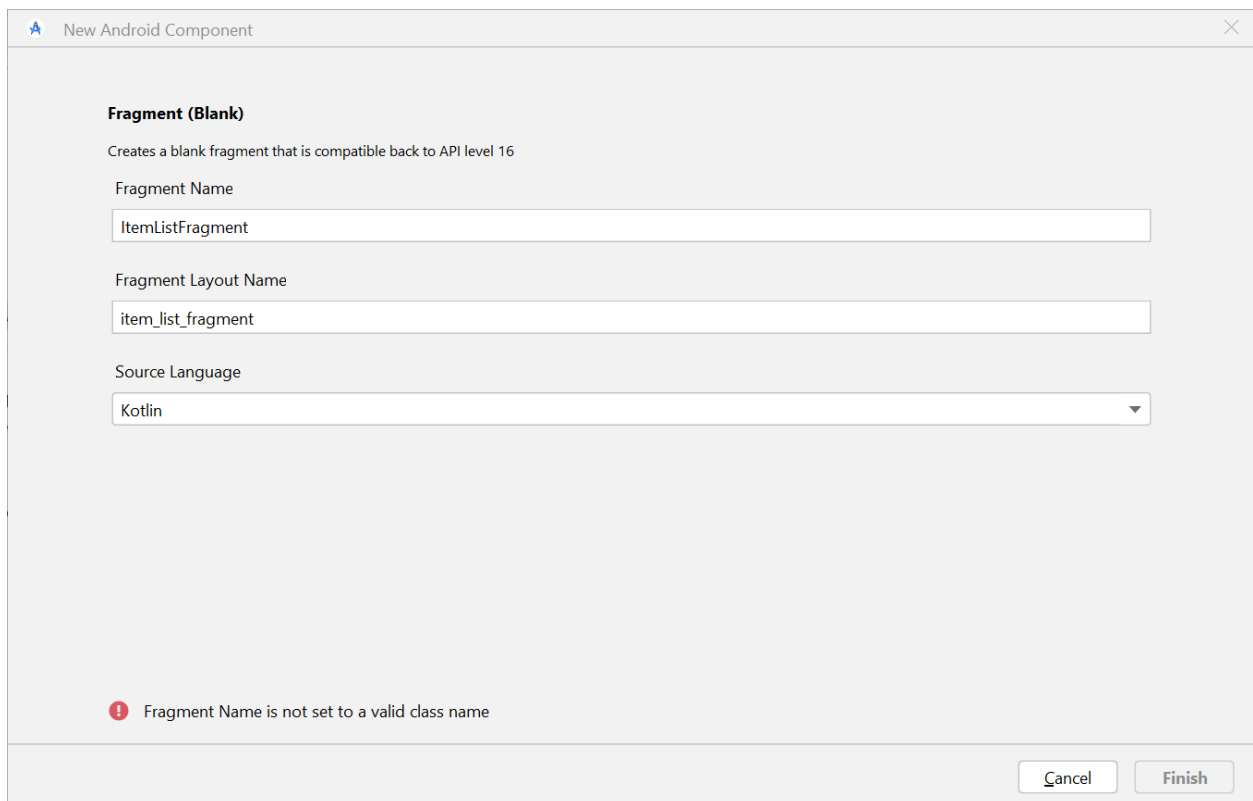

New Android Component

Fragment (Blank)
Creates a blank fragment that is compatible back to API level 16

Fragment Name
ItemListFragment

Fragment Layout Name
item_list_fragment

Source Language
Kotlin

 Fragment Name is not set to a valid class name

Cancel Finish

Bước 4. Cập nhật giao diện của ItemListFragment

Mở file item_list_fragment.xml

```
<androidx.constraintlayout.widget.ConstraintLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:layout_margin="@dimen/margin"
    tools:context=".ItemListFragment">
```

```
<TextView
    android:id="@+id/item_name"
    style="@style/Widget.Inventory.Header"
    android:layout_marginStart="@dimen/margin_between_elements"
    android:text="@string/item"
    app:layout_constraintEnd_toStartOf="@+id/item_price"
    app:layout_constraintHorizontal_weight="2"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent" />
```

```
<TextView
    android:id="@+id/item_price"
    style="@style/Widget.Inventory.Header"
    android:layout_below="@+id/item_name"
    android:layout_marginStart="@dimen/margin_between_elements"
    android:text="@string/price"
    android:textAlignment="center"
    app:layout_constraintEnd_toStartOf="@+id/item_quantity"
    app:layout_constraintHorizontal_weight="1"
```

```
app:layout_constraintStart_toEndOf="@+id/item_name"  
app:layout_constraintTop_toTopOf="parent" />
```

```
<TextView
```

```
    android:id="@+id/item_quantity"  
    style="@style/Widget.Inventory.Header"  
    android:layout_alignParentEnd="true"  
    android:layout_marginEnd="@dimen/margin_between_elements"  
    android:text="@string/quantity_in_stock"  
    android:textAlignment="center"  
    app:layout_constraintEnd_toEndOf="parent"  
    app:layout_constraintHorizontal_weight="1"  
    app:layout_constraintStart_toEndOf="@+id/item_price"  
    app:layout_constraintTop_toTopOf="parent" />
```

```
<View
```

```
    android:id="@+id/divider"  
    style="@style/Divider"  
    android:layout_marginTop="@dimen/margin_between_elements"  
    app:layout_constraintBottom_toTopOf="@+id/recyclerView"  
    app:layout_constraintEnd_toEndOf="parent"  
    app:layout_constraintStart_toStartOf="parent"  
    app:layout_constraintTop_toBottomOf="@+id/item_quantity" />
```

```
<androidx.recyclerview.widget.RecyclerView
```

```
    android:id="@+id/recyclerView"  
    android:layout_width="match_parent"  
    android:layout_height="wrap_content"
```

```

        android:scrollbars="vertical"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/divider" />

<com.google.android.material.floatingactionbutton.FloatingActionButton
    android:id="@+id/floatingActionButton"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginEnd="@dimen/margin_between_elements"
    android:layout_marginBottom="@dimen/margin_between_elements"
    android:contentDescription="@string/add_new_item"
    android:src="@android:drawable/ic_input_add"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:tint="@android:color/white" />

</androidx.constraintlayout.widget.ConstraintLayout>

```

Bước 5. Cập nhật file res/values/strings.xml

```

<string name="sell">Sell</string>

<string name="quantity">Quantity in Stock:</string>

<string name="quantity_req">Quantity in Stock <font color='#FF0000'>*</font></string>

<string name="item_name_req">Item Name <font color='#FF0000'>*</font></string>

<string name="item_price_req">Item Price <font color='#FF0000'>*</font></string>

<string name="save_action">Save</string>

<string name="item_detail_fragment_title">Item Details</string>

<string name="add_fragment_title">Add Item</string>

```

```

<string name="edit_fragment_title">Edit Item</string>
<string name="price">Price</string>
<string name="quantity_in_stock">Quantity\nIn Stock</string>
<string name="item">Item</string>
<string name="delete">Delete</string>
<string name="delete_question">Are you sure you want to delete?</string>
<string name="no">No</string>
<string name="yes">Yes</string>
<string name="currency_symbol">$</string>
<string name="edit_item">Edit Item</string>
<string name="add_new_item">Add new item</string>

```

Bước 6. Bổ sung file res/values/styles.xml

```

<style name="Widget.Inventory.ListItemTextView"
parent="Widget.MaterialComponents.TextView">
    <item name="android:gravity">center_vertical</item>
    <item name="android:layout_height">48dp</item>
    <item name="android:textAppearance">?attr/textAppearanceBody1</item>
</style>

<style name="Widget.Inventory.TextView"
parent="Widget.MaterialComponents.TextView">
    <item name="android:textSize">16sp</item>
    <item name="android:layout_height">wrap_content</item>
    <item
name="android:textAppearance">@style/TextAppearance.AppCompat.Body1</item>
</style>

<style name="Widget.Inventory.Header" parent="Widget.MaterialComponents.TextView">

```

```

<item name="android:gravity">center_vertical</item>
<item name="android:textSize">14sp</item>
<item name="android:layout_marginTop">8dp</item>
<item name="android:layout_width">0dp</item>
<item name="android:layout_height">wrap_content</item>
<item name="android:textAppearance">?attr/textAppearanceOverline</item>
</style>

```

```

<style name="Divider">
    <item name="android:layout_width">match_parent</item>
    <item name="android:layout_height">1dp</item>
    <item name="android:background">?android:attr/listDivider</item>
</style>

```

```

<style name="Widget.Inventory.TextInputLayout.OutlinedBox"
    parent="Widget.MaterialComponents.TextInputLayout.OutlinedBox">
    <item name="boxStrokeErrorColor">@color/red_700</item>
    <item name="errorIconTint">@color/red_700</item>
    <item name="errorTextColor">@color/red_700</item>
    <item name="errorIconDrawable">@android:drawable/stat_notify_error</item>
    <item
name="helperTextTextAppearance">@style/TextAppearance.MaterialComponents.Subtitle1
    </item>
</style>

```

Bước 7. Bổ sung file `dimens.xml` và cập nhật file `colors.xml`

```

<dimen name="margin">16dp</dimen>
<dimen name="margin_between_elements">8dp</dimen>

```

Cập nhật file colors.xml

```
<?xml version="1.0" encoding="utf-8"?>
<resources>
    <color name="purple_200">#FFBB86FC</color>
    <color name="purple_500">#FF6200EE</color>
    <color name="purple_700">#FF3700B3</color>
    <color name="teal_200">#FF03DAC5</color>
    <color name="teal_700">#FF018786</color>
    <color name="black">#FF000000</color>
    <color name="white">#FFFFFFFF</color>
    <color name="red_700">#FFD32F2F</color>
</resources>
```

Bước 8. Cập nhật mã nguồn của ItemListFragment

```
package com.example.inventory
```

```
import android.os.Bundle
import androidx.fragment.app.Fragment
import android.view.LayoutInflater
import android.view.View
import android.view.ViewGroup
import androidx.navigation.fragment.findNavController
import androidx.recyclerview.widget.LinearLayoutManager
import com.example.inventory.databinding.ItemListFragmentBinding

class ItemListFragment : Fragment() {
    private var _binding: ItemListFragmentBinding? = null
    private val binding get() = _binding!!
```


```

override fun onCreateView(
    inflater: LayoutInflater, container: ViewGroup?,
    savedInstanceState: Bundle?
): View? {
    // Inflate the layout for this fragment
    _binding = ItemListFragmentBinding.inflate(inflater, container, false)
    return binding.root
}


override fun onViewCreated(view: View, savedInstanceState: Bundle?) {
    super.onViewCreated(view, savedInstanceState)
    binding.recyclerView.layoutManager = LinearLayoutManager(this.context)
    binding.floatingActionButton.setOnClickListener {
        /*val action = ItemListFragmentDirections.actionItemListFragmentToAddItemFragment(
            getString(R.string.add_fragment_title)
        )
        this.findNavController().navigate(action)
        */
    }
}
}

```

Bước 9. Tạo file res/navigation/nav_graph.xml

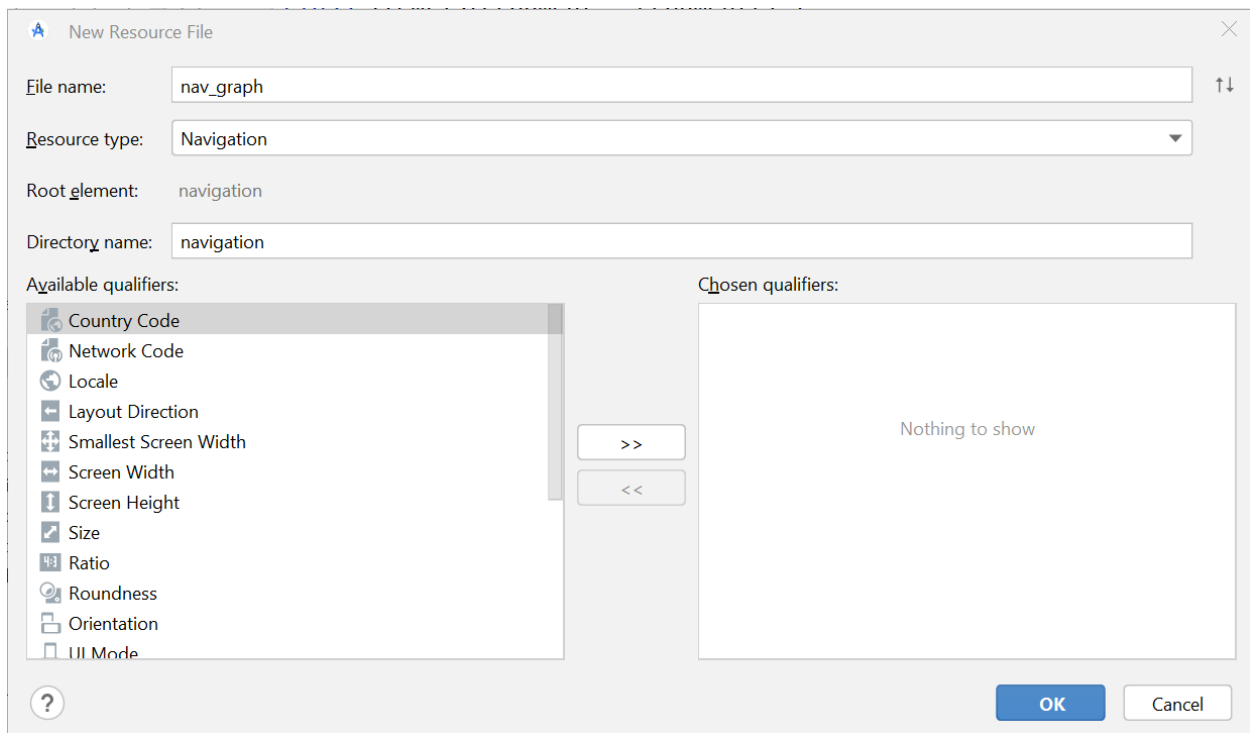

Thêm ItemListFragment vào nav_graph.xml

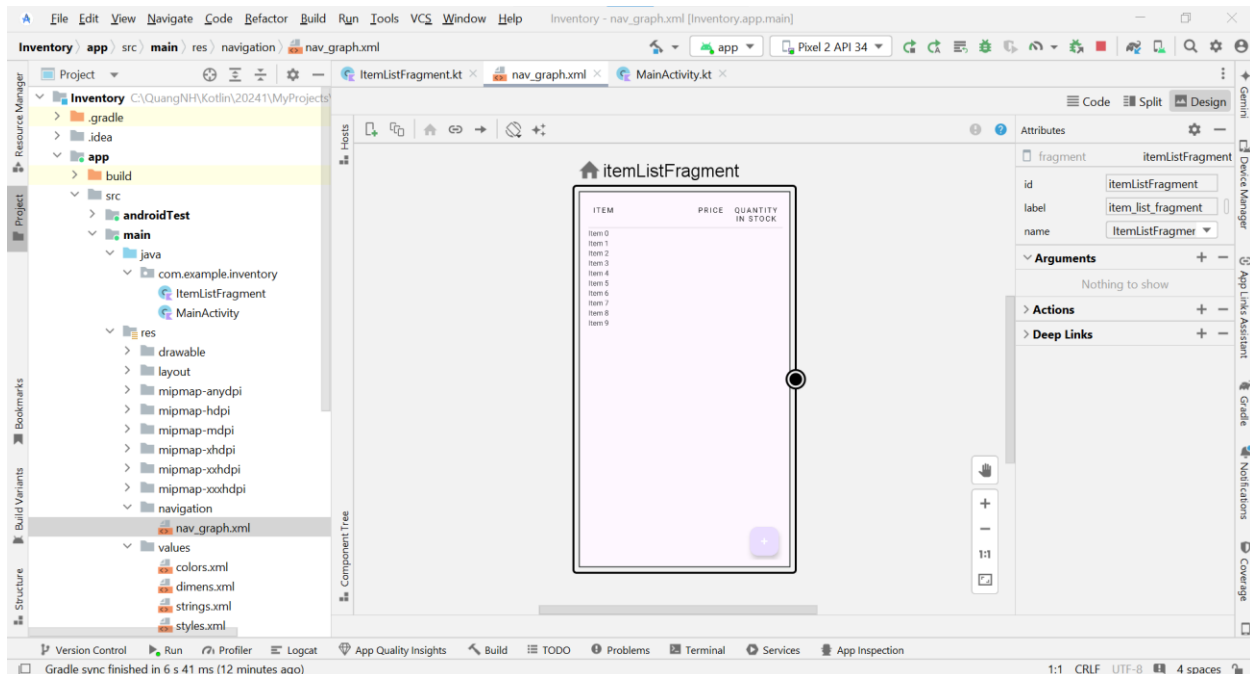

Bước 10. Bổ sung NavHostFragment vào activity_main.xml

<?xml version="1.0" encoding="utf-8"?>

```


<androidx.constraintlayout.widget.ConstraintLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <androidx.fragment.app.FragmentContainerView
        android:id="@+id/nav_host_fragment"
        android:name="androidx.navigation.fragment.NavHostFragment"
        android:layout_width="0dp"
        android:layout_height="0dp"
        app:defaultNavHost="true"
        app:layout_constraintBottom_toBottomOf="parent"
        app:layout_constraintLeft_toLeftOf="parent"
        app:layout_constraintRight_toRightOf="parent"
        app:layout_constraintTop_toTopOf="parent"
        app:navGraph="@navigation/nav_graph" />


</androidx.constraintlayout.widget.ConstraintLayout>

```

Chạy thử ứng dụng Inventory:

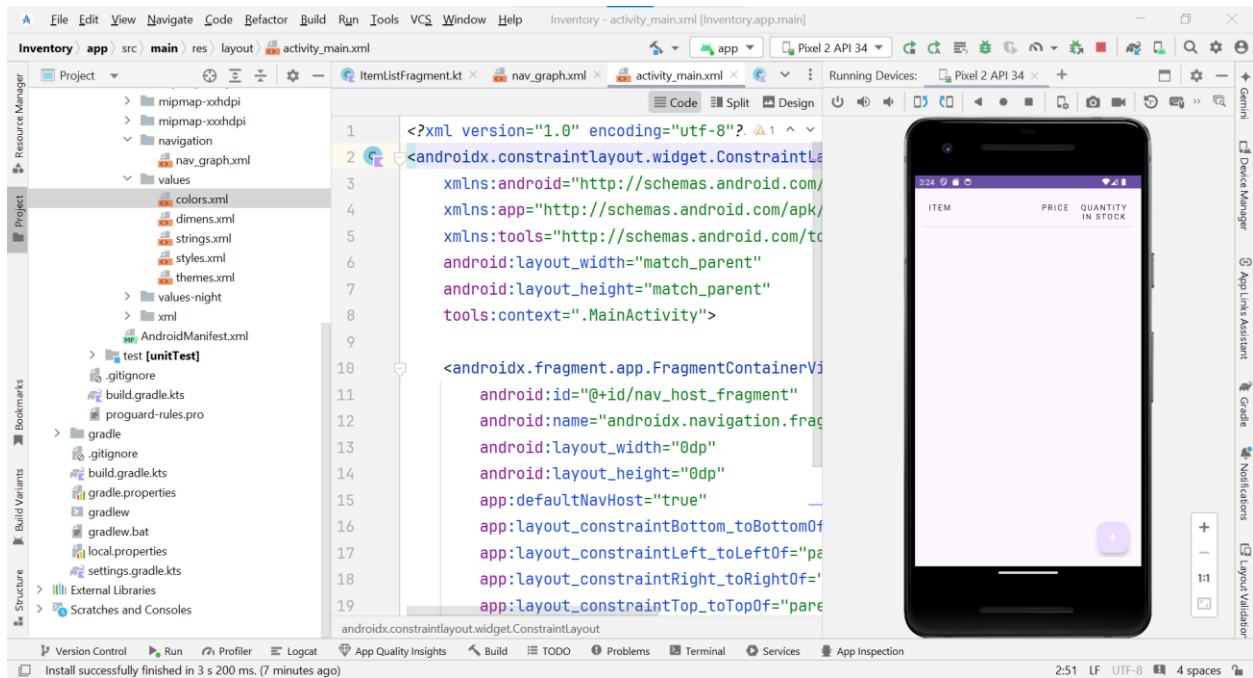

Bước 11. Thêm ItemDetailFragment

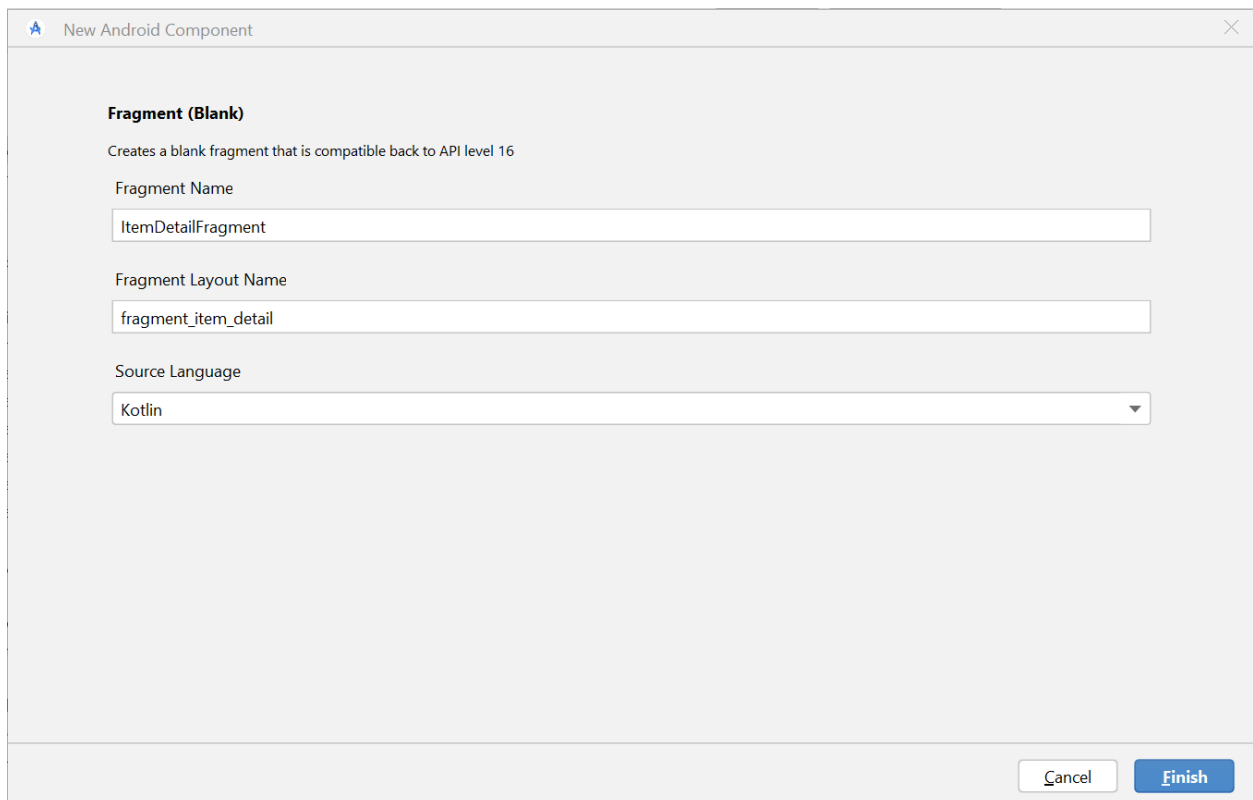

Bước 12. Cập nhật giao diện fragment_item_detail.xml

```
<androidx.constraintlayout.widget.ConstraintLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:layout_margin="@dimen/margin"
    tools:context=".ItemDetailFragment">
```

```
<TextView
    android:id="@+id/item_name"
    style="@style/Widget.Inventory.TextView"
    android:layout_width="wrap_content"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent"
    tools:text="Screwdrivers" />
```

```
<TextView
    android:id="@+id/item_price"
    style="@style/Widget.Inventory.TextView"
    android:layout_width="wrap_content"
    android:layout_marginTop="@dimen/margin"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toBottomOf="@+id/item_name"
    tools:text="$5.50" />
```

```
<TextView
    android:id="@+id/item_count_label"
    style="@style/Widget.Inventory.TextView"
    android:layout_width="wrap_content"
    android:text="@string/quantity"
    app:layout_constraintBaseline_toBaselineOf="@+id/item_count"
    app:layout_constraintEnd_toStartOf="@+id/item_count"
    app:layout_constraintHorizontal_bias="0.5"
    app:layout_constraintStart_toStartOf="parent" />
```

```
<TextView
    android:id="@+id/item_count"
    style="@style/Widget.Inventory.TextView"
    android:layout_width="0dp"
    android:layout_marginStart="@dimen/margin_between_elements"
    android:layout_marginTop="@dimen/margin"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toEndOf="@+id/item_count_label"
    app:layout_constraintTop_toBottomOf="@+id/item_price"
    tools:text="5" />
```

```
<Button
    android:id="@+id/sell_item"
    android:layout_width="0dp"
    android:layout_height="wrap_content"
    android:layout_marginTop="@dimen/margin"
    android:text="@string/sell"
    app:layout_constraintBottom_toTopOf="@+id/delete_item"
```

```
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toBottomOf="@+id/item_count" />
```

<Button

```
android:id="@+id/delete_item"
style="?attr/materialButtonOutlinedStyle"
android:layout_width="0dp"
android:layout_height="wrap_content"
android:layout_marginTop="@dimen/margin"
android:text="@string/delete"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toBottomOf="@id/sell_item" />
```

<com.google.android.material.floatingactionbutton.FloatingActionButton

```
android:id="@+id/edit_item"
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:layout_marginEnd="@dimen/margin_between_elements"
android:layout_marginBottom="@dimen/margin_between_elements"
android:contentDescription="@string/edit_item"
android:src="@drawable/ic_edit"
app:layout_constraintBottom_toBottomOf="parent"
app:layout_constraintEnd_toEndOf="parent"
app:tint="@android:color/white" />
```

</androidx.constraintlayout.widget.ConstraintLayout>

Bước 13. Thêm ic_edit.xml vào res/drawable

```
<vector xmlns:android="http://schemas.android.com/apk/res/android"
    android:width="24dp"
    android:height="24dp"
    android:tint="#FFFFFF"
    android:viewportWidth="24"
    android:viewportHeight="24">
    <path
        android:fillColor="@android:color/white"
        android:pathData="M3,17.25V21h3.75L17.81,9.94l-3.75,-
3.75L3,17.25zM20.71,7.04c0.39,-0.39 0.39,-1.02 0,-1.41l-2.34,-2.34c-0.39,-0.39 -1.02,-0.39 -
1.41,0l-1.83,1.83 3.75,3.75 1.83,-1.83z" />
</vector>
```

Bước 14. Cập nhật mã nguồn của ItemDetailFragment

```
private val navigationArgs: ItemDetailFragmentArgs by navArgs()
```

```
private var _binding: FragmentItemDetailBinding? = null
```

```
private val binding get() = _binding!!
```

```
override fun onCreateView(
```

```
    inflater: LayoutInflater,
```

```
    container: ViewGroup?,
```

```
    savedInstanceState: Bundle?
```

```
): View? {
```

```
    _binding = FragmentItemDetailBinding.inflate(inflater, container, false)
```

```
    return binding.root
```

```
}
```

```
/**
```

```
 * Displays an alert dialog to get the user's confirmation before deleting the item.
```

```
 */
```

```
private fun showConfirmationDialog() {
```

```
    MaterialAlertDialogBuilder(requireContext())
```

```
        .setTitle(getString(android.R.string.dialog_alert_title))
```

```
        .setMessage(getString(R.string.delete_question))
```

```
        .setCancelable(false)
```

```
        .setNegativeButton(getString(R.string.no)) { _, _ -> }
```

```
        .setPositiveButton(getString(R.string.yes)) { _, _ ->
```

```
            deleteItem()
```

```
        }
```

```
        .show()
```

```
}
```

```
/**
```

```
 * Deletes the current item and navigates to the list fragment.
```

```
 */
```

```
private fun deleteItem() {
```

```
    findNavController().navigateUp()
```

```
}
```

```
/**
```

```
 * Called when fragment is destroyed.
```

```
 */
```


```
override fun onDestroyView() {
```

```
super.onDestroyView()
_binding = null
}
```

Bước 15. Bổ sung ItemDetailFragment vào nav_graph.xml

```
<fragment
    android:id="@+id/itemDetailFragment"
    android:name="com.example.inventory.ItemDetailFragment"
    android:label="fragment_item_detail"
    tools:layout="@layout/fragment_item_detail" >
    <argument
        android:name="item_id"
        app:argType="integer" />
</fragment>
```

Bước 16. Thêm AddItemFragment.xml

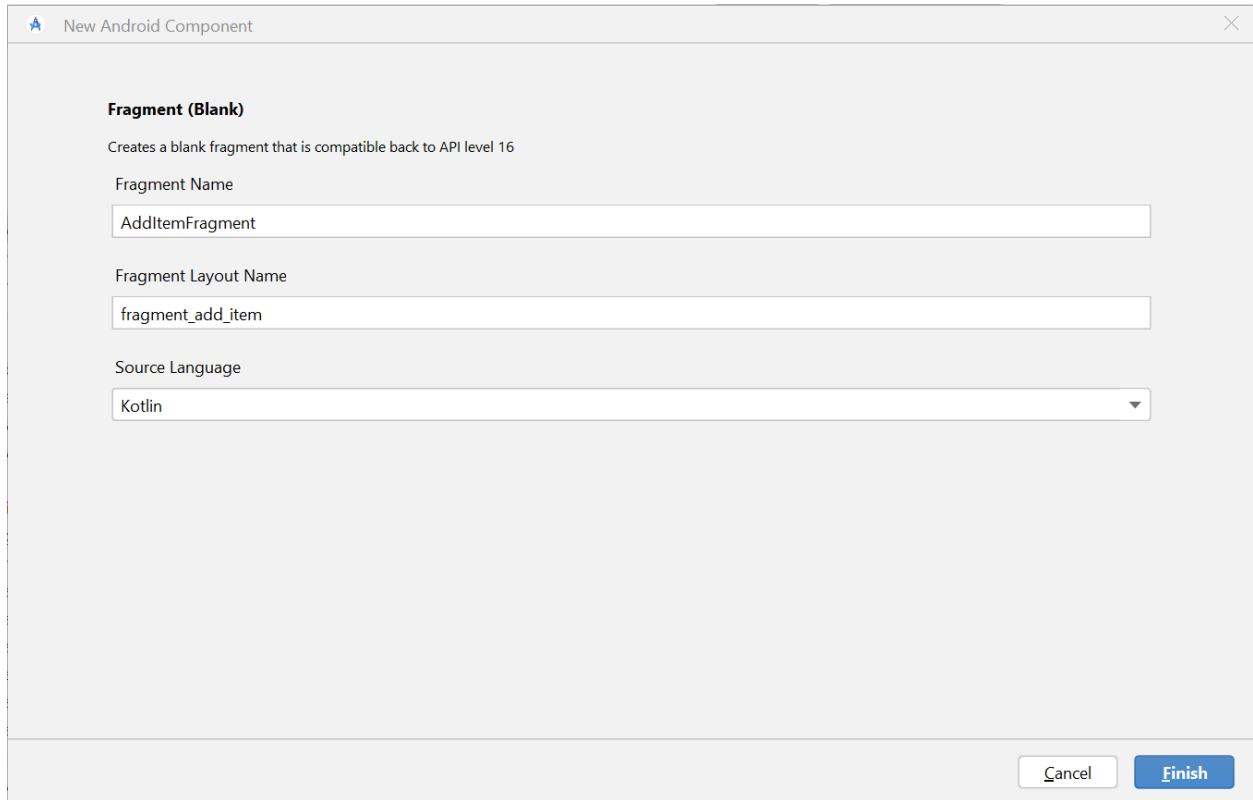

Bước 17. Cập nhật giao diện fragment_add_item.xml

```
<ScrollView xmlns:android="http://schemas.android.com/apk/res/android"
```

```
    xmlns:app="http://schemas.android.com/apk/res-auto"
```

```
    android:layout_width="match_parent"
```

```
    android:layout_height="match_parent">
```

```
    <androidx.constraintlayout.widget.ConstraintLayout
```

```
        android:layout_width="match_parent"
```

```
        android:layout_height="wrap_content"
```

```
        android:layout_margin="@dimen/margin">
```

```
        <com.google.android.material.textfield.TextInputLayout
```

```
            android:id="@+id/item_name_label"
```

```
android:layout_width="0dp"
android:layout_height="wrap_content"
android:layout_marginTop="@dimen/margin"
android:hint="@string/item_name_req"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toTopOf="parent">
```

```
<com.google.android.material.textfield.TextInputEditText
    android:id="@+id/item_name"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:inputType="textAutoComplete|textCapWords"
    android:singleLine="true" />
</com.google.android.material.textfield.TextInputLayout>
```

```
<com.google.android.material.textfield.TextInputLayout
    android:id="@+id/item_price_label"
    android:layout_width="0dp"
    android:layout_height="wrap_content"
    android:layout_marginTop="@dimen/margin"
    android:hint="@string/item_price_req"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toBottomOf="@+id/item_name_label"
    app:prefixText="@string/currency_symbol">
```

```
<com.google.android.material.textfield.TextInputEditText
```

```

        android:id="@+id/item_price"
        android:layout_width="match_parent"
        android:layout_height="match_parent"
        android:inputType="numberDecimal"
        android:singleLine="true" />
</com.google.android.material.textfield.TextInputLayout>

<com.google.android.material.textfield.TextInputLayout
    android:id="@+id/item_count_label"
    android:layout_width="0dp"
    android:layout_height="wrap_content"
    android:layout_marginTop="@dimen/margin"
    android:hint="@string/quantity_req"
    app:layout_constraintBottom_toTopOf="@+id/save_action"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toBottomOf="@+id/item_price_label">

    <com.google.android.material.textfield.TextInputEditText
        android:id="@+id/item_count"
        android:layout_width="match_parent"
        android:layout_height="match_parent"
        android:inputType="number"
        android:singleLine="true" />
</com.google.android.material.textfield.TextInputLayout>

<Button
    android:id="@+id/save_action"

```

```
        android:layout_width="0dp"
        android:layout_height="wrap_content"
        android:layout_marginTop="32dp"
        android:text="@string/save_action"
        app:layout_constraintEnd_toEndOf="parent"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toBottomOf="@+id/item_count_label" />

</androidx.constraintlayout.widget.ConstraintLayout>

</ScrollView>
```

Bước 18. Cập nhật mã nguồn của AddItemFragment

```
package com.example.inventory
```

```
import android.content.Context.INPUT_METHOD_SERVICE
import android.os.Bundle
import androidx.fragment.app.Fragment
import android.view.LayoutInflater
import android.view.View
import android.view.ViewGroup
import android.view.inputmethod.InputMethodManager
import androidx.navigation.fragment.navArgs
import com.example.inventory.databinding.FragmentAddItemBinding

class AddItemFragment : Fragment() {

    private val navigationArgs: ItemDetailFragmentArgs by navArgs()
```

```

// Binding object instance corresponding to the fragment_add_item.xml layout

// This property is non-null between the onCreateView() and onDestroyView() lifecycle
callbacks,

// when the view hierarchy is attached to the fragment
private var _binding: FragmentAddItemBinding? = null
private val binding get() = _binding!!

override fun onCreateView(
    inflater: LayoutInflater,
    container: ViewGroup?,
    savedInstanceState: Bundle?
): View? {
    _binding = FragmentAddItemBinding.inflate(inflater, container, false)
    return binding.root
}

/**
 * Called before fragment is destroyed.
 */

override fun onDestroyView() {
    super.onDestroyView()
    // Hide keyboard.

    val inputMethodManager =
requireActivity().getSystemService(INPUT_METHOD_SERVICE) as
        InputMethodManager


    inputMethodManager.hideSoftInputFromWindow(requireActivity().currentFocus?.windowToken, 0)

    _binding = null
}

```

}

Bước 19. Thêm AddItemFragment vào nav_graph.xml

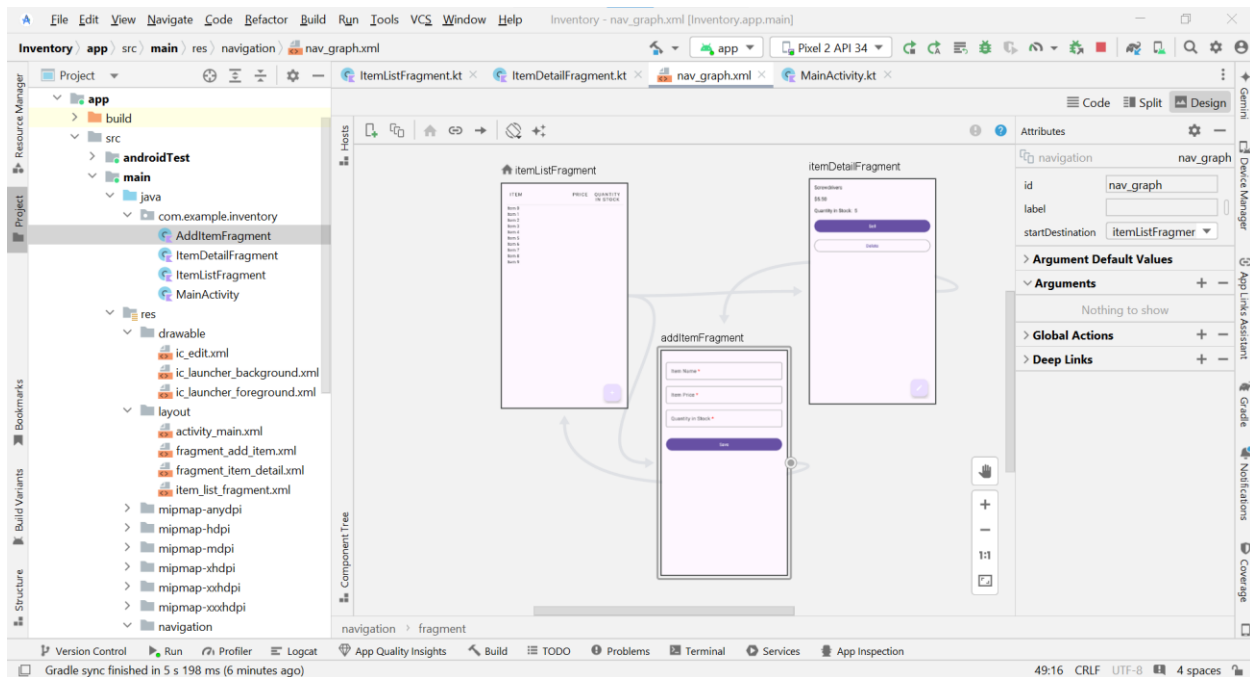

```
<?xml version="1.0" encoding="utf-8"?>
```

```
<navigation xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:id="@+id/nav_graph"
    app:startDestination="@id/itemListFragment">
```

```
    <fragment
        android:id="@+id/itemListFragment"
        android:name="com.example.inventory.ItemListFragment"
        android:label="item_list_fragment"
        tools:layout="@layout/item_list_fragment" >
        <action
            android:id="@+id/action_itemListFragment_to_itemDetailFragment"
            app:destination="@id/itemDetailFragment" />
        <action
            android:id="@+id/action_itemListFragment_to_addItemFragment"
            app:destination="@id/addItemFragment" />
    </fragment>
```

```
    <fragment
        android:id="@+id/itemDetailFragment"
        android:name="com.example.inventory.ItemDetailFragment"
```

```

        android:label="fragment_item_detail"
        tools:layout="@layout/fragment_item_detail" >
        <argument
            android:name="item_id"
            app:argType="integer" />
        <action
            android:id="@+id/action_itemDetailFragment_to_addItemFragment"
            app:destination="@id/addItemFragment" />
    </fragment>
    <fragment
        android:id="@+id/addItemFragment"
        android:name="com.example.inventory.AddItemFragment"
        android:label="{title}"
        tools:layout="@layout/fragment_add_item">
        <argument
            android:name="title"
            app:argType="string" />
        <argument
            android:name="item_id"
            android:defaultValue="-1"
            app:argType="integer" />
        <action
            android:id="@+id/action_addItemFragment_to_itemListFragment"
            app:destination="@id/itemListFragment"
            app:popUpTo="@id/itemListFragment"
            app:popUpToInclusive="true" />
    </fragment>
</navigation>

```

Bước 20. Bổ sung lớp InventoryApplication

```

package com.example.inventory

import android.app.Application

class InventoryApplication : Application()

```

Bước 21. Chạy thử ứng dụng

