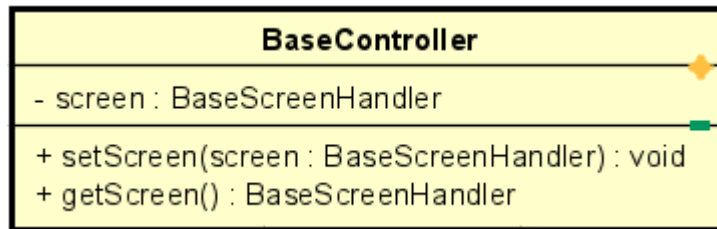


## Design for class “BaseController”



**Table 1. Attribute Design**

| # | Name   | Data type         | Default value | Description                                               |
|---|--------|-------------------|---------------|-----------------------------------------------------------|
| 1 | screen | BaseScreenHandler | null          | The boundary (UI) screen associated with this controller. |

**Table 2. Operation Design**

| # | Name              | Return type       | Description                                        |
|---|-------------------|-------------------|----------------------------------------------------|
| 1 | setScreen(screen) | void              | Assign the UI screen that this controller manages. |
| 2 | getScreen()       | BaseScreenHandler | Return the currently assigned screen.              |

### Method Design:

#### 1. setScreen

- Parameter:
  - o screen: BaseScreenHandler - the UI screen that this controller will manage.
- Exception:
- Method:
  - o Assign the provided screen to the internal attribute.
  - o Ensure the UI can request controller actions through this reference.

#### 2. getScreen

- Parameter:

- Exception:

- Method:

- Return the screen currently associated with this controller.