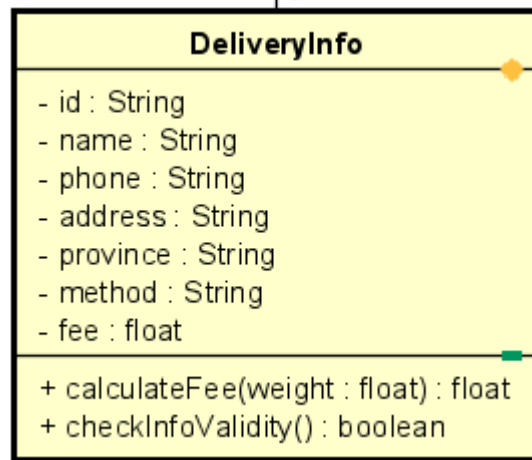


## Design for class “DeliveryInfo”



**Table 1. Attribute Design**

| # | Name     | Data type | Default value | Description                            |
|---|----------|-----------|---------------|----------------------------------------|
| 1 | id       | String    | ""            | Unique id of the delivery info         |
| 2 | name     | String    | ""            | Receiver's name                        |
| 3 | phone    | String    | ""            | Receiver's phone number                |
| 4 | address  | String    | ""            | Detailed home address                  |
| 5 | province | String    | ""            | Receiver's province                    |
| 6 | method   | String    | ""            | Delivery method (express, standard...) |
| 7 | fee      | float     | 0.0           | Calculated shipping fee                |

**Table 2. Operation Design**

| # | Name                 | Return type | Description / Purpose                    |
|---|----------------------|-------------|------------------------------------------|
| 1 | calculateFee(weight) | float       | Compute the delivery fee based on weight |
| 2 | checkInfoValidity()  | boolean     | Validate delivery info fields            |

**Method Design:**

## **1. calculateFee**

- Parameter:
  - weight: float
- Exception:
- Method:
  - Use a shipping formula (e.g.,  $\text{base} + \text{weight} \times \text{unit price}$ ).
  - Store resulting fee into attribute fee.
  - Return the fee.

## **2. checkInfoValidity**

- Parameter:
- Exception:
- Method:
  - Check non-empty fields: name, phone, address, province.
  - Validate phone number format.
  - If any field is invalid → return false.
  - Else → return true.