

hw3.3

November 19, 2019

```
[1]: import torch
import torchvision
import torchvision.transforms as transforms
```

```
[2]: transform = transforms.Compose(
    [transforms.ToTensor(),
     transforms.Normalize((0.5, 0.5, 0.5), (0.5, 0.5, 0.5))])

trainset = torchvision.datasets.CIFAR10(root='./data', train=True,
                                         download=True, transform=transform)
trainloader = torch.utils.data.DataLoader(trainset, batch_size=4,
                                           shuffle=True, num_workers=2)

testset = torchvision.datasets.CIFAR10(root='./data', train=False,
                                         download=True, transform=transform)
testloader = torch.utils.data.DataLoader(testset, batch_size=4,
                                          shuffle=False, num_workers=2)

classes = ('plane', 'car', 'bird', 'cat',
           'deer', 'dog', 'frog', 'horse', 'ship', 'truck')
```

Files already downloaded and verified

Files already downloaded and verified

```
[3]: print(len(trainset))
print(len(trainloader))
```

50000

12500

(ii) 50000 images and 12500 batches are been used to train the network


```
[19]: import matplotlib.pyplot as plt
import numpy as np

# functions to show an image
```

```
def imshow(img):
    img = img / 2 + 0.5     # unnormalize
    npimg = img.numpy()
    plt.imshow(np.transpose(npimg, (1, 2, 0)))
    plt.show()

# get some random training images
dataiter = iter(trainloader)
images, labels = dataiter.next()

# show images
imshow(torchvision.utils.make_grid(images))
# print labels
print(' '.join('%5s' % classes[labels[j]] for j in range(4)))
```

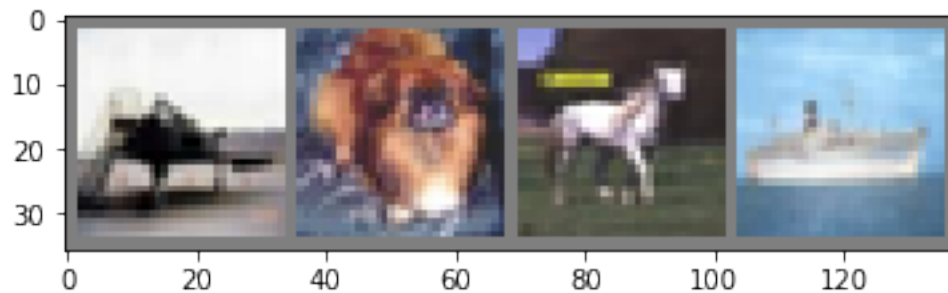

plane dog horse ship

- (iii) Here instead normalize the image, we unnormalize the image by set the range of image from -1 to 1 to 0 to 1, by dividing each pixel value of the image by 2 and add 0.5

```
[5]: import torch.nn as nn
import torch.nn.functional as F

class Net(nn.Module):
    def __init__(self):
        super(Net, self).__init__()
        self.conv1 = nn.Conv2d(3, 6, 5)
        self.pool = nn.MaxPool2d(2, 2)
        self.conv2 = nn.Conv2d(6, 16, 5)
        self.fc1 = nn.Linear(16 * 5 * 5, 120)
        self.fc2 = nn.Linear(120, 84)
        self.fc3 = nn.Linear(84, 10)
```

```

def forward(self, x):
    x1 = self.conv1(x)
    x = self.pool(F.relu(x1))
    x = self.pool(F.relu(self.conv2(x)))
    x = x.view(-1, 16 * 5 * 5)
    x = F.relu(self.fc1(x))
    x = F.relu(self.fc2(x))
    x = self.fc3(x)
    return x, x1

```

```
net = Net()
```

```
[6]: import torch.optim as optim
```

```

criterion = nn.CrossEntropyLoss()
optimizer = optim.SGD(net.parameters(), lr=0.001, momentum=0.9)

```

```

[7]: device = torch.device("cuda:0" if torch.cuda.is_available() else "cpu")
     # Assuming that we are on a CUDA machine, this should print a CUDA device:
     print(device)

```

```
cuda:0
```

```

[8]: losses = []
     for epoch in range(2): # loop over the dataset multiple times

         running_loss = 0.0
         for i, data in enumerate(trainloader, 0):
             # get the inputs; data is a list of [inputs, labels]
             inputs, labels = data[0].to(device), data[1].to(device)
             net.to(device)

             # zero the parameter gradients
             optimizer.zero_grad()

             # forward + backward + optimize
             outputs, _ = net(inputs)
             loss = criterion(outputs, labels)
             loss.backward()
             optimizer.step()

             # print statistics
             running_loss += loss.item()
             if i % 2000 == 1999: # print every 2000 mini-batches
                 print('%5d, %5d] loss: %.3f' %
                       (epoch + 1, i + 1, running_loss / 2000))

```


```
        losses.append(running_loss / 2000)
        running_loss = 0.0

print('Finished Training')
```

```
[1, 2000] loss: 2.155
[1, 4000] loss: 1.843
[1, 6000] loss: 1.661
[1, 8000] loss: 1.571
[1, 10000] loss: 1.523
[1, 12000] loss: 1.478
[2, 2000] loss: 1.408
[2, 4000] loss: 1.393
[2, 6000] loss: 1.365
[2, 8000] loss: 1.336
[2, 10000] loss: 1.304
[2, 12000] loss: 1.290
```

Finished Training

```
[9]: xrange = np.arange(1, len(losses) + 1, 1)
plt.title('losses')
plt.plot(xrange, losses)
plt.xlabel('iter')
plt.ylabel('loss')
plt.show()
```

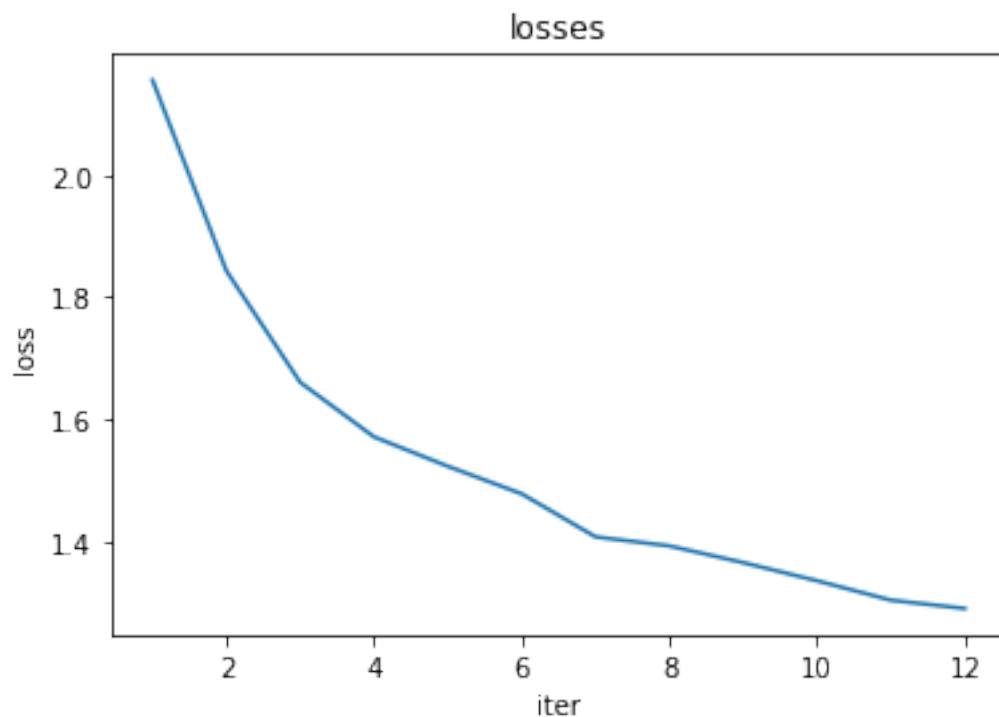


(iv) Here I plot the dropping losses

```
[10]: PATH = './cifar_net.pth'
torch.save(net.state_dict(), PATH)
```

```
[11]: dataiter = iter(testloader)
images, labels = dataiter.next()
images, labels = dataiter.next()

# print images
imshow(torchvision.utils.make_grid(images))
print('GroundTruth: ', ' '.join('%5s' % classes[labels[j]] for j in range(4)))
```

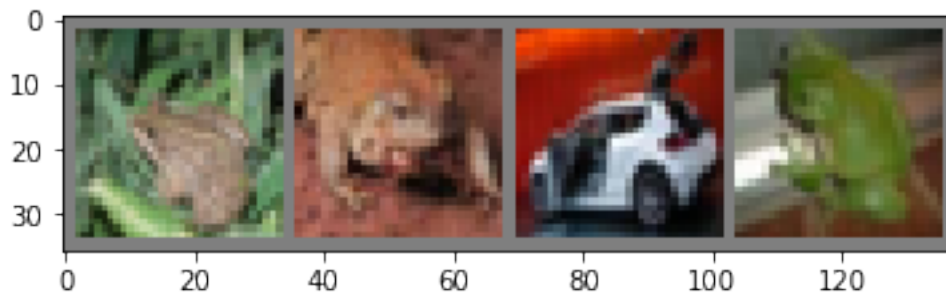

GroundTruth: frog frog car frog

```
[12]: net = Net()
net.load_state_dict(torch.load(PATH))
```

```
[12]: <All keys matched successfully>
```


```
[13]: outputs, middle = net(images)
_, predicted = torch.max(outputs, 1)

print('Predicted: ', ' '.join('%5s' % classes[predicted[j]]
                                for j in range(4)))
middle = middle.detach().numpy()
```

Predicted: cat frog car deer

(v) Here we can show the right result from 2nd and 3rd images as the label of ground truth and prediction are the same. We can also see the wrong result of 1st and 4th image as the label of ground truth and prediction are not matched.

```
[18]: image_one = middle[0]
f = plt.figure(figsize=(14,14))
for i in range(image_one.shape[0]):
    ax = f.add_subplot(1, image_one.shape[0], i + 1)
    ax.imshow(image_one[i])
plt.show()
```

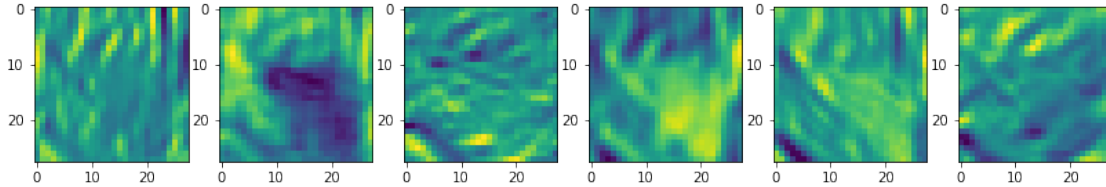

(vi) Here I plot the output of the 1st layer of CNN using one image from the training set as above

```
[16]: correct = 0
total = 0
with torch.no_grad():
    for data in testloader:
        images, labels = data[0].to(device), data[1].to(device)
        net.to(device)
        outputs,_ = net(images)
        _, predicted = torch.max(outputs.data, 1)
        total += labels.size(0)
        correct += (predicted == labels).sum().item()

print('Accuracy of the network on the 10000 test images: %d %%' % (
    100 * correct / total))
```

Accuracy of the network on the 10000 test images: 54 %

```
[17]: class_correct = list(0. for i in range(10))
class_total = list(0. for i in range(10))
with torch.no_grad():
    for data in testloader:
        images, labels = data[0].to(device), data[1].to(device)
        net.to(device)
        outputs,_ = net(images)
        _, predicted = torch.max(outputs, 1)
        c = (predicted == labels).squeeze()
        for i in range(4):
            label = labels[i]
            class_correct[label] += c[i].item()
            class_total[label] += 1
```

```
for i in range(10):  
    print('Accuracy of %5s : %2d %%' % (  
        classes[i], 100 * class_correct[i] / class_total[i]))
```

```
Accuracy of plane : 63 %  
Accuracy of   car : 79 %  
Accuracy of  bird : 25 %  
Accuracy of   cat : 30 %  
Accuracy of  deer : 47 %  
Accuracy of   dog : 36 %  
Accuracy of  frog : 72 %  
Accuracy of horse : 71 %  
Accuracy of  ship : 54 %  
Accuracy of truck : 61 %
```