
Inter-annotator reliability

Six-class Cohen's κ = 0.786 [0.772, 0.799] • Binary Cohen's κ = 0.718 [0.698, 0.738] • Agreement = 84.3% • N = 5,140


a Agreement matrix

Row-normalised, counts below • observed agreement 84.3%
Blue = agreement, orange = disagreement

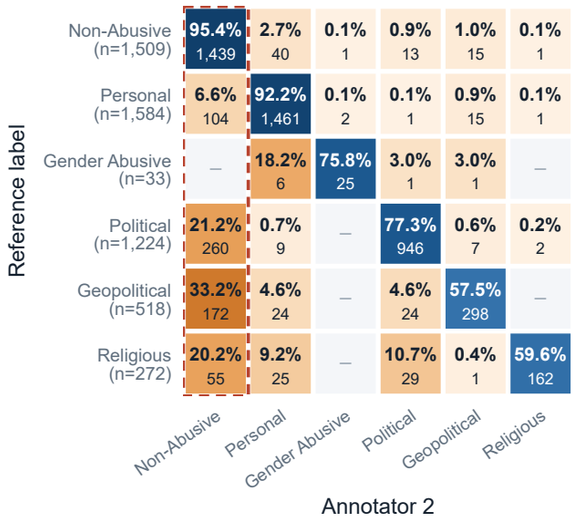


b Chance-corrected reliability

Binary κ = 0.718 • six-class κ = 0.786
Filled = audit sample, open = corpus-adjusted

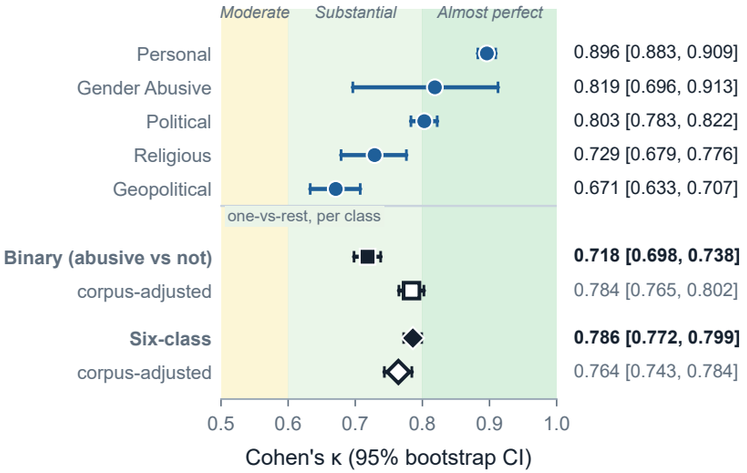


c Sampling uncertainty

10,000 bootstrap resamples; shaded = 95% CI
Six-class [0.772, 0.799] • binary [0.698, 0.738]

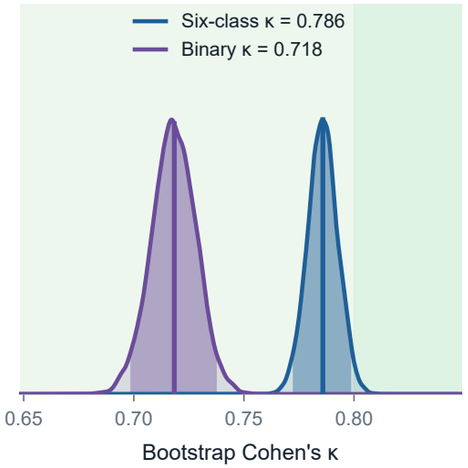


d Label-marginal shift

Stuart–Maxwell $\chi^2(5) = 475.4$, $p < 0.001$
Δ = Annotator 2 − reference, percentage points

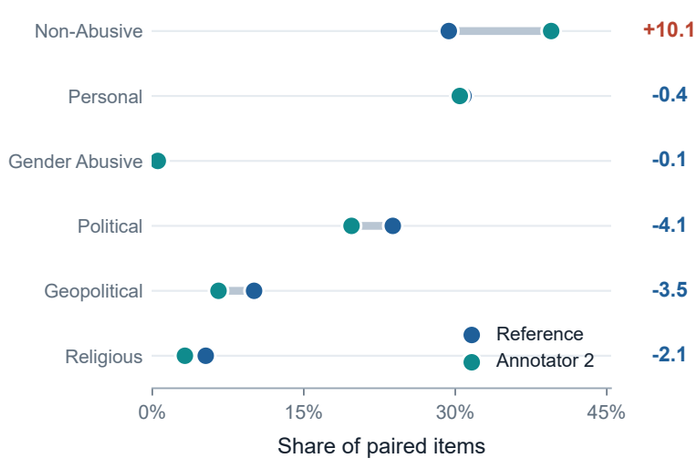


e Dominant disagreement flows

809 disagreements, 82% involve Non-Abusive
Label: count (% of reference class)

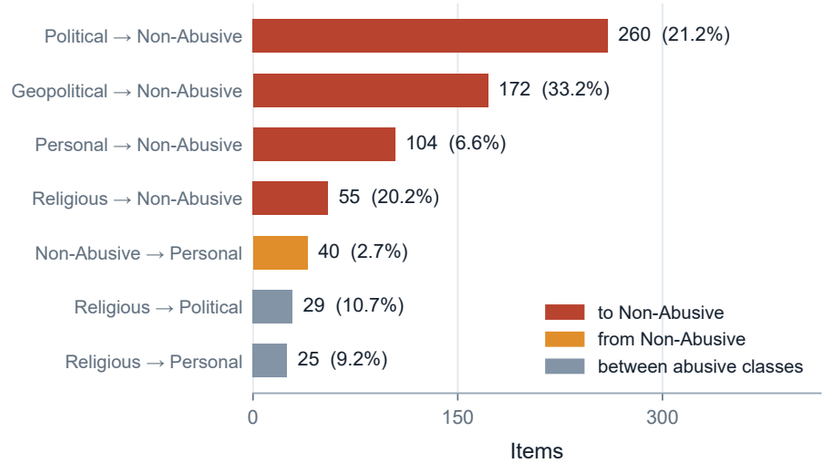

f Prevalence sensitivity

Binary κ = 0.718 at audit prevalence (70.6%)
Corpus-adjusted = 0.784 (51.5% abusive)

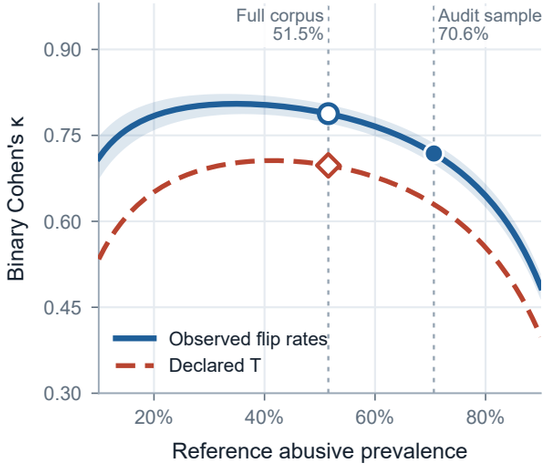

CI: percentile bootstrap 95% interval. Corpus-adjusted = reference-class shares reweighted to the full corpus. κ bands: Landis & Koch (1977).