Name: Trần Anh Tuấn
Student ID: 24521943
Class: CS4323.Q12.CTTT – CTTT2024

OS
LAB 1

CHECKLIST

1. Homework

	1	2	3	4	5	6
Explanation	☒	☒	☒	☒	☒	☒
Your code	☒	☒	☒	☒	☒	☒
Results and discussions	☒	☒	☒	☒	☒	☒

Mark: 10/10

2. Lab 1 Execute, google, and explain usage of all commands in this section

Answer:

1. **ls – List files and directories**

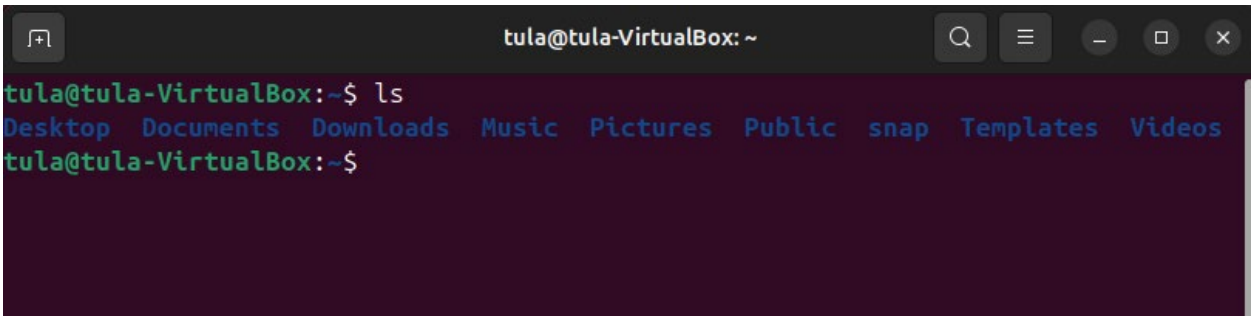

Usage: ls [directory]

Purpose: Displays files and folders in the current or specified directory.

2. **cd – Change directory**

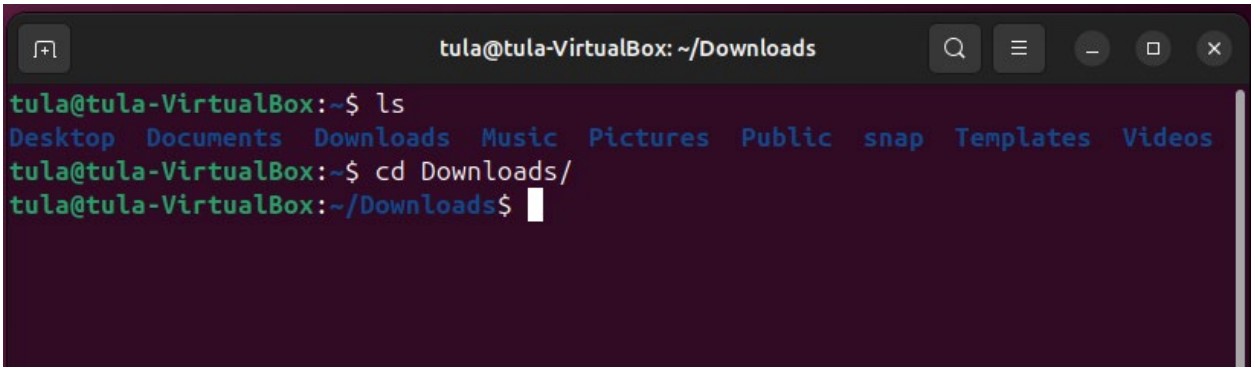

Usage: cd [directory]

Purpose: Moves you from your current directory to another.

3. pwd – Print working directory

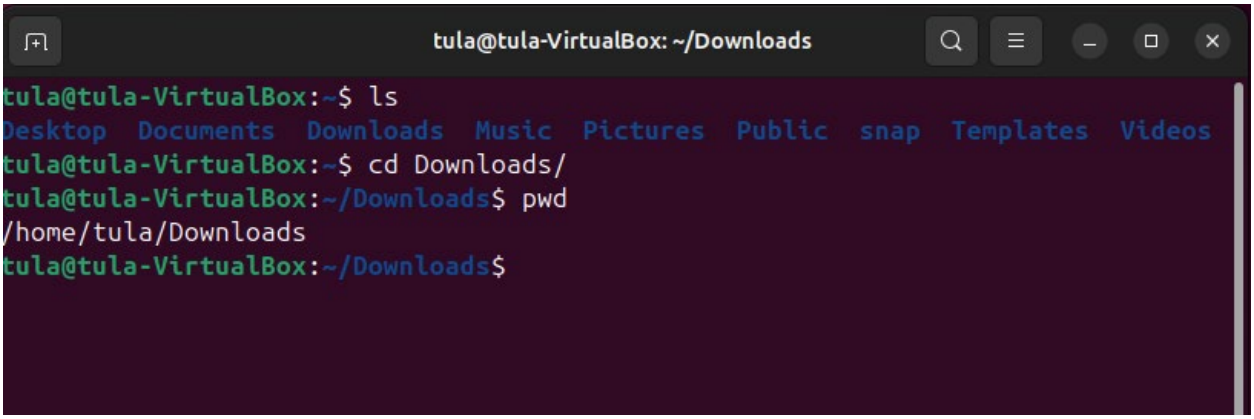

Usage: pwd

Purpose: Shows the full path of your current directory.

4. touch – Create empty files

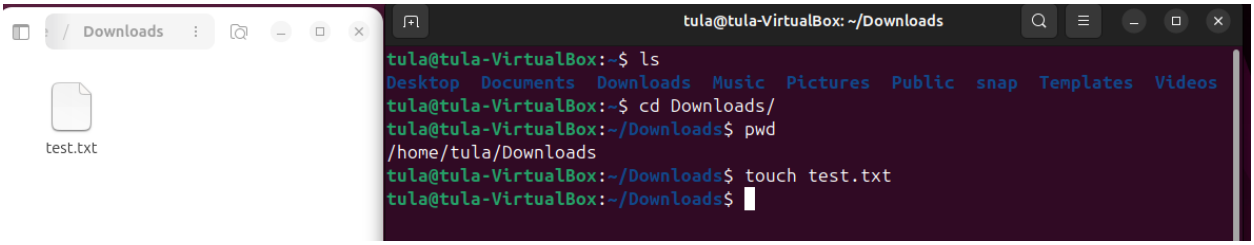

Usage: touch [filename]

Purpose: Creates an empty file or updates the modification time of an existing file.

5. nano – Text editor

Usage: nano [filename]

Purpose: Opens a text-based editor in the terminal to edit files.

6. mkdir – Make directory

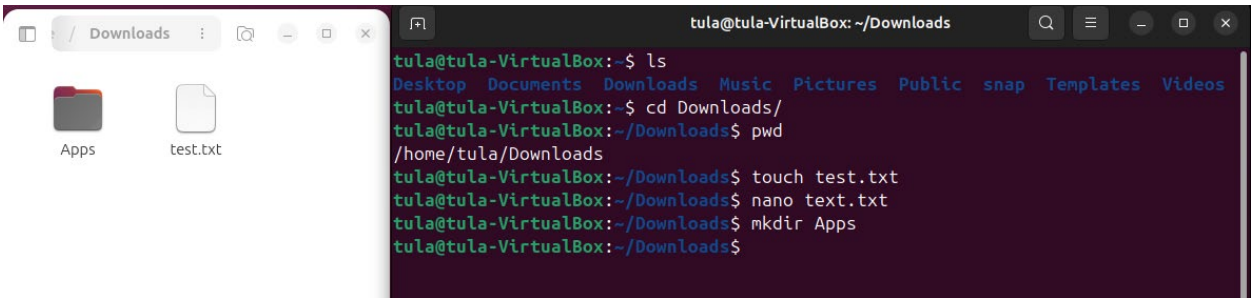

Usage: mkdir [directory_name]

Purpose: Creates a new folder.

7. rm – Remove files or directories

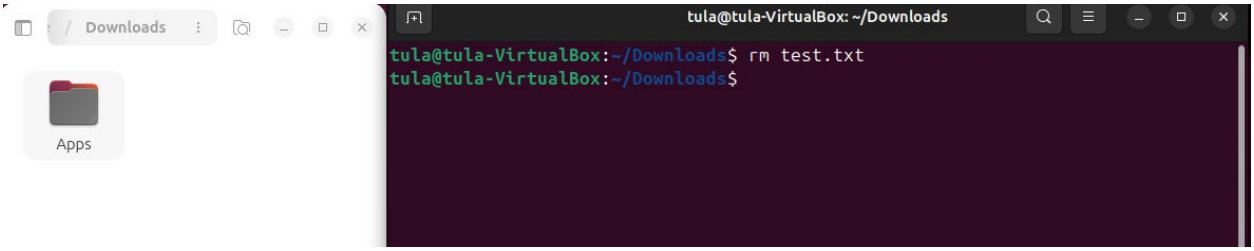

Usage: rm [options] [file]

Purpose: Deletes files or folders.

8. cp – Copy files or directories

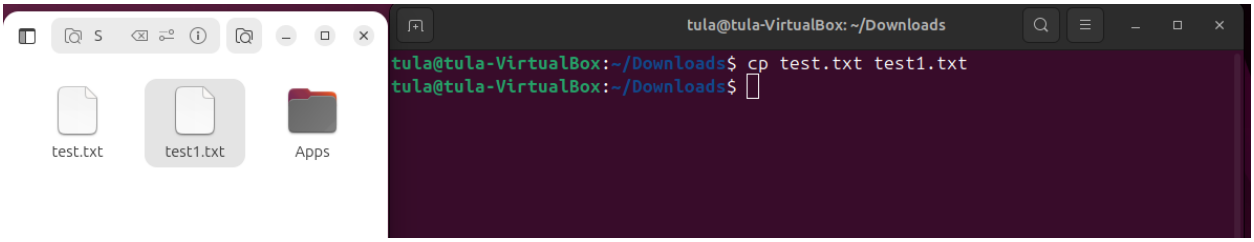

Usage: cp [source] [destination]

Purpose: Copies files or folders.

9. mv – Move or rename files

Usage: mv [source] [destination]

Purpose: Moves or renames files or directories.

10. echo – Print text to terminal or file

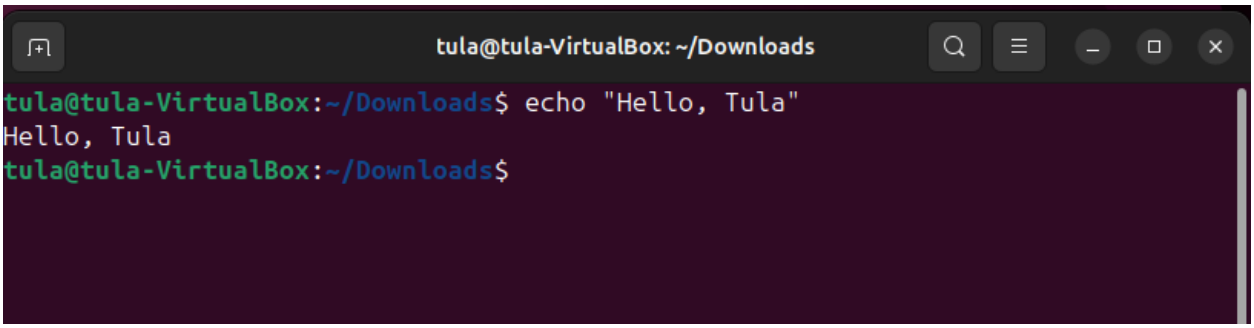

Usage: echo [text]

Purpose: Displays text or writes it to a file.

11. cat – Concatenate and display file content

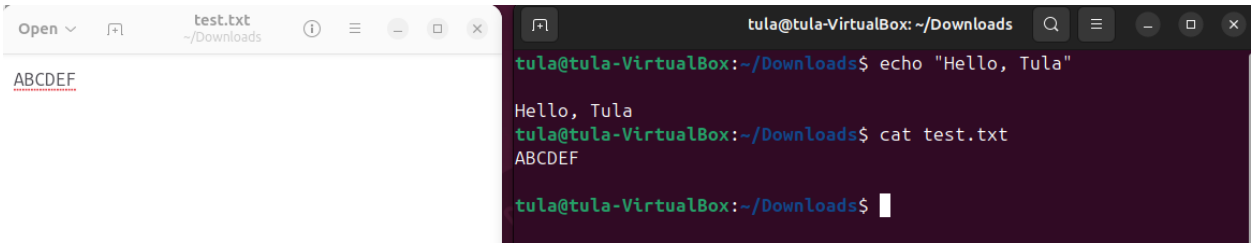

Usage: cat [file]

Purpose: Shows the content of a file or combines multiple files.

2. Create a folder tree like image below:

```
Myweb
    |-images
    |     |-- icon
    |     |-- background
    |     |-- animation
    |-databases
    |-scripts
    |-java
```

Answer:

```
tula@tula-VirtualBox: ~/Downloads/Myweb
tula@tula-VirtualBox:~$ cd Downloads/
tula@tula-VirtualBox:~/Downloads$ mkdir Myweb
tula@tula-VirtualBox:~/Downloads$ cd Myweb/
tula@tula-VirtualBox:~/Downloads/Myweb$ mkdir images
tula@tula-VirtualBox:~/Downloads/Myweb$ cd images/
tula@tula-VirtualBox:~/Downloads/Myweb/images$ mkdir icon, background, animatio
n
tula@tula-VirtualBox:~/Downloads/Myweb/images$ cd..
cd..: command not found
tula@tula-VirtualBox:~/Downloads/Myweb/images$ cd ..
tula@tula-VirtualBox:~/Downloads/Myweb$ mkdir databases, scripts, java
tula@tula-VirtualBox:~/Downloads/Myweb$
```

```
tula@tula-VirtualBox: ~/Downloads/Myweb/images
tula@tula-VirtualBox:~/Downloads/Myweb$ ls
databases  images  java  scripts
tula@tula-VirtualBox:~/Downloads/Myweb$ cd images/
tula@tula-VirtualBox:~/Downloads/Myweb/images$ ls
animation  background  icon
tula@tula-VirtualBox:~/Downloads/Myweb/images$
```

Explanation:

1. mkdir Myweb → creates a main folder named **Myweb**.
2. cd Myweb → moves inside the **Myweb** folder.
3. mkdir images → makes a folder called **images** inside Myweb.
4. cd images → moves into the **images** folder.
5. mkdir icon background animation → creates three subfolders: **icon**, **background**, and **animation**.

6. cd .. → goes back one level to the **Myweb** directory.
7. mkdir databases scripts java → creates three more folders: **databases**, **scripts**, and **java**.

3. Google how to find files with the ".html" extension in your entire system. Copy one of them to Myweb.

Answer:

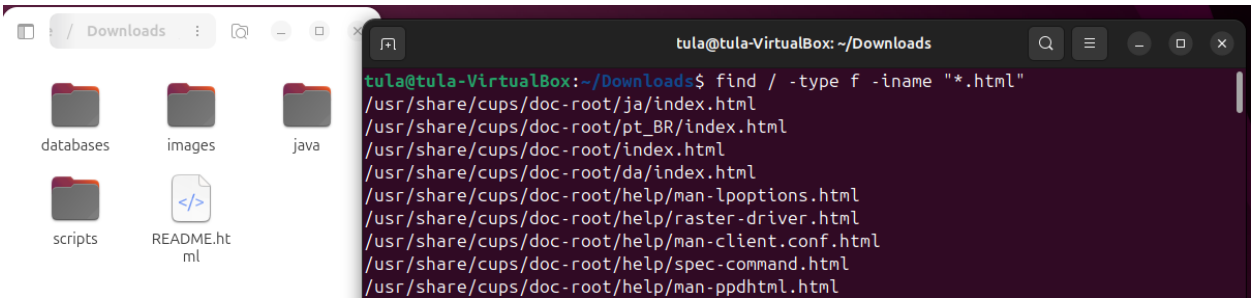

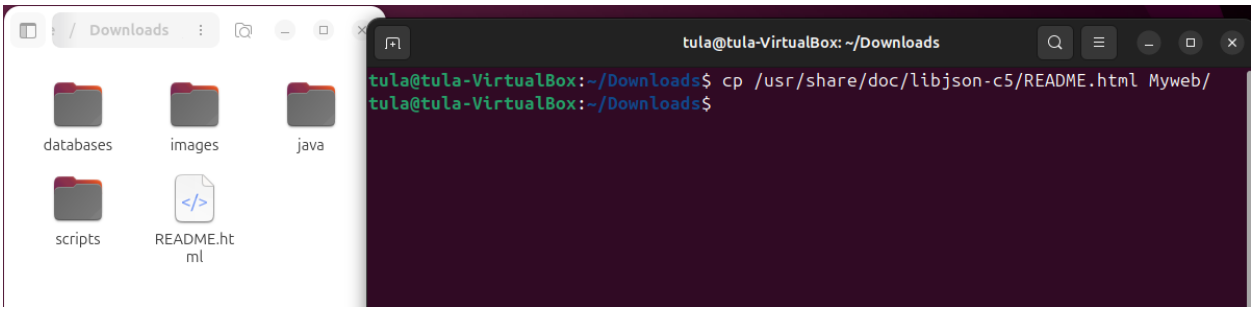

Explanation:

find / -type f -name "*.html": This command searches from the root directory / for all regular files (-type f) whose names end with **.html**.

cp /usr/share/doc /libjson-c5/README.html Myweb/: This command copy the file into the Myweb folder.

4. Remove the directory Myweb/scripts.

Answer:

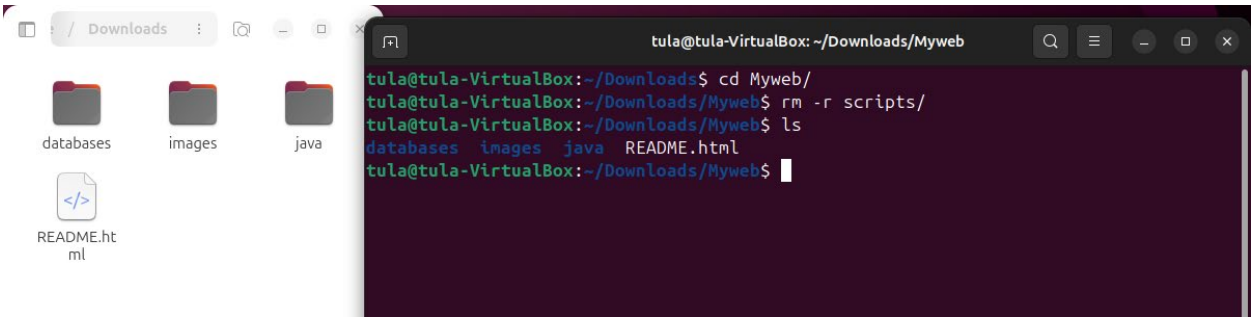

Explanation:

rm -r Myweb/scripts: The rm command removes files or directories, while the **-r** option enables recursive deletion, allowing all contents within the directory to be removed.

5. Set the permission for Myweb/databases as below:

- The owner has all permissions
- Other users have no permission

Answer:

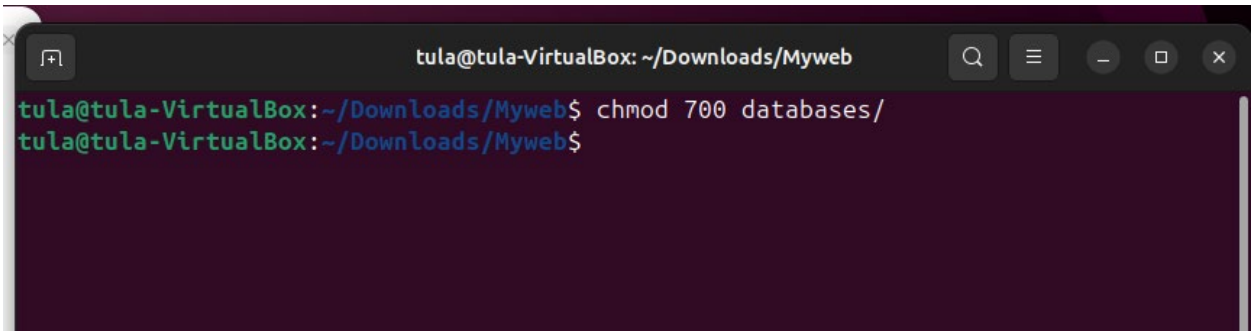

Explanation:

chmod 700 Myweb/databases:

The chmod command modifies access rights.

- The first number **7** grants the owner **read (r), write (w), and execute (x)** permissions.
- The second **0** remove all permissions from the group.
- The third **0** remove all permissions from other users.