

IRONIC: Coherence-Aware Reasoning Chains for Multi-Modal Sarcasm Detection

Aashish Anantha Ramakrishnan^{1*}, Aadarsh Anantha Ramakrishnan^{2*}, Dongwon Lee¹

¹The Pennsylvania State University; ²National Institute of Technology, Tiruchirappalli

¹{aza6352, dul13}@psu.edu, ²106121001@nitt.edu

Abstract

Interpreting figurative language such as sarcasm across multi-modal inputs presents unique challenges, often requiring task-specific fine-tuning and extensive reasoning steps. However, current Chain-of-Thought approaches do not efficiently leverage the same cognitive processes that enable humans to identify sarcasm. We present IRONIC, an in-context learning framework that leverages Multi-modal Coherence Relations to analyze referential, analogical and pragmatic image-text linkages. Our experiments show that IRONIC achieves state-of-the-art performance on zero-shot Multi-modal Sarcasm Detection across different baselines. This demonstrates the need for incorporating linguistic and cognitive insights into the design of multi-modal reasoning strategies. Our code is available at: <https://github.com/aashish2000/IRONIC>

1 Introduction

Sarcasm can be defined as a form of verbal irony where the goal is to mock or convey contempt while the literal meaning of the words is different, often opposite to the intended meaning (Camp, 2012). Multi-modal sarcasm utilizes the interplay between these visual and text cues to convey these intents. The task of multi-modal sarcasm detection is helpful for various applications, including social media analysis, sentiment analysis, and human-computer interaction (Pang and Lee, 2008). With traditional supervised learning approaches demonstrating limited success in this domain, recent research has focused on leveraging Multi-modal Large Language Models (MLLMs) to improve performance (Tang et al., 2024). These models have shown promise even in Zero-Shot settings, where they can generalize to new tasks without explicit training data. *The complexity of multi-modal sarcasm detection*

stems from the fact that it incorporates a combination of semantic, pragmatic, and analogical cues, which are not aligned with the logical and sequential nature of traditional reasoning strategies of language models (Yao et al., 2025; Kumar et al., 2022). This leads to models taking shortcuts such as over-reliance on uni-modal cues and failing to discern sarcasm from other forms of figurative language (Liang et al., 2022; Qin et al., 2023).

Existing approaches for prompt-based reasoning in MLLMs have focused on leveraging different varieties of logical chains, such as Chain-of-Thought (CoT) prompting (Wei et al., 2022). Inspired by the success of text-only cognition-aware and linguistics-based reasoning strategies (Wang and Zhao, 2024; Lee et al., 2025), we propose IRONIC (explicit Reasoning with coherence relations as cognitive structures). IRONIC leverages multi-modal Coherence Relations (Anantha Ramakrishnan et al., 2025a; Alikhani et al., 2020) to provide a structured reasoning pathway for MLLMs to follow while identifying image-text incongruencies. Coherence Relations (CR) are a formal theory of discourse (Hobbs, 1978) that provides a formal framework for understanding how different communicative components relate to each other (Hobbs, 1978). As a task-independent framework, CR-based reasoning can help generate informative rationales for multi-modal sarcasm detection.

We analyze the capabilities of both proprietary (GPT-4o) and open-source models (InternVL3) in using Coherence Relations for reasoning (Zhu et al., 2025; OpenAI et al., 2024). Our findings on two different datasets: MMSD2.0 (Qin et al., 2023) and RedEval (Tang et al., 2024) show that the higher-order reasoning abilities of MLLMs play a crucial role in how they leverage CRs. IRONIC enables more pragmatically-aware models such as GPT-4o (OpenAI et al., 2024) to achieve state-of-the-art performance on zero-shot multi-modal sarcasm detection tasks. The contributions of this work can

*These authors contributed equally to this work.

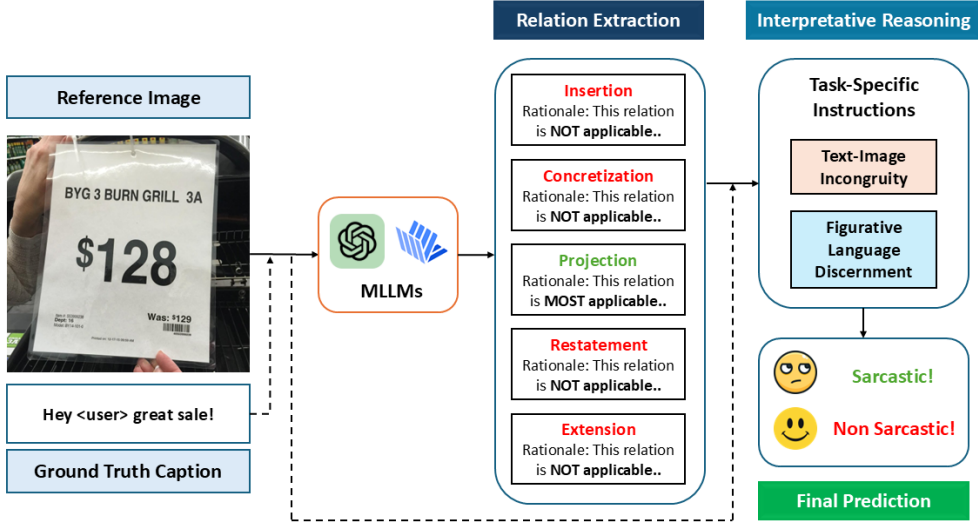


Figure 1: Overview of the IRONIC proposed framework

be summarized as follows:

- We present IRONIC, a coherence-aware in-context reasoning framework that leverages Multi-modal Discourse Coherence Relations for effectively analyzing image-text incongruities.
- IRONIC enables MLLMs with emergent higher-order reasoning capabilities to outperform existing multi-step reasoning strategies such as CoT in zero-shot settings across different datasets.
- Our results demonstrate the importance of leveraging linguistic and cognitive insights into the design of multi-modal reasoning chains, improving the performance of MLLMs on pragmatic and analogical comprehension tasks.

2 Related Work

2.1 Multi-Modal Sarcasm Detection

Initial approaches for multi-modal sarcasm detection utilized supervised deep learning models to incorporate image and text features (Schifanella et al., 2016; Das and Clark, 2018). Attention mechanisms further improved their abilities to associate image-text features across modalities (Pan et al., 2020; Wu et al., 2021). This led to the incorporation of more modalities such as audio, video, and facial expressions (Castro et al., 2019; Ray et al., 2022). However, models still struggled to comprehend complex relationships between image-text modalities required for sarcasm understanding.

With the popularity of pre-training architectures such as CLIP (Radford et al., 2021) and MLLMs, the capabilities of these models in identifying sarcastic content expanded further (Jia et al., 2024). Prompting-based approaches gained prominence due to their ability to generalize across domains without task-specific fine-tuning (Wang et al., 2024; Zhang et al., 2025b).

Relations	Referential	Pragmatic	Analogical
Insertion	•	✓	•
Concretization	✓	✓	•
Projection	•	✓	✓
Restatement	✓	•	•
Extension	•	✓	✓

Table 1: Classification of CRs by type of cognitive reasoning. Green checkmarks indicate the presence of each reasoning type, while dots indicate absence.

2.2 Image-Text Relation Understanding

Traditional multi-modal models worked solely on the assumption that information across modalities is highly correlated with each other (Radford et al., 2021), with tasks such as image captioning and image generation leveraging their strong semantic overlap (Mahajan and Roth, 2020; Liu et al., 2021). However, as these multi-modal models expanded their applications across different task domains such as news (Anantha Ramakrishnan et al., 2024) and social media (Xu et al., 2022; Vempala and Preoțiuc-Pietro, 2019), the need for enhanced

reasoning beyond semantic overlap became clear. Coherence Relations offer a cohesive framework for connecting different types of reasoning across multiple modalities and have improved model comprehension capabilities across different domains (Alikhani et al., 2020, 2022; Xu et al., 2022; Sosea et al., 2021). Motivated by these insights, we analyze the incorporation of CRs as a cognitive reasoning scaffold for multi-modal sarcasm detection.

3 Methodology

The proposed IRONIC framework, as shown in Figure 1, constructs a reasoning chain with 2 main components: (1) Relation Extraction (2) Interpretative Reasoning. The predicted CR distributions and specific prompts are shown in the Appendix Sections A & C.

3.1 Relation Extraction

The Relation Extraction step analyzes each image-text pair and predicts the most applicable CR along with a rationale to justify its selection. As depicted in Table 1, we utilize CRs that provide coverage of referential, analogical, and pragmatic reasoning types with varying levels of granularity. The selection of these CRs is supported by their applicability to analyzing image-text pairs from social media domains (Xu et al., 2022), ensuring strong generalizability with the datasets utilized for multi-modal sarcasm detection. The outputs of this step include the predicted CRs and their supporting rationales for each sample. Our framework incorporates 5 distinct CRs:

- **Insertion:** The reader must infer the referent object or entity from the visual concept with no explicit mentions in the text.
- **Concretization:** Identifies explicit referential alignment between image and text along with implied communicative intents.
- **Projection:** Presents an analogical mapping between topics discussed in the text and the objects presented in the image.
- **Restatement:** Describes an explicit referential agreement with strong semantic overlap across modalities.
- **Extension:** Introduces narrative or storytelling metaphors in the text that convey speaker intent and elaborate further on the visual content.

3.2 Interpretative Reasoning

Although MLLMs show limited ability in explicit coherence understanding tasks such as predicting CRs (Anantha Ramakrishnan et al., 2025a; Jia et al., 2025), recent studies have shown that language models are effective in utilizing coherence-aware reasoning chains for downstream higher-order reasoning tasks (Zhang et al., 2025a; Anantha Ramakrishnan et al., 2025b). This motivates the second step of our reasoning chain, where we integrate the image-text pair, the predicted CR, and the generated rationale for distinguishing if a sample contains multi-modal sarcasm. In addition to these inputs, we provide task-specific instructions to discern simple humor or satirical commentary from sarcasm indicators such as mockery or irony concerning a specific referent. This enables our Interpretative Reasoning step to be robust, where the coherence-aware rationale is used as a supporting element while basing the final decision on the full multi-modal input. Thus, by providing both general coherence rationales and task-specific instructions, we develop a flexible prompting strategy that can handle inconsistencies in upstream reasoning steps.

4 Experiments

4.1 Datasets

We select two popular multi-modal sarcasm detection datasets: MMSD2.0 (Qin et al., 2023) and RedEval (Tong et al., 2024) for evaluating the effectiveness of IRONIC. It builds on the popular Twitter-based MMSD dataset (Cai et al., 2019) by removing spurious cues such as hashtags and unreasonable labels through re-annotation. MMSD2.0’s test set contains 1037 and 1372 examples for the sarcasm and the non-sarcasm classes. RedEval was constructed for Out-of-Domain evaluation of models trained on Twitter-based datasets. Samples in RedEval are sourced from Reddit, with 395 sarcastic examples selected from the "sarcasm" subreddit and 609 negative examples from other subreddits.

4.2 Evaluation Metrics

To measure the performance of MLLMs on multi-modal sarcasm detection, we use the F1 score (weighted) as our main metric since it is framed as a binary classification task. We also report overall Accuracy, Precision, and Recall for all models.

Dataset	Model	Type	Accuracy \uparrow	Precision \uparrow	Recall \downarrow	F1 \uparrow
MMSD 2.0	GPT4o	Zero-Shot	0.7107	0.7952	0.7107	0.7024
		Zero-Shot CoT	0.7468	0.8096	0.7468	0.7430
		S^3 CoT	0.6559	0.7863	0.6559	0.6344
		IRONIC	0.7659	0.7729	0.7659	0.7670
	InternVL3-14B	Zero-Shot	0.7393	0.7427	0.7393	0.7322
		Zero-Shot CoT	0.7406	0.7752	0.7406	0.7400
		S^3 CoT	0.6874	0.7727	0.6874	0.6775
		IRONIC	0.7177	0.7294	0.7177	0.7032
RedEval	GPT4o	Zero-Shot	0.7799	0.8423	0.7799	0.7807
		Zero-Shot CoT	0.7669	0.8290	0.7669	0.7677
		S^3 CoT	0.7002	0.8172	0.7002	0.6939
		IRONIC	0.8406	0.8501	0.8406	0.8422
	InternVL3-14B	Zero-Shot	0.8327	0.8319	0.8327	0.8309
		Zero-Shot CoT	0.7420	0.8039	0.7420	0.7428
		S^3 CoT	0.7122	0.8201	0.7122	0.7075
		IRONIC	0.8197	0.8188	0.8197	0.8175

Table 2: Results for Multi-Modal Sarcasm Detection on both datasets

4.3 Baselines Compared

To understand how MLLMs utilize different types of reasoning chains compared to IRONIC, we include a variety of prompting strategies in our experiments. Zero-Shot serves as a simple baseline where only the input image and text are provided with a single task prompt for sarcasm prediction. Zero-Shot CoT requires the model to generate a step-by-step rationale before deciding whether sarcasm is present in the inputs. We also compare S^3 CoT, a strategy based on S^3 Agent (Wang et al., 2024) for multi-modal sarcasm detection. S^3 Agent analyzes image-text pairs from 3 critical perspectives: superficial expression, semantic information, and sentiment expression using a multi-agent framework. To ensure consistency, we combine the parallel agent prompts that generate 3 separate rationales into one single prompt, followed by a decision agent to predict the presence of sarcasm. This way, S^3 CoT is also a two-step strategy, serving as an alternate reasoning chain baseline.

5 Results

IRONIC Improves over CoT Baselines From our presented results on both datasets, we observe that IRONIC outperforms S^3 CoT across all settings and Zero-Shot CoT in 3 out of the 4 settings compared. With GPT-4o, we see an improvement of 3.23% and 9.70% on both MMSD2.0 and RedEval, respectively, compared to Zero-Shot CoT. Similarly, for InternVL3, we observe a 10.06% improvement over Zero-Shot CoT in RedEval. IRONIC when combined with GPT-4o beats all previous

state-of-the-art Zero-Shot approaches for MLLM-based sarcasm detection on both datasets (Zhang et al., 2025b; Tang et al., 2024). This demonstrates the benefits of a structured cognitive framework for multi-modal sarcasm prediction over empirical prompting strategies in Zero-Shot settings, supporting our initial hypothesis.

Challenges in Explicit Reasoning Incorporation

An interesting observation that we find when testing InternVL3-14B, is the strong zero-shot performance without separate reasoning steps on both datasets. The introduction of reasoning chains, both general and coherence-aware, does not provide meaningful performance improvements. This suggests that the model may rely on implicit heuristics for sarcasm recognition. Another potential reason for this behavior may be the lack of capacity to generate high-quality intermediate rationales (Anantha Ramakrishnan et al., 2025a). This indicates that larger proprietary models may demonstrate higher internal reasoning fidelity to make use of cognitive reasoning scaffolds such as CRs.

6 Conclusion

We propose IRONIC, a coherence-aware in-context prompting strategy inspired by the Theory of Discourse Coherence for multi-modal sarcasm detection. Our study covers both proprietary and open-source models across image-text pairs sourced from 2 different social media platforms. We observe that IRONIC elicits improved reasoning capabilities from MLLMs compared to other CoT approaches. Our experiments also investigate

the distinction between implicit pattern matching and explicit reasoning, demonstrating the importance of expanding model capabilities to include pragmatic and analogical reasoning, moving beyond factual and logical approaches.

Limitations

Our current experimental setup for IRONIC is limited to a couple of top-performing proprietary and open-source models. We are working on expanding our study to cover a more comprehensive set of models as a part of future work. Additionally, our evaluation strategy does not incorporate task-specific fine-tuning. Exploring multi-task fine-tuning strategies to improve both CR prediction and sarcasm recognition are promising research directions we aim to pursue. Finally, to facilitate a deeper analysis on the Relation Extraction step of IRONIC, we plan to explore human evaluation approaches for rationale quality analysis, facilitating identification of reasoning gaps and hallucinations.

Ethics Statement

With Multi-modal Sarcasm detection requiring implicit assumptions that leverage a model’s world view, we acknowledge the potential negative impacts of unintended stereotypical biases learned by these models. Similarly, the types of CRs we analyze are optimized for image-text linkages present in English. This may result in unexpected behavior when evaluating sarcasm in multi-lingual or code-mixed settings. Thus, we advocate the safe use of these approaches with human-in-the-loop validation. Similarly, we release all code and prompt templates to support transparency, reproducibility, and further research on coherence-aware reasoning in multi-modal models.

Acknowledgments

This research was in part supported by the U.S. National Science Foundation (NSF) award #1820609. Part of the research results were obtained using the computational resources provided by CloudBank (<https://www.cloudbank.org/>), which was supported by the NSF award #1925001.

References

Malihe Alikhani, Fangda Han, Hareesh Ravi, Mubbasis Kapadia, Vladimir Pavlovic, and Matthew Stone.

2022. Cross-modal coherence for text-to-image retrieval. *Proc. Conf. AAAI Artif. Intell.*, 36(10):10427–10435.

Malihe Alikhani, Piyush Sharma, Shengjie Li, Radu Soricut, and Matthew Stone. 2020. Cross-modal coherence modeling for caption generation. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 6525–6535, Stroudsburg, PA, USA. Association for Computational Linguistics.

Aashish Anantha Ramakrishnan, Aadarsh Anantha Ramakrishnan, and Lee Dongwon. 2025a. CORDIAL: Can multimodal large language models effectively understand coherence relationships? *arXiv [cs.CL]*.

Aashish Anantha Ramakrishnan, Aadarsh Anantha Ramakrishnan, and Dongwon Lee. 2025b. RONA: Pragmatically diverse image captioning with coherence relations. In *The Fourth Workshop on Intelligent and Interactive Writing Assistants (In2Writing)*. The Nations of the Americas Chapter of the Association for Computational Linguistics.

Aashish Anantha Ramakrishnan, Sharon X Huang, and Dongwon Lee. 2024. ANNA: Abstractive text-to-image synthesis with filtered news captions. In *The Third Workshop on Advances in Language and Vision Research*. Association for Computational Linguistics.

Yitao Cai, Huiyu Cai, and Xiaojun Wan. 2019. Multi-modal sarcasm detection in twitter with hierarchical fusion model. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2506–2515, Stroudsburg, PA, USA. Association for Computational Linguistics.

Elisabeth Camp. 2012. Sarcasm, pretense, and the semantics/pragmatics distinction. *Nous*, 46(4):587–634.

Santiago Castro, Devamanyu Hazarika, Verónica Pérez-Rosas, Roger Zimmermann, Rada Mihalcea, and Soujanya Poria. 2019. Towards multimodal sarcasm detection (an _obviously_ perfect paper). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4619–4629, Stroudsburg, PA, USA. Association for Computational Linguistics.

Dipto Das and Anthony J Clark. 2018. Sarcasm detection on facebook: a supervised learning approach. In *Proceedings of the 20th International Conference on Multimodal Interaction: Adjunct*, New York, NY, USA. ACM.

Jerry R Hobbs. 1978. *Why is discourse coherent?*, volume 176. SRI International Menlo Park, CA.

Boyu Jia, Junzhe Zhang, Huixuan Zhang, and Xiaojun Wan. 2025. Exploring and evaluating multimodal knowledge reasoning consistency of multimodal large language models. *arXiv [cs.CL]*.

- Mengzhao Jia, Can Xie, and Liqiang Jing. 2024. De-biasing multimodal sarcasm detection with contrastive learning. *Proc. Conf. AAAI Artif. Intell.*, 38(16):18354–18362.
- Shivani Kumar, Atharva Kulkarni, Md Shad Akhtar, and Tanmoy Chakraborty. 2022. When did you become so smart, oh wise one?! sarcasm explanation in multimodal multi-party dialogues. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5956–5968, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Joshua Lee, Wyatt Fong, Alexander Le, Sur Shah, Kevin Han, and Kevin Zhu. 2025. Pragmatic metacognitive prompting improves LLM performance on sarcasm detection. In *Proceedings of the 1st Workshop on Computational Humor (CHum)*, pages 63–70.
- Bin Liang, Chenwei Lou, Xiang Li, Min Yang, Lin Gui, Yulan He, Wenjie Pei, and Ruifeng Xu. 2022. Multimodal sarcasm detection via cross-modal graph convolutional network. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1767–1777, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Xingchao Liu, Chengyue Gong, Lemeng Wu, Shujian Zhang, Hao Su, and Qiang Liu. 2021. FuseDream: Training-free text-to-image generation with improved CLIP+GAN space optimization. *arXiv:2112.01573 [cs]*.
- Shweta Mahajan and Stefan Roth. 2020. Diverse image captioning with context-object split latent spaces. In *Proceedings of the 34th International Conference on Neural Information Processing Systems, NIPS ’20*, Red Hook, NY, USA. Curran Associates Inc.
- OpenAI, Aaron Hurst, Adam Lerer, Adam P Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, A J Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, Aleksander Mądry, Alex Baker-Whitcomb, Alex Beutel, Alex Borzunov, Alex Carney, Alex Chow, Alex Kirillov, Alex Nichol, and 400 others. 2024. GPT-4o system card. *arXiv [cs.CL]*.
- Hongliang Pan, Zheng Lin, Peng Fu, Yatao Qi, and Weiping Wang. 2020. Modeling intra and inter-modality incongruity for multi-modal sarcasm detection. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 1383–1392, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Bo Pang and Lillian Lee. 2008. Opinion mining and sentiment analysis. *Found. Trends® Inf. Retr.*, 2(1-2):1–135.
- Libo Qin, Shijue Huang, Qiguang Chen, Chenran Cai, Yudi Zhang, Bin Liang, Wanxiang Che, and Ruifeng Xu. 2023. MMSD2.0: Towards a reliable multimodal sarcasm detection system. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 10834–10845, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. 2021. Learning transferable visual models from natural language supervision. *arXiv:2103.00020 [cs]*.
- Anupama Ray, Shubham Mishra, Apoorva Nunna, and Pushpak Bhattacharyya. 2022. A multimodal corpus for emotion recognition in sarcasm. In *Proceedings of the Thirteenth Language Resources and Evaluation Conference*, pages 6992–7003.
- Rossano Schifanella, Paloma de Juan, Joel Tetreault, and Liangliang Cao. 2016. Detecting sarcasm in multimodal social platforms. In *Proceedings of the 24th ACM international conference on Multimedia*, New York, NY, USA. ACM.
- Tiberiu Sosea, Iustin Sirbu, Cornelia Caragea, Doina Caragea, and Traian Rebedea. 2021. Using the image-text relationship to improve multimodal disaster tweet classification. *Int Conf Inf Syst Crisis Response Manag*, pages 691–704.
- Binghao Tang, Boda Lin, Haolong Yan, and Si Li. 2024. Leveraging generative large language models with visual instruction and demonstration retrieval for multimodal sarcasm detection. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 1732–1742, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Shengbang Tong, Zhuang Liu, Yuexiang Zhai, Yi Ma, Yann LeCun, and Saining Xie. 2024. Eyes wide shut? exploring the visual shortcomings of MultiModal LLMs. *Proc. IEEE Comput. Soc. Conf. Comput. Vis. Pattern Recognit.*, pages 9568–9578.
- Alakananda Vempala and Daniel Preotiuc-Pietro. 2019. Categorizing and inferring the relationship between the text and image of twitter posts. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2830–2840, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Peng Wang, Yongheng Zhang, Hao Fei, Qiguang Chen, Yukai Wang, Jiasheng Si, Wenpeng Lu, Min Li, and Libo Qin. 2024. S³ agent: Unlocking the power of VLLM for zero-shot multi-modal sarcasm detection. *ACM Trans. Multimed. Comput. Commun. Appl.*
- Yuqing Wang and Yun Zhao. 2024. Metacognitive prompting improves understanding in large language models. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 1914–1926, Stroudsburg, PA, USA. Association for Computational Linguistics.

- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, and Others. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837.
- Yang Wu, Yanyan Zhao, Xin Lu, Bing Qin, Yin Wu, Jian Sheng, and Jinlong Li. 2021. Modeling incongruity between modalities for multimodal sarcasm detection. *IEEE Multimed.*, 28(2):86–95.
- Chunpu Xu, Hanzhuo Tan, Jing Li, and Piji Li. 2022. Understanding social media cross-modality discourse in linguistic space. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 2459–2471, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Ben Yao, Yazhou Zhang, Qiuchi Li, and Jing Qin. 2025. Is sarcasm detection a step-by-step reasoning process in large language models? *Proc. Conf. AAAI Artif. Intell.*, 39(24):25651–25659.
- Jinghan Zhang, Xiting Wang, Weijieying Ren, Lu Jiang, Dongjie Wang, and Kunpeng Liu. 2025a. RATT: A thought structure for coherent and correct LLM reasoning. *Proc. Conf. AAAI Artif. Intell.*, 39(25):26733–26741.
- Yazhou Zhang, Chunwang Zou, Bo Wang, and Jing Qin. 2025b. Commander-GPT: Fully unleashing the sarcasm detection capability of multi-modal large language models. *arXiv [cs.CL]*.
- Jinguo Zhu, Weiyun Wang, Zhe Chen, Zhaoyang Liu, Shenglong Ye, Lixin Gu, Yuchen Duan, Hao Tian, Weijie Su, Jie Shao, Zhangwei Gao, Erfei Cui, Yue Cao, Yangzhou Liu, Xingguang Wei, Hongjie Zhang, Haomin Wang, Weiye Xu, Hao Li, and 31 others. 2025. InternVL3: Exploring advanced training and test-time recipes for open-source multimodal models. *arXiv [cs.CV]*.

Appendix

A Distribution of Predicted Coherence Relations

As an extended analysis, we present the distribution of predicted Coherence Relations by GPT4o coupled with IRONIC in Tables 3 and 4. This distribution has been constructed by parsing the Relation Extraction reasoning step. In MMSD 2.0 and RedEval, eight and two image-text pairs respectively do not have predicted Coherence Relations because their rationales exceeded the maximum token limit.

CR	Non-Sarcastic	Sarcastic
Insertion	122	75
Extension	248	297
Concretization	84	39
Projection	458	283
Restatement	456	339

Table 3: Distribution of CRs in the MMSD 2.0 Dataset

CR	Non-Sarcastic	Sarcastic
Insertion	51	24
Extension	96	129
Concretization	27	16
Projection	101	75
Restatement	334	149

Table 4: Distribution of CRs in the RedEval Dataset

B Model Availability

This section focuses on the details regarding model availability and parameters used for evaluation. For all models, we set temperature to 0 or `do_sample=False`, maximum output tokens to 512 and the random seed set to 42, wherever possible to ensure reproducibility.

B.1 Proprietary Models

OpenAI GPT: We access the GPT-4o model via a custom deployment using Azure OpenAI. We evaluate `gpt-4o-2024-11-20` with a custom safety filter to restrict content of *high* severity level. We also use the public version of GPT-4o, via the official OpenAI API.

B.2 Open-Source Models

We evaluate InternVL3 14B MLLM (OpenGVLab/InternVL3-14B on Huggingface)

using the VLLM¹ framework.

C Prompt Templates

We use various prompt templates with different system/user messages for IRONIC and the baselines mentioned in Section 4.3. The different prompts and system messages used are present in the appendix.

D Postprocessing MLLM Responses

Since both datasets feature image-caption pairs on a wide selection of topics, around **50+ images** were flagged by Azure GPT4o’s strict safety filter or rejected by the model during evaluation. To ensure test set consistency, we decided to rerun these samples using the official OpenAI API instead and were able to get results.

¹<https://github.com/vllm-project/vllm>

System Message for Baseline Zero-Shot/CoT Evaluation

You are an expert linguist. Your task is to analyze a image-text pair and determine if it is 'sarcastic' or 'non-sarcastic'.

System Message for IRONIC

You are an expert linguist, and your task is to analyze and predict the most applicable Coherence Relations for image-text pairs. A coherence relation describes the structural, logical, and purposeful relationships between an image and its caption, capturing the author's intent.

These are the possible coherence relations you can assign to an image-text pair:

- Insertion: The salient object described in the image is not explicitly mentioned in the text.
- Concretization: Both the text and image contain a mention of the main visual entity.
- Projection: The main entity mentioned in the text is implicitly related to the visual objects present in the image.
- Restatement: The text directly describes the image contents.
- Extension: The image expands upon the story or idea in the text, presenting new elements or elaborations, effectively filling in narrative gaps left by the text.

Baseline Zero-Shot Prompt

System

<insert-system-message>

User

Output 0 if it does not contain sarcastic content, and 1 if it does. Do not add anything else in your response.

<insert-image-text-pair>

Baseline Zero-Shot CoT Prompt

System

<insert-system-message>

User

Let's think **step-by-step** and analyze the relationship between the text and image carefully.

<insert-image-text-pair>

Assistant

Analysis: <add-analysis-from-model>

User

Using your rationale, please determine if the image-text pair is sarcastic in nature. Output 0 if it does not contain sarcastic content, and 1 if it does. Do not add anything else in your response.

S^3 Agent Prompt

User

Given the following image and text, please judge whether there is sarcasm based on the 3 perspectives below.

1. **Superficial Expression:** This includes detect underlying critiques in contexts through image-text discrepancies.
2. **Semantic Information:** This includes detect extreme portrayals and metaphorical in contexts through image-text semantic.
3. **Sentiment Expression:** This includes detect criticize emotion on specific subjects or behaviors in the content.

Without considering conclusions drawn solely from images or text, both must be considered together. Then, you should output the corresponding chain-of-thought to support your answer.

<insert-image-text-pair>

Assistant

Analysis: <add-analysis-from-model>

User

Unmask the hidden intent! Given the above rationales, delve into its layers of meaning. Analyze the surface - the literal words used. Pierce deeper to uncover the semantic information - the intended meaning behind those words. Finally, gauge the sentiment - the emotional undercurrent. By weaving these insights together, can you crack the code of sarcasm and determine if the comment is meant to be sincere or laced with sarcastic?

Follow these rules:

1. If any perspective cannot determine sarcasm due to lack of information, disregard that perspective.
2. If any of the views conflict, choose the view with the most well-founded reasoning.
3. Output 0 if it does not contain sarcastic content, and 1 if it does. Do not add anything else in your response.

IRONIC Prompt

System

<insert-system-message>

User

Let's think **step-by-step** and analyze the relationship between the text and image carefully. Please also identify the most appropriate coherence relation between the text and image.

<insert-image-text-pair>

Assistant

Analysis: <add-analysis-from-model>

User

Using the coherence relation analysis and the input image-text pair, please determine if the content contains multi-modal sarcasm. Content where both image and text together create a sarcastic effect is considered multi-modal sarcasm, do not focus on the sarcasm in only the image or text. Clearly distinguish simple humor and satire which is not sarcastic from mockery and irony which is sarcastic.

Output 0 if it does not contain multi-modal sarcasm, and 1 if it does. Do not add anything else in your response.