# **ULTRAEDIT: Training-, Subject-, and Memory-Free Lifelong Editing in Large Language Models**

Xiaojie Gu $^{1*}$  Guangxu Chen $^{4*}$  Jungang Li $^{4*}$  Jia-Chen Gu $^2$  Xuming Hu $^4$  Kai Zhang $^{3\dagger}$ 

<sup>1</sup> Independent <sup>2</sup> University of California, Los Angeles <sup>3</sup> The Ohio State University <sup>4</sup> The Hong Kong University of Science and Technology (Guangzhou) peettherapynoys@gmail.com drogozhang@gmail.com

# **Abstract**

Lifelong learning enables large language models (LLMs) to adapt to evolving information by continually updating their internal knowledge. An ideal system should support efficient, wide-ranging updates while preserving existing capabilities and ensuring reliable deployment. Model editing stands out as a promising solution for this goal, offering a focused and efficient way to revise a model's internal knowledge. Although recent paradigms have made notable progress, they often struggle to meet the demands of practical lifelong adaptation at scale. To bridge this gap, we propose ULTRAEDIT—a fundamentally new editing solution that is training-, subject- and memory-free, making it particularly well-suited for ultra-scalable, real-world lifelong model editing. ULTRAEDIT performs editing through a self-contained process that relies solely on lightweight linear algebra operations to compute parameter shifts, enabling fast and consistent parameter modifications with minimal overhead. To improve scalability in lifelong settings, ULTRAEDIT employs a *lifelong normalization* strategy that continuously updates feature statistics across turns, allowing it to adapt to distributional shifts and maintain consistency over time. ULTRAEDIT achieves editing speeds over 7× faster than the previous state-of-the-art method—which was also the fastest known approach—while consuming less than 1/3 the VRAM, making it the only method currently capable of editing a 7B LLM on a 24GB consumer-grade GPU. Furthermore, we construct ULTRAEDITBENCH—the largest dataset in the field to date, with over 2M editing pairs—and demonstrate that our method supports up to 1M edits while maintaining high accuracy. Comprehensive experiments on four datasets and six models show that ULTRAEDIT consistently achieves superior performance across diverse model editing scenarios. Our code is available at: https://github.com/XiaojieGu/UltraEdit

# 1 Introduction

Lifelong learning (also known as continual learning [1, 2]) is essential for enabling large language models (LLMs) to continuously adapt to evolving knowledge and real-world dynamics. Despite its importance, scalable and reliable lifelong adaptation remains challenging in practice [3]. Retraining is prohibitively expensive and slow, making it unsuitable for frequent updates [4]. Meanwhile, existing lifelong learning approaches often suffer from catastrophic forgetting [5, 6], or depend on retrieval-augmented generation (RAG) [7, 8], which may potentially introduce conflicts between retrieved content and the model's internal knowledge [9]. These limitations suggest that current

<sup>\*</sup>Equal contribution.

<sup>&</sup>lt;sup>†</sup>Corresponding author.

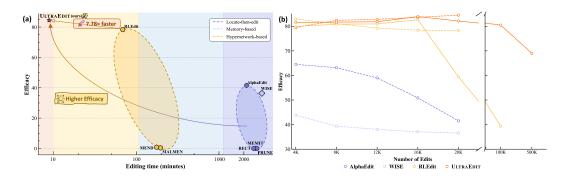


Figure 1: (a) Average efficacy and editing time (excluding validation time) of different solutions on 20K edits from ZsRE, evaluated across GPT-J, Mistral, and LLaMA-3. (b) Variation in average Efficacy as edits accumulate. Dashed lines represent performance on the ZsRE dataset across GPT-J, Mistral, and LLaMA-3, while solid lines represent results on the WikiBigEdit dataset with LLaMA-3. paradigms may not fully meet the demands of lifelong deployment—highlighting the need for more targeted and efficient mechanisms for continual knowledge integration [10].

One promising solution is model editing [11, 12, 13, 14], which enables targeted modifications to a model's internal knowledge while leaving unrelated information unaffected—making it especially suited for continual updates over time [15, 16]. Some methods enhance this process by training auxiliary networks [17, 18, 19, 20] to guide how model parameters are adjusted in response to new information. Others rely on strong structural assumptions—such as *subject-centric* representations [21, 12, 22] or carefully formatted input prompts [23, 24, 25, 26]—which tie them to handcrafted data pipelines [27, 28, 29] and limit both generalization and practical feasibility. In addition, many approaches depend on external memory [30, 31, 32, 33] to store knowledge, introducing significant overhead that impairs scalability. These limitations pose challenges for applying model editing to high-frequency, large-scale modification scenarios [34, 35, 36]. To address the issues mentioned above, we introduce ULTRAEDIT: a novel *training-*, *subject-*, and *memory-free* method.

ULTRAEDIT introduces a *lifelong normalization* strategy that dynamically adapts to the model's evolving state throughout the editing process. Specifically, it maintains and incrementally updates the statistics (mean and variance) of internal feature representations extracted from editing instances—across editing turns. This ensures that inputs to the update computation remain well-calibrated, promoting stable and consistent edits over time. As a result, ULTRAEDIT enables accurate, multi-turn knowledge updates without training. This self-contained approach relies solely on a few lightweight linear algebra operations over editing-instance features, without requiring any additional dependencies—making it especially efficient for high-frequency updates. This direct approach avoids iterative optimization and external memory, enabling robust, scalable edits with minimal overhead and strong model consistency—making it well-suited for real-world application demands [37, 38, 39, 40]. Existing paradigms, by contrast, are prone to the *Edit Collapse* phenomenon [41, 42]—a sharp decline in editing stability and effectiveness as the number of edits or editing turns grows. As shown in Figure 1, ULTRAEDIT not only avoids this collapse but also achieves significantly faster editing speeds while maintaining consistent performance in ultra-large-scale lifelong editing scenarios. A comparison between ULTRAEDIT and other solutions is provided in Table 1.

To evaluate our method at its full potential and push the boundaries of large-scale model editing, we introduce our benchmark ULTRAEDITBENCH—a factual QA benchmark constructed from Wikidata triples, comprising over 2 million complete editing pairs. In addition to this new benchmark, we assess the effectiveness and scalability of ULTRAEDIT on other three widely used model editing datasets—zsRE[43], FEVER [44], and WikiBigEdit [45]—across six diverse models, including GPT [46], Mistral [47], LLaMA [48], Qwen [49],Phi [50], and Gemma [51]. Our results show that ULTRAEDIT achieves new state-of-the-art performance across most editing scenarios. In addition to its strong empirical performance, ULTRAEDIT demonstrates remarkable efficiency: it achieves over 7× faster editing speeds and uses less than one-third of the GPU memory compared to prior leading baselines, as show in Figure 1 (a) and Figure 2. Notably, it is the only method to date capable of reliably editing a 7B-scale model on a standard 24GB consumer GPU, making it uniquely practical for real-world deployment. Moreover, ULTRAEDIT demonstrates the ability to scale to 1 million edits while preserving model stability, underscoring its promise for ultra-large-scale lifelong model editing. Our contributions are four-fold:




Figure 2: VRAM usage over the course of 20K edits on the ZsRE dataset using different methods with Mistral-7B.

Table 1: Comparison between the ULTRAEDIT and three prevailing model editing solutions. ✓ indicates "yes" or well-supported, while ★denotes "no" or badly-supported.

Solution	Training-free	Subject-free	Memory-free	Lifelong scalability
Locate-then-edit	✓	×	✓	×
Memory-based	✓	×	×	×
Hypernetwork-based	X	✓	✓	×
ULTRAEDIT	✓	✓	✓	✓

- We identify and analyze the shortcomings of three dominant model editing paradigms under large-scale lifelong settings, providing insights for developing more advanced editing methods.
- We propose ULTRAEDIT, a novel training-, subject-, and memory-free editing solution that performs stable updates through lifelong normalization. ULTRAEDIT achieves over 7× faster editing and 3× less VRAM compared to previous state-of-the-art methods.
- We construct ULTRAEDITBENCH, currently the largest dataset for model editing, comprising more than **2 Million** factual editing pairs to facilitate research on lifelong ultra-large-scale model editing.
- Comprehensive experiments on four benchmarks and six LLMs, demonstrating ULTRAEDIT's superior performance and scalability to 1 Million edits.

#### 2 Related Work

## 2.1 Lifelong Learning

Lifelong learning, also known as continual learning, aims to develop models that can continuously learn from a stream of tasks while preserving knowledge acquired in earlier stages [1, 2]. The primary challenge lies in overcoming catastrophic forgetting, where new learning interferes with previously acquired knowledge. To address this challenge, existing approaches generally fall into three categories: regularization-based methods [52, 53], which focus on preserving important parameters; replay-based methods [54, 55], which revisit past information during training; and architecture-based methods [56, 57], which dynamically adjust the model structure.

#### 2.2 Model Editing Paradigm

**Hypernetwork-based** methods [17, 18, 19, 20] treat model editing as a meta-learning problem by training a separate neural network to predict parameter shifts. This auxiliary network operates independently from the base model and learns to project editing inputs into effective weight updates. Once trained on a collection of edits samples, it enables quick application of new updates without re-optimizing for each case. However, the hypernetwork remains fixed while the underlying model continues to evolve as edits accumulate. This growing mismatch can lead to degraded editing performance over time. Furthermore, the need for additional training data limits the practicality of these methods in scenarios requiring rapid or continual updates.

**Locate-then-edit** methods [58, 12, 59, 60, 61, 62] rely on the presence of an explicit subject or entity in the input to identify which internal components of the model are primarily responsible for storing the corresponding piece of knowledge. They then apply targeted perturbations—typically through computationally intensive iterative optimization—to enforce the desired output while minimizing side effects on unrelated behaviors and representations. Although effective for isolated edits, these methods often become unstable in lifelong settings, as repeated updates to overlapping parameters can accumulate and lead to interference or degradation of previously edited knowledge.

**Memory-based** [32, 24, 15, 30, 33, 63, 64] approaches enhance the model with an external memory that stores edits separately from the core parameters. New knowledge is incorporated by adding or modifying memory entries, allowing the model to adapt its responses without altering its original weights—thereby localizing changes and minimizing side effects. However, these methods reroute inference through the memory and require maintaining one entry per edit, leading to memory consumption that grows linearly with the number of edits. This limits their practicality in lifelong model editing scenarios involving high-frequency or large-scale updates.

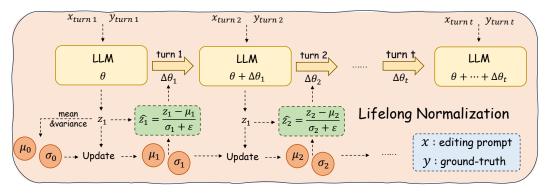


Figure 3: This figure illustrates the lifelong editing workflow of ULTRAEDIT, where parameter shifts are applied iteratively across turns using a lifelong normalization mechanism that maintains running statistics of editing-instance features to ensure stable and consistent model behavior over time.

# 3 Methodology

#### 3.1 Preliminary

We consider a pre-trained language model  $f_{\theta}: \mathcal{X} \to \mathcal{Y}$  with parameters  $\theta$ . Model editing is the task of modifying this model's parameters to change its behavior on a specific input while leaving the rest of its behavior intact. Formally, an editing instance is a pair  $(x_e, y_e) \in \mathcal{X} \times \mathcal{Y}$ , where  $x_e$  is an edit query and  $y_e$  is the ground-truth output for that input. The goal is to find a parameter set  $\theta'$  such that the edited model  $f_{\theta'}$  produces the desired output  $y_e$  for the edit query  $x_e$  (Efficacy). In addition, the model should respond appropriately to a set of equivalent queries  $\mathcal{E}(x_e) \subset \mathcal{X}$ , which includes semantically similar variations of the original query (Generalization), while ensuring that its behavior on a set of unrelated queries  $\mathcal{U}(x_e) \subset \mathcal{X}$ , which are not associated with the edited knowledge, remains unaffected (Specificity).

In a lifelong model editing scenario, the model is updated iteratively across a sequence of editing turns. At each turn t, n editing instances  $\{(x_e^{(t,i)}, y_e^{(t,i)})\}_{i=1}^n$  is applied to the current model  $f_{\theta^{(t-1)}}$ , resulting in a new model  $f_{\theta^{(t)}}$ . Each turn of edits is performed on the model that has already incorporated all previous edits, making stability across turns critically important.

#### 3.2 ULTRAEDIT

Motivation ULTRAEDIT draws on key insights from three dominant model editing paradigms and unifies them into a streamlined, robust design. From locate-then-edit approaches, our method inherits the principle of per-layer localized intervention, applying updates directly at the module level without global rewiring. Additionally, ULTRAEDIT directly leverages intrinsic signals extracted from each editing instance to guide parameter updates. In doing so, it avoids reliance on external memory structures, which are commonly used in memory-based paradigms but often introduce scalability and latency bottlenecks. Finally, inspired by hypernetwork-based techniques, ULTRAEDIT inherits the use of closed-form optimization to compute parameter shifts efficiently, eliminating the need for iterative procedures. By combining these strengths, ULTRAEDIT enables lifelong editing by maintaining and updating feature statistics across turns to preserve stable internal signal distributions, allowing fast, consistent, and training-free updates over time. This lightweight and dependency-free design supports scalable, high-frequency model updates and is well-suited for real-world lifelong learning scenarios where continuous adaptation is essential.

**Principle** For a given editing turn t, ULTRAEDIT processes a batch of n editing instances by extracting two key signals from a designated editable module (e.g., a transformer feedforward layer). Since the goal is to directly intervene in the model's behavior, both the input prompt and the desired output (i.e., the ground-truth label) are explicitly provided during the editing process. A *forward hook* is registered to capture the hidden state  $h_i \in \mathbb{R}^d$  at the token position corresponding to the ground-truth answer—i.e., the unmasked label position—during the forward pass. This reflects the model's contextual representation of the target knowledge and does not constitute information

#### **Algorithm 1:** ULTRAEDIT

**Input:** Model  $f_{\theta}$ , editing instances  $\{(x_i, y_i)\}_{i=1}^n$ , editable modules  $\mathcal{M}$  **Output:** Edited model  $f_{\theta'} = f_{\theta} + \{\Delta \theta_m\}_{m \in \mathcal{M}}$ 

foreach instance  $(x_i, y_i)$  do

Run forward pass to extract hidden state  $h_i$  at each module  $m \in \mathcal{M}$ ;

Run backward pass to compute gradient  $\nabla y_i$  at each module;

Concatenate editing feature:  $z_i \leftarrow [h_i \parallel \nabla y_i]$ ;

Update running mean  $\mu$ , variance  $\sigma$  using lifelong rules;

Cache  $z_i$  for each module;

#### foreach module $m \in \mathcal{M}$ do

Load cached feature vectors  $\{z_i\}_{i=1}^n$  for module m;

Normalize:  $\hat{z}_i \leftarrow \frac{z_i - \mu}{\sigma + \varepsilon}$ ;

Split:  $[\tilde{h}_i \parallel \tilde{v}_i] \leftarrow \hat{z}_i$ ;

Compute scaled update:  $v_i = -\eta \cdot ||\tilde{h}_i||^2 \cdot \tilde{v}_i$ ;

 $\text{Stack } H \leftarrow [h_1^\top, ..., h_n^\top]^\top, V \leftarrow [v_1^\top, ..., v_n^\top]^\top;$ 

Compute optimal closed-form solution:  $\Delta \theta_m \leftarrow (H^\top H + I)^{-1} H^\top V$ ;

Apply:  $\theta'_m \leftarrow \theta_m + \Delta \theta_m$ ;

**return** Post-edited model  $f_{\theta'}$ 

leakage, as the label is part of the specified editing target [20, 61]. Simultaneously, a backward hook extracts the gradient vector  $\nabla y_i \in \mathbb{R}^{d'}$  during backpropagation, computed from the supervised loss with respect to the same ground-truth output. This gradient captures the direction in which the model should be updated to internalize the desired knowledge. By concatenating these components into a unified editing feature  $z_i = [h_i \| \nabla y_i] \in \mathbb{R}^{d+d'}$ , we encode both the *location* and *direction* of the update in a cohesive representation. This joint feature lays the groundwork for our subsequent normalization strategy, as it enables stable co-normalization of hidden states and gradients, facilitating efficient parameter shift computation via downstream least-squares estimation.

**Design** Building on the joint feature  $z_i = [h_i || \nabla y_i]$ , we introduce a lifelong normalization mechanism that maintains running statistics over successive editing turns. This mechanism enables consistent normalization of editing features across turns, ensuring stability and compatibility for downstream parameter update computation.

We begin by normalizing each feature vector using the current running statistics:

$$\hat{z}_i = \text{Norm}(z_i) = \frac{z_i - \mu}{\sigma + \varepsilon},$$
 (1)

where  $\mu$  and  $\sigma$  are the running mean and standard deviation, and  $\varepsilon$  is a small constant (machine epsilon) for numerical stability.

At each editing turn t, let  $\{z_i\}_{i=1}^n$  denote the concatenated feature vectors from n editing instances. The turn-wise mean and variance are computed as  $\bar{z} = \frac{1}{n} \sum_{i=1}^{n} z_i$  and  $\text{Var}(z) = \frac{1}{n} \sum_{i=1}^{n} (z_i - \bar{z})^2$ , respectively. We then compute the difference  $\delta = \bar{z} - \mu$ , accumulate squared deviations with  $s^2 \leftarrow s^2 + n \cdot \text{Var}(z) + \frac{Nn}{N+n} \cdot \delta^2$ , and update the sample count as  $N \leftarrow N + n$ .

The running mean and standard deviation are updated via:

$$\mu \leftarrow \mu + \frac{n}{N+n} \cdot \delta,\tag{2}$$

$$\mu \leftarrow \mu + \frac{n}{N+n} \cdot \delta, \tag{2}$$

$$\sigma \leftarrow \sqrt{\frac{s^2}{N+n-1+\varepsilon}}. \tag{3}$$

At the first turn, since no prior statistics exist, we initialize the running mean and standard deviation as  $\mu_0 = \bar{z}$  and  $\sigma_0 = \sqrt{\operatorname{Var}(z) + \varepsilon}$ .

After normalization, the vector  $\hat{z}_i \in \mathbb{R}^{d+d'}$  is split into two components:

$$[\tilde{h}_i \parallel \tilde{v}_i] = \hat{z}_i, \tag{4}$$

Table 2: Results on three datasets across three models and bold values indicate the best results. *Eff.* denotes *Efficacy*, *Gen.* denotes *Generalization*, and *Spe.* denotes *Specificity*.  $\Delta$  indicates the performance difference between ULTRAEDIT and the previous best method. ULTRAEDIT\* denotes performance results under a ultra-large-scale edit setting.

Method		ZsRE			FEVER		WikiBigEdit				
Method	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Personas	Multi-hop
GPT-J											
FT	15.11	13.55	2.61	14.02	13.98	9.26	21.90	17.56	8.47	13.91	9.24
WISE	34.13	33.14	26.81	93.95	92.86	57.03	49.88	45.39	30.00	40.52	21.01
AlphaEdit	50.23	43.31	12.54	1.89	1.87	1.85	69.66	55.03	21.20	42.60	0.07
RLEdit	73.34	68.93	22.00	14.26	13.74	14.11	66.18	60.97	32.20	55.78	25.94
ULTRAEDIT	78.03	72.42	27.05	97.45	96.37	79.72	73.84	66.57	37.17	56.90	29.27
UltraEdit*	72.95	68.68	25.91	97.89	96.73	79.85	66.46	60.54	47.90	51.73	-
$\Delta$	+4.69	+3.49	+0.24	+3.94	+3.87	+22.82	+4.18	+5.60	+15.70	+1.12	+3.33
Mistral-7B-v0.3											
FT	13.69	12.43	19.87	23.80	23.37	16.30	13.77	14.86	11.84	11.55	7.51
WISE	34.01	32.61	46.05	81.95	76.94	40.37	37.31	33.44	11.61	27.44	8.95
AlphaEdit	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
RLEdit	72.57	68.87	23.17	92.35	91.39	71.85	57.55	52.47	28.78	49.21	22.41
ULTRAEDIT	85.30	80.80	47.38	97.87	96.09	84.29	76.00	70.15	46.09	62.27	35.80
UltraEdit*	81.13	76.78	48.06	98.23	96.97	83.43	71.78	65.63	55.40	56.11	-
$\Delta$	+12.73	+11.93	+2.01	+5.88	+5.58	+12.44	+18.45	+17.68	+26.62	+13.06	+13.39
				I	LaMA-3	-8B-Instr	uct				
FT	12.24	10.97	9.06	16.21	13.08	5.01	13.00	11.70	6.75	11.02	4.38
WISE	40.94	40.27	37.40	86.38	86.36	72.08	34.07	32.26	28.91	29.55	21.19
AlphaEdit	74.34	67.85	22.94	6.39	6.14	2.72	63.24	54.68	20.17	42.58	0.01
RLEdit	91.34	89.68	41.94	91.38	89.93	41.98	75.35	70.00	37.21	65.55	28.13
ULTRAEDIT	90.07	87.36	49.51	95.39	91.93	67.14	79.60	73.49	48.51	66.55	35.64
UltraEdit*	87.80	85.48	46.74	97.18	94.64	68.62	68.99	63.59	52.28	55.04	_
$\Delta$	-1.27	-2.32	+7.57	+5.80	+4.71	-3.46	+4.25	+3.49	+15.07	+1.00	+7.51

where  $\tilde{h}_i \in \mathbb{R}^d$  is the normalized hidden state, and  $\tilde{v}_i \in \mathbb{R}^{d'}$  the normalized gradient value.

To adaptively scale the influence of each editing sample, following [17, 18, 20], we employ a scaling mechanism based on the magnitude of its normalized hidden state. Specifically, for each sample i, the scaled update direction is computed as:

$$v_i = -\eta \cdot \|\tilde{h}_i\|^2 \cdot \tilde{v}_i,\tag{5}$$

where  $\eta$  is a global scaling factor analogous to a learning rate. The scaling reflects the saliency of the hidden representation and determines the strength of the corresponding edit.

Let  $H \in \mathbb{R}^{n \times d}$  be the matrix of unnormalized hidden state and  $V \in \mathbb{R}^{n \times d'}$  the matrix of scaled update vectors  $v_i$ . The final parameter shift is obtained by solving a regularized least-squares problem that minimizes both the reconstruction error and the update norm:

$$\min_{\Delta \theta} \|H\Delta \theta - V\|^2 + \|\Delta \theta\|^2, \tag{6}$$

where  $\theta' \in \mathbb{R}^{d \times d'}$  is the target weight perturbation. The optimal closed-form solution is given by:

$$\Delta \theta = (H^{\top}H + I)^{-1}H^{\top}V,\tag{7}$$

and the resulting edited model parameters are obtained by directly applying the shift, i.e.,  $\theta' = \theta + \Delta \theta$ , thereby completing the model editing process. ULTRAEDIT's complete pipeline is illustrated in Figure 3, and a detailed pseudocode of the ULTRAEDIT procedure is provided in Algorithm 1.

# 4 Experiments

#### 4.1 ULTRAEDITBENCH-2M Construction

We construct ULTRAEDITBENCH using entity—relation—object triples from the Wikidata5M [65] knowledge base. For each triple, we treat the object as the ground-truth answer and use the GPT-40-mini model in a zero-shot setting to generate corresponding factual questions based on the subject and relation. To promote linguistic diversity, we apply constraints on question length and phrasing during generation. To ensure data quality, we perform random spot checks on a subset of samples to verify factual accuracy, linguistic fluency, and alignment between questions and answers.

To support evaluation across key dimensions, the dataset is divided into three sample types:

- Editing instances require the subject entity to appear in the question. This design aligns with the assumptions of many subject-dependent editing methods, which rely on identifying subject-centric representations to apply updates. While ULTRAEDIT does not require this constraint, we include it to ensure compatibility with prior paradigms and enable consistent evaluation of Efficacy.
- Equivalent instances are paraphrased variants of the editing instances that share the same answers. They evaluate *Generalization*—i.e., whether the edit transfers to semantically equivalent rephrasings. We do not enforce whether the subject entity appears in the question.
- Unrelated instances contain questions unrelated to the editing fact, used to assess *Specificity*—i.e., whether unrelated knowledge remains unaffected after editing. We do not enforce whether the subject entity appears in the question.

For all three types, the answer is explicitly excluded from the question to prevent lexical leakage and ensure that models must rely on internal knowledge rather than surface patterns. ULTRAEDITBENCH comprises over 2 million complete editing pairs, each containing an editing instance, an equivalent instance, and an unrelated instance. This construction enables ULTRAEDITBENCH to serve as a comprehensive and controlled benchmark for evaluating the precision, generalization, and safety of lifelong model editing methods. And for more details, please refer to Appendix B.1. The full dataset is available at https://huggingface.co/datasets/XiaojieGu/UltraEditBench.

# 4.2 Experiment Setup

**Dataset & Model** We evaluate the effectiveness and scalability of ULTRAEDIT across four model editing benchmarks: ZsRE, FEVER, WikiBigEdit and our newly constructed ULTRAEDITBENCH-on a diverse set of open-source models, including GPT-J, Mistral-7B-v0.3, LLaMA-3-8B-Instruct, Qwen2.5-7B-Instruct, Phi-4-14B, and Gemma-3-27B-it. Datasets such as Counterfact [66], KnowEdit [67], LEME [68], and MQuAKE [69] are excluded from our evaluation, due to their limited scale to support meaningful large-scale lifelong model editing experiments. Detailed descriptions of each dataset, along with their corresponding evaluation metrics, are provided in Appendix B.1.

**Baseline** We compare ULTRAEDIT with comprehensive baselines, including Finetune (FT), MEND [17], MEMIT [12], MALMEN [18], PRUNE [70], WISE [33], RECT [71], AlphaEdit [61], and RLEdit [20]. Except for WISE, which is specifically designed for editing one samples per turn, all other methods are evaluated under a consistent setting where each turn consists of 100 samples. We exclude AnyEdit [72] from our comparison, as it is not designed for lifelong editing and thus not applicable to our evaluation. Comprehensive information on the baseline methods is provided in Appendix B.2 and hyperparameter configurations are presented in Appendix B.3.

## 4.3 Overall Results

We report the performance of ULTRAEDIT alongside the strongest representative methods from each editing paradigm across multiple benchmarks and models. As shown in Table 2 and 3, ULTRAEDIT\* is evaluated on 100K edits for ZsRE and FEVER, 500K for WikiBigEdit, and 1M for ULTRAEDITBENCH, whereas all other methods are evaluated on 20K edits for ZsRE, FEVER, and ULTRAEDITBENCH, and 17K for WikiBigEdit. ULTRAEDIT consistently leads across standard metrics—*Efficacy*, *Generalization*, and *Specificity*—as well as two newly introduced ones, *Personas* and *Multi-hop*, outperforming all baselines in nearly every setting. Full results for all baseline methods are provided in Appendix C.1. Due to the fact that most existing methods are **several hundred times slower** than ULTRAEDIT, and some require additional training data, scaling them to larger numbers

Table 3: Results on ULTRAEDITBENCH across four models.

	ULTRAEDITBENCH												
Method	GPT-J			Mi	Mistral-7B-v0.3			LLaMA-3-8B-Instruct			Qwen2.5-7B-Instruct		
Method	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	
FT	22.03	17.61	19.60	0.06	0.36	0.07	13.50	11.92	10.18	13.20	10.53	10.27	
WISE	52.51	47.88	47.50	47.21	44.55	39.13	42.27	41.65	39.79	_	-	_	
AlphaEdit	22.19	12.09	6.88	0.00	0.00	0.00	4.51	3.16	2.78	17.44	8.01	5.42	
RLEdit	81.42	75.35	62.13	76.50	70.68	61.29	85.69	81.88	65.64	47.08	38.76	39.27	
ULTRAEDIT	84.03	76.62	64.03	83.71	77.30	67.26	85.70	81.28	68.73	79.01	71.45	64.10	
ULTRAEDIT*	81.70	76.78	74.96	81.98	77.57	76.02	83.10	79.20	76.39	80.64	76.26	74.92	
$\Delta$	+2.61	+1.43	+12.83	+7.21	+6.89	+14.73	+0.01	-0.60	+10.75	+33.56	+37.50	+35.45	

of edits is computationally impractical. Nevertheless, the clear performance degradation observed in Figure 1 (b) as the number of edits increases already demonstrates that current methods do not scale effectively to ultra-large-scale editing scenarios. In contrast, ULTRAEDIT remains robust and stable, even when scaled to lifelong editing scenarios with updates reaching hundreds of thousands in total. For example, on LLaMA-3-8B with ZsRE, ULTRAEDIT\* achieves performance closely matching its standard configuration across all three metrics, with only a slight drop despite a 5× increase in the number of edits. Overall, the results demonstrate that ULTRAEDIT achieves both high-quality knowledge injection and long-term stability across diverse scenarios, offering a practical and scalable solution for real-world model editing.

# 5 Analysis

#### 5.1 Ablation Study

To assess the contribution of each component in ULTRAEDIT, we conduct an ablation study on 20K editing instances from the ZsRE dataset, with results averaged across three backbone models as shown in Table 4. When the lifelong normalization mechanism is entirely removed, we observe a drastic drop in both efficacy and generalization, underscoring the importance of aligning feature distributions across modules during editing. To further assess its effectiveness, we apply lifelong normalization to a

Table 4: Ablation study of ULTRAEDIT. Blue numbers indicate a decrease, while Red numbers indicate an increase compared to the full method.

Variant	Efficacy	Generalization	Specificity
Original	84.47	80.19	41.31
w/o lifelong normalization	36.15↓ 48.32	35.25↓ 44.94	38.14↓ 3.17
w/ 25% module norm	77.38↓ <del>7.09</del>	72.68 \psi 7.51	<b>42.40</b> ↑ 1.09
w/ 50% module norm	80.81 \( \preceq 3.66 \)	76.07\plus 4.12	42.37 <del>↑</del> 1.06
w/ 75% module norm	83.64 \ 0.83	79.22↓ 0.97	41.64 <del>↑</del> 0.33
w/o normalization update	1.11↓83.36	1.02 \ 79.17	0.07 \ 41.24
w/ $k \cdot  ilde{k}$	74.27 \( \pm 10.20 \)	70.23↓ <del>9.96</del>	42.18 <b>↑ 0.87</b>

randomly selected 25%, 50%, and 75% subset of the editable modules. The results show a clear upward trend in performance with increasing normalization coverage, indicating that its benefit is both cumulative and globally impactful. We also examine the effect of freezing the normalization statistics—by disabling their online updates during editing—which leads to a catastrophic collapse in all metrics. This demonstrates that dynamic calibration of activation statistics is critical for preserving stability and maintaining consistent editing behavior across batches. In addition, we ablate the original norm-based scaling coefficient  $\|\tilde{k}_i\|^2$  by replacing it with a direction-based inner product  $k_i \cdot \tilde{k}_i$ . While both schemes involve inner products, our norm-based formulation more faithfully captures per-sample saliency, whereas the alternative mixes magnitude and alignment, resulting in less stable modulation across edits. Overall, the ablation results confirm that both lifelong normalization and its dynamic updating mechanism are critical for ensuring stable, accurate, and ultra-scalable editing.

# 5.2 Lifelong Scalability of ULTRAEDIT

ULTRAEDIT is designed not only for editing accuracy but also for long-term scalability. As shown in Figure 1(b) and Figure 4, it maintains strong performance across three key metrics—even as the number of edits increases. This robustness is driven by its simple yet effective lifelong normalization strategy, which dynamically calibrates internal feature distributions as the model evolves. Unlike




Figure 4: Variation in average generalization and Figure 5: Efficacy of lifelong editing on Phi-4-specificity as edits accumulate.

14B and Gemma-3-27B.

many existing methods that tend to suffer from performance degradation much earlier, ULTRAEDIT exhibits a progressive stabilization effect: as more edits accumulate, its normalization mechanism continuously regularizes the feature space, leading to improved performance over time—up to a saturation point. By continually adapting to the model's current state without requiring retraining, ULTRAEDIT is particularly well-suited for real-world, lifelong editing scenarios that demand frequent and ongoing updates. Additionally, ULTRAEDIT scales effectively to models with substantially larger parameter sizes. It preserves editing accuracy on both standard language models such as Phi-4-14B and more complex multimodal models like Gemma-3-27B, as shown in Figure 5. And full scalability evaluation is provided in Appendix C.2.

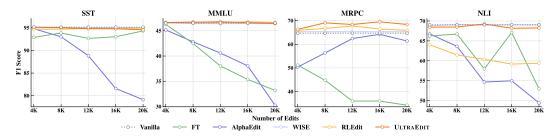


Figure 6: Performance of post-edited LLaMA-3 (20K ZsRE edits) across various benchmarks.

#### 5.3 Impact on the General Ability of Post-Edited Models

We evaluate how lifelong editing affects the general ability of post-edited models on four representative benchmarks: SST [73], MMLU [74], MRPC [75], and NLI [76]. Results for the original unedited model (Vanilla), AlphaEdit, WISE, RLEdit, and ULTRAEDIT are shown in Figure 6. We observe that as the number of edits increases, methods like AlphaEdit and finetuning begin to significantly degrade the general ability of the post-edited models across all benchmarks, indicating that these approaches introduce cumulative interference when scaled to the lifelong setting. WISE shows relatively stable performance, as it stores edits in an external memory component—trading additional memory for reduced interference with the base model. RLEdit causes notable degradation on NLI, but remains more stable on the other benchmarks. In contrast, ULTRAEDIT consistently preserves the general abilities of the model even after up to 20K edits, causing almost no deviation from the Vanilla baseline across all tasks. These findings confirm that ULTRAEDIT introduces the least interference to the model's general capabilities, making it especially well-suited for lifelong model editing. For a detailed comparison with other baseline methods, as well as comprehensive description of four benchmarks, please refer to Appendix C.3.

#### 6 Conclusion

We present ULTRAEDIT, a fast, stable, and scalable approach to lifelong model editing without additional training, subject reliance, or external memory. Through lifelong normalization, it adapts to evolving model states while maintaining high precision across editing turns. Experiments show that ULTRAEDIT achieves over 7× faster editing with less than one-third the VRAM of prior methods, and supports up to 1M edits with stable performance. These efficiency gains make lifelong editing feasible at ultra-large scale and broadly accessible—lowering barriers and enabling wider community participation. To support further research, we release ULTRAEDITBENCH, the largest benchmark to date, with over 2 million factual editing pairs for evaluating ultra-scale, lifelong scenarios.

#### References

- [1] Haizhou Shi, Zihao Xu, Hengyi Wang, Weiyi Qin, Wenyuan Wang, Yibin Wang, Zifeng Wang, Sayna Ebrahimi, and Hao Wang. Continual learning of large language models: A comprehensive survey. arXiv preprint arXiv:2404.16789, 2024.
- [2] Matthias De Lange, Rahaf Aljundi, Marc Masana, Sarah Parisot, Xu Jia, Aleš Leonardis, Gregory Slabaugh, and Tinne Tuytelaars. A continual learning survey: Defying forgetting in classification tasks. *IEEE transactions on pattern analysis and machine intelligence*, 44(7):3366–3385, 2021.
- [3] Tongtong Wu, Linhao Luo, Yuan-Fang Li, Shirui Pan, Thuy-Trang Vu, and Gholamreza Haffari. Continual learning for large language models: A survey. *arXiv preprint arXiv:2402.01364*, 2024.
- [4] Bill Yuchen Lin, Sida I Wang, Xi Lin, Robin Jia, Lin Xiao, Xiang Ren, and Scott Yih. On continual model refinement in out-of-distribution data streams. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3128–3139, 2022.
- [5] Yujia Qin, Jiajie Zhang, Yankai Lin, Zhiyuan Liu, Peng Li, Maosong Sun, and Jie Zhou. Elle: Efficient lifelong pre-training for emerging data. In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 2789–2810, 2022.
- [6] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April* 25-29, 2022. OpenReview.net, 2022.
- [7] Bernal Jiménez Gutiérrez, Yiheng Shu, Yu Gu, Michihiro Yasunaga, and Yu Su. Hipporag: Neurobiologically inspired long-term memory for large language models. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [8] Bernal Jiménez Gutiérrez, Yiheng Shu, Weijian Qi, Sizhe Zhou, and Yu Su. From rag to memory: Non-parametric continual learning for large language models. *arXiv preprint arXiv:2502.14802*, 2025.
- [9] Jian Xie, Kai Zhang, Jiangjie Chen, Renze Lou, and Yu Su. Adaptive chameleon or stubborn sloth: Revealing the behavior of large language models in knowledge conflicts. In *The Twelfth International Conference on Learning Representations*, 2023.
- [10] Rahaf Aljundi, Eugene Belilovsky, Tinne Tuytelaars, Laurent Charlin, Massimo Caccia, Min Lin, and Lucas Page-Caccia. Online continual learning with maximal interfered retrieval. *Advances in neural information processing systems*, 32, 2019.
- [11] Nicola De Cao, Wilker Aziz, and Ivan Titov. Editing factual knowledge in language models. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6491–6506, 2021.
- [12] Kevin Meng, Arnab Sen Sharma, Alex J. Andonian, Yonatan Belinkov, and David Bau. Massediting memory in a transformer. In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023.* OpenReview.net, 2023.
- [13] Yunzhi Yao, Peng Wang, Bozhong Tian, Siyuan Cheng, Zhoubo Li, Shumin Deng, Huajun Chen, and Ningyu Zhang. Editing large language models: Problems, methods, and opportunities. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 10222–10240, 2023.
- [14] Hongkang Li, Yihua Zhang, Shuai Zhang, Pin-Yu Chen, Sijia Liu, and Meng Wang. When is task vector provably effective for model editing? a generalization analysis of nonlinear transformers. In *The Thirteenth International Conference on Learning Representations*, 2025.

- [15] Tom Hartvigsen, Swami Sankaranarayanan, Hamid Palangi, Yoon Kim, and Marzyeh Ghassemi. Aging with grace: Lifelong model editing with discrete key-value adaptors. *Advances in Neural Information Processing Systems*, 36, 2023.
- [16] Chenhui Hu, Pengfei Cao, Yubo Chen, Kang Liu, and Jun Zhao. Wilke: Wise-layer knowledge editor for lifelong knowledge editing. In *Findings of the Association for Computational Linguistics ACL* 2024, pages 3476–3503, 2024.
- [17] Eric Mitchell, Charles Lin, Antoine Bosselut, Chelsea Finn, and Christopher D. Manning. Fast model editing at scale. In *The Tenth International Conference on Learning Representations, ICLR* 2022, *Virtual Event, April* 25-29, 2022. OpenReview.net, 2022.
- [18] Chenmien Tan, Ge Zhang, and Jie Fu. Massive editing for large language models via meta learning. In *The Twelfth International Conference on Learning Representations*, 2024.
- [19] Taolin Zhang, Qizhou Chen, Dongyang Li, Chengyu Wang, Xiaofeng He, Longtao Huang, Jun Huang, et al. Dafnet: Dynamic auxiliary fusion for sequential model editing in large language models. In *Findings of the Association for Computational Linguistics ACL 2024*, pages 1588–1602, 2024.
- [20] Zherui Li, Houcheng Jiang, Hao Chen, Baolong Bi, Zhenhong Zhou, Fei Sun, Junfeng Fang, and Xiang Wang. Reinforced lifelong editing for language models. arXiv preprint arXiv:2502.05759, 2025.
- [21] Akshat Gupta, Sidharth Baskaran, and Gopala Anumanchipalli. Rebuilding rome: Resolving model collapse during sequential model editing. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 21738–21744, 2024.
- [22] Xiaopeng Li, Shasha Li, Shezheng Song, Jing Yang, Jun Ma, and Jie Yu. Pmet: Precise model editing in a transformer. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 18564–18572, 2024.
- [23] Qizhou Chen, Taolin Zhang, Xiaofeng He, Dongyang Li, Chengyu Wang, Longtao Huang, et al. Lifelong knowledge editing for llms with retrieval-augmented continuous prompt learning. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 13565–13580, 2024.
- [24] Ce Zheng, Lei Li, Qingxiu Dong, Yuxuan Fan, Zhiyong Wu, Jingjing Xu, and Baobao Chang. Can we edit factual knowledge by in-context learning? In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 4862–4876, 2023.
- [25] Zexuan Zhong, Zhengxuan Wu, Christopher D Manning, Christopher Potts, and Danqi Chen. Mquake: Assessing knowledge editing in language models via multi-hop questions. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 15686–15702, 2023.
- [26] Paul Youssef, Zhixue Zhao, Jörg Schlötterer, and Christin Seifert. How to make llms forget: On reversing in-context knowledge edits. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 12656–12669, 2025.
- [27] Jingcheng Deng, Zihao Wei, Liang Pang, Hanxing Ding, Huawei Shen, and Xueqi Cheng. Everything is editable: Extend knowledge editing to unstructured data in large language models. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [28] Shaochen Zhong, Yifan Lu, Lize Shao, Bhargav Bhushanam, Xiaocong Du, Yixin Wan, Yucheng Shi, Daochen Zha, Yiwei Wang, Ninghao Liu, Kaixiong Zhou, Shuai Xu, Kai-Wei Chang, Louis Feng, Vipin Chaudhary, and Xia Hu. MQuAKE-remastered: Multi-hop knowledge editing can only be advanced with reliable evaluations. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [29] Zian Su, Ziyang Huang, Kaiyuan Zhang, and Xiangyu Zhang. μke: Matryoshka unstructured knowledge editing of large language models. arXiv preprint arXiv:2504.01196, 2025.

- [30] Lang Yu, Qin Chen, Jie Zhou, and Liang He. Melo: Enhancing model editing with neuronindexed dynamic lora. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 19449–19457, 2024.
- [31] Zeyu Huang, Yikang Shen, Xiaofeng Zhang, Jie Zhou, Wenge Rong, and Zhang Xiong. Transformer-patcher: One mistake worth one neuron. In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net, 2023.
- [32] Eric Mitchell, Charles Lin, Antoine Bosselut, Christopher D Manning, and Chelsea Finn. Memory-based model editing at scale. In *International Conference on Machine Learning*, pages 15817–15831. PMLR, 2022.
- [33] Peng Wang, Zexi Li, Ningyu Zhang, Ziwen Xu, Yunzhi Yao, Yong Jiang, Pengjun Xie, Fei Huang, and Huajun Chen. Wise: Rethinking the knowledge memory for lifelong model editing of large language models. *Advances in Neural Information Processing Systems*, 37:53764–53797, 2024.
- [34] Baolong Bi, Shenghua Liu, Yiwei Wang, Lingrui Mei, Hongcheng Gao, Junfeng Fang, and Xueqi Cheng. Struedit: Structured outputs enable the fast and accurate knowledge editing for large language models. *arXiv* preprint arXiv:2409.10132, 2024.
- [35] Mengqi Zhang, Xiaotian Ye, Qiang Liu, Shu Wu, Pengjie Ren, and Zhumin Chen. Uncovering overfitting in large language model editing. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [36] Tianci Liu, Ruirui Li, Yunzhe Qi, Hui Liu, Xianfeng Tang, Tianqi Zheng, Qingyu Yin, Monica Xiao Cheng, Jun Huan, Haoyu Wang, and Jing Gao. Unlocking efficient, scalable, and continual knowledge editing with basis-level representation fine-tuning. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [37] Hongling Zheng, Li Shen, Anke Tang, Yong Luo, Han Hu, Bo Du, Yonggang Wen, and Dacheng Tao. Learning from models beyond fine-tuning. *Nature Machine Intelligence*, pages 1–12, 2025.
- [38] Keltin Grimes, Marco Christiani, David Shriver, and Marissa Catherine Connor. Concept-ROT: Poisoning concepts in large language models with model editing. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [39] Leonardo Iurada, Marco Ciccone, and Tatiana Tommasi. Efficient model editing with task-localized sparse fine-tuning. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [40] Baixiang Huang, Canyu Chen, Xiongxiao Xu, Ali Payani, and Kai Shu. Can knowledge editing really correct hallucinations? In *The Thirteenth International Conference on Learning Representations*, 2025.
- [41] Wanli Yang, Fei Sun, Xinyu Ma, Xun Liu, Dawei Yin, and Xueqi Cheng. The butterfly effect of model editing: Few edits can trigger large language models collapse. In *Findings of the Association for Computational Linguistics ACL 2024*, pages 5419–5437, 2024.
- [42] Pinzheng Wang, Zecheng Tang, Keyan Zhou, Juntao Li, Qiaoming Zhu, and Min Zhang. Revealing and mitigating over-attention in knowledge editing. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [43] Omer Levy, Minjoon Seo, Eunsol Choi, and Luke Zettlemoyer. Zero-shot relation extraction via reading comprehension. In *Proceedings of the 21st Conference on Computational Natural Language Learning (CoNLL 2017)*, pages 333–342, 2017.
- [44] James Thorne, Andreas Vlachos, Christos Christodoulopoulos, and Arpit Mittal. Fever: a large-scale dataset for fact extraction and verification. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 809–819, 2018.

- [45] Lukas Thede, Karsten Roth, Matthias Bethge, Zeynep Akata, and Tom Hartvigsen. Understanding the limits of lifelong knowledge editing in llms. *arXiv preprint arXiv:2503.05683*, 2025.
- [46] Ben Wang and Aran Komatsuzaki. Gpt-j-6b: A 6 billion parameter autoregressive language model, 2021.
- [47] Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023.
- [48] Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- [49] An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, et al. Qwen2. 5 technical report. *arXiv* preprint *arXiv*:2412.15115, 2024.
- [50] Marah Abdin, Jyoti Aneja, Harkirat Behl, Sébastien Bubeck, Ronen Eldan, Suriya Gunasekar, Michael Harrison, Russell J Hewett, Mojan Javaheripi, Piero Kauffmann, et al. Phi-4 technical report. *arXiv preprint arXiv:2412.08905*, 2024.
- [51] Gemma Team, Aishwarya Kamath, Johan Ferret, Shreya Pathak, Nino Vieillard, Ramona Merhej, Sarah Perrin, Tatiana Matejovicova, Alexandre Ramé, Morgane Rivière, et al. Gemma 3 technical report. *arXiv preprint arXiv:2503.19786*, 2025.
- [52] James Kirkpatrick, Razvan Pascanu, Neil Rabinowitz, Joel Veness, Guillaume Desjardins, Andrei A Rusu, Kieran Milan, John Quan, Tiago Ramalho, Agnieszka Grabska-Barwinska, et al. Overcoming catastrophic forgetting in neural networks. *Proceedings of the national academy of sciences*, 114(13):3521–3526, 2017.
- [53] Friedemann Zenke, Ben Poole, and Surya Ganguli. Continual learning through synaptic intelligence. In *International conference on machine learning*, pages 3987–3995. PMLR, 2017.
- [54] Sylvestre-Alvise Rebuffi, Alexander Kolesnikov, Georg Sperl, and Christoph H Lampert. icarl: Incremental classifier and representation learning. In *Proceedings of the IEEE conference on Computer Vision and Pattern Recognition*, pages 2001–2010, 2017.
- [55] Hanul Shin, Jung Kwon Lee, Jaehong Kim, and Jiwon Kim. Continual learning with deep generative replay. *Advances in neural information processing systems*, 30, 2017.
- [56] Andrei A Rusu, Neil C Rabinowitz, Guillaume Desjardins, Hubert Soyer, James Kirkpatrick, Koray Kavukcuoglu, Razvan Pascanu, and Raia Hadsell. Progressive neural networks. *arXiv* preprint arXiv:1606.04671, 2016.
- [57] Arun Mallya and Svetlana Lazebnik. Packnet: Adding multiple tasks to a single network by iterative pruning. In *Proceedings of the IEEE conference on Computer Vision and Pattern Recognition*, pages 7765–7773, 2018.
- [58] Damai Dai, Li Dong, Yaru Hao, Zhifang Sui, Baobao Chang, and Furu Wei. Knowledge neurons in pretrained transformers. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 8493–8502, 2022.
- [59] Mengru Wang, Ningyu Zhang, Ziwen Xu, Zekun Xi, Shumin Deng, Yunzhi Yao, Qishen Zhang, Linyi Yang, Jindong Wang, and Huajun Chen. Detoxifying large language models via knowledge editing. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3093–3118, 2024.
- [60] Akshat Gupta, Dev Sajnani, and Gopala Anumanchipalli. A unified framework for model editing. In Findings of the Association for Computational Linguistics: EMNLP 2024, pages 15403–15418, 2024.

- [61] Junfeng Fang, Houcheng Jiang, Kun Wang, Yunshan Ma, Jie Shi, Xiang Wang, Xiangnan He, and Tat-Seng Chua. Alphaedit: Null-space constrained model editing for language models. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [62] Haowen Pan, Xiaozhi Wang, Yixin Cao, Zenglin Shi, Xun Yang, Juanzi Li, and Meng Wang. Precise localization of memories: A fine-grained neuron-level knowledge editing technique for LLMs. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [63] Qingxiu Dong, Damai Dai, Yifan Song, Jingjing Xu, Zhifang Sui, and Lei Li. Calibrating factual knowledge in pretrained language models. In *Findings of the Association for Computational Linguistics: EMNLP* 2022, pages 5937–5947, 2022.
- [64] Yuxin Jiang, Yufei Wang, Chuhan Wu, Wanjun Zhong, Xingshan Zeng, Jiahui Gao, Liangyou Li, Xin Jiang, Lifeng Shang, Ruiming Tang, et al. Learning to edit: Aligning llms with knowledge editing. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 4689–4705, 2024.
- [65] Xiaozhi Wang, Tianyu Gao, Zhaocheng Zhu, Zhengyan Zhang, Zhiyuan Liu, Juanzi Li, and Jian Tang. Kepler: A unified model for knowledge embedding and pre-trained language representation. *Transactions of the Association for Computational Linguistics*, 9:176–194, 2021.
- [66] Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in gpt. Advances in Neural Information Processing Systems, 35:17359–17372, 2022.
- [67] Ningyu Zhang, Bozhong Tian, Siyuan Cheng, Xiaozhuan Liang, Yi Hu, Kouying Xue, Yanjie Gou, Xi Chen, and Huajun Chen. Instructedit: instruction-based knowledge editing for large language models. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence*, pages 6633–6641, 2024.
- [68] Domenic Rosati, Robie Gonzales, Jinkun Chen, Xuemin Yu, Yahya Kayani, Frank Rudzicz, and Hassan Sajjad. Long-form evaluation of model editing. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 3749–3780, 2024.
- [69] Zexuan Zhong, Zhengxuan Wu, Christopher D Manning, Christopher Potts, and Danqi Chen. Mquake: Assessing knowledge editing in language models via multi-hop questions. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 15686–15702, 2023.
- [70] Jun-Yu Ma, Hong Wang, Hao-Xiang Xu, Zhen-Hua Ling, and Jia-Chen Gu. Perturbation-restrained sequential model editing. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [71] Jia-Chen Gu, Hao-Xiang Xu, Jun-Yu Ma, Pan Lu, Zhen-Hua Ling, Kai-Wei Chang, and Nanyun Peng. Model editing harms general abilities of large language models: Regularization to the rescue. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 16801–16819, 2024.
- [72] Houcheng Jiang, Junfeng Fang, Ningyu Zhang, Guojun Ma, Mingyang Wan, Xiang Wang, Xiangnan He, and Tat-seng Chua. Anyedit: Edit any knowledge encoded in language models. arXiv preprint arXiv:2502.05628, 2025.
- [73] Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D Manning, Andrew Y Ng, and Christopher Potts. Recursive deep models for semantic compositionality over a sentiment treebank. In *Proceedings of the 2013 conference on empirical methods in natural language processing*, pages 1631–1642, 2013.
- [74] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. In *International Conference on Learning Representations*, 2021.

- [75] Bill Dolan and Chris Brockett. Automatically constructing a corpus of sentential paraphrases. In *Third international workshop on paraphrasing (IWP2005)*, 2005.
- [76] Adina Williams, Nikita Nangia, and Samuel Bowman. A broad-coverage challenge corpus for sentence understanding through inference. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 1112–1122, 2018.

# **Appendix**

The appendix includes the following sections:

• Section A: Limitation.

• Section B: Implementation Details of Experiment.

• Section C: Full Experiment Results.

· Section D: Case Study.

#### A Limitation

Due to limited computational resources and the scale of certain datasets, we were unable to scale all baselines to ultra-large-scale lifelong editing settings or to models with significantly larger parameter counts. This reflects a broader limitation of current model editing research when applied to realistic deployment scenarios.

# **B** Implementation Details

#### **B.1** Dataset and Evaluation Metrics

**ZsRE** (Zero-shot Relation Extraction) dataset [43] is a widely adopted benchmark for evaluating factual consistency and knowledge editing in language models. Each example in the dataset comprises a question—answer pair that encapsulates a factual relation. To facilitate comprehensive assessment of model editing capabilities, the dataset is augmented with two types of auxiliary samples: (1) paraphrased variants of the original question, which test the model's ability to generalize the update, and (2) unrelated but structurally similar questions, which assess the specificity of the edit by ensuring unrelated knowledge remains unaffected. This design enables precise evaluation of editing accuracy, generalization to rephrased inputs, and the preservation of unrelated facts, making ZsRE particularly well-suited for controlled knowledge update tasks. The dataset contains a total of 178,196 examples.

Following prior work [12, 61, 20], we evaluate various model editing approaches on ZsRE using standard metrics. Given a large language model  $f_{\theta}$ , a target editing pair  $(x^e, y^e)$ , its paraphrased equivalent  $x^{e'}$ , and a set of unrelated knowledge pairs  $(x^u, y^u)$ , we assess the following three metrics:

Efficacy (Eff.) measures whether the model correctly incorporates the edit by verifying if the top-1 prediction for the edited input  $x^e$  matches the target label  $y^e$ :

$$\mathbb{E}\left\{y^e = \arg\max_{y'} \mathbb{P}_{f_{\theta}}(y' \mid x^e)\right\}. \tag{8}$$

Generalization (Gen.) evaluates whether the model successfully generalizes the edit to paraphrased forms of the input, by checking if the top-1 prediction for  $x^{e'}$  remains consistent with  $y^e$ :

$$\mathbb{E}\left\{y^e = \arg\max_{y'} \mathbb{P}_{f_{\theta}}(y' \mid x^{e'})\right\}. \tag{9}$$

Specificity (Spe.) assesses the model's ability to retain unrelated knowledge by ensuring the top-1 prediction for each unrelated input  $x^u$  continues to match its original label  $y^u$ :

$$\mathbb{E}\left\{y^{u} = \underset{y'}{\arg\max} \mathbb{P}_{f_{\theta}}(y' \mid x^{u})\right\}. \tag{10}$$

**FEVER** (Fact Extraction and VERification) dataset [44] is a large-scale benchmark designed for evaluating factual consistency and claim verification in natural language. Each example comprises a natural language claim accompanied by a label—Supported, Refuted, or Not Enough Information—determined based on evidence retrieved from Wikipedia. The claims are either directly extracted from Wikipedia or are semantically modified versions of actual content, while the supporting evidence may span multiple sentences or even multiple documents. This setup enables fine-grained assessment

of a model's ability to confirm, reject, or abstain from factual assertions. The dataset contains a total of 114,422 examples. For consistency in evaluation, we adopt same metric definitions used in ZsRE.

WikiBigEdit [45] is a large-scale benchmark designed for lifelong knowledge editing. The dataset contains a total of 506,035 editing pairs, all derived from real-world Wikidata revisions collected across eight time steps over a six-month period. To support comprehensive evaluation, WikiBigEdit defines five core metrics: *Update*, *Rephrase*, *Locality*, *Personas*, and *Multi-hop Reasoning*. Among them, *Update*, *Rephrase*, and *Locality* correspond closely to the standard editing criteria of *Efficacy*, Generalization, and Specificity, and are evaluated using the same methodology as in ZsRE. Personas and Multi-hop Reasoning extend the evaluation scope to identity conditioning and complex reasoning, respectively. A total of 490,519 examples support the first four metrics, while 17,541 are specifically annotated for multi-hop reasoning, enabling focused evaluation of a model's ability to handle compositional queries and long-range dependencies. Reflecting realistic and evolving knowledge dynamics, WikiBigEdit supports iterative assessment of a model's capacity to incorporate factual updates over time. Constructed via an automated data pipeline, the benchmark is continuously expandable as new Wikidata edits become available. Specifically, Personas evaluates whether the model correctly answers identity-conditioned prompts  $x^p$ , while Multi-hop Reasoning measures the model's ability to resolve compositional or chained queries  $x^m$ . Their accuracy is computed as:

Personas: 
$$\mathbb{E}\left\{y^p = \underset{y'}{\operatorname{arg\,max}} \mathbb{P}_{f_{\theta}}(y' \mid x^p)\right\},$$
 (11)

Personas: 
$$\mathbb{E}\left\{y^{p} = \underset{y'}{\operatorname{arg\,max}} \mathbb{P}_{f_{\theta}}(y' \mid x^{p})\right\},$$
 (11)  
Multi-hop:  $\mathbb{E}\left\{y^{m} = \underset{y'}{\operatorname{arg\,max}} \mathbb{P}_{f_{\theta}}(y' \mid x^{m})\right\}.$  (12)

ULTRAEDITBENCH comprises 2,008,326 editing pairs and adheres to the model editing evaluation framework established in ZsRE. Inference results on different models across all datasets, including ULTRAEDITBENCH are shown in Table 5. The results indicate that the knowledge in ULTRAEDITBENCH aligns well with the requirements of model editing tasks.

Table 5: Inference results on pre-edited models. ZsRE, FEVER, and ULTRAEDITBENCH use 20K edits, while WikiBigEdit uses 17K.

Model	ZsRE				FEVER		WikiBigEdit					ULTRAEDITBENCH		
Model	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Personas	Multi-hop	Eff.	Gen.	Spe.
GPT-J	27.22	26.42	27.33	9.61	9.68	15.90	29.97	29.08	32.58	26.46	21.81	22.01	21.47	22.20
Mistral-7B-v0.3	44.46	43.55	48.08	0.41	0.50	1.98	39.14	38.21	41.62	35.54	29.93	30.83	29.94	31.11
LLaMA-3-8B-Instruct	36.76	35.83	38.93	0.02	0.02	0.26	24.92	35.46	38.87	32.70	26.42	27.29	26.40	27.24
Qwen2.5-7B-Instruct	34.32	33.39	38.06	0.57	0.60	2.17	30.97	30.40	34.50	28.43	22.09	26.03	25.22	26.35

# **B.2** Description of Baselines

FT (Fine-Tuning) in model editing refers to the process of updating a pre-trained language model's parameters by optimizing them on a small set of new data containing the desired knowledge. This approach aims to adjust the model's behavior to reflect updated or corrected information without retraining the model from scratch. In the context of model editing, fine-tuning typically involves minimizing a loss function—such as cross-entropy—on carefully selected inputs and targets related to the editing fact, while optionally applying regularization to avoid catastrophic forgetting. Despite its simplicity and effectiveness, FT can lead to unintended changes in the model's general abilities or interfere with unrelated knowledge, especially when used repeatedly or with large learning rates.

MEND enables efficient post-hoc editing of large pre-trained models using only a single input-output pair by training lightweight auxiliary networks that transform standard fine-tuning gradients into localized, low-rank parameter updates. MEND leverages the inherent rank-1 structure of gradients in neural networks to map input activations and output deltas through a small MLP, producing edits that are reliable, local, generalizable, and scalable to models with over 10 billion parameters, all without retraining or modifying the original model's predictions on unrelated inputs.

MEMIT modifies factual associations in language models by identifying and updating critical MLP layers responsible for knowledge recall, computing target hidden states for new facts, and applying analytically derived weight updates that distribute edits across multiple layers. The method treats MLPs as linear associative memories and performs batch updates to insert new associations while

preserving previously stored information, enabling efficient memory editing within the model's internal structure.

**MALMEN** is a scalable hypernetwork-based method for editing large language models, which addresses the limitations of MEND by formulating parameter shift aggregation as a least squares problem solved via the normal equation to prevent cancellation effects, and decoupling the training of the hyper-network and language model to support arbitrary batch sizes, enabling efficient and memory-economic editing of thousands of facts while maintaining strong locality and generalization.

**RECT** introduces a regularization-based approach to model editing that constrains the complexity of edit updates by preserving only the top-k% of weight changes based on their relative change magnitude, thereby mitigating overfitting and protecting the model's general abilities. By identifying and retaining the most impactful parameter updates while zeroing out less significant ones, RECT reduces interference with original model knowledge and avoids degradation across downstream tasks. This method ensures that the edited model maintains a balance between incorporating new factual information and preserving its overall performance.

WISE proposes a dual-parametric memory approach for lifelong model editing, where pretrained knowledge is kept in a main memory and all edits are stored in a separate side memory, which is a copy of a Transformer layer's value matrix. To determine which memory to use at inference, WISE employs a routing mechanism based on activation differences, directing queries to side memory if they relate to edited knowledge. To handle continuous edits without conflict, WISE introduces a knowledge sharding technique that stores different edits in randomly masked subspaces of the side memory, and then merges these using Ties-Merge to maintain consistency. This design allows WISE to achieve high reliability, generalization, and locality simultaneously—overcoming the limitations of traditional long-term or working memory editing methods.

**PRUNE** introduces a plug-and-play framework for sequential model editing by restraining the condition number of the edited matrix, which is identified as the main factor causing degradation in general abilities during repeated edits. It operates by analyzing the singular value decomposition of accumulated edit updates and selectively reducing excessively large singular values through a restraint function, thereby minimizing perturbations to the model's original knowledge associations while preserving the newly injected information. This method reduces overfitting from edit accumulation and maintains model stability without interfering with editing efficacy, making it compatible with various existing editing approaches.

**AlphaEdit** introduces a null-space constrained knowledge editing approach by projecting parameter perturbations onto the null space of preserved knowledge, ensuring updates do not interfere with existing information. This projection allows the editing process to focus solely on updating target knowledge without trade-offs, eliminating the need for additional constraints in the optimization objective. The method achieves substantial improvements in editing performance and generalization with minimal implementation overhead, maintaining the integrity of preserved knowledge and the model's overall capabilities during sequential edits.

**RLEdit** formulates lifelong model editing as a reinforcement learning problem by treating the hypernetwork as an agent that generates parameter updates based on the current state of the language model and input knowledge, where the update is considered an action and the editing performance defines the reward. It trains the hypernetwork offline using accumulated rewards across a sequence of edits, incorporating a reward function that balances knowledge injection, preservation of unrelated information, memory backtracking for prior edits, and regularization to constrain update magnitude. This design enables the hypernetwork to adaptively produce edits that are compatible with dynamically evolving model parameters over long editing trajectories.

# **B.3** Hyperparameter Setting

All experiments are conducted on a single NVIDIA A800 GPU, and ULTRAEDIT introduces only two hyperparameters: the learning rate  $\eta$  and the editable module. In all settings,  $\eta$  is set to 1e-6, and editable module details shown in Table 6, where the numbers indicate corresponding layer indices.

Table 6: Editable Module settings of ULTRAEDIT across different models and datasets

Dataset	Model	Editable Module
ZsRE	GPT-J Mistral-7B-v0.3 LLaMA-3-8B-Instruct Qwen2.5-7B-Instruct	[18-26].mlp.fc_out [29, 30].mlp.down_proj [11-15].mlp.gate_proj, [18-24].mlp.up_proj [18-26].mlp.gate_proj,[18-26].mlp.up_proj
FEVER	GPT-J Mistral-7B-v0.3 LLaMA-3-8B-Instruct Qwen2.5-7B-Instruct	[25,26].mlp.fc_out [29, 30].mlp.down_proj [22-30].mlp.gate_proj, [22-30].mlp.up_proj [18-26].mlp.gate_proj,[18-26].mlp.up_proj
WikiBigEdit	GPT-J Mistral-7B-v0.3 LLaMA-3-8B-Instruct Qwen2.5-7B-Instruct Phi-4-14B Gemma-3-27B-it	[19-26].mlp.fc_out [29, 30].mlp.down_proj [11-15].mlp.gate_proj, [18-24].mlp.up_proj [19-26].mlp.gate_proj,[19-26].mlp.up_proj [30-38].mlp.down_proj [52-60].mlp.gate_proj,[52-60].mlp.up_proj
ULTRAEDITBENCH	GPT-J Mistral-7B-v0.3 LLaMA-3-8B-Instruct Qwen2.5-7B-Instruct Phi-4-14B Gemma-3-27B-it	[18-26].mlp.fc_out [29, 30].mlp.down_proj [11-15].mlp.gate_proj, [18-24].mlp.up_proj [18-26].mlp.gate_proj,[18-26].mlp.up_proj [30-38].mlp.down_proj [52-60].mlp.gate_proj,[52-60].mlp.up_proj

For methods that require additional training data, such as MEND, MALMEN, and RLEdit, we follow the experimental setup described in RLEdit. Specifically, for the ZsRE and FEVER datasets, the training set for MEND and MALMEN contains the total number of samples excluding the editing examples. For large-scale datasets like WikiBigEdit and ULTRAEDITBENCH, the size of the training set is equal to the number of editing examples. In all RLEdit experiments, the training and editing set sizes are always matched. Regarding the selection of editable modules for these methods, we strictly follow the setup in RLEdit. For WikiBigEdit and ULTRAEDITBENCH, the editable modules are aligned with those used for ZsRE. Specifically, for the GPT-J model, we edit layers [18–26].mlp.fc\_out, and for Qwen-2.5, we edit [18–26].mlp.gate\_proj and [18–26].mlp.up\_proj.

# C Full Experimental Results

# C.1 Extended Baseline Comparison

This section presents a comprehensive comparison of ULTRAEDIT against baseline methods across four datasets and four model architectures. Detailed results in Tables 7, 8, and 9 highlight the strong performance of ULTRAEDIT across diverse editing scenarios.

Table 7: Extended results across four models on ULTRAEDITBENCH.

	UltraEditBench												
Method		GPT-J			Mistral-7B-v0.3			LLaMA-3-8B-Instruct			Qwen2.5-7B-Instruct		
Method	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	
MEND	1.71	1.71	1.83	0.00	0.00	0.00	0.00	0.00	0.00	3.48	3.45	3.43	
MEMIT	0.25	0.18	0.20	0.00	0.00	0.00	0.74	0.45	0.21	0.82	0.32	0.69	
MALMEN	0.76	0.48	0.78	2.42	2.48	3.47	40.64	34.18	37.29	4.36	3.48	4.38	
RECT	0.09	0.06	0.08	0.00	0.00	0.00	0.55	0.09	0.00	1.86	1.55	1.84	
PRUNE	0.32	0.27	0.28	0.00	0.00	0.00	1.21	0.85	0.32	0.27	0.06	0.14	
ULTRAEDIT	84.03	76.62	64.03	83.71	77.30	67.26	85.70	81.28	68.73	79.01	71.45	64.10	
ULTRAEDIT*	81.70	76.78	74.96	81.98	77.57	76.02	83.10	79.20	76.39	80.64	76.26	74.92	
Δ	+82.32	+75.07	+73.13	+81.29	+75.09	+72.55	+45.06	+47.10	+39.10	+76.28	+72.78	+70.54	

Table 8: Extended results on three datasets across three models.

Method		ZsRE			FEVER				WikiBig	Edit	
Metnod	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Personas	Multi-hop
					GP'	Г-J					
MEND	2.52	2.55	0.19	52.80	51.44	45.42	0.02	0.01	0.02	0.02	0.02
MEMIT	0.00	0.00	0.00	5.54	5.03	5.46	1.59	1.59	0.50	0.80	0.00
MALMEN	0.02	0.01	0.02	1.33	1.25	2.92	0.00	0.01	0.01	0.00	0.00
RECT	0.03	0.03	0.12	18.12	18.08	12.27	2.13	1.99	0.59	2.06	0.00
PRUNE	0.00	0.00	0.01	5.25	4.72	5.20	2.36	2.32	1.01	1.86	0.00
ULTRAEDIT	78.03	72.42	27.05	97.45	96.37	79.72	73.84	66.57	37.17	56.90	29.27
UltraEdit*	72.95	68.68	25.91	97.89	96.73	79.85	66.46	60.54	47.90	51.73	_
Δ	+75.51	+69.87	+26.86	+45.09	+45.29	+34.43	+71.48	+64.25	+46.89	+54.84	+29.25
					Mistral-	7B-v0.3					
MEND	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.01	0.00
MEMIT	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
MALMEN	0.00	0.00	0.00	18.42	17.43	12.09	0.00	0.00	0.01	0.00	0.00
RECT	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PRUNE	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ULTRAEDIT	85.30	80.80	47.38	97.87	96.09	84.29	76.00	70.15	46.09	62.27	35.80
UltraEdit*	81.13	76.78	48.06	98.23	96.97	83.43	71.78	65.63	55.40	56.11	-
Δ	+85.30	+80.80	+48.06	+79.81	+79.54	+72.20	+75.99	+70.15	+55.39	+62.26	+35.80
				Ll	LaMA-3-8	B-Instruc	:t				
MEND	0.00	0.00	0.00	36.19	36.19	24.31	0.01	0.01	0.10	0.01	0.00
MEMIT	0.14	0.14	1.40	0.02	0.02	0.02	0.02	0.02	0.09	0.02	0.00
MALMEN	0.20	0.12	0.09	94.50	91.26	67.76	0.00	0.00	0.00	0.00	0.00
RECT	0.00	0.00	0.00	0.01	0.00	0.00	0.21	0.24	0.06	0.29	0.00
PRUNE	0.00	0.00	0.24	0.02	0.02	0.00	0.02	0.02	0.09	0.02	0.00
ULTRAEDIT	90.07	87.36	49.51	95.39	91.93	67.14	79.60	73.49	48.51	66.55	35.64
UltraEdit*	87.80	85.48	46.74	97.18	94.64	68.62	68.99	63.59	52.28	55.04	_
$\Delta$	+89.87	+87.22	+48.11	+2.68	+3.38	+0.86	+79.39	+73.25	+52.18	+66.26	+35.64

Table 9: Results on three datasets across Qwen2.5.

					Qwen2.5-	7B-Instru	ct					
Method		ZsRE			FEVER			WikiBigEdit				
Method	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Eff.	Gen.	Spe.	Personas	Multi-hop	
FT	14.02	10.91	3.39	26.09	24.62	21.36	10.35	7.59	3.68	5.55	5.84	
MEND	15.00	14.41	0.47	76.43	77.66	40.39	0.00	0.00	0.00	0.00	0.00	
MEMIT	0.02	0.02	0.17	0.08	0.12	0.15	0.54	0.33	0.38	0.32	0.00	
MALMEN	0.00	0.00	0.00	0.06	0.06	0.07	0.06	0.02	0.02	0.00	0.00	
RECT	0.00	0.00	0.00	3.36	3.10	3.20	2.34	2.29	0.83	0.78	0.00	
PRUNE	0.01	0.02	0.07	0.08	0.15	0.11	2.34	2.34	0.97	1.37	0.00	
AlphaEdit	16.32	13.96	1.66	32.78	31.19	22.12	20.31	15.49	2.17	9.01	0.23	
RLEdit	84.70	82.79	38.26	0.00	0.00	0.00	2.83	1.81	0.43	1.45	0.39	
ULTRAEDIT	82.03	77.08	45.51	97.97	93.91	68.86	73.37	65.86	45.12	54.65	32.74	
ULTRAEDIT*	78.39	74.72	49.27	97.49	94.83	68.99	66.34	60.42	51.74	50.53	_	
Δ	-2.67	-5.71	+11.01	+21.54	+17.17	+28.60	+53.06	+50.37	+48.06	+45.64	+26.90	

## C.2 Supplementary Lifelong Scalability Evaluation

Figure 7 shows a comparison of ULTRAEDIT and baseline methods as the number of edits gradually increases. The results demonstrate that ULTRAEDIT maintains stable performance, highlighting its lifelong scalability with respect to the number of edits.

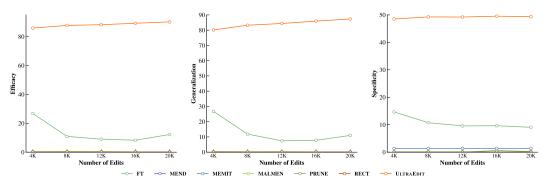


Figure 7: Performance comparison of different baselines as ZsRE edits accumulate in LLaMA-3.

The Generalization and Specificity performance of ULTRAEDIT on larger-parameter models is shown in Figure 8, demonstrating the method's scalability with respect to model size.

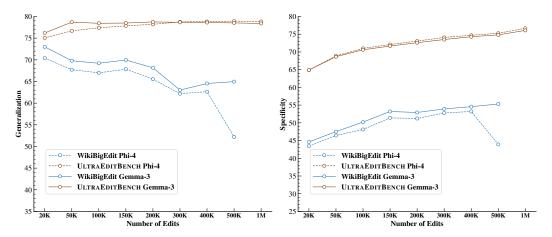


Figure 8: Generalization and Specificity of lifelong editing on Phi-4-14B and Gemma-3-27B.

# C.3 Additional Results on Post-Edited Model Evaluation

We begin by introducing the four evaluation benchmarks used in our study:

**SST** (Stanford Sentiment Treebank) is a sentiment analysis benchmark composed of movie reviews annotated with fine-grained sentiment labels. It evaluates a model's ability to capture subtle emotional cues in natural language.

**MMLU** (Massive Multitask Language Understanding) is a comprehensive benchmark spanning a wide range of academic and professional subjects. It assesses a model's general knowledge and reasoning ability across diverse domains.

**MRPC** (Microsoft Research Paraphrase Corpus) contains sentence pairs annotated for semantic equivalence. This benchmark tests whether a model can accurately identify paraphrases, reflecting its understanding of meaning preservation.

**NLI** (Natural Language Inference) tasks involve determining the logical relationship—entailment, contradiction, or neutrality—between a premise and a hypothesis. It evaluates a model's capacity for logical reasoning and inference.

Figure 9 provides a full comparison between ULTRAEDIT and baselines, further confirming its minimal effect on the model's inherent abilities.

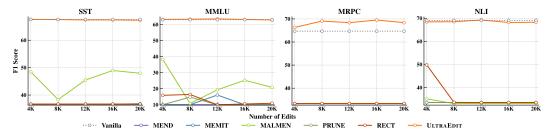


Figure 9: Performance of post-edited LLaMA-3 (20K ZsRE edits) across various benchmark.

# D Case study

Table 10: Case study of applying ULTRAEDIT to LLaMA3-8B on ULTRAEDITBENCH. ✓ indicates the post-edited output exactly matches the ground-truth answer, while ✗ denotes mismatch.

Prompt	<b>Pre-edited Output</b>	<b>Ground truth</b>	<b>Post-edited Output</b>
What is the country of citizenship for Olivier Renard?	Oliviergium	belgie	belgie √
What type of place is mechanics-ville, delaware?	Mechanics	community	community 🗸
What type of ecological system does goobang creek belong to?	Goine	riverine	riverine 🗸
What is the profession of shamsulanuar nasarah?	Shician	Politician	Politician 🗸
What type of sport was featured during the 2003 Canadian Open?	The volleyball	indoor tennis	indoor tennis 🗸
What is the place of birth of jyotsna radhakrishnan?	Jwaitali	kuwet	malwet <b>X</b>
Which location shares a border with guipronvel?	Guzguer	plouguin	Saintouguin X