
WikiDBGraph: Large-Scale Database Graph of Wikidata for Collaborative Learning

Zhaomin Wu*, Ziyang Wang*, Bingsheng He

National University of Singapore, Singapore

zhaomin@nus.edu.sg, wangziyang@u.nus.edu, hebs@comp.nus.edu.sg

Abstract

Tabular data, ubiquitous and rich in informational value, is an increasing focus for deep representation learning, yet progress is hindered by studies centered on single tables or isolated databases, which limits model capabilities due to data scale. While collaborative learning approaches such as federated learning, transfer learning, split learning, and tabular foundation models aim to learn from multiple correlated databases, they are challenged by a scarcity of real-world interconnected tabular resources. Current data lakes and corpora largely consist of isolated databases lacking defined inter-database correlations. To overcome this, we introduce WikiDBGraph, a large-scale graph of 100,000 real-world tabular databases from WikiData, interconnected by 17 million edges and characterized by 13 node and 12 edge properties derived from its database schema and data distribution. WikiDBGraph’s weighted edges identify both instance- and feature-overlapped databases. Experiments on these newly identified databases confirm that collaborative learning yields superior performance, thereby offering considerable promise for structured foundation model training while also exposing key challenges and future directions for learning from interconnected tabular data.

1 Introduction

Tabular data is a prevalent modality in numerous real-world applications [39], including critical areas such as disease diagnosis [6], credit scoring [13], census data analysis [35], and cybersecurity [7]. Consequently, developing effective tabular foundation models [48, 21, 22] has become a pressing need to enable robust representation learning for diverse real-world tabular datasets.

However, existing approaches predominantly focus on single tables or isolated databases [37], which is often insufficient for training high-performing models. To address this limitation and enable learning from numerous heterogeneous tabular datasets, multiple collaborative learning approaches have emerged. These include federated learning [28], transfer learning [50], split learning [40], and the development of tabular foundation models [21].

Despite the promise of these collaborative methodologies, their practical application and development are significantly hampered by limitations in available real-world data, an issue highlighted in recent surveys [29, 39]. For instance, the reliance on synthetic datasets, as seen in models like TabPFN [21], risks introducing distribution bias when applied to real-world scenarios. While initial data collection efforts yielded large corpora of individual tables, such as GitTables [24] and WikiTables [4], and subsequent resources like WikiDBs [41] expanded this scope to include corpora of databases offering richer structural context, a fundamental challenge persists. These existing datasets, even extensive ones like WikiDBs, predominantly feature isolated entities with scarce or undefined explicit relationships between individual databases. This lack of defined inter-

*Equal contribution

Table 1: Comparison of existing real-world table or database corpora with WikiDBGraph. Note: ‘Schema-Data’ refers to corpora with both Schema & Content; ‘DB’ refers to database.

Dataset	Category	DB Relationship	#DBs	#Tables
SQLShare [25]	Data-Only	✗	-	3.9k
GitTables [24]		✗	-	1M
SchemaDB [12]	Schema-Only	✗	2.5k	-
GitSchemas [14]		✗	50k	300k
BIRD [27]	Schema-Data	✗	95	694
CTU Prague [31]		✗	83	813
Spider [47]		✗	200	1020
WikiDBs [41]		✗	100k	1.6M
SchemaPile [15]		✗	221k	1.7M
WikiDBGraph (ours)	Schema-Data	✓	100k	1.6M

connections means that models trained on such collections primarily capture intra-database dependencies, thereby critically overlooking inter-database relationships essential for developing more comprehensive and high-performing tabular foundation models [30].

To address this challenge, we introduce WikiDBGraph, a large-scale, open-sourced graph of relational databases constructed from Wikidata [42]. Our method first leverages the known relations within WikiDBs, a corpus of tabular databases also based on Wikidata. Subsequently, we employ contrastive learning to train a model that predicts the similarity between databases. Utilizing these predicted similarities, we construct a graph where each node represents a database, and edges signify their correlation. Furthermore, we define and calculate a range of properties for both nodes and edges, derived from database structure, schemas, and data distributions. This approach is intended to facilitate a more profound exploration of inter-database relationships and can be utilized in various collaborative learning paradigms. We categorize data scenarios into two main types: feature-overlap and instance-overlap, conducting experiments on each case to observe the improvement in collaborative learning. Finally, we summarize the future challenges of large-scale tabular collaborative learning. Our code and data are available at GitHub [45] and Huggingface, respectively.

The primary contributions of this work are: (1) We present WikiDBGraph, a large-scale graph of interconnected relational databases. (2) We enrich this dataset by defining and computing comprehensive node and edge properties, thereby providing a nuanced representation of the database ecosystem. (3) We derive feature- and instance-overlapped databases from the edges of WikiDBGraph and conduct experiments to validate the improvement of collaborative learning, with a summary of the challenges and future directions for collaborative learning.

2 Related Work

This section reviews existing literature pertinent to WikiDBGraph, encompassing traditional knowledge graphs, large-scale table corpora, and database corpora. We aim to contextualize our contribution by comparing its characteristics with existing datasets, as summarized in Table 1.

Knowledge Graphs. Knowledge Graphs (KGs) model individual entities and their explicit relationships. For example, Wikidata [42] serves as a collaboratively built central knowledge hub, DBpedia [3] structures Wikipedia content, and YAGO [38] integrates Wikipedia with other lexical resources. These KGs, including newer domain-specific versions, employ fine-grained, entity-level nodes, making them ideal for tasks such as understanding specific facts, logical reasoning, and semantic search, often leveraging graph learning techniques like Graph Neural Networks (GNNs) [43]. However, the entity-centric nature of KGs is not directly suited for tabular deep learning paradigms that require structured data. In contrast, our proposed WikiDBGraph is constructed with relational databases as nodes and inter-database relationships as edges. This higher-level, structured view of interconnected tabular data repositories is specifically designed to support tabular deep learning across multiple databases.

Table Corpora. Existing large-scale table corpora have predominantly concentrated on amassing collections of individual, self-contained tables. Prominent examples include Wikipedia-sourced

datasets like WikiTables [4]. Other significant collections encompass web-derived corpora such as WDC WebTables [26] and the Dresden Web Table Corpus [17], tables from code repositories such as GitTables [24], and collections from open data portals, for instance, Open Data Portal Watch [34] and the Table Union Search Benchmark [33]. Furthermore, specialized compilations like VizNet [23] and challenge-specific datasets such as WikidataTables2023R1 [1] contribute to this landscape. These resources have been instrumental in advancing research on single-table deep tabular learning. Nevertheless, their inherent focus on isolated tables presents a significant limitation, as it diverges from practical scenarios where tabular data often exists within relational databases.

Database Corpora. Unlike single-table versions, database corpora feature multiple interrelated tables to support complex relational tasks and multi-table representation learning. These resources include: schema-only corpora (e.g., SchemaDB [12], GitSchemas [14] from GitHub SQL) offering detailed schemas but minimal/no data; data-only corpora (e.g., SQLShare [25]) providing table content, often without explicit schemas; and schema-data corpora with both. Among schema-data corpora, some are small-scale (e.g., CTU Prague Relational Learning Repository [31]) or task-specific (e.g., Text-to-SQL datasets Spider [47], BIRD [27]), making them less suitable for general representation learning. Large-scale schema-data corpora like WikiDBs [41] (from Wikidata) and SchemaPile [15] (from GitHub SQL) provide substantial data. However, a significant limitation, even in these extensive collections, is the scarcity of explicitly identified inter-database relationships, which hinders studying collaborative learning across databases. WikiDBGraph addresses this critical gap by systematically constructing and defining these inter-database connections, thereby enabling such collaborative learning.

3 Dataset Construction

This section details the methods to construct WikiDBGraph. We begin by formally defining the problem of database relationship identification (Section 3.1). Subsequently, our proposed solution is presented in Section 3.2. The efficacy of this approach in identifying meaningful correlations is then evaluated in Section 3.3. Finally, Section 3.4 describes the utilization of the validated model to construct the database graph. The pipeline of WikiDBGraph construction is shown in Figure 1.

3.1 Problem Definition

This work leverages WikiDBs [41], a large-scale collection of relational databases extracted from Wikidata. We aim to construct WikiDBGraph by identifying and establishing correlations between these databases. We initially define two databases as *correlated* if they share the same value for an existing Wikidata attribute, `wikidata_topic_item_id`, referred to as TID. However, this explicit linkage based on TID identifies only 8,816 correlated pairs among 9,895 distinct databases. This results in a very sparse set of connections, leaving over 90% of the databases isolated. Such sparsity is probably because many topics, though intrinsically related, have distinct TIDs within Wikidata.

The primary objective of this work is to train a model capable of uncovering these implicit correlations. Let $\mathcal{D} = \{D_1, D_2, \dots, D_N\}$ and $\mathcal{S} = \{s_1, s_2, \dots, s_N\}$ represent the set of all N databases and N schemas within WikiDBs, respectively, and let $\mathcal{P}_{\text{explicit}} = \{(D_i, D_j) | \text{TID of } D_i = \text{TID of } D_j, i \neq j\}$ denote the limited set of explicitly correlated database pairs identified through shared TIDs. We aim to train a function $f : \mathcal{D} \times \mathcal{D} \rightarrow [0, 1]$, where $f(D_i, D_j)$ outputs the predicted probability of a correlation existing between databases D_i and D_j . We model this as a semi-supervised learning problem due to the limited positive labels in $\mathcal{P}_{\text{explicit}}$.

3.2 Approach

Database Serialization. To mitigate the verbosity of the original JSON files and reduce input size for subsequent processing, we serialize each s_i and samples in D_i into a concise textual format, denoted as *abstract* $t_i \in \mathcal{T}$. This serialization retains both structural information and an abstract of the data content. Specifically, for each database, we preserve its name, the names of its tables, and for each table, the names of its columns along with a few representative sample values from each column. An illustrative example of our serialization format is presented below:

```
Database: <database_name>
Table: <table_name_1>
```

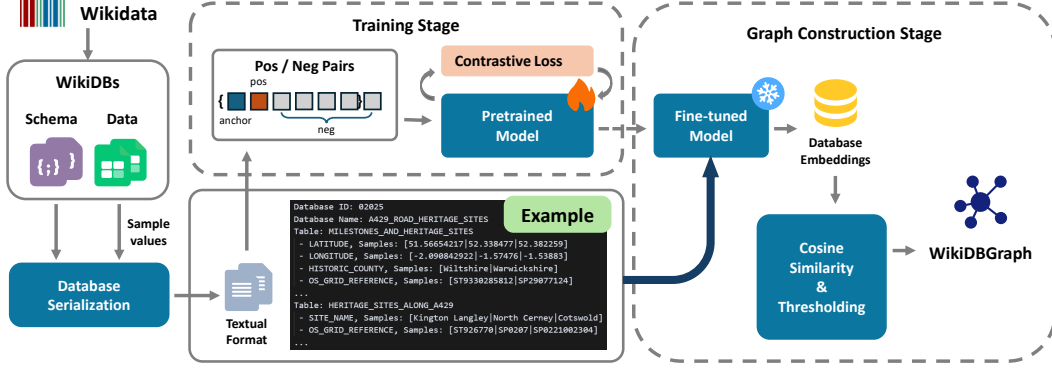


Figure 1: The overview of WikiGraph construction process

```

- Column: <column_name_1> ; Samples: <value_1> | <value_2> | <value_3>
- Column: <column_name_2> ; Samples: <value_1> | <value_2> | <value_3>
...
Table: <table_name_2>
- Column: <column_name_1> ; Samples: <value_1> | <value_2> | <value_3>
- Column: <column_name_2> ; Samples: <value_1> | <value_2> | <value_3>
...

```

While sample values are included to offer a qualitative indication of the data, we do not incorporate full data distributions or the entirety of the raw data. This approach is adopted for two primary reasons: 1) schema-level information (database, table, and column names) combined with data samples is often more directly indicative of the database’s topic than comprehensive statistical distributions of all values. 2) Processing and representing the complete data for all databases would be computationally expensive and lead to excessively large serialized representations.

Training. We employ a contrastive learning [11] framework to train an embedding model, $f_\theta(\cdot) : \mathcal{T} \rightarrow \mathbb{R}^d$. This model maps serialized database schema representations from the input space \mathcal{T} into a d -dimensional vector space. The distinction between positive and negative pairs, crucial for the contrastive loss, is determined by TIDs: a pair of database abstracts (t_i, t_j) is regarded as a positive pair if t_i and t_j share an identical TID. Conversely, pairs of abstracts that do not share a common TID are treated as negative pairs. The sets of positive and negative pairs are partitioned into training, validation, and test subsets in a 7:1:2 ratio, ensuring no database overlap between partitions.

Specifically, the embedding model $f_\theta(\cdot)$ is initialized using parameters from the pretrained encoder-only language model BGE-M3 [9] and is subsequently fine-tuned during our training process. To construct training instances, each positive pair (t_a, t_b) from the training set is utilized, where t_a serves as the *anchor* and t_b as the *positive abstract*. For each anchor t_a , we sample k *negative abstracts* that has distinct TID with t_a , denoted as $\{t_{n_j}\}_{j=1}^k$, from the training set. The triplet $(t_a, t_b, \{t_{n_j}\}_{j=1}^k)$ is fed into the training; k is set to 6 in our experiments.

The model parameters θ are optimized by minimizing the InfoNCE loss. Initially, the anchor, positive, and negative abstracts are transformed into their respective embeddings:

$$e_a = f_\theta(t_a), \quad e_b = f_\theta(t_b), \quad e_{n_j} = f_\theta(t_{n_j}) \text{ for } j = 1, \dots, k. \quad (1)$$

These embeddings, $e_a, e_b, e_{n_j} \in \mathbb{R}^d$, are then employed to compute the InfoNCE loss function [11] as follows:

$$\mathcal{L}_{\text{InfoNCE}} = -\log \frac{\exp(\text{sim}(e_a, e_b)/\tau)}{\exp(\text{sim}(e_a, e_b)/\tau) + \sum_{j=1}^k \exp(\text{sim}(e_a, e_{n_j})/\tau)}, \quad (2)$$

where $\text{sim}(\cdot, \cdot)$ represents cosine similarity between two embedding vectors, and τ is a temperature hyperparameter controlling the sharpness of the distribution. The optimal embedding model θ^* is obtained by optimizing the InfoNCE loss function.

$$\theta^* = \arg \min_{\theta} \mathcal{L}_{\text{InfoNCE}}(\theta; \{(t_a, t_b, \{t_{n_j}\}_{j=1}^k)\}_{a,b,j=1}^N). \quad (3)$$

3.3 Evaluation of Embedding Model

This section presents an evaluation of the embedding model $f_\theta(\cdot)$ on the test set. The test set is structured with a positive-to-negative pair ratio of $1 : k$, where $k = 6$ as consistent to the training. We sample five test sets using different random seeds and report their mean and standard deviation of the performance. Performance metrics are detailed in Table 2, and the ROC curve is depicted in Figure 2a. The results demonstrate that the fine-tuned BGE-M3 model significantly outperforms the original BGE-M3 baseline. Furthermore, the fine-tuned model achieves near-optimal performance, effectively distinguishing between positive and negative database pairs.

Table 2: Performance of the embedding model on the test set with threshold 0.5.

Model	Performance			
	AUC-ROC	F1-Score	Precision	Recall
Original BGE-M3	0.9651 ± 0.0005	0.5533 ± 0.0028	0.3856 ± 0.0027	0.9790 ± 0.0000
Fine-tuned BGE-M3	0.9987 ± 0.0001	0.9270 ± 0.0023	0.8687 ± 0.0041	0.9938 ± 0.0000

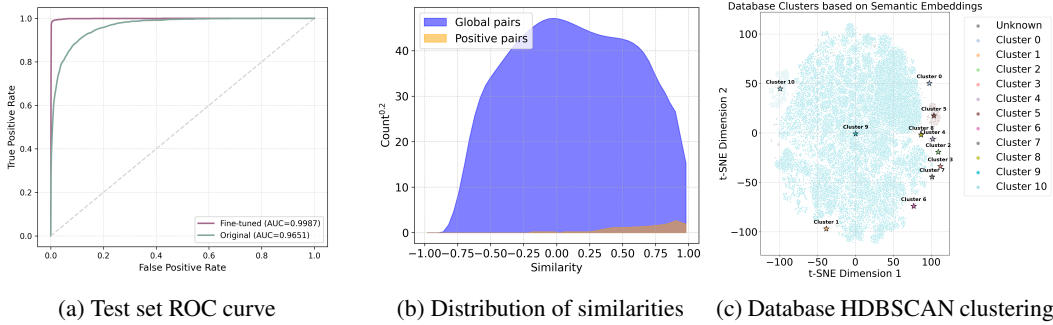


Figure 2: Performance evaluation of the embedding model

3.4 Graph Construction

Upon obtaining the pretrained embedding model, denoted as f_{θ^*} , the embedding vector for each database in the corpus can be derived. To construct the database graph, we then compute the cosine similarity between the embedding vectors of all possible database pairs. This computation is performed in parallel for efficiency.

Subsequently, a similarity threshold, τ , is applied to these computed scores to determine the presence of an edge (i.e., a connection) between pairs of databases in the graph. The selection of an appropriate value for τ necessitates a trade-off. A lower value of τ may increase the recall of genuinely related pairs but can also decrease precision by introducing spurious connections and potentially escalate computational costs for subsequent graph analyses. Conversely, a higher value of τ tends to enhance precision and the confidence in the identified relationships, but it may result in a sparser graph. To strike a balance between graph density and the reliability of the relationships, we establish a default threshold of $\tau \geq 0.94$ while also providing generated graphs using various values of τ to accommodate different analytical needs.

Embedding Analysis. A clustering of the database embeddings, projected to two dimensions using t-SNE and subsequently processed with HDBSCAN, is illustrated in Figure 2c. This visualization reveals that the embeddings are grouped into 11 distinct clusters (excluding unknown) of varying sizes, corresponding to different topical categories. Manual inspection indicates, for instance, that cluster 10 predominantly represents sports-related datab, while cluster 9 corresponds to biomedical data. These observations suggest that **the learned embeddings effectively capture meaningful semantic relationships between databases**. Further analysis, focusing on the distribution of similarity scores, is presented in Figure 2b. The figure demonstrates two key points: first, the overall distribution of cosine similarities across all database pairs approximates a normal distribution, which is consistent with expectations for large-scale pairwise comparisons. Second, when

compared to explicit positive pairs (those sharing a TID), this analysis reveals **a substantial number of previously unidentified related databases exhibiting high similarity scores**. This finding underscores the efficacy of our approach in significantly expanding the network of thematically related databases within the WikiDBs corpus, beyond the initial set identified by shared TIDs. While this finding underscores the efficacy of our approach in significantly expanding the graph of correlated databases beyond WikiDBs, it is important to note that the number of such newly identified positive pairs remains relatively small compared to the global data size. Consequently, this does not substantially affect the negative pair sampling method in training.

4 Dataset Details

This section introduces the structural details of the WikiDBGraph dataset (Section 4.1) and subsequently describes the properties defined for the nodes and edges within this graph (Section 4.2).

4.1 Graph Structure

The structural characteristics of the generated database graphs, as detailed in Table 3 and further elucidated by the distributions presented in Figures 3a, 3b, and 3c, provide two key insights relevant to the exploration of inter-database relationships.

Firstly, **WikiDBGraph exhibits notable density**. As illustrated in Figure 3a, a considerable number of database nodes display degrees exceeding 100, signifying a high level of local connectivity for many entities. This observation, corroborated by the data in Table 3 which indicates high maximum node degrees (e.g., up to 4,803 for a similarity threshold $\tau = 0.94$), suggests that real-world databases in similar topics are often tightly correlated. This correlation is particularly beneficial to collaborative learning algorithms that can effectively leverage these rich interconnections.

Secondly, **WikiDBGraph comprises numerous small connected components and communities**. The distributions of connected component sizes (Figure 3b) and community sizes (Figure 3c) both demonstrate a sharp increase in frequency as the size of components or communities decreases. This structural characteristic aligns with the clustering observations in Figure 2c, which also indicated the presence of many distinct, smaller topical groupings within the dataset.

Table 3: Summary of Graph Statistical Properties (CC: Connected Component, IN: Isolated Node)

τ	#Nodes	#Edges	#CCs	#INs	Degree				Connected Component			
					Min	Max	Mean	Med	Min	Max	Mean	Med
0.93	100,000	26,879,058	64,417	58,010	0	5,872	268.79	0	1	12,054	1.55	1
0.94	100,000	17,964,868	71,235	65,126	0	4,803	179.65	0	1	10,703	1.40	1
0.96	100,000	6,197,746	78,359	73,300	0	4,527	123.95	0	1	7,960	1.28	1

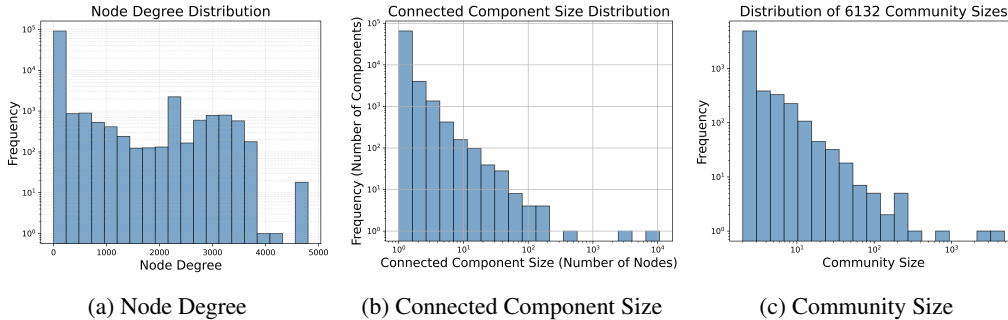


Figure 3: Distribution of Graph Properties in WikiDBGraph ($\tau = 0.94$)

4.2 Node and Edge Properties

While the graph construction primarily leverages the similarity of database schema embeddings, we incorporate a broader range of properties for both nodes (databases) and edges (inter-database

Table 4: Summary of Node (Database) Properties in WikiDBGraph

Category	Property	Min	Max	Mean	Median	Description
Structural	#Tables	2	100	16.11	3.0	Number of tables in the database
	#Columns	7	7,955	849.32	78.0	sum of #columns across all tables
	PropCat	0.4	1.0	0.92	0.92	Proportion of categorical columns
	FKDensity	0.0	0.36	0.05	0.04	#foreign keys / #columns
	AvgConn	1.0	13.5	2.71	1.50	Average #foreign keys per table
Semantic	DBEmbed	Database embedding vector (768-dim)				
	Cluster	Topic ID from clustering (12 clusters)				
	Community	Community from graph structure (6133 communities)				
Statistical	DataVol	23.8KB	216.3MB	1.7MB	112.0KB	Total size of database files
	AllJoinSize	10	9.5×10^{21}	9.5×10^{16}	73	Row count when joining all tables
	AvgCard	0.00	6.1×10^5	26.65	13.00	Average distinct values per column
	AvgSparsity	0.00	1.00	0.25	0.20	Average proportion of NULL values
	AvgEntropy	0.00	19.19	3.66	3.57	Average entropy of columns

Table 5: Summary of Edge (Database Relationship) Properties in WikiDBGraph ($\tau = 0.94$)

Category	Property	Min	Max	Mean	Median	Description
Structural	JaccTable	0.00	1.00	0.12	0.02	Jaccard index of table name sets
	JaccCol	0.00	1.00	0.36	0.37	Jaccard index of column name sets
	JaccType	0.33	1.00	0.93	1.00	Jaccard index of data type sets
	HellingerDist	0.00	0.57	0.07	0.02	Hellinger distance of data type distributions
	GED	0	1230	111.89	4	Graph edit distance between schema graph ¹
	CommonTables	0	60	1.85	1	#common tables between schemas
	CommonCols	0	1092	74.00	13	#common columns between schemas
Semantic	CommonTypes	2	6	3.24	2	#common data types between schemas
	EmbedSim	0.9436	0.9998	0.9732	0.9771	Cosine similarity of database embeddings
	SimConf	0.9982	1.0000	0.9991	0.9991	Confidence score ² of similarity prediction
Statistical	DistDiv	0.00	34.01	17.05	17.60	KL divergence of shared column distributions
	OverlapRatio	0.00	1.00	0.22	0.20	Ratio of overlapping values in shared columns

¹The schema graph is a directed graph that connects tables (edge) with foreign keys (edge).²The ratio of edges which has lower similarities.

relationships) to enrich the graph and support diverse analytical models, such as graph neural networks [43]. These properties are categorized into three main types, with detailed summaries available in Table 4 for nodes and Table 5 for edges. **Structural Properties** capture architectural characteristics: for nodes, this includes table and column counts and foreign key relationships; for edges, it involves quantifying structural similarity between connected databases using metrics like the Jaccard index on their respective sets of table names, column names, and data types. **Semantic Properties** encapsulate conceptual aspects: for nodes, these include pre-computed embedding vectors, topic categories (e.g., from clustering), and community categories (e.g., derived via Louvain community detection); for edges, they measure semantic relatedness through the cosine similarity of database embeddings and any confidence scores from the similarity prediction that formed the edge. Lastly, **Statistical Properties** offer quantitative insights: for nodes, this covers sparsity, sparsity, and cardinality; for edges, these properties describe relationships based on shared data characteristics, such as the Kullback-Leibler (KL) divergence of shared column distributions and the ratio of overlapping values within these columns.

5 Experiments and Case Study

In this section, we categorize database correlations identified by WikiDBGraph into two primary types based on their similarities: feature overlap and instance overlap. We present two examples of a newly discovered correlated database pair - databases with distinct TIDs that were not explicitly linked in Wikidata or WikiDBs. Furthermore, we conduct collaborative learning experiments on these pairs showing performance benefits compared to training on individual databases.

Model and Metric. We utilize XGBoost [10] with 100 trees, a learning rate of 0.1, and a maximum depth of 6, for XGBoost’s strong performance on tabular data. In the evaluation, the data is split by a ratio of 8:2 for training and testing. Weighted averages for Precision, Recall, and F1-Score were used as evaluation metrics to account for potential class imbalances. For multiclass classification, Precision, Recall, and F1 Score are weighted averages. The variance is not reported as XGBoost is a deterministic algorithm in our setting.

5.1 Top Similarity: Feature Overlap

An example of feature overlap is between database 02799 (Trypanosoma_Cruzi_Orthologs_Db_30, TID: Q62194121) and database 79665 (TrypanosomaCruziOrthologs225, TID: Q62256692), reveals a high degree of similarity, with an embedding similarity score (EmbedSim) of 1.0. Both databases exhibit nearly identical schemas, each possessing two tables with the same 24 columns (thus presenting overlapped features) and corresponding foreign key relationships. The primary distinction lies in their number of rows (data instances) and distributions: dataset 02799 contains 282 rows in both its tables, whereas dataset 79665 has 514 and 304 rows in its respective tables.

To empirically validate the benefits of leveraging combined instances in this feature-overlap scenario, a multi-class classification task was designed to predict the `details_encoded_protein` label, which comprises six distinct classes. We first left-join each database into a single table. Then, models are trained under three conditions: (1) solely on dataset 02799, (2) solely on dataset 79665, and (3) on a combined dataset (Combined) comprising instances from both. The performance of these models was subsequently evaluated on test sets derived from both the individual datasets. The results, summarized in Table 6, clearly demonstrate the **advantages of utilizing Combined**. **These findings underscore the practical benefits of instance expansion in feature-overlap scenarios**, leading to more robust and generalizable models.

Table 6: XGBoost performance in feature-overlapped scenario

Data Configuration (Instance included)	Accuracy	Precision	Recall	F1 Score
Model trained on DB 02799, tested on DB 02799	0.9417	0.9462	0.9417	0.9367
Model trained on Combined, tested on DB 02799	0.9515	0.9546	0.9515	0.9481
Model trained on DB 79665, tested on DB 79665	0.9745	0.9746	0.9745	0.9740
Model trained on Combined, tested on DB 79665	0.9847	0.9850	0.9847	0.9836

Feature-overlapped collaborative learning, where datasets share a common feature space but differ in their specific instances, presents significant opportunities for various machine learning paradigms. It is a foundational scenario for **horizontal federated learning** [46], enabling collaborative model training across distributed datasets without direct data exchange. Such feature overlap readily supports **incremental learning**, allowing models trained on one dataset to be efficiently updated or expanded using data from the other. Furthermore, it also enables effective **transfer learning** within the same problem domain, where a model pre-trained on one dataset can be leveraged for tasks on the other, particularly if their underlying data distributions are related.

5.2 High Similarity: Instance Overlap

An instance-overlap collaborative learning scenario is demonstrated by comparing two gene-centric databases: database 00381 (TrypanosomaCruziOrthologs1, TID: Q62194121) and database 48804 (Ortholog_Lpg11_Genomic_Data, TID: Q62256692). These databases exhibit a notable embedding similarity (EmbedSim) of 0.95. Our analysis revealed that two specific tables - GeneOrthologsAnnotations from database 00381 (referred to as the gene table) and Ortholog_Lpg11_Protein_Annotations from database 48804 (the protein table) - share a significant number of overlapped instances based on the GeneId column. The protein table, containing properties of various proteins, is considered the primary table for this analysis. The gene table, providing detailed profiles for each specific gene, serves as the secondary, enriching table. For our classification task, we selected the `lpg_Uni_Prot_Protein_Id` column from the protein table as the target label, which represents 49 distinct categories of proteins. The underlying hypothesis is that integrating detailed gene information from the secondary (gene) table can intuitively improve the precision of predicting these protein categories.

To empirically validate the benefits of leveraging combined features in this instance-overlap scenario, models were trained under two conditions: (1) solely on data from database 48804 (protein table features), and (2) on a left-joined dataset (Combined) comprising features from both the protein table (DB 48804) and the gene table (DB 00381), linked by their common GeneId. Both datasets were split into training and testing sets using the same indices to ensure comparable evaluation.

Table 7: XGBoost performance in instance-overlapped scenario

Data Configuration (Features Used)	Accuracy	Precision	Recall	F1 Score
DB 48804 (Protein Table Features Only)	0.8571	0.8327	0.8571	0.8418
Combined (DB 48804 + DB 00381 Features)	0.8571	0.8724	0.8571	0.8518

The results, summarized in Table 7, **clearly demonstrate the advantages of utilizing the combined feature set**. While accuracy and recall remained the same, the combined model achieved improved precision and a higher F1-score. These findings underscore the practical benefits of feature enrichment through instance overlap, leading to more robust and generalizable models by incorporating complementary information from related datasets.

Instance-overlapped collaborative learning, where different datasets contain distinct features for the same set of entities (instances), also opens up powerful avenues for advanced machine learning. This scenario aligns well with **vertical federated learning** [46], where models are trained by jointly leveraging complementary feature sets from multiple clients without raw data exchange. Furthermore, this configuration corresponds to a specific case of **split learning** [40], in which distinct feature sets are processed by different segments of a neural network architecture. Such instance-overlapped data also provides a suitable foundation for **ensemble learning** [16], which investigates how models, potentially trained on these varied feature subsets, can be effectively combined to improve overall predictive performance or robustness.

6 Limitation

Despite WikiDBGraph’s identification of inter-database relationships facilitating collaborative learning, directly applying existing algorithms poses significant challenges, highlighting research needs in dataset curation and robust algorithm development.

Feature Alignment. Precisely aligning columns across databases in feature-overlap scenarios is non-trivial. Identifying semantically equivalent columns in our case studies required manual inspection or LLM assistance, a task further complicated by differing column orders. Developing an automated, high-precision pipeline for column correspondence identification is a crucial future step.

Missing Instances and Partial Overlap. In instance-overlap scenarios, few data instances are reliably linkable across databases using common identifiers, leaving substantial unaligned (yet potentially valuable) data in client datasets. Leveraging these unaligned instances effectively demands advanced collaborative learning algorithms. While related areas like semi-supervised learning show some progress [49], dedicated efforts are required for this specific challenge.

These limitations hinder the direct evaluation of some existing collaborative learning algorithms on the entirety of WikiDBGraph. However, this also underscores the necessity for algorithms robust to common real-world data imperfections. WikiDBGraph therefore serves not only as a resource but also as a benchmark to foster the development of such practical algorithms.

7 Conclusion

This paper presented WikiDBGraph, a novel, large-scale graph of 100,000 interconnected relational databases derived from Wikidata, designed to address the scarcity of explicit inter-database relationships in existing corpora. We demonstrated through experiments on feature-overlap and instance-overlap scenarios that WikiDBGraph identifies correlated databases that present superior performance in collaborative learning compared to using isolated databases, highlighting its utility for advancing federated learning, split learning, tabular foundation models, and the development of more collaborative learning methods.

References

- [1] Nora Abdelmageed, Jiaoyan Chen, Vincenzo Cutrona, Vasilis Efthymiou, Oktie Hassanzadeh, Madelon Hulsebos, Ernesto Jimenez-Ruiz, Juan Sequeda, and Kavitha Srinivas. Semantic web challenge on tabular data to knowledge graph matching. In *International Semantic Web Conference*, 2022.
- [2] Gabriel Amaral, Odinaldo Rodrigues, and Elena Simperl. WDV: A broad data verbalisation dataset built from wikidata. *arXiv preprint arXiv:2205.02627*, 2022.
- [3] Sören Auer, Christian Bizer, Georgi Kobilarov, Jens Lehmann, Richard Cyganiak, and Zachary G Ives. Dbpedia: A nucleus for a web of open data. In *The semantic web*, pages 722–735. Springer, 2007.
- [4] Chandra Sekhar Bhagavatula, Thanapon Noraset, and Doug Downey. TabEL: Entity linking in web tables. In *The Semantic Web - ISWC 2015*, volume 9366 of *Lecture Notes in Computer Science*, pages 425–441. Springer, 2015.
- [5] Kurt Bollacker, Colin Evans, Praveen Paritosh, Tim Sturge, and Jamie Taylor. Freebase: a collaboratively created graph database for structuring human knowledge. In *Proceedings of the 2008 ACM SIGMOD international conference on Management of data*, pages 1247–1250, 2008.
- [6] Vadim Borisov, Tobias Leemann, Koen Seßler, Johannes Haug, Martin Pawelczyk, and Gjergji Kasneci. Deep neural networks and tabular data: A survey. *IEEE Transactions on Neural Networks and Learning Systems*, 2022.
- [7] Anna L. Buczak and Erhan Guven. A survey of data mining and machine learning methods for cyber security intrusion detection. *IEEE Communications Surveys & Tutorials*, 18(2):1153–1176, 2016.
- [8] Alberto Cetoli, Mohammad Akbari, Stefano Bragaglia, Andrew D. O’Harney, and Marc Sloan. Named entity disambiguation using deep learning on graphs. *arXiv preprint arXiv:1810.09164*, 2018.
- [9] Jianlv Chen, Shitao Xiao, Peitian Zhang, Kun Luo, Defu Lian, and Zheng Liu. Bge m3-embedding: Multi-lingual, multi-functionality, multi-granularity text embeddings through self-knowledge distillation. *arXiv preprint arXiv:2402.03216*, 2024.
- [10] Tianqi Chen and Carlos Guestrin. XGBoost: A Scalable Tree Boosting System. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining - KDD '16*, pages 785–794, San Francisco, California, USA, 2016. ACM Press.
- [11] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pages 1597–1607. PmlR, 2020.
- [12] Cody James Christopher, Kristen Moore, and David Liebowitz. Schemadb: Structures in relational datasets. *arXiv preprint arXiv:2111.12835*, 2021.
- [13] X. Dastile, T. Celik, and M. Potsane. Statistical and machine learning models in credit scoring: A systematic literature survey. *Applied Soft Computing*, 91:106263, June 2020.
- [14] Till Döhmen, Radu Geacu, Madelon Hulsebos, and Sebastian Schelter. GitSchemas: A dataset for automating relational data preparation tasks. *Proc. ACM Manag. Data*, 2(3):1–172, 2024.
- [15] Till Döhmen, Radu Geacu, Madelon Hulsebos, and Sebastian Schelter. Schemapile: a large collection of relational database schemas. *Proceedings of the ACM on Management of Data*, 2(3):1–25, 2024.
- [16] Xibin Dong, Zhiwen Yu, Wenming Cao, Yifan Shi, and Qianli Ma. A survey on ensemble learning. *Frontiers of Computer Science*, 14:241–258, 2020.

- [17] Julian Eberius, Maik Thiele, Katrin Braunschweig, and Wolfgang Lehner. Top-k entity augmentation using consistent set covering. In *Proceedings of the 27th International Conference on Scientific and Statistical Database Management*, pages 1–12, 2015.
- [18] M. Fatima and M. Pasha. Survey of machine learning algorithms for disease diagnostic. *Journal of Intelligent Learning Systems and Applications*, 09(01):1–1, 2017.
- [19] Johanna Geiß, Andreas Spitz, and Michael Gertz. NECKAr: A named entity classifier for wikidata. In *Proceedings of the Int. Conference of the German Society for Computational Linguistics*, volume 10713 of *Lecture Notes in Computer Science*, pages 115–129, Berlin, Germany, 2017. Springer.
- [20] Google. Introducing the knowledge graph: things, not strings. <https://blog.google/products/search/introducing-knowledge-graph-things-not/>, 2012. Accessed: [Insert Date of Access].
- [21] Noah Hollmann, Samuel Müller, Katharina Eggersperger, and Frank Hutter. TabPFN: A transformer that solves small tabular classification problems in a second. *arXiv preprint arXiv:2207.01848*, 2022.
- [22] Noah Hollmann, Samuel Müller, Lennart Purucker, Arjun Krishnakumar, Max Körfer, Shi Bin Hoo, Robin Tibor Schirrmeyer, and Frank Hutter. Accurate predictions on small data with a tabular foundation model. *Nature*, 637(8045):319–326, 2025.
- [23] Kevin Hu, Snehal Kumar Neil’s Gaikwad, Madelon Hulsebos, Michiel A Bakker, Emanuel Zraggen, César Hidalgo, Tim Kraska, Guoliang Li, Arvind Satyanarayan, and Çağatay Demiralp. Viznet: Towards a large-scale visualization learning and benchmarking repository. In *Proceedings of the 2019 CHI conference on human factors in computing systems*, pages 1–12, 2019.
- [24] Madelon Hulsebos, Çağatay Demiralp, and Paul Groth. Gittables: A large-scale corpus of relational tables. *Proc. ACM Manag. Data*, 1(1):1–17, 2023.
- [25] Shrainik Jain, Dominik Moritz, Daniel Halperin, Bill Howe, and Ed Lazowska. SQLShare: Results from a multi-year SQL-as-a-service experiment. In *Proceedings of the 2016 International Conference on Management of Data*, pages 281–293, 2016.
- [26] Oliver Lehmberg, Dominique Ritze, Robert Meusel, and Christian Bizer. A large public corpus of web tables containing time and context metadata. In *Proceedings of the 25th international conference companion on world wide web*, pages 75–76, 2016.
- [27] Jinyang Li, Binyuan Li, Yujia Liu, Sesh Sivaraman, Yixin Zhang, Rui Zhang, Tao Yu, Charles Wang, Linyong Shang, and Xiang Li. Can llm already serve as a database interface? a big bench for large-scale database grounded text-to-sqls. In A. Oh, T. Neumann, A. Globerson, K. Saenko, M. Welling, and S. Koyejo, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 12876–12893. Curran Associates, Inc., 2023.
- [28] Qinbin Li, Zeyi Wen, Zhaomin Wu, Sixu Hu, Naibo Wang, Yuan Li, Xu Liu, and Bingsheng He. A survey on federated learning systems: Vision, hype and reality for data privacy and protection. *IEEE Transactions on Knowledge and Data Engineering*, 35(4):3347–3366, 2021.
- [29] Yang Liu, Yan Kang, Tianyuan Zou, Yanhong Pu, Yuanqin He, Xiaozhou Ye, Ye Ouyang, Yaqin Zhang, and Qiang Yang. Vertical federated learning: Concepts, advances, and challenges. *IEEE Transactions on Knowledge and Data Engineering*, 36(7):3615–3634, 2024.
- [30] Divyam Madaan, Taro Makino, Sumit Chopra, and Kyunghyun Cho. Jointly modeling inter- & intra-modality dependencies for multi-modal learning. *Advances in Neural Information Processing Systems*, 37:116084–116105, 2024.
- [31] Jan Motl and Oliver Schulte. The CTU prague relational learning repository. *arXiv preprint arXiv:1511.03086*, 2015.

- [32] Raghunath Othayoth Nambiar and Meikel Poess. The making of TPC-DS. In *Proceedings of the 32nd international conference on Very large data bases*, pages 1049–1058, Seoul, 2006. VLDB Endowment.
- [33] Fatemeh Nargesian, Erkang Zhu, Ken Q Pu, and Renée J Miller. Table union search on open data. *Proceedings of the VLDB Endowment*, 11(7):813–825, 2018.
- [34] Sebastian Neumaier, Jürgen Umbrich, and Axel Polleres. Automated quality assessment of metadata across open data portals. *Journal of Data and Information Quality (JDIQ)*, 8(1):1–29, 2016.
- [35] Office for National Statistics. 2021 census, 2021.
- [36] Ravid Shwartz-Ziv and Amnon Armon. Tabular data: Deep learning is not all you need. *Information Fusion*, 81:84–90, May 2022.
- [37] Shriyank Somvanshi, Subasish Das, Syed Aaqib Javed, Gian Antariksa, and Ahmed Hossain. A survey on deep tabular learning. *arXiv preprint arXiv:2410.12034*, 2024.
- [38] Fabian M Suchanek, Gjergji Kasneci, and Gerhard Weikum. Yago: a core of semantic knowledge. In *Proceedings of the 16th international conference on World Wide Web*, pages 697–706, 2007.
- [39] Boris Van Breugel and Mihaela Van Der Schaar. Why tabular foundation models should be a research priority. *ICML*, 2024.
- [40] Praneeth Vepakomma, Otkrist Gupta, Tristan Swedish, and Ramesh Raskar. Split learning for health: Distributed deep learning without sharing raw patient data. *arXiv preprint arXiv:1812.00564*, 2018.
- [41] Liane Vogel, Jan-Micha Bodensohn, and Carsten Binnig. WikiDBs: A large-scale corpus of relational databases from wikidata. In *NeurIPS 2024 Datasets and Benchmarks Track*, 2024.
- [42] Denny Vrandečić and Markus Krötzsch. Wikidata: a free collaborative knowledgebase. *Communications of the ACM*, 57(10):78–85, 2014.
- [43] Zonghan Wu, Shirui Pan, Fengwen Chen, Guodong Long, Chengqi Zhang, and Philip S Yu. A comprehensive survey on graph neural networks. *IEEE transactions on neural networks and learning systems*, 32(1):4–24, 2020.
- [44] Wu, Zhaomin and Wang, Ziyang and He, Bingsheng. WikiDBGraph: Dataset on hugging face. <https://huggingface.co/datasets/JerryLife/WikiDBGraph>, 2025.
- [45] Wu, Zhaomin and Wang, Ziyang and He, Bingsheng. WikiDBGraph: Source code repository. <https://github.com/JerryLife/WikiDBGraph.git>, 2025.
- [46] Qiang Yang, Yang Liu, Tianjian Chen, and Yongxin Tong. Federated machine learning: Concept and applications. *ACM Transactions on Intelligent Systems and Technology (TIST)*, 10(2):1–19, 2019.
- [47] Tao Yu, Rui Zhang, Kai Yang, Michihiro Yasunaga, Dongxu Wang, Zifan Li, James Ma, Irene Li, Qingning Yao, Shanelle Roman, Zilin Zhang, and Dragomir Radev. Spider: A large-scale human-labeled dataset for complex and cross-domain semantic parsing and text-to-sql task. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 3911–3921, 2018.
- [48] Han Zhang, Xumeng Wen, Shun Zheng, Wei Xu, and Jiang Bian. Towards foundation models for learning on tabular data. *arXiv*, 2023.
- [49] Zhi-Hua Zhou and Zhi-Hua Zhou. Semi-supervised learning. *Machine Learning*, pages 315–341, 2021.
- [50] Fuzhen Zhuang, Zhiyuan Qi, Keyu Duan, Dongbo Xi, Yongchun Zhu, Hengshu Zhu, Hui Xiong, and Qing He. A comprehensive survey on transfer learning. *Proceedings of the IEEE*, 109(1):43–76, 2020.

A Licenses

The WikiDBGraph dataset introduced in this paper, including its constructed graph structure and computed properties, will be released under the Creative Commons Attribution 4.0 International (CC BY 4.0) license. The code developed for the construction of WikiDBGraph and for conducting the experiments described herein will be made available under the Apache License 2.0. This work also utilizes several existing assets:

- **WikiDBs** [41]: The source corpus, derived from Wikidata, is available under the CC BY 4.0 license, as per its creators (<https://wikidbs.github.io/>).
- **Wikidata** [42]: The underlying knowledge base. Its content is available under the Creative Commons CC0 1.0 Universal Public Domain Dedication (CC0 1.0 Deed) (https://www.wikidata.org/wiki/Wikidata:Main_Page).
- **XGBoost** [10]: This framework is distributed under the Apache License 2.0 (<https://github.com/dmlc/xgboost>).
- Other scientific computing libraries (e.g., for embeddings, clustering) are generally under permissive open-source licenses (e.g., BSD, MIT, Apache 2.0); specific versions will be detailed with the released code.

All terms of use for these assets have been respected.

B Computational Resources

The construction of WikiDBGraph and the execution of experiments were performed on a high-performance computing environment. Key computational tasks included database embedding generation (leveraging GPU resources), pairwise similarity computation (parallelized on CPUs), graph construction, and XGBoost model training for experimental evaluation. The hardware environment comprised AMD EPYC 9654 96-Core Processors (1.1TB system RAM) and four NVIDIA H100 PCIe GPUs (80GB HBM2e memory each, CUDA Version 12.8).

C Broader Impact

The introduction of WikiDBGraph carries several potential broader impacts.

Positive Social Impact. WikiDBGraph aims to advance collaborative learning research by providing a large-scale, realistic, and richly annotated resource. This can lower barriers for developing and benchmarking novel algorithms for federated learning, split learning, and tabular foundation models. By modeling inter-database relationships, it can inspire methods for improved data utilization from distributed sources and facilitate reproducible research through a common benchmark. Furthermore, the graph structure itself offers insights into complex data ecosystems, aiding data discovery and integration strategies.

Negative Social Impact. As WikiDBGraph is derived from Wikidata via WikiDBs, it may inherit biases (e.g., representational, factual inaccuracies) present in the source data, potentially leading to skewed outcomes if models trained on it are deployed in sensitive applications. While the graph identifies correlations, these do not inherently imply causation, and misinterpretation could lead to flawed conclusions.