

# ATR-Bench: A Federated Learning Benchmark for Adaptation, Trust, and Reasoning

Tajamul Ashraf<sup>1</sup>, Mohammed Mohsen Peerzada<sup>5</sup>, Moloud Abdar<sup>2</sup>, Yutong Xie<sup>1</sup>,  
Yuyin Zhou<sup>3</sup>, Xiaofeng Liu<sup>4</sup>, Iqra Altaf Gillani<sup>\*5</sup>, Janibul Bashir<sup>\*5</sup>

<sup>\*</sup>Equal senior authorship.

<sup>1</sup>Department of Computer Vision, MBZUAI <sup>2</sup>University of Queensland

<sup>3</sup>University of California, Santa Cruz <sup>4</sup>Yale University <sup>5</sup>Gaash Lab, Department of IT, NIT Srinagar

## Abstract

Federated Learning (FL) has emerged as a promising paradigm for collaborative model training while preserving data privacy across decentralized participants. As FL adoption grows, numerous techniques have been proposed to tackle its practical challenges. However, the lack of standardized evaluation across key dimensions hampers systematic progress and fair comparison of FL methods. In this work, we introduce **ATR-Bench**, a unified framework for analyzing federated learning through three foundational dimensions: *Adaptation*, *Trust*, and *Reasoning*. We provide an in-depth examination of the conceptual foundations, task formulations, and open research challenges associated with each theme. We have extensively benchmarked representative methods and datasets for *adaptation to heterogeneous clients* and *trustworthiness in adversarial or unreliable environments*. Due to the lack of reliable metrics and models for reasoning in FL, we only provide literature-driven insights for this dimension. **ATR-Bench** lays the groundwork for systematic and holistic evaluation of federated learning with real-world relevance. We will make our complete codebase<sup>1</sup> publicly accessible and a curated repository that continuously tracks new developments and research in the FL literature.

## 1 Introduction

Deep learning has revolutionized numerous fields, leading to groundbreaking advancements across various scientific domains, and has increasingly permeated industrial and societal applications. This transformation is especially evident in areas such as computer vision [28, 155, 32, 53, 196, 59, 213], natural language processing [179, 30], multi-modal learning [149, 97, 232], and medical analysis [14]. With increasing concerns around data sensitivity and privacy, several regulatory frameworks have been introduced to regulate how data is collected and used [116, 135, 182, 137]. As a result, traditional centralized training approaches, which rely on aggregating raw data from multiple sources, face significant deployment challenges in real-world applications. To address these constraints, federated learning (FL) [82, 81, 118, 210, 166, 57, 209] has gained traction as an effective paradigm for privacy-aware collaborative learning. FL allows multiple participants to collaboratively train a shared model without sharing their data. Clients locally update the model using their data, and only the learned updates are sent to a central server, which aggregates them into a global model for further refinement. This decentralized approach allows FL to support secure and privacy-preserving learning across distributed data silos. Despite notable progress in FL research [51, 73, 236, 49, 102, 189, 138, 13], the field still faces several open challenges. Three primary areas of concern are:

<sup>1</sup><https://github.com/Tajamul21/ATR-Bench>

Table 1: **Summary of existing works.** Additional information can be found in § C.

Prior Works	Generalization	Adaptation	Trust		Reasoning	Benchmark
			Robustness	Fairness		
[arXiv'18], [226], [TIST'19] [210], [WS4'20] [180], [arXiv'21] [114] [FGCS'22] [201], [CSUR'23] [129], [arXiv'23] [215] [NC'21] [66], [CSUR'22] [131], [FGCS'22] [201]	✓					
[FGCS'21][181], [SPM'20][175], [CSR'23][24]	✓		✓			
[FTML'21][140], [TKDE'21][144]	✓	✓	✓	✓		
[arXiv'20][108], [TrustCom'22] [72], [TNNLS'22] [109]			✓			
[TKDE'21][144], [arXiv'22] [198], [arXiv'23] [71]	✓	✓				✓
[TNNLS'23] [219], [arXiv'23] [215]					✓	
[TPAMI'24][62] [CVPR'24] [230]	✓		✓	✓		✓
[arXiv'24] [113], [OJCOMS'24] [169]					✓	
Ours	✓	✓	✓	✓	✓	✓

• **Adaptation.** In federated learning, data is often generated across diverse sources, naturally resulting in non-independent and non-identically distributed (Non-IID) characteristics [134, 133, 79, 173, 197, 19, 221]. These discrepancies introduce two primary types of distribution shifts: **i) Cross-Client Distribution Shift:** Each client typically operates on data with a distinct distribution, leading to significant heterogeneity between participants. As a result, clients tend to optimize their local models toward different empirical minima, which may conflict with one another [142, 125, 115, 212, 238]. This misalignment in optimization trajectories can hinder convergence and reduce the effectiveness of the aggregated global model. **ii) Out-of-Client Distribution Shift:** Federated models are trained solely on data from participating clients, and thus are biased toward the distributions present during training. When deployed in unseen environments or encountering new clients (*i.e.*, external domains), these models often underperform due to their inability to generalize beyond the observed training distributions [65, 204, 146, 123, 107]. This issue limits the model’s robustness in real-world scenarios.

• **Trust.** Although FL preserves privacy, its decentralized structure makes it vulnerable: a few compromised clients can poison local updates and skew global training. **i) Byzantine Attacks:** Clients may send malicious updates by poisoning local data (*data poisoning* [9, 4]) or tampering with model weights (*model poisoning* [44, 23, 121]), degrading model accuracy. **ii) Backdoor Attacks:** Adversaries embed triggers in their updates so the global model misclassifies specific inputs while appearing normal otherwise [193, 17, 170]. Distributed trigger schemes further evade detection by splitting patterns across clients [21, 200]. In high-stakes applications such as medical imaging [131], autonomous driving [3], and fraud detection [190], these threats demand robust defenses and fair reward mechanisms to ensure long-term collaboration. **iii) Privacy-Preserving Adaptation:** Adapting pretrained models to local tasks (*e.g.*, via federated fine-tuning methods such as LoRA [58]) must preserve data privacy while maintaining robustness under heterogeneous client objectives [93].

• **Reasoning.** The rapid emergence of large language models (LLMs) and foundation models has made reasoning a central capability in modern AI systems. These models have demonstrated remarkable abilities in structured inference, commonsense reasoning, and multi-hop decision-making across modalities. As such, enabling robust reasoning is now a critical goal for federated learning (FL), especially in vision-centric tasks involving multimodal inputs [187, 56]. Major challenge arise: *Distributed Reasoning.* FL must support structured, multi-step inference across clients with Non-IID data, and limited communication without overfitting to any single client’s distribution [119, 94, 90].

Despite growing interest in adaptation, trust, and reasoning, the absence of a unified evaluation framework limits systematic progress. We address this by introducing a structured benchmark that consolidates these challenges for robust, comparative assessment. As shown in Table 1, prior works often focus on isolated FL challenges *e.g.*, generalization [226], robustness [108], or fairness [219] without offering unified perspectives. Recent benchmarks [71, 230] also overlook reasoning and fairness trade-offs. In contrast, our benchmark holistically evaluates generalization, adaptation, robustness, fairness, and reasoning making our contributions threefold:

- We introduce **ATR-Bench**, a unified benchmark that not only categorizes key federated learning challenges across **Adaptation**, **Trustworthiness**, and **Reasoning**, but also formalizes task settings, evaluation criteria, and research gaps in current literature.

Table 2: Overview of Key Attributes in Reviewed Techniques for Cross Calibration (See § 2).

Method	Venue	Core Idea
<b>Global Neural Network</b>		
<b>Drawback:</b> Linear growth in local computational load		
FedProx[173]	[MLSys'20]	$\ell_2$ -based constraint on updates
SCAFFOLD[78]	[ICML'20]	Gradient correction via control variates
MOON[142]	[ICVPR'21]	Contrastive learning in feature space
FedNTD[45]	[NeurIPS'22]	Decoupled approach to knowledge transfer
FedSeg[122]	[ICVPR'23]	Contrastive strategy at pixel-level granularity
GeFL[77]	[arXiv'24]	Aggregate global knowledge across users
<b>Global Statistical Cues</b>		
<b>Drawback:</b> Heavily dependent on comprehensive data diversity		
FedProx[202]	[arXiv'21]	Use of prototype similarity for contrast
HarmoFL[124]	[AAAI'22]	Employs signal amplitude normalization
FedFA[178]	[ICLR'23]	Data augmentation via Gaussian modeling
FPL[61]	[ICVPR'23]	Prototype refinement using clustering
FedSB[164]	[ICASSP'25]	Utilizes label smoothing to prevent overfitting
<b>Augmented Architectures</b>		
<b>Drawback:</b> Introduces integration issues and added overhead		
FedMLB[49]	[ICML'22]	Multi-branch architecture for flexibility
FedCGAN[225]	[ICAA'22]	GAN-based synthetic data generation
ADCOL[143]	[ICML'23]	Generator that learns client representations
DaKDD[64]	[ICVPR'23]	Introduces a discriminator for distillation
CAFA[84]	[FGCS'25]	Leverages computational capacities for local training
<b>Self-Regulated Learning</b>		
<b>Drawback:</b> Hyperparameter tuning instability, risk of forgetting		
FedRS[96]	[KDD'21]	Limits softmax confidence levels
FedAlign[126]	[ICVPR'22]	Ensures final layer stability via Lipschitz constraints
FedSAM[238]	[ICML'22]	Applies sharpness-aware optimization
FedLC[229]	[ICML'22]	Adjusts logits using class-wise probability
FedDecor[220]	[ICLR'23]	Reduces inter-feature redundancy
FedVR-AL[171]	[arXiv'24]	Variance reduction and adaptation for non-convex optimization

Method	Venue	Core Idea
<b>Collaborative Data Sharing</b>		
<b>Drawback:</b> Assumes prior availability of suitable external data		
DC-Adam[141]	[ICS'21]	Initial warm-up using pre-distributed data
FEDAUX[41]	[TNLS'21]	Auxiliary data for pretraining and distillation
ProxyFL[76]	[NatureComms'23]	Shares proxy models across clients
ShareFL[160]	[arXiv'23]	Review on collaborative data sharing in FL
FedSPD[98]	[arXiv'24]	Clustering-based framework enabling consensus for distinct data clusters
<b>Data Augmentation for FL</b>		
<b>Drawback:</b> May reduce data variety, can cause privacy issues		
FedMix[177]	[ICLR'21]	Mixup of averaged samples across clients
FEDGEN[241]	[ICML'21]	Uses ensemble generators for diversity
FedInverse[188]	[ICLR'24]	Investigates inversion attacks and defenses
FLa[194]	[KDD'24]	Privacy-preserving feature augmentation techniques
<b>Sample Filtering in FL</b>		
<b>Drawback:</b> Risk of unfair exclusion at client/data level		
FedACS[185]	[IWQOS'21]	Detects and excludes poisoned data via clustering
Safe[206]	[TII'22]	Prefers clients with lower distributional skew
FedBalancer[163]	[MobiSys'22]	Prioritizes fair data sampling across devices
Fedrid[211]	[Cybersecurity'24]	Introducing random client participation and adaptive time constraints
<b>Aggregation Reweighting at Server</b>		
<b>Drawback:</b> Requires thorough dataset quality evaluation		
FEDBE[111]	[ICLR'21]	Uses Bayesian ensembles for aggregation
Elastic[29]	[ICVPR'23]	Aggregates via parameter sensitivity interpolation
FFA[31]	[arXiv'24]	Novel metrics that consider client participation and aggregation methods
<b>Server-Side Adaptive Methods</b>		
<b>Drawback:</b> Needs auxiliary data and aligned training objectives		
FedMD[89]	[NeurIPS'19]	Distills from local classifiers on proxy data
FedDF[199]	[NeurIPS'20]	Combines knowledge from diverse client models
FedGKT[52]	[NeurIPS'20]	Shares group knowledge across clients
FedOPT[152]	[ICLR'21]	Adaptive optimization on central server
FCCL[60]	[ICVPR'22]	Cross-correlation for representation alignment

- We conduct extensive empirical evaluations covering generalization, adaptation, robustness, and fairness across diverse FL settings. For reasoning, we provide a conceptual outline and literature insights, identifying open challenges due to the absence of mature models and evaluation metrics.
- We highlight future research directions and consolidate key datasets, tasks, and method trends to guide actionable progress in federated learning deployments.

## 2 Adaptive Federated Learning

Adaptive Federated Learning tackles generalization and personalization across diverse clients. It balances global performance with client-specific adaptation using techniques like meta-learning and fine-tuning, enabling effective deployment in Non-IID settings such as healthcare and cross-device systems.

**Cross Calibration.** In the case of *Cross-Client Shift* challenge, client data is often distributed in a highly skewed manner, which results in inconsistencies between local training goals. Consequently, each client updates its model based on a distinct local optimum, resulting in divergence of optimization directions. Existing approaches primarily aim to mitigate this divergence by adjusting client updates from three key perspectives, as shown in Table 2.

**Client Regularization.** Federated methods that seek to align client updates with a shared global objective can be broadly classified into four categories. First, global neural network guidance directly incorporates the aggregated model into each client’s local update either via parameter-sensitivity constraints (*e.g.*, FedProx [173], FedCurv [134], FedDyn [1]) or by penalizing divergence from global predictions (*e.g.*, MOON [142], FedUFO [115]) at the cost of increased computation that scales with model size. Second, global statistical cues approaches construct class-wise summaries (*e.g.*, prototypes [202], Gaussian descriptors [125], spectral signatures [124]) or aggregate feature representations [139] to provide finer-grained guidance, though their reliability depends on the diversity and richness of client data. Third, augmented architectures introduce supplementary modules such as GAN-based generators [241, 64] or parallel “global” branches [52, 69] to counter client drift, but these often require architectural compatibility and increase communication overhead. Finally, self-regulated learning leverage self-distillation [222] or reweighted loss functions [96, 220] to stabilize local training without extra communication, though their effectiveness can be highly sensitive to hyperparameters, especially under extreme data heterogeneity.

**Client Augmentation.** To mitigate client data heterogeneity, FL methods can be broadly grouped into three strategies. First, collaborative data sharing exchanges labeled or unlabeled examples or models among clients to promote knowledge transfer. Approaches like DC-Adam [141] and FEDAUX [41] use warm-up phases or auxiliary pretraining, while others like ProxyFL [76] share proxy models to enable indirect data knowledge exchange. ShareFL [160] provides a comprehensive review, and FedSPD [98] enables inter-client clustering to reach consensus among data-similar clients. However,

Table 3: **Overview of key properties of the evaluated methods for Unknown Generalization (see § 2).** The symbols  $\star$  and  $\circ$  indicate **possible privacy exposure** and **modifications to the model architecture**, respectively.

Federated Domain Adaptation			
Methods	Venue	Highlight	Limitation
FADA [204]	[ICLR'20]	Adversarial alignment	$\circ$ : Uses GAN [48]
COPA [50]	[ICCV'21]	Shared encoder, task heads	$\circ$ : Needs IBN [203]
AEGR [46]	[ICME'23]	Pseudo-label tuning	$\star$ : Exposed to PGD [2]
FedGP [25]	[ICLR'24]	Gradient projection aggregation	Requires projection tuning
FedRF-TCA [40]	[TKDE'25]	Random features for efficiency	May underperform on complex domains

Federated Domain Generalization			
Methods	Venue	Highlight	Limitation
FedDG [146]	[CVPR'21]	Frequency-based sharing	$\star$ : Reveals amplitude
CCST [112]	[WACV'23]	Client-wise style mixing	$\star$ : Leaks style cues
CSAC [74]	[TKDE'23]	Semantic layer fusion	$\circ$ : Adds attention
FedSB [164]	[ICASSP'25]	Label smoothing and balanced training	Careful tuning of smoothing parameters
FedCGA [105]	[ICME'24]	Global consistent augmentation	Assumes availability of diverse styles

these strategies assume the availability of meaningful and appropriately matched auxiliary data, which may not always be feasible. Second, data augmentation enhances local datasets to simulate more diverse conditions. Methods like FedMix [177] mix local data representations across clients, FEDGEN [241] employs ensemble generators to synthesize informative samples, and FedInverse [188] explores the privacy implications of such augmentations. FLear [194] applies privacy-preserving feature augmentation techniques. While useful, these methods can reduce diversity or inadvertently leak private data through reconstruction or overfitting. Third, sample filtering avoids direct data sharing or augmentation by selecting clients or samples deemed more trustworthy. For example, FedACS [185] and Safe [206] cluster data or prioritize lower-skew clients, respectively. FedBalancer [163] balances fairness by allocating sampling quotas, and Fedrtid [211] introduces random client participation with adaptive timing to reduce resource burden and enhance robustness. However, these methods risk marginalizing clients with less “mainstream” data, undermining fairness.

**Server Operation.** To better handle heterogeneous client updates, federated learning can adapt aggregation dynamics at the server. One direction is aggregation reweighting, where clients are weighted based on factors beyond static proportions. For instance, FEDBE [11] uses Bayesian ensembling, Elastic [29] reweights updates using gradient sensitivity, and FFA [31] introduces fairness-aware metrics to evaluate participation and aggregation impacts. While these improve personalization and convergence, they rely on costly evaluations of data quality or model variance. A complementary direction is server-side adaptive optimization, where the central model is refined using external data or tailored learning rules. Methods like FedMD [89], FedDF [99], and FedGKT [52] distill knowledge across clients using proxy data. FedOPT [152] adapts server-side optimization rules, while FCCL [60] aligns representations using cross-correlation signals. Though effective, such approaches often require additional datasets and tuned objectives, which may complicate real-world deployment.

**Unknown Generalization.** Prior studies have shown that deep neural networks often overfit their training data and produce overly confident outputs [10, 6]. We summarize the essential characteristics of various solutions addressing Unknown Generalization in Table 3. Such overconfidence can prove detrimental in practice [27], as even slight distributional shifts between training and deployment data may lead to substantial performance degradation [7, 218]. In federated learning, the majority of the work concentrates on boosting in-distribution accuracy across clients, with limited attention paid to how models generalize to novel, out-of-federation domains [33, 204, 146, 65]. Approaches addressing this gap can be categorized according to when they gain access to out-of-distribution data: Federated Domain Adaptation (FDA) and Federated Domain Generalization (FDG). FDA methods incorporate unlabeled target-domain samples during training to reduce distribution shift, and can be broadly categorized into alignment-based approaches which enforce feature consistency through contrastive losses [223, 224], knowledge-distillation alignment [55, 237, 199], adversarial adaptation [46], or gradient matching [235, 228] and disentanglement-based methods, which split the model into shared and domain-specific components via adversarial losses [204, 88], multi-expert gating [227], or separate classifiers [50]. In contrast, FDG seeks to train on heterogeneous client data and generalize directly to unseen domains, using either invariant optimization techniques, such as spectrum alignment [146], style normalization [12], barycenter-based feature fusion [233], or specialized architectural blocks (GANs [114], AdaIN [12], IBN [50]) or invariant aggregation schemes that reweight or calibrate server-side model fusion to balance domain performance [157, 34, 74].

### 3 Trustworthy Federated Learning

Trustworthy Federated Learning centers on **robustness** and **fairness**. Robustness addresses threats from adversarial clients or corrupted updates, while fairness ensures equitable performance across heterogeneous users. Together, they define the trust boundary essential for FL deployment in sensitive domains like healthcare and finance.

**Byzantine Tolerance.** To guard against *Byzantine* clients, robust aggregation methods can be grouped into three families: distance-based tolerance, which detects and discards updates that deviate strongly from the group consensus (*e.g.*, Krum [8], FoolsGold [42], FABA [148]); statistical-based tolerance, which applies robust estimators such as the geometric median or trimmed means to filter outliers without tracking individual contributions (*e.g.*, RFA [85], Bulyan [153]); and proxy-based tolerance, which uses a small, clean auxiliary dataset to score and weight client updates by their performance on trusted samples (*e.g.*, Sageflow [70], FLTrust [192]). Similarly, mitigating backdoor attacks has led to three main defense paradigms: post-hoc model sanitization, where the aggregated model is fine-tuned or distilled on clean data to erase backdoors (*e.g.*, FedPurning [20], FedDF [99]); aggregation-time filtering, which extends Byzantine defenses to remove poisoned updates during server aggregation (*e.g.*, DimKrum [240], RLR [136]); and certified defenses, which construct provable guarantees by maintaining multiple model variants or applying randomized smoothing so that small client perturbations cannot alter predictions (*e.g.*, ProvableFL [191], CRFL [22]). Each category trades off different assumptions, computational costs, and requirements for auxiliary data or statistical priors, and their effectiveness can degrade significantly under real-world heterogeneity. Table 4 summarizes the essential characteristics of Byzantine Tolerance solutions discussed above.

**Collaboration Fairness.** In federated learning, fair contribution evaluation is critical to reward clients in proportion to their inputs while respecting data privacy [112, 110]. A common strategy is individualized evaluation, where each client’s score is derived from locally available signals such as data acquisition cost [75], economic incentives (*e.g.*, contract theory [68], Stackelberg models [128]), compute bids [172], or performance-based reputations computed via local validation [111] or update divergence from the global model [90]. However, this approach assumes honest reporting and can penalize clients with non-IID or smaller datasets. An alternative is marginal contribution estimation via cooperative game theory, notably Shapley value approximations [161, 43, 207]. Methods like Cosine-Gradient Shapley (CGSV) [207] and FEDCE [67] evaluate each client’s impact on model performance, but suffer from exponential complexity and often require auxiliary validation data, limiting their scalability in large-scale federations.

**Performance Fairness.** Performance imbalance in federated learning arises when the global model disproportionately favors clients with abundant or homogeneous data, leaving underrepresented participants with subpar accuracy. To mitigate this, two main classes of methods have emerged: (i) fairness-aware optimization, which embeds fairness constraints directly into each client’s local loss—for example, min–max formulations such as AFL [127] and loss-penalizing schemes like qFFL [174], or multi-objective descent approaches such as FedMGDA [234] and FCFL [18] to uplift the worst-performing clients; and (ii) fair aggregation reweighting, which dynamically adjusts server-side combination weights based on client-level signals (*e.g.*, gradient conflict in FedFV [239] or variance of generalization gaps in FedCE [67, 37]). While optimization-based strategies can improve the tail accuracy, they often assume honest reporting and can degrade overall utility; reweighting methods reduce skew via stale or auxiliary risk estimates, but incur extra synchronization overhead and may require validation data.

## 4 Reasonable Federated Learning

Reasoning in FL extends beyond explainability, requiring structured, privacy-aware inference across decentralized clients. As FL expands to high-stakes domains (*e.g.*, healthcare, autonomous vehicles), it must evolve from black-box prediction to reasoning-driven learning. Traditional methods like FedAvg [119] struggle with heterogeneity and lack interpretability. To address this, FL must adopt reasoning frameworks that generalize across clients and maintain privacy.

Table 4: **Key characteristics of the reviewed Byzantine Tolerance solutions** as discussed in (§ 3).

Methods	Venue	Highlight
<i>Distance Base Tolerance</i>		
<b>Limitation:</b> Poor handling of data heterogeneity		
Multi Krum [8]	[NeurIPS’17]	Selects gradients using Krum rule
FoolsGold [42]	[arXiv’18]	Detects sybils via similarity scores
DnC [162]	[NDSS’21]	Uses SVD to isolate abnormal updates
RED-FL [54]	[GlobConET’23]	Distance-based method to assign weights to client updates
FedWad [151]	[ICLR’24]	Compute Wasserstein distances
<i>Statistics Distribution Tolerance</i>		
<b>Limitation:</b> Depends on strong mathematical assumptions		
Trim Median [35]	[ICML’18]	Applies trimmed mean per dimension
Bulyan [153]	[ICML’18]	Selects top vectors, aggregates per axis
RFA [85]	[TSP’22]	Iterative median via Weiszfeld approach
OPDS-FL [106]	[NeurIPS’23]	Measure data heterogeneity across clients
DFL-FS [16]	[ICME’24]	Address long-tailed and non-IID data distributions
FD-PerFL [117]	[NeurIPS’24]	Feature distributions for personalized federated learning
<i>Proxy Dataset Tolerance</i>		
<b>Limitation:</b> Needs trusted data and client similarity		
FLTrust [192]	[NDSS’21]	Uses trusted seed and ReLU score
Sageflow [70]	[NeurIPS’21]	Adjusts weights via entropy and loss
ProxyZKP [92]	[ScientificReports’24]	Zero-knowledge proofs with polynomial proxy models





Table 5: **Performance under Label Skew conditions** on Cifar-10, Cifar-100, MNIST, and Fashion-MNIST datasets, measured using  $\mathcal{A}^u$ , and  $\mathcal{E}$  (with  $\beta = 0.5$ ) as defined in § A.2.1. Bold indicates the highest value, underline marks the second-best, and "/" denotes zero or NaN. See § E.1 for metric details and § E.3 for further insights.

Methods	Cifar-10					Cifar-100					MNIST					Fashion-MNIST				
	1.0	0.5	0.3	0.1	$\mathcal{E}$	1.0	0.5	0.3	0.1	$\mathcal{E}$	1.0	0.5	0.3	0.1	$\mathcal{E}$	1.0	0.5	0.3	0.1	$\mathcal{E}$
FedAvg [118]	70.64	66.96	63.92	60.43	0.354	68.47	69.72	69.21	68.92	0.213	99.44	99.37	99.13	98.76	0.602	89.94	89.87	83.82	<b>90.15</b>	0.462
FedProx [173]	<b>71.22</b>	67.16	64.88	61.03	0.423	<b>72.37</b>	70.19	63.48	<u>67.4</u>	0.773	99.15	<b>99.41</b>	<b>99.32</b>	98.73	0.114	89.87	89.97	88.69	83.57	0.524
SCAFFOLD [78]	70.77	<b>68.33</b>	<b>68.34</b>	60.83	/	<u>71.91</u>	<b>72.76</b>	<u>69.82</u>	<b>68.24</b>	/	99.41	99.12	98.95	96.95	/	89.83	89.73	88.32	81.27	/
FedNova [184]	70.94	67.06	66.42	<b>64.05</b>	/	70.12	67.11	63.86	27.91	/	99.42	99.29	99.22	<b>99.88</b>	/	90.20	89.81	<b>89.03</b>	<u>84.39</u>	/
MOON [142]	69.73	<u>68.07</u>	<u>66.48</u>	61.71	0.063	71.47	69.51	69.09	65.53	0.412	<b>99.51</b>	99.36	99.17	98.02	0.324	<b>90.52</b>	<b>90.11</b>	<u>88.95</u>	82.92	0.614
FedRS [96]	70.14	66.036	63.89	59.47	0.184	69.81	68.53	67.32	67.16	0.637	99.34	99.33	<u>99.23</u>	<u>98.93</u>	0.333	90.01	89.40	88.47	77.54	0.579
FedDyn [1]	70.59	67.80	64.39	60.52	0.488	71.48	<u>71.25</u>	<b>70.28</b>	66.81	0.583	99.48	99.31	99.10	98.71	0.059	<u>90.24</u>	89.97	88.59	82.92	0.533
FedOPT [152]	70.44	66.70	65.95	<u>63.10</u>	/	69.40	68.52	67.57	67.26	/	99.32	<b>99.11</b>	98.92	98.13	/	90.06	89.65	88.79	83.41	/
FedProto [168]	69.75	65.05	56.45	48.74	0.319	70.07	70.83	68.32	67.36	0.759	99.44	99.26	99.12	98.69	0.323	90.17	<u>90.07</u>	88.73	83.26	0.444
FedNTD [45]	51.43	35.06	37.37	22.18	0.647	32.48	28.92	24.36	21.21	0.492	85.47	31.41	78.87	30.18	0.930	83.67	79.23	70.12	52.04	0.782

Table 6: **Quantitative Domain Skew results** in term of  $\mathcal{A}^u$ ,  $\mathcal{A}^u$ ,  $\mathcal{E}$ , and  $\mathcal{V}$  (Defined in E.3) on Digits, Office Caltech, and PACS. Refer to § 5.1.

Methods	Digits								Office Caltech								PACS							
	M	U	Svz	Sy	$\mathcal{A}^u$	$\mathcal{E}$	$\mathcal{V}$		Am	Ca	D	W	$\mathcal{A}^u$	$\mathcal{E}$	$\mathcal{V}$		P	AP	Ct	Sk	$\mathcal{A}^u$	$\mathcal{E}$	$\mathcal{V}$	
FedAvg [118]	90.40	60.30	34.68	46.99	58.09	0.024	<u>4.35</u>		81.99	73.21	79.37	67.93	<u>75.62</u>	0.653	0.379		76.09	64.19	83.50	89.40	78.30	0.279	0.911	
FedProx [173]	95.03	63.25	34.50	44.60	59.34	0.059	5.44		85.26	75.08	84.67	75.17	<u>80.23</u>	0.717	<b>0.273</b>		79.26	69.86	80.51	90.82	<u>80.19</u>	0.170	0.612	
SCAFFOLD [78]	97.79	94.45	26.64	90.69	<b>77.39</b>	/	8.93		39.79	42.50	78.02	70.69	57.75	/	0.281		61.95	45.44	58.87	54.64	55.25	/	<b>0.383</b>	
MOON [142]	92.78	68.11	33.36	39.28	58.36	0.287	5.72		84.42	75.98	84.67	68.97	78.51	0.678	0.539		74.44	64.19	83.92	89.17	77.93	0.321	0.924	
FedDyn [1]	88.91	60.34	34.57	50.72	58.65	0.161	<b>4.06</b>		84.02	72.59	77.34	68.97	75.72	0.824	0.430		78.17	64.29	82.27	89.93	78.66	0.129	0.881	
FedOPT [152]	92.71	87.62	31.32	87.92	<u>74.89</u>	/	6.37		79.05	71.96	89.34	74.48	78.71	/	0.480		78.66	67.66	82.41	83.68	78.12	/	<u>0.410</u>	
FedProto [168]	90.54	89.54	34.61	58.00	68.18	0.558	5.47		87.79	75.98	90.0	79.31	<b>83.27</b>	0.556	0.410		85.63	73.69	83.57	91.14	<b>83.51</b>	0.540	0.411	
FedNTD [45]	52.31	58.07	18.03	97.29	56.43	0.800	7.90		10.95	10.89	14.67	10.34	11.71	0.911	0.601		16.77	18.23	28.47	93.18	39.16	0.642	9.932	
Framework for the Performance Fairness Setting § 3																								
AFL [127]	96.58	90.72	32.90	87.56	76.94	0.64	6.57		85.33	73.79	80.21	68.93	77.06	0.775	0.517		85.76	72.92	83.16	87.08	82.23	0.90	0.329	

with 100K images of size  $64 \times 64$  with 200 classes scale. • **Fashion-MNIST** [195] includes 70,000  $28 \times 28$  grayscale fashion product images with ten categories. Figure 1 illustrates test accuracy over 100 communication rounds for various federated learning methods on Cifar-10, Cifar-100, MNIST, and Fashion-MNIST under a Dirichlet distribution with  $\beta = 0.5$ .

**Domain Skew & Out-Client Shift Datasets.** Both Domain Skew and Out-Client Shift scenarios involve datasets originating from different domains, where the main distinction lies in how evaluation is conducted. In Domain Skew, each client has domain-specific feature variations, as described in § A.2.1. In contrast, Out-Client Shift adopts a leave-one-domain-out evaluation strategy, where one domain is treated as the unseen target client and the remaining domains are used collectively as sources for training. Examples from federated domain datasets are illustrated in Figure 2. • **Office Caltech** combines samples from the Office dataset and Caltech256 [39], focusing on 10 shared categories across four domains: Amazon (Am), Caltech (Ca), DSLR (D), and Webcam (W). • **Digits** features handwritten and synthetic digit recognition across four domains: MNIST (M) [214], USPS (U) [63], SVHN (Svz) [130], and SYN (Sy) [80], each with ten digit classes. • **Office31** [158] includes 31 object categories commonly seen in office environments, such as monitors, keyboards, and filing cabinets, spread across three domains: (Am, D, and W). • **PACS** comprises four stylistically varied domains: Photo (P), Art Painting (AP), Cartoon (Ct), and Sketch (Sk).

## 5.1 Adaptation Benchmark

**Evaluation Metrics.** The metric  $\mathcal{A}^u$ , known as Cross-Client Accuracy, is used to evaluate performance in Cross-Client Shift scenarios, including both Label and Domain Skew settings. We further denote Out-Client Accuracy  $\mathcal{A}^o$  under Out-Client Shift for generalizable performance evaluation.

**Results:** Federated learning has been extensively explored in various settings, including Label Skew, Domain Skew, and Out-Client Shift. For the Label Skew scenario, we consider four widely used datasets: Cifar-10 [86], Cifar-100 [86], MNIST [214], and Fashion-MNIST [195]. The performance of ten methods on these datasets is summarized in Table 5. These methods range from the foundational FedAvg [118], introduced in 2017, to more recent and sophisticated solutions [45]. For a more detailed comparison, we also provide a visualization of the training curves, illustrating test accuracy trends during training under  $\beta = 0.5$ . In the case of the Domain Skew scenario, we leverage three widely used federated benchmarks: Digits [214, 63, 216, 130], Office Caltech [39, 158], and PACS. As shown in Table 6, methods like SCAFFOLD [78] and FedProto [168] demonstrate relatively competitive

Table 7: **Quantitative Byzantine Attack results** in term of  $\mathcal{A}^u$ ,  $\mathcal{A}_{Byz}^u$ , and  $\mathcal{I}$  (§ E.2) on Cifar-10, MNIST, and Fashion-MNIST scenarios. FLTrust and Sageflow utilizes SVHN as the proxy. The local optimization is FedProx [173] with  $\mu=0.01$ . See Byzantine Tolerance comparison in § 5.2.

Methods	Cifar-10						Fashion-MNIST						MNIST						USPS						
	$\beta=0.5$			$\beta=0.3$			$\beta=0.5$			$\beta=0.3$			$\beta=0.5$			$\beta=0.3$			$\beta=0.5$			$\beta=0.3$			
	$\Upsilon=0.2$	$\Upsilon=0.4$	$\mathcal{I}$	$\Upsilon=0.2$	$\Upsilon=0.4$	$\mathcal{I}$	$\Upsilon=0.2$	$\Upsilon=0.4$	$\mathcal{I}$	$\Upsilon=0.2$	$\Upsilon=0.4$	$\mathcal{I}$	$\Upsilon=0.2$	$\Upsilon=0.4$	$\mathcal{I}$	$\Upsilon=0.2$	$\Upsilon=0.4$	$\mathcal{I}$	$\Upsilon=0.2$	$\Upsilon=0.4$	$\mathcal{I}$	$\Upsilon=0.2$	$\Upsilon=0.4$	$\mathcal{I}$	
FedProx [173]	$\mathcal{A}_{Byz}^u$	$\mathcal{A}_{Byz}^u$	$\mathcal{I}$	$\mathcal{A}_{Byz}^u$	$\mathcal{A}_{Byz}^u$	$\mathcal{I}$	$\mathcal{A}_{Byz}^u$	$\mathcal{A}_{Byz}^u$	$\mathcal{I}$	$\mathcal{A}_{Byz}^u$	$\mathcal{A}_{Byz}^u$	$\mathcal{I}$	$\mathcal{A}_{Byz}^u$	$\mathcal{A}_{Byz}^u$	$\mathcal{I}$	$\mathcal{A}_{Byz}^u$	$\mathcal{A}_{Byz}^u$	$\mathcal{I}$	$\mathcal{A}_{Byz}^u$	$\mathcal{A}_{Byz}^u$	$\mathcal{I}$	$\mathcal{A}_{Byz}^u$	$\mathcal{A}_{Byz}^u$	$\mathcal{I}$	
Pair Flipping	$\mathcal{A}^u$	$\mathcal{A}^u$	$\mathcal{I}$	$\mathcal{A}^u$	$\mathcal{A}^u$	$\mathcal{I}$	$\mathcal{A}^u$	$\mathcal{A}^u$	$\mathcal{I}$	$\mathcal{A}^u$	$\mathcal{A}^u$	$\mathcal{I}$	$\mathcal{A}^u$	$\mathcal{A}^u$	$\mathcal{I}$	$\mathcal{A}^u$	$\mathcal{A}^u$	$\mathcal{I}$	$\mathcal{A}^u$	$\mathcal{A}^u$	$\mathcal{I}$	$\mathcal{A}^u$	$\mathcal{A}^u$	$\mathcal{I}$	
Multi Krum [8]	50.21	46.85	20.31	46.99	43.91	20.82	82.20	47.59	42.38	80.79	82.51	6.18	10.18	11.35	88.06	10.43	11.35	87.97	50.83	93.52	3.18	93.41	51.11	45.58	
Bulyan [153]	46.88	44.06	20.68	10.00	10.00	54.88	82.62	80.76	9.21	78.00	73.57	15.12	97.01	98.18	1.23	93.21	92.13	7.19	93.21	92.13	4.57	86.04	87.20	9.49	
Trim Median [35]	51.70	45.77	21.39	19.94	10.67	54.21	84.18	78.09	11.88	81.76	77.89	10.8	98.57	94.62	4.79	93.25	92.90	6.42	94.85	94.33	2.37	91.72	92.05	0.64	
FoolsGold [42]	60.09	56.80	10.36	50.81	57.98	6.90	86.97	86.07	3.90	85.65	81.50	7.19	97.25	97.80	1.61	98.05	97.22	2.10	77.69	91.77	4.93	87.90	77.23	19.46	
DnC [162]	62.67	58.38	8.78	60.41	59.96	4.92	87.54	87.76	2.21	87.22	88.24	0.45	99.33	99.07	0.34	98.85	98.70	0.62	95.94	95.16	1.54	95.07	95.08	1.61	
FLTrust [192]	/	/	/	/	/	/	/	/	/	/	/	/	/	11.35	11.35	88.06	11.35	78.68	20.64	13.15	13.15	83.55	13.15	13.15	
Sageflow [70]	/	/	/	/	/	/	/	/	/	/	/	/	/	99.28	99.03	0.38	99.02	98.73	0.59	95.36	94.34	2.36	96.15	95.37	1.32
RFA [85]	66.84	66.31	0.85	62.28	61.54	3.34	89.67	89.73	0.24	88.18	88.73	-0.04	99.12	99.10	0.31	98.97	98.91	0.41	96.12	95.56	1.14	96.30	96.08	0.61	
Symmetry Flipping																									
Multi Krum [8]	52.18	46.48	20.68	49.03	50.56	14.32	81.87	85.52	4.45	82.14	81.76	6.93	10.02	91.76	7.65	11.35	92.72	6.60	81.20	93.06	3.64	84.12	93.79	2.90	
Bulyan [153]	50.73	38.38	28.78	14.55	27.01	37.87	84.15	82.15	7.82	79.51	74.93	13.76	97.16	97.52	1.89	87.10	91.66	7.66	91.46	89.71	6.99	89.94	87.93	8.76	
Trim Median [35]	53.24	49.82	17.34	34.46	39.24	25.64	84.61	84.39	5.58	80.49	81.48	7.21	98.50	98.08	1.33	92.16	96.25	3.07	93.46	92.23	4.47	93.32	93.70	2.99	
FoolsGold [42]	61.37	59.34	7.82	58.35	54.97	9.91	69.15	86.30	3.67	82.34	84.27	4.42	98.46	97.77	1.64	95.90	90.45	8.87	83.02	78.07	18.63	75.72	73.92	22.77	
DnC [162]	62.57	58.12	9.04	61.94	59.51	5.37	88.15	87.23	12.74	86.33	87.83	0.86	99.31	98.99	0.42	98.63	98.63	0.69	95.86	94.70	2.00	94.98	93.64	3.05	
FLTrust [192]	/	/	/	/	/	/	/	/	/	/	/	/	/	11.35	70.09	29.32	11.35	67.29	32.03	60.41	52.83	43.87	59.31	13.15	
Sageflow [70]	/	/	/	/	/	/	/	/	/	/	/	/	/	98.86	98.75	0.66	98.51	98.31	1.01	94.08	92.32	4.38	95.33	92.93	3.76
RFA [85]	63.43	61.67	5.49	62.78	60.13	4.75	89.44	88.30	11.67	87.73	87.49	1.20	99.00	99.06	0.35	98.78	98.65	0.67	95.80	94.57	2.13	95.98	95.47	1.22	
Random Noise																									
Multi Krum [8]	10.00	13.06	54.1	29.25	14.11	50.77	10.00	21.71	68.26	75.55	25.60	63.09	11.35	13.42	85.99	11.35	21.04	78.28	89.25	15.07	81.63	13.15	26.79	69.90	
Bulyan [153]	51.04	51.34	15.82	42.09	49.29	15.59	82.70	87.24	2.73	81.70	86.43	2.26	98.74	98.63	0.78	91.95	98.32	1.00	94.27	94.51	2.19	92.59	95.34	1.35	
Trim Median [35]	53.87	51.92	15.24	50.24	50.21	14.67	85.94	85.66	4.31	82.32	85.61	3.08	98.86	98.85	0.56	94.36	98.18	1.14	94.80	13.15	83.55	95.66	95.59	1.10	
FoolsGold [42]	50.01	32.85	34.31	49.60	27.45	37.43	85.98	35.82	54.15	76.86	83.58	5.11	98.46	37.62	61.79	87.91	78.90	20.42	85.36	22.55	74.15	54.10	55.92	40.77	
DnC [162]	59.64	56.95	10.21	60.00	56.45	8.43	87.81	87.72	2.25	87.26	87.66	1.03	99.31	98.97	0.44	98.78	98.85	0.47	95.73	94.60	2.10	95.31	94.28	2.41	
FLTrust [192]	/	/	/	/	/	/	/	/	/	/	/	/	/	11.35	11.35	88.06	11.35	11.35	87.97	36.53	13.15	83.55	13.15	13.15	
Sageflow [70]	/	/	/	/	/	/	/	/	/	/	/	/	/	98.76	96.75	2.66	93.14	89.85	9.47	92.40	78.20	18.50	86.02	75.63	
RFA [85]	56.37	10.64	56.52	55.88	15.45	49.43	87.11	64.10	25.87	85.32	72.30	16.39	99.15	95.40	4.01	98.26	94.01	5.31	94.67	67.49	29.21	95.35	53.08	43.61	
Min-Sum																									
Multi Krum [8]	10.00	10.90	56.26	42.20	10.02	54.86	10.00	11.02	78.95	80.78	10.00	78.69	11.35	23.17	76.24	10.43	11.35	87.97	13.15	15.96	80.74	13.15	13.15	83.54	
Bulyan [153]	51.49	51.00	16.16	42.99	40.07	24.81	84.64	85.84	4.13	80.23	84.21	4.48	98.60	94.38	5.03	92.40	90.14	9.18	94.88	85.91	10.79	92.91	93.36	3.33	
Trim Median [35]	53.62	53.71	13.45	49.58	51.76	13.12	84.64	85.71	4.26	83.24	85.41	3.28	98.77	98.76	0.65	96.80	92.90	6.42	95.12	95.75	0.95	94.22	95.45	1.24	
FoolsGold [42]	52.26	10.00	57.16	47.83	10.00	54.88	80.58	14.80	75.17	80.20	19.36	69.33	97.18	16.87	82.54	98.71	97.22	2.10	69.49	15.04	81.66	64.16	13.12	83.57	
DnC [162]	61.11	55.52	11.84	60.29	55.83	9.05	87.63	87.80	2.17	87.25	88.01	0.68	99.19	99.20	0.21	98.80	98.70	0.62	95.34	94.51	2.19	94.93	95.35	1.34	
FLTrust [192]	/	/	/	/	/	/	/	/	/	/	/	/	/	61.57	12.99	86.42	11.35	11.35	87.97	13.15	15.04	81.66	13.15	14.09	
Sageflow [70]	/	/	/	/	/	/	/	/	/	/	/	/	/	98.59	92.85	6.56	92.30	85.01	14.31	87.07	14.09	82.61	81.95	50.59	
RFA [85]	51.90	11.40	55.76	60.29	14.22	50.66	87.40	22.83	67.14	85.71	61.18	27.51	99.05	94.39	5.02	98.80	98.91	0.41	94.65	71.23	25.47	94.93	57.83	38.86	

performance across these datasets. In the Out-Client Shift setting, we evaluate Federated Domain Adaptation(FDA) and Federated Domain Generalization paradigms. FDA leverages unlabeled target distributions during training, improving *Out-Client Accuracy*. For example, KD3A achieves 67.16 accuracy on Office Caltech, demonstrating strong generalization to unseen domains.

## 5.2 Trustworthiness Benchmark

**Evaluation Metrics for Robustness.**  $\mathcal{A}_{Byz}^u$  represents the test accuracy when subjected to Byzantine Attack conditions. Consequently, the metric Accuracy Decline Impact  $\mathcal{I}$  quantifies the drop in performance relative to standard (benign) federated learning. Likewise, Attack Success Rate  $\mathcal{R}^u$  measures model behavior on datasets affected by backdoor attacks.

**Results:** Table 7 summarizes the experimental outcomes for various Byzantine Tolerance strategies under Byzantine Attack scenarios. The evaluation is conducted on four widely used datasets: Cifar-10, Fashion-MNIST, MNIST, and USPS. We examine two categories of data poisoning attacks, specifically Data-Based Byzantine Attack techniques: Pair Flipping and Symmetry Flipping. Additionally, we investigate two model poisoning approaches under Model-Based Byzantine Attack, namely Random Noise and Min-Sum. The selected Byzantine Tolerance approaches fall into three categories: Distance Base Tolerance, Statistics Distribution Tolerance, and Proxy Dataset Tolerance. Among them, DnC demonstrates comparatively strong resilience across all attack types. In contrast, methods under the Proxy Dataset Tolerance category exhibit notable limitations, often requiring external proxy data. Table 8 presents the results for Backdoor Attack namely two prevalent variants: Bac and Sem Bac. Additionally, we assess the robustness of two prominent Backdoor Defense techniques, namely RLR [136] and CRFL [22], having effective defense capabilities against backdoor threats.

**Evaluation Metrics for fairness.** As described in § A.2.1, Contribution Match Degree ( $\mathcal{E}$ ) and Performance Deviation ( $\mathcal{V}$ ) are metrics specifically designed to assess Performance Fairness..

**Results:** As shown in Table 5 and Table 6, few of the existing federated optimization takes the Collaboration Fairness into federated objective account. Besides, fairness is also largely impeded under large local data distribution diversity, such as the Domain Skew. Regarding the Performance Fairness, existing methods focus on minimizing the weighted empirical loss and thus bring the



Table 8: **Quantitative Backdoor Attack results** in term of  $\mathcal{A}^u$  and  $\mathcal{R}^u$  on Cifar-10, MNIST, and USPS. The local optimization algorithm is FedAvg [118]. We consider two types of backdoor attacks and abbreviate them as Bac [193] and Sem Bac [36]. - means that these solutions are not applicable to these evaluations. Refer to § 5.2 for Backdoor Defense discussion.

Methods	Cifar-10								MNIST								USPS							
	0.5				0.3				0.5				0.3				0.5				0.3			
	Bac	$\mathcal{A}^u$	Sem Bac	$\mathcal{R}^u$	Bac	$\mathcal{A}^u$	Sem Bac	$\mathcal{R}^u$	Bac	$\mathcal{A}^u$	Sem Bac	$\mathcal{R}^u$	Bac	$\mathcal{A}^u$	Sem Bac	$\mathcal{R}^u$	Bac	$\mathcal{A}^u$	Sem Bac	$\mathcal{R}^u$	Bac	$\mathcal{A}^u$	Sem Bac	$\mathcal{R}^u$
Focus on Byzantine Tolerance § 3																								
Bulyan [153]	47.61	28.73	44.61	17.12	-	-	11.12	19.56	96.95	14.77	92.13	0.45	87.70	11.13	<b>87.86</b>	<b>0.10</b>	93.32	10.95	93.52	11.32	87.79	10.83	85.14	1.56
Trim Median [35]	51.34	<b>22.49</b>	52.21	13.70	-	-	14.78	51.66	98.07	99.18	98.44	<u>0.16</u>	96.65	89.42	96.72	0.61	94.62	71.52	94.24	4.82	92.05	84.17	94.77	2.40
FoolsGold [42]	<u>60.69</u>	62.54	60.50	13.06	58.58	<u>56.85</u>	<u>59.84</u>	12.56	82.20	91.61	98.45	0.59	92.88	98.06	97.00	1.52	89.66	90.24	83.21	10.11	76.56	86.14	94.77	2.40
DnC [162]	59.30	<u>23.07</u>	<b>61.40</b>	12.88	<u>60.03</u>	<b>42.79</b>	59.80	<b>9.76</b>	<b>99.26</b>	<u>10.39</u>	99.13	0.20	98.53	<u>10.46</u>	<u>98.79</u>	<u>0.29</u>	<u>95.75</u>	<u>9.62</u>	<b>95.11</b>	<b>2.89</b>	96.14	16.89	94.86	1.81
FLTrust [192]	/	/	/	/	/	/	/	/	95.31	<b>8.71</b>	97.84	<b>0.00</b>	92.55	<b>10.03</b>	97.43	0.30	71.67	17.69	59.83	20.96	<b>63.20</b>	<b>5.29</b>	63.20	5.29
Sageflow [70]	/	/	/	/	/	/	/	/	99.17	98.70	<b>99.21</b>	0.53	<u>99.03</u>	98.05	98.83	1.27	96.07	73.63	96.20	3.61	96.83	86.39	96.02	2.65
RFA [85]	<b>64.90</b>	74.31	<b>63.90</b>	11.54	<b>60.36</b>	75.57	<b>62.75</b>	14.76	99.09	99.09	<u>99.12</u>	0.32	<b>99.11</b>	98.88	98.84	0.39	<b>95.89</b>	<b>2.28</b>	<u>95.75</u>	<u>3.13</u>	97.04	39.59	95.89	2.28
Focus on Backdoor Defense																								
RLR [136]	51.65	28.83	50.37	<u>10.60</u>	-	-	44.80	20.74	94.77	10.54	93.11	0.40	91.11	22.69	92.94	0.35	89.20	10.78	92.00	12.65	<u>87.00</u>	<u>10.27</u>	<u>82.15</u>	<u>1.44</u>
CRFL [22]	59.27	63.29	58.59	<b>9.52</b>	52.27	59.50	52.62	<u>11.66</u>	98.93	33.86	98.89	0.43	98.44	26.28	98.08	0.91	94.96	49.77	95.31	3.61	95.38	62.98	<b>94.36</b>	<b>1.32</b>

imbalanced performance. Notably, global network utilization and server adaptive optimization seem to alleviate the imbalanced performance on the multiple domains roundly.

## 6 Future Outlook

**(1) Summary of Experimental Observations.** Our evaluation surfaces key trends and gaps across federated learning methods: • *Reasoning Benchmark Void.* Despite its importance, reasoning in FL remains underexplored due to the lack of dedicated benchmarks, reliable metrics, and structured evaluation settings. Most existing methods focus on performance, with limited support for interpretability, traceability, or privacy-aware inference. We address this gap conceptually in Section 4 and encourage future empirical studies. • *Reproducibility Dilemma.* Many FL studies lack transparent experimental setups and open-source code. The inconsistency in datasets and models complicates fair comparisons, undermining reproducibility. • *Computational Efficiency Gap.* Despite strong accuracy claims, most methods overlook memory and runtime overheads. In real-world deployments, especially cross-device [51] and cross-silo [217, 210] settings, efficiency is often a limiting factor. • *Fragmented Solutions.* FL research often targets isolated issues like heterogeneity [201], robustness [72], or fairness [219], lacking unified solutions that balance performance, trust, and efficiency.

**(2) Open Issues and Future Opportunities.** • *Building a Reasoning Benchmark.* Our work outlines a preliminary roadmap for benchmarking reasoning in FL. Future efforts should define evaluation criteria for trace coherence, faithfulness, and privacy-preserving reasoning across decentralized clients. • *Towards Reproducibility.* **ATR-Bench** introduces a unified taxonomy, standard protocols, and open-source assets to enhance comparability. Future work should prioritize consistent baselines and transparent reporting practices. • *Advancing Efficiency.* While optimizations like quantization, pruning, and homomorphic encryption [160] have emerged, trade-offs remain. Future FL systems must balance speed, scalability, and security to support edge-centric applications. • *Toward Holistic Evaluation.* We advocate for comprehensive benchmarks that jointly assess generalization, robustness, fairness, reasoning, and efficiency across diverse modalities including video and multimodal settings to close the gap between research and deployment.

## 7 Conclusion

We introduce **ATR-Bench**, the first comprehensive benchmark that systematically evaluates federated learning (FL) across three foundational dimensions: *Adaptation*, *Trust*, and *Reasoning*. Our work benchmarks various FL methods, categorizing them by task settings, learning strategies, and contributions. In addition, we conducted a unified empirical evaluation in eight widely used FL datasets to uncover key insights and limitations in existing approaches. ATR-Bench highlights persistent challenges in the field and establishes a foundation for developing robust, trustworthy, and adaptive FL systems, paving the way for future research and practical deployment.

**Limitations.** Benchmarking reasoning in LLMs remains a bottleneck, especially in federated settings where reasoning traces vary across clients; ATR-Bench highlights this gap and motivates the need for unified metrics to assess coherence, faithfulness, and adaptability of distributed reasoning.

## References

- [1] D.A.E. Acar, Y.Zhao, R.Matas, M.Mattina, P.Whatmough, and V.Saligrama. Federated learning based on dynamic regularization. In *ICLR*, 2021.
- [2] A.Madry, A.Makelov, L.Schmidt, D.Tsipras, and A.Vladu. Towards deep learning models resistant to adversarial attacks. *arXiv preprint arXiv:1706.06083*, 2017.
- [3] A.Nguyen, T.Do, M.Tran, B.X. Nguyen, C.Duong, T.Phan, E.Tjiputra, and Q.D. Tran. Deep federated learning for autonomous driving. In *IEEE IV*, pages 1824–1830, 2022.
- [4] B.Han, Q.Yao, X.Yu, G.Niu, M.Xu, W.Hu, I.Tsang, and M.Sugiyama. Co-teaching: Robust training of deep neural networks with extremely noisy labels. In *NeurIPS*, volume 31, 2018.
- [5] J.M. Bilbao. *Cooperative games on combinatorial structures*, volume 26. Springer Science & Business Media, 2012.
- [6] B.Lakshminarayanan, A.Pritzel, and C.Blundell. Simple and scalable predictive uncertainty estimation using deep ensembles. In *NeurIPS*, 2017.
- [7] B.Lakshminarayanan, A.Pritzel, and C.Blundell. Simple and scalable predictive uncertainty estimation using deep ensembles. In *NeurIPS*, volume 30, 2017.
- [8] P. Blanchard, E. M. El Mhamdi, R. Guerraoui, and J. Stainer. Machine learning with adversaries: Byzantine tolerant gradient descent. In *NeurIPS*, 2017.
- [9] B.VanRooyen, A.Menon, and R.C. Williamson. Learning with symmetric label noise: The importance of being unhinged. In *NeurIPS*, volume 28, 2015.
- [10] C.Guo, G.Pleiss, Y.Sun, and K.Q. Weinberger. On calibration of modern neural networks. In *ICML*, pages 1321–1330, 2017.
- [11] H.-Y. Chen and W.-L. Chao. Fedbe: Making bayesian model ensemble applicable to federated learning. In *ICLR*, 2021.
- [12] J. Chen, M. Jiang, Q. Dou, and Q. Chen. Federated domain generalization for image recognition via cross-client style transfer. In *WACV*, pages 361–370, 2023.
- [13] S. Chen, L. Zhang, and L. Zhang. Msdfomer: Multiscale deformable transformer for hyperspectral image super-resolution. *IEEE TGRS*, 2023.
- [14] T. Chen, C. Gong, D.J. Diaz, X. Chen, J.T. Wells, Qiang Liu, Z. Wang, A. Ellington, A. Dimakis, and A. Klivans. Hotprotein: A novel framework for protein thermostability prediction and editing. In *ICLR*, 2023.
- [15] Zhongwu Chen, Chengjin Xu, Fenglong Su, Zhen Huang, and Yong Dou. Meta-learning based knowledge extrapolation for temporal knowledge graph. In *Proceedings of the ACM Web Conference 2023, WWW '23*, page 2433–2443, New York, NY, USA, 2023. Association for Computing Machinery.
- [16] Zhuoxin Chen, Zhenyu Wu, and Yang Ji. Decoupled federated learning on long-tailed and non-iid data with feature statistics. In *2024 IEEE International Conference on Multimedia and Expo (ICME)*, pages 1–6, 2024.
- [17] C.Liao, H.Zhong, A.Squicciarini, S.Zhu, and D.Miller. Backdoor embedding in convolutional neural network models via invisible perturbation. *arXiv preprint arXiv:1808.10307*, 2018.
- [18] S. Cui, W. Pan, J. Liang, C. Zhang, and F. Wang. Addressing algorithmic disparity and performance inconsistency in federated learning. In *NeurIPS*, pages 26 091–26 102, 2021.
- [19] C.Wu, F.Wu, L.Lyu, T.Qi, Y.Huang, and X.Xie. A federated graph neural network framework for privacy-preserving personalization. *Nature Communications*, 13(1):3091, 2022.
- [20] C.Wu, X.Yang, S.Zhu, and P.Mitra. Mitigating backdoor attacks in federated learning. *arXiv preprint arXiv:2011.01767*, 2020.

- [21] C.Xie, K.Huang, P.-Y. Chen, and B.Li. Dba: Distributed backdoor attacks against federated learning. In *ICLR*, 2020.
- [22] C.Xie, M.Chen, P.-Y. Chen, and B.Li. Crfl: Certifiably robust federated learning against backdoor attacks. In *ICML*, pages 11,372–11,382. PMLR, 2021.
- [23] C.Xie, O.Koyejo, and I.Gupta. Fall of empires: Breaking byzantine-tolerant sgd by inner product manipulation. In *UAI*, pages 261–270, 2020.
- [24] C.Xu, Y.Qu, Y.Xiang, and L.Gao. Asynchronous federated learning on heterogeneous devices: A survey. *arXiv preprint arXiv:2109.04269*, 2021.
- [25] Shenghong Dai, Yicong Chen, Jy yong Sohn, S M Iftekharul Alam, Ravikumar Balakrishnan, Suman Banerjee, Nageen Himayat, and Kangwook Lee. FedGP: Buffer-based gradient projection for continual federated learning, 2024.
- [26] G. Damaskinos, R. Guerraoui, R. Patra, and M. etal. Taziki. Asynchronous byzantine machine learning (the case of sgd). In *ICML*, pages 1145–1154, 2018.
- [27] D.Amodei, C.Olah, J.Steinhardt, P.Christiano, J.Schulman, and D.Mané. Concrete problems in ai safety. *arXiv preprint arXiv:1606.06565*, 2016.
- [28] J. Deng, W. Dong, R. Socher, L.-J. Li, K. Li, and L. Fei-Fei. Imagenet: A large-scale hierarchical image database. In *CVPR*, pages 248–255. IEEE, 2009.
- [29] C. Dengsheng, J. Hu, V. J. K. Tan, and E. Wu. Elastic aggregation for federated optimization. In *CVPR*, 2023.
- [30] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 conference of the North American chapter of the association for computational linguistics: human language technologies, volume 1 (long and short papers)*, pages 4171–4186, 2019.
- [31] Oscar Dilley, Juan Marcelo Parra-Ullauri, Rasheed Hussain, and Dimitra Simeonidou. Federated fairness analytics: Quantifying fairness in federated learning, 2024.
- [32] A. Dosovitskiy, L. Beyer, A. Kolesnikov, D. Weissenborn, X. Zhai, T. Unterthiner, M. Dehghani, M. Minderer, G. Heigold, and S. Gelly et al. An image is worth 16x16 words: Transformers for image recognition at scale. In *ICLR*, 2021.
- [33] D.Peterson, P.Kanani, and V.J. Marathe. Private federated learning with domain adaptation. In *NeurIPS*, 2019.
- [34] J.h. Duan, W.Li, D.Zou, R.Li, and S.Lu. Federated learning with data-agnostic distribution fusion. In *CVPR*, 2023.
- [35] D.Yin, Y.Chen, R.Kannan, and P.Bartlett. Byzantine-robust distributed learning: Towards optimal statistical rates. In *ICML*, pages 5650–5659, 2018.
- [36] E.Bagdasaryan, A.Veit, Y.Hua, D.Estrin, and V.Shmatikov. How to backdoor federated learning. In *AISTATS*, pages 2938–2948, 2020.
- [37] Y. H. Ezzeldin, S. Yan, C. He, E. Ferrara, and A. S. Avestimehr. Fairfed: Enabling group fairness in federated learning. In *AAAI*, pages 7494–7502, 2023.
- [38] Alireza Fallah, Aryan Mokhtari, and Asuman Ozdaglar. Personalized federated learning with theoretical guarantees: A model-agnostic meta-learning approach. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 3557–3568. Curran Associates, Inc., 2020.
- [39] Li Fei-Fei, Rob Fergus, and Pietro Perona. Learning generative visual models from few training examples: An incremental bayesian approach tested on 101 object categories. *Comput. Vis. Image Underst.*, 106(1):59–70, April 2007.
- [40] Zhanbo Feng, Yuanjie Wang, Jie Li, Fan Yang, Jiong Lou, Tiebin Mi, Robert Caiming Qiu, and Zhenyu Liao. Robust and Communication-Efficient Federated Domain Adaptation via Random Features. *IEEE Transactions on Knowledge & Data Engineering*, 37(03):1411–1424, March 2025.
- [41] F.Sattler, T.Korjakow, R.Rischke, and W.Samek. Fedaux: Leveraging unlabeled auxiliary data in federated learning. *IEEE TNNLS*, 2021.

- [42] C. Fung, C. J. Yoon, and I. Beschastnikh. Mitigating sybils in federated learning poisoning. *arXiv preprint arXiv:1808.04866*, 2018.
- [43] Felipe Garrido-Lucero, Benjamin Heymann, Maxime Vono, Patrick Loiseau, and Vianney Perchet. Du-shapley: A shapley value proxy for efficient dataset valuation. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 1973–2000. Curran Associates, Inc., 2024.
- [44] G.Baruch, M.Baruch, and Y.Goldberg. A little is enough: Circumventing defenses for distributed learning. In *NeurIPS*, volume 32, 2019.
- [45] G.Lee, M.Jeong, Y.Shin, S.Bae, and S.-Y. Yun. Preservation of the global knowledge by not-true distillation in federated learning. In *NeurIPS*, 2022.
- [46] G.Li, Q.Zhang, P.Wang, J.Zhang, and C.Wu. Federated domain adaptation via pseudo-label refinement. In *ICME*, pages 1829–1834. IEEE, 2023.
- [47] Xuan Gong, Abhishek Sharma, Srikrishna Karanam, Ziyang Wu, Terrence Chen, David Doermann, and Arun Innanje. Preserving privacy in federated learning with ensemble cross-domain knowledge distillation. *Proceedings of the AAAI Conference on Artificial Intelligence*, 36(11):11891–11899, Jun. 2022.
- [48] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio. Generative adversarial nets. In *NeurIPS*, 2014.
- [49] X. Guo, P. Xing, S. Feng, B. Li, and C. Miao. Federated learning with diversified preference for humor recognition. In *IJCAI Workshop*, 2020.
- [50] G.Wu and S.Gong. Collaborative optimization and aggregation for decentralized domain generalization and adaptation. In *ICCV*, pages 6484–6493, 2021.
- [51] A. Hard, K. Rao, R. Mathews, S. Ramaswamy, F. Beaufays, S. Augenstein, H. Eichner, C. Kiddon, and D. Ramage. Federated learning for mobile keyboard prediction. *arXiv preprint arXiv:1811.03604*, 2018.
- [52] C. He, M. Annavaram, and S. Avestimehr. Group knowledge transfer: Federated learning of large cnns at the edge. In *NeurIPS*, pages 14,068–14,080, 2020.
- [53] K. He, X. Zhang, S. Ren, and J. Sun. Deep residual learning for image recognition. In *CVPR*, pages 770–778, 2016.
- [54] Charuka Herath, Yogachandran Rahulamathavan, and Xiaolan Liu. Recursive euclidean distance-based robust aggregation technique for federated learning. In *2023 IEEE IAS Global Conference on Emerging Technologies (GlobConET)*, pages 1–6, 2023.
- [55] H.Feng, Z.You, M.Chen, T.Zhang, M.Zhu, F.Wu, C.Wu, and W.Chen. Kd3a: Unsupervised multi-source decentralized domain adaptation via knowledge distillation. In *ICML*, pages 3274–3283, 2021.
- [56] Yassine Himeur, Iraklis Varlamis, Hamza Kheddar, Abbes Amira, Shadi Atalla, Yashbir Singh, Faycal Bensaali, and Wathiq Mansoor. Federated learning for computer vision, 2023.
- [57] S. Hong and J. Chae. Communication-efficient randomized algorithm for multi-kernel online federated learning. *IEEE PAMI*, 44(12):9872–9886, 2021.
- [58] Edward J. Hu, Yelong Shen, Phil Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- [59] G. Huang, Z. Liu, G. Pleiss, L. Van Der Maaten, and K. Weinberger. Convolutional networks with dense connectivity. *IEEE PAMI*, 2019.
- [60] W. Huang, M. Ye, and B. Du. Learn from others and be yourself in heterogeneous federated learning. In *CVPR*, 2022.
- [61] W. Huang, M. Ye, Z. Shi, H. Li, and B. Du. Rethinking federated learning with domain shift: A prototype view. In *CVPR*, pages 16 312–16 322, 2023.
- [62] Wenke Huang, Mang Ye, Zekun Shi, Guancheng Wan, He Li, Bo Du, and Qiang Yang. Federated learning for generalization, robustness, fairness: A survey and benchmark. *IEEE Transactions on Pattern Analysis & Machine Intelligence*, 46(12):9387–9406, dec 2024.
- [63] J.J. Hull. A database for handwritten text recognition research. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 16(5):550–554, 1994.

- [64] H.Wang, Y.Li, W.Xu, R.Li, Y.Zhan, and Z.Zeng. Dafkd: Domain-aware federated knowledge distillation. In *CVPR*, 2023.
- [65] H.Yuan, W.Morningstar, L.Ning, and K.Singhal. What do we mean by generalization in federated learning? In *ICLR*, 2022.
- [66] H.Zhu, J.Xu, S.Liu, and Y.Jin. Federated learning on non-iid data: A survey. *NC*, pages 371–390, 2021.
- [67] M. Jiang, H. R. Roth, W. Li, D. Yang, C. Zhao, V. Nath, D. Xu, Q. Dou, and Z. Xu. Fair federated medical image segmentation via client contribution estimation. In *CVPR*, 2023.
- [68] J.Kang, Z.Xiong, D.Niyato, H.Yu, Y.Liang, and D.I. Kim. Incentive design for efficient federated learning in mobile networks: A contract theory approach. In *APWCS*, pages 1–5, 2019.
- [69] J.Kim, G.Kim, and B.Han. Multi-level branched regularization for federated learning. In *ICML*, pages 11,058–11,073, 2022.
- [70] J.Park, D.-J. Han, M.Choi, and J.Moon. Sageflow: Robust federated learning against both stragglers and adversaries. In *NeurIPS*, pages 840–851, 2021.
- [71] J.Shao, Z.Li, W.Sun, T.Zhou, Y.Sun, L.Liu, Z.Lin, and J.Zhang. A survey of what to share in federated learning: Perspectives on model utility, privacy leakage, and communication efficiency. *arXiv preprint arXiv:2307.10655*, 2023.
- [72] J.Shi, W.Wan, S.Hu, J.Lu, and L.Y. Zhang. Challenges and approaches for mitigating byzantine attacks in federated learning. In *IEEE TrustCom*, pages 139–146, 2022.
- [73] C. Ju, R. Zhao, J. Sun, X. Wei, B. Zhao, Y. Liu, H. Li, T. Chen, X. Zhang, D. Gao, et al. Privacy-preserving technology to help millions of people: Federated prediction model for stroke prevention. *arXiv preprint arXiv:2006.10517*, 2020.
- [74] J.Yuan, X.Ma, D.Chen, F.Wu, L.Lin, and K.Kuang. Collaborative semantic aggregation and calibration for federated domain generalization. *IEEE TKDE*, 2023.
- [75] J.Zhang, C.Li, A.Robles-Kelly, and M.Kankanhalli. Hierarchically fair federated learning. *arXiv*, 2020.
- [76] Shivam Kalra, Junfeng Wen, Jesse C. Cresswell, Maksims Volkovs, and H. R. Tizhoosh. Decentralized federated learning through proxy model sharing. *Nature Communications*, 14(1):2899, may 2023.
- [77] Honggu Kang, Seohyeon Cha, and Joonhyuk Kang. Gefl: Model-agnostic federated learning with generative models, 2024.
- [78] S.P. Karimireddy, S.Kale, M.Mohri, S.J. Reddi, S.U. Stich, and A.T. Suresh. Scaffold: Stochastic controlled averaging for on-device federated learning. In *ICML*, 2020.
- [79] K.Hsieh, A.Phanishayee, O.Mutlu, and P.Gibbons. The non-iid data quagmire of decentralized machine learning. In *ICML*, pages 4387–4398, 2020.
- [80] Diederik P. Kingma and Max Welling. Auto-encoding variational bayes. *CoRR*, abs/1312.6114, 2013.
- [81] J. Konečný, H.B. McMahan, D. Ramage, and P. Richtárik. Federated optimization: Distributed machine learning for on-device intelligence. *arXiv preprint arXiv:1610.02527*, 2016.
- [82] J. Konečný, H.B. McMahan, F.X. Yu, P. Richtárik, A.T. Suresh, and D. Bacon. Federated learning: Strategies for improving communication efficiency. *arXiv preprint arXiv:1610.05492*, 2016.
- [83] S. Kotz, N. Balakrishnan, and N. L. Johnson. *Continuous multivariate distributions, Volume 1: Models and applications*, volume 1. John Wiley & Sons, 2004.
- [84] Mohamed Amine Kouda, Badis Djamaa, and Ali Yachir. An efficient federated learning solution for the artificial intelligence of things. *Future Generation Computer Systems*, 163:107533, 2025.
- [85] K.Pillutla, S.M. Kakade, and Z.Harchaoui. Robust aggregation for federated learning. *IEEE TSP*, 70:1142–1154, 2022.
- [86] Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- [87] L.Gao, H.Fu, L.Li, Y.Chen, M.Xu, and C.-Z. Xu. Feddc: Federated learning with non-iid data via local drift decoupling and correction. In *CVPR*, 2022.



- [88] L.Huang, A.D. Joseph, B.Nelson, B.I. Rubinstein, and J.D. Tygar. Adversarial machine learning. In *ACM workshop on Security and artificial intelligence*, pages 43–58, 2011.
- [89] D. Li and J. Wang. Fedmd: Heterogeneous federated learning via model distillation. In *NeurIPS Workshop*, 2019.
- [90] Qinbin Li, Bingsheng He, and Dawn Song. Model-contrastive federated learning. In *CVPR*, 2021.
- [91] T. Li, S. Hu, A. Beirami, and V. Smith. Ditto: Fair and robust federated learning through personalization. In *ICML*, pages 6357–6368, 2021.
- [92] Tan Li, Samuel Cheng, Tak Lam Chan, and Haibo Hu. A polynomial proxy model approach to verifiable decentralized federated learning. *Scientific Reports*, 14(1):28786, November 2024.
- [93] Tian Li, Zhuang He, Virginia Song, and Ameet Talwalkar. Ditto: Fair and robust federated learning through personalization. *arXiv preprint arXiv:2012.04221*, 2020.
- [94] Tian Li, Anit Kumar Sahu, Manzil Zaheer, Maziar Sanjabi, Ameet Talwalkar, and Virginia Smith. Federated optimization in heterogeneous networks. *arXiv preprint arXiv:1812.06127*, 2018.
- [95] X. Li, K. Huang, W. Yang, S. Wang, and Z. Zhang. On the convergence of fedavg on non-iid data. *arXiv preprint arXiv:1907.02189*, 2019.
- [96] X.-C. Li and D.-C. Zhan. Fedrs: Federated learning with restricted softmax for label distribution non-iid data. In *ACM SIGKDD*, pages 995–1005, 2021.
- [97] Y. Li, F. Liang, L. Zhao, Y. Cui, W. Ouyang, J. Shao, F. Yu, and J. Yan. Supervision exists everywhere: A data efficient contrastive language-image pre-training paradigm. In *ICLR*, 2022.
- [98] I-Cheng Lin, Osman Yagan, and Carlee Joe-Wong. Fedspd: A soft-clustering approach for personalized decentralized federated learning, 2024.
- [99] T. Lin, L. Kong, S. U. Stich, and M. Jaggi. Ensemble distillation for robust model fusion in federated learning. In *NeurIPS*, pages 2351–2363, 2020.
- [100] Renpu Liu, Cong Shen, and Jing Yang. Federated representation learning in the under-parameterized regime. In *Proceedings of the 41st International Conference on Machine Learning, ICML’24*. JMLR.org, 2024.
- [101] Xiangyang Liu, Tianqi Pang, and Chenyou Fan. Federated prompting and chain-of-thought reasoning for improving llms answering. In *Knowledge Science, Engineering and Management: 16th International Conference, KSEM 2023, Guangzhou, China, August 16–18, 2023, Proceedings, Part IV*, page 3–11, Berlin, Heidelberg, 2023. Springer-Verlag.
- [102] Y. Liu, A. Huang, Y. Luo, H. Huang, Y. Liu, Y. Chen, L. Feng, T. Chen, H. Yu, and Q. Yang. Fedvision: An online visual object detection platform powered by federated learning. In *AAAI*, pages 13172–13179, 2020.
- [103] Y. Liu, Y. Kang, C. Xing, T. Chen, and Q. Yang. A secure federated transfer learning framework. *IEEE TS*, 35(4):70–82, 2020.
- [104] Y. Liu, Y. Kang, T. Zou, Y. Pu, Y. He, X. Ye, Y. Ouyang, Y.-Q. Zhang, and Q. Yang. Vertical federated learning. *arXiv preprint arXiv:2211.12814*, 2022.
- [105] Yuan Liu, Shu Wang, Zhe Qu, Xingyu Li, Shichao Kan, and Jianxin Wang. Fedgca: Global consistent augmentation based single-source federated domain generalization. In *2024 IEEE International Conference on Multimedia and Expo (ICME)*, pages 1–6, 2024.
- [106] Zichang Liu, Zhaozhuo Xu, Benjamin Coleman, and Anshumali Shrivastava. One-pass distribution sketch for measuring data heterogeneity in federated learning. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 15660–15679. Curran Associates, Inc., 2023.
- [107] L.Jiang and T.Lin. Test-time robust personalization for federated learning. In *ICLR*, 2023.
- [108] L.Lyu, H.Yu, and Q.Yang. Threats to federated learning: A survey. *arXiv preprint arXiv:2003.02133*, 2020.
- [109] L.Lyu, H.Yu, X.Ma, C.Chen, L.Sun, J.Zhao, Q.Yang, and S.Y. Philip. Privacy and robustness in federated learning: Attacks and defenses. *IEEE TNNLS*, 2022.

- [110] L.Lyu, J.Yu, K.Nandakumar, Y.Li, X.Ma, J.Jin, H.Yu, and K.S. Ng. Towards fair and privacy-preserving federated deep models. *IEEE Transactions on Parallel and Distributed Systems*, 31(11):2524–2541, 2020.
- [111] L.Lyu, X.Xu, Q.Wang, and H.Yu. *Collaborative fairness in federated learning*. 2020.
- [112] L.Lyu, Y.Li, K.Nandakumar, J.Yu, and X.Ma. How to democratise and protect ai: Fair and differentially private decentralised deep learning. *IEEE TDSC*, 19(2):1003–1017, 2020.
- [113] Luis M. Lopez-Ramos, Florian Leiser, Aditya Rastogi, Steven Hicks, Inga Strümke, Vince I. Madai, Tobias Budig, Ali Sunyaev, and Adam Hilbert. Interplay between federated learning and explainable artificial intelligence: a scoping review, 2025.
- [114] L.Zhang, X.Lei, Y.Shi, H.Huang, and C.Chen. Federated learning with domain generalization. arXiv preprint arXiv:2111.10487, 2021.
- [115] L.Zhang, Y.Luo, Y.Bai, B.Du, and L.-Y. Duan. Federated learning for non-iid data via unified feature learning and optimization objective alignment. In *ICCV*, pages 4420–4428, 2021.
- [116] C. May and S.K. Sell. *Intellectual Property Rights: A Critical History*. Lynne Rienner Publishers Boulder, 2006.
- [117] Connor McLaughlin and Lili Su. Personalized federated learning via feature distribution adaptation. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [118] B. McMahan, E. Moore, D. Ramage, S. Hampson, and B.A. y Arcas. Communication-efficient learning of deep networks from decentralized data. In *AISTATS*, pages 1273–1282, 2017.
- [119] H. Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Aguera y Arcas. Communication-efficient learning of deep networks from decentralized data. *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2017.
- [120] M.Davis and M.Maschler. The kernel of a cooperative game. *Naval Research Logistics Quarterly*, 12(3):223–259, 1965.
- [121] M.Fang, X.Cao, J.Jia, and N.Z. Gong. Local model poisoning attacks to byzantine-robust federated learning. In *USENIX*, pages 1623–1640, 2020.
- [122] J. Miao, Z. Yang, L. Fan, and Y. Yang. Fedseg: Class-heterogeneous federated learning for semantic segmentation. In *CVPR*, pages 8042–8052, 2023.
- [123] M.Jiang, H.Yang, C.Cheng, and Q.Dou. Iop-fl: Inside-outside personalization for federated medical image segmentation. *IEEE TMI*, 2023.
- [124] M.Jiang, Z.Wang, and Q.Dou. Harmofl: Harmonizing local and global drifts in federated learning on heterogeneous medical images. In *AAAI*, pages 1087–1095, 2022.
- [125] M.Luo, F.Chen, D.Hu, Y.Zhang, J.Liang, and J.Feng. No fear of heterogeneity: Classifier calibration for federated learning with non-iid data. In *NeurIPS*, 2021.
- [126] M.Mendieta, T.Yang, P.Wang, M.Lee, Z.Ding, and C.Chen. Local learning matters: Rethinking data heterogeneity in federated learning. In *CVPR*, pages 8397–8406, 2022.
- [127] M.Mohri, G.Sivek, and A.T. Suresh. Agnostic federated learning. In *ICML*, pages 4615–4625, 2019.
- [128] M.Simaan and J.B.J. Cruz. On the stackelberg strategy in nonzero-sum games. *JOTA*, 11:533–555, 1973.
- [129] M.Ye, X.Fang, B.Du, P.C. Yuen, and D.Tao. Heterogeneous federated learning: State-of-the-art and research challenges. *CSUR*, 2023.
- [130] Yuval Netzer, Tao Wang, Adam Coates, Alessandro Bissacco, Bo Wu, and Andrew Y. Ng. Reading digits in natural images with unsupervised feature learning. In *NIPS Workshop on Deep Learning and Unsupervised Feature Learning 2011*, 2011.
- [131] D.C. Nguyen, Q.-V. Pham, P.N. Pathirana, M.Ding, A.Seneviratne, Z.Lin, O.Dobre, and W.-J. Hwang. Federated learning for smart healthcare: A survey. *CSUR*, pages 1–37, 2022.
- [132] Q. P. Nguyen, B. K. H. Low, and P. Jaillet. Trade-off between payoff and model rewards in shapley-fair collaborative machine learning. In *NeurIPS*, pages 30 542–30 553, 2022.

- [133] N.Liu, Z.Liang, J.Lin, and Y.Liu. Patient clustering improves efficiency of federated machine learning to predict mortality and hospital stay time using distributed electronic medical records. *Journal of Biomedical Informatics*, 99:103291, 2019.
- [134] N.Shoham, T.Avidor, A.Keren, N.Israel, D.Benditkis, L.Mor-Yosef, and I.Zeitak. Overcoming forgetting in federated learning on non-iid data. In *NeurIPS Workshop*, 2019.
- [135] I.C. of Investigators for Fairness in Trial Data Sharing. Toward fairness in data sharing. *New England Journal of Medicine*, 375(5):405–407, 2016.
- [136] M.S. Ozdayi, M.Kantarcioglu, and Y.R. Gel. Defending against backdoors in federated learning with robust learning rate. In *AAAI*, pages 9268–9276, 2021.
- [137] S.L. Pardo. The california consumer privacy act: Towards a european-style privacy regime in the united states. *J. Tech. L. & Pol’y*, 23:68, 2018.
- [138] S. Pati, U. Baid, B. Edwards, M. Sheller, S.-H. Wang, G.A. Reina, P. Foley, A. Gruzdev, D. Karkada, C. Davatzikos, et al. Federated learning enables big data for rare cancer boundary detection. *Nature Communications*, 13(1):7346, 2022.
- [139] B. Peng, M. Chi, and C. Liu. Non-iid federated learning via random exchange of local feature maps for textile iiot secure computing. *SCIS*, 65(7):170302, 2022.
- [140] P.Kairouz, H.B. McMahan, B.Avent, A.Bellet, M.Bennis, A.N. Bhagoji, K.Bonawitz, Z.Charles, G.Cormode, R.Cummings, and et al. Advances and open problems in federated learning. *Found. Trends Mach. Learn.*, pages 1–210, 2021.
- [141] P.Tian, Z.Chen, W.Yu, and W.Liao. Towards asynchronous federated learning based threat detection: A dc-adam approach. *Computers & Security*, 108:102344, 2021.
- [142] Q.Li, B.He, and D.Song. Model-contrastive federated learning. In *CVPR*, pages 10,713–10,722, 2021.
- [143] Q.Li, B.He, and D.Song. Adversarial collaborative learning on non-iid features. In *ICML*, 2023.
- [144] Q.Li et al. A survey on federated learning systems: vision, hype and reality for data privacy and protection. *IEEE TKDE*, 2021.
- [145] Q.Li, Y.Diao, Q.Chen, and B.He. Federated learning on non-iid data silos: An experimental study. *IEEE TKDE*, 2022.
- [146] Q.Liu, C.Chen, J.Qin, Q.Dou, and P.-A. Heng. Feddg: Federated domain generalization on medical image segmentation via episodic learning in continuous frequency space. In *CVPR*, pages 1013–1023, 2021.
- [147] Z. Qu, K. Lin, J. Kalagnanam, Z. Li, J. Zhou, and Z. Zhou. Federated learning’s blessing: Fedavg has linear speedup. In *ICLR*, 2021.
- [148] Q.Xia, Z.Tao, Z.Hao, and Q.Li. Faba: an algorithm for fast aggregation against byzantine attacks in distributed neural networks. In *IJCAI*, 2019.
- [149] A. Radford, J.W. Kim, C. Hallacy, A. Ramesh, G. Goh, S. Agarwal, G. Sastry, A. Askell, P. Mishkin, and J. Clark et al. Learning transferable visual models from natural language supervision. In *ICML*, pages 8748–8763, 2021.
- [150] T.H. Rafi, F.A. Noor, T.Hussain, and D.-K. Chae. Fairness and privacy-preserving in federated learning: A survey. *arXiv preprint arXiv:2306.08402*, 2023.
- [151] Alain Rakotomamonjy, Kimia Nadjahi, and Liva Ralaivola. Federated wasserstein distance. In *The Twelfth International Conference on Learning Representations*, 2024.
- [152] S. Reddi, Z. Charles, M. Zaheer, Z. Garrett, K. Rush, J. Konečný, S. Kumar, , and H. B. McMahan. Adaptive federated optimization. In *ICLR*, 2021.
- [153] R.Guerraoui, S.Rouault, et al. The hidden vulnerability of distributed learning in byzantium. In *ICML*, pages 3521–3530, 2018.
- [154] N. Rodríguez-Barroso, D. Jiménez-López, M. V. Luzón, F. Herrera, and E. Martínez-Cámara. Survey on federated learning threats: Concepts, taxonomy on attacks and defences, experimental study and challenges. *Information Fusion*, 90:148–173, 2023.

- [155] O. Russakovsky, J. Deng, H. Su, J. Krause, S. Satheesh, S. Ma, Z. Huang, A. Karpathy, A. Khosla, M. Bernstein, A. C. Berg, and L. Fei-Fei. Imagenet large scale visual recognition challenge. *IJCV*, pages 211–252, 2015.
- [156] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual recognition challenge. *International journal of computer vision*, 115:211–252, 2015.
- [157] R.Zhang, Q.Xu, J.Yao, Y.Zhang, Q.Tian, and Y.Wang. Federated domain generalization with generalization adjustment. In *CVPR*, pages 3954–3963, 2023.
- [158] Kate Saenko, Brian Kulis, Mario Fritz, and Trevor Darrell. Adapting visual category models to new domains. In *Proceedings of the 11th European Conference on Computer Vision: Part IV, ECCV’10*, page 213–226, Berlin, Heidelberg, 2010. Springer-Verlag.
- [159] S. Saha and T. Ahmad. Federated transfer learning: Concept and applications. *IA*, 15(1):35–44, 2021.
- [160] Jiawei Shao, Zijian Li, Wenqiang Sun, Tailin Zhou, Yuchang Sun, Lumin Liu, Zehong Lin, Yuyi Mao, and Jun Zhang. A survey of what to share in federated learning: Perspectives on model utility, privacy leakage, and communication efficiency, 2024.
- [161] L.S. Shapley. *A value for n-person games*, volume 69. 1997.
- [162] V. Shejwalkar and A. Houmansadr. Manipulating the byzantine: Optimizing model poisoning attacks and defenses for federated learning. In *NDSS*, 2021.
- [163] Jaemin Shin, Yuanchun Li, Yunxin Liu, and Sung-Ju Lee. Fedbalancer: data and pace control for efficient federated learning on heterogeneous clients. In *Proceedings of the 20th Annual International Conference on Mobile Systems, Applications and Services, MobiSys ’22*, page 436–449, New York, NY, USA, 2022. Association for Computing Machinery.
- [164] Milad Soltany, Farhad Pourpanah, Mahdiyar Molahasani, Michael Greenspan, and Ali Etemad. Federated domain generalization with label smoothing and balanced decentralized training. In *ICASSP 2025 - 2025 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1–5, 2025.
- [165] Jie Song, Li Wang, Hao Liu, et al. Fuzzfl: A fuzzy logic-based federated learning framework. *IEEE Transactions on Fuzzy Systems*, 29(5):1000–1012, 2021.
- [166] J. Sun, T. Chen, G.B. Giannakis, Q. Yang, and Z. Yang. Lazily aggregated quantized gradient innovation for communication-efficient federated learning. *IEEE PAMI*, 44(4):2031–2044, 2020.
- [167] Z. Sun, P. Kairouz, A. T. Suresh, and H. B. McMahan. Can you really backdoor federated learning? In *NeurIPS*, 2019.
- [168] Y. Tan, G. Long, L. Liu, T. Zhou, Q. Lu, J. Jiang, and C. Zhang. Fedproto: Federated prototype learning across heterogeneous clients. In *AAAI*, 2022.
- [169] Asadullah Tariq, Mohamed Adel Serhani, Farag M. Sallabi, Ezedin S. Barka, Tariq Qayyum, Heba M. Khater, and Khaled A. Shuaib. Trustworthy federated learning: A comprehensive review, architecture, key challenges, and future research prospects. *IEEE Open Journal of the Communications Society*, 5:4920–4998, 2024.
- [170] T.Gu, K.Liu, B.Dolan-Gavitt, and S.Garg. Badnets: Evaluating backdooring attacks on deep neural networks. *IEEE Access*, 7:47,230–47,244, 2019.
- [171] Dipanwita Thakur, Antonella Guzzo, Giancarlo Fortino, and Sajal K. Das. Non-convex optimization in federated learning via variance reduction and adaptive learning, 2024.
- [172] Tra Huong Thi Le, Nguyen H. Tran, Yan Kyaw Tun, Minh N. H. Nguyen, Shashi Raj Pandey, Zhu Han, and Choong Seon Hong. An incentive mechanism for federated learning in wireless cellular networks: An auction approach. *Trans. Wireless. Comm.*, 20(8):4874–4887, August 2021.
- [173] T.Li, A.K.Sahu, M.Zaheer, M.Sanjabi, A.Talwalkar, and V.Smith. Federated optimization in heterogeneous networks. In *MLSys*, 2020.
- [174] T.Li, M.Sanjabi, A.Beirami, and V.Smith. Fair resource allocation in federated learning. In *ICLR*, 2020.
- [175] T.Li, A.K. Sahu, A. Talwalkar, and V. Smith. Federated learning: Challenges, methods, and future directions. *IEEE SPM*, pages 50–60, 2020.

- [176] T.Song, Y.Tong, and S.Wei. Profit allocation for federated learning. In *IEEE Big Data*, pages 2577–2586, 2019.
- [177] T.Yoon, S.Shin, S.J. Hwang, and E.Yang. Fedmix: Approximation of mixup under mean augmented federated learning. In *ICLR*, 2021.
- [178] T.Zhou and E.Konukoglu. FedFA: Federated feature augmentation. In *ICLR*, 2023.
- [179] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A.N. Gomez, Ł. Kaiser, and I. Polosukhin. Attention is all you need. In *NeurIPS*, 2017.
- [180] V.Kulkarni, M.Kulkarni, and A.Pant. Survey of personalization techniques for federated learning. In *WorldS4*, pages 794–797, 2020.
- [181] V.Mothukuri, R.M. Parizi, S.Pouriyeh, Y.Huang, A.Dehghantanha, and G.Srivastava. A survey on security and privacy of federated learning. *Future Generation Computer Systems*, pages 619–640, 2021.
- [182] P. Voigt and A. Von dem Bussche. *The EU General Data Protection Regulation (GDPR)*. Springer International Publishing, 1st edition, 2017.
- [183] O.A. Wahab, A.Mourad, H.Otrok, and T.Taleb. Federated machine learning: Survey, multi-level classification, desirable criteria and future directions in communication and networking systems. *IEEE CST*, pages 1342–1397, 2021.
- [184] J. Wang, Q. Liu, H. Liang, G. Joshi, and H. V. Poor. Tackling the objective inconsistency problem in heterogeneous federated optimization. In *NeurIPS*, pages 7611–7623, 2020.
- [185] Z.Wang, Y.Zhu, D.Wang, and Z.Han. Fedacs: Federated skewness analytics in heterogeneous decentralized data environments. In *IWQOS*, pages 1–10, 2021.
- [186] K. Wei, J. Li, C. Ma, M. Ding, S. Wei, F. Wu, G. Chen, and T. Ranbaduge. Vertical federated learning: Challenges, methodologies and experiments. *arXiv preprint arXiv:2202.04309*, 2022.
- [187] Herbert Woiseschläger, Alexander Erben, Shiqiang Wang, Ruben Mayer, and Hans-Arno Jacobsen. Federated fine-tuning of llms on the very edge: The good, the bad, the ugly. In *Proceedings of the Eighth Workshop on Data Management for End-to-End Machine Learning, SIGMOD/PODS '24*, page 39–50. ACM, June 2024.
- [188] Di Wu, Jun Bai, Yiliao Song, Junjun Chen, Wei Zhou, Yong Xiang, and Atul Sajjanhar. Fedinverse: Evaluating privacy leakage in federated learning. In *The Twelfth International Conference on Learning Representations*, 2024.
- [189] G. Wu and S. Gong. Decentralised learning from independent multi-domain labels for person re-identification. In *AAAI*, pages 2898–2906, 2021.
- [190] W.Zheng, L. Yan, C. Gou, and F.-Y. Wang. Federated meta-learning for fraudulent credit card detection. In *IJCAI*, pages 4654–4660, 2021.
- [191] X.Cao, J.Jia, and N.Z. Gong. Provably secure federated learning against malicious clients. In *AAAI*, pages 6885–6893, 2021.
- [192] X.Cao, M.Fang, J.Liu, and N.Z. Gong. Fltrust: Byzantine-robust federated learning via trust bootstrapping. In *NDSS*, 2021.
- [193] X.Chen, C.Liu, B.Li, K.Lu, and D.Song. Targeted backdoor attacks on deep learning systems using data poisoning. *arXiv preprint arXiv:1712.05526*, 2017.
- [194] Tong Xia, Abhirup Ghosh, Xinchu Qiu, and Cecilia Mascolo. Flea: Addressing data scarcity and label skew in federated learning via privacy-preserving feature augmentation. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining, KDD '24*, page 3484–3494, New York, NY, USA, 2024. Association for Computing Machinery.
- [195] Han Xiao, Kashif Rasul, and Roland Vollgraf. Fashion-mnist: a novel image dataset for benchmarking machine learning algorithms. *arXiv preprint arXiv:1708.07747*, 2017.
- [196] S. Xie, R. Girshick, P. Dollár, Z. Tu, and K. He. Aggregated residual transformations for deep neural networks. In *CVPR*, pages 1492–1500, 2017.
- [197] X.Li, M.Jiang, X.Zhang, M.Kamp, and Q.Dou. Fed{bn}: Federated learning on non-{iid} features via local batch normalization. In *ICLR*, 2021.



- [198] X.Liu et al. Unifed: A benchmark for federated learning frameworks. *arXiv preprint arXiv:2207.10308*, 2022.
- [199] X.Liu, W.Xi, W.Li, D.Xu, G.Bai, and J.Zhao. Co-mda: Federated multi-source domain adaptation on black-box models. *IEEE TCSVT*, 2023.
- [200] X.Lyu, Y.Han, W.Wang, J.Liu, B.Wang, J.Liu, and X.Zhang. Poisoning with cerberus: stealthy and colluded backdoor attack against federated learning. In *AAAI*, 2023.
- [201] X.Ma, J.Zhu, Z.Lin, S.Chen, and Y.Qin. A state-of-the-art survey on solving non-iid data in federated learning. *Future Generation Computer Systems*, 135:244–258, 2022.
- [202] X.Mu, Y.Shen, K.Cheng, X.Geng, J.Fu, T.Zhang, and Z.Zhang. Fedproc: Prototypical contrastive federated learning on non-iid data. *arXiv preprint arXiv:2109.12273*, 2021.
- [203] X.Pan, P.Luo, J.Shi, and X.Tang. Two at once: Enhancing learning and generalization capacities via ibn-net. In *ECCV*, pages 464–479, 2018.
- [204] X.Peng, Z.Huang, Y.Zhu, and K.Saenko. Federated adversarial domain adaptation. In *ICLR*, 2020.
- [205] Yifan Xu, Wei Wang, Yujing Zhang, et al. Fedad: Federated learning via attention distillation. *arXiv preprint arXiv:2203.09553*, 2022.
- [206] X.Xu, H.Li, Z.Li, and X.Zhou. Safe: Synergic data filtering for federated learning in cloud-edge computing. *IEEE TII*, 19(2):1655–1665, 2022.
- [207] X.Xu, L.Lyu, X.Ma, C.Miao, C.S. Foo, and B.K.H. Low. Gradient driven rewards to guarantee fairness in collaborative machine learning. In *NeurIPS*, volume 34, pages 16,104–16,117, 2021.
- [208] X.Zhang, F.Li, Z.Zhang, Q.Li, C.Wang, and J.Wu. Enabling execution assurance of federated learning at untrusted participants. In *INFOCOM*, pages 1877–1886. IEEE, 2020.
- [209] H. Yang, J. Yuan, C. Li, G. Zhao, Z. Sun, Q. Yao, B. Bao, A.V. Vasilakos, and J. Zhang. Brainiot: Brain-like productive services provisioning with federated learning in industrial iot. *IEEE IoT-J*, 9(3):2014–2024, 2021.
- [210] Q. Yang, Y. Liu, T. Chen, and Y. Tong. Federated machine learning: Concept and applications. *ACM TIST*, pages 1–19, 2019.
- [211] Qiantao Yang, Xuehui Du, Xiangyu Wu, Wenjuan Wang, Aodi Liu, and Shihao Wang. Fedrtid: an efficient shuffle federated learning via random participation and adaptive time constraint. *Cybersecurity*, 7(1):76, 2024.
- [212] Y.Dandi, L.Barba, and M.Jaggi. Implicit gradient alignment in distributed and federated learning. In *AAAI*, pages 6454–6462, 2022.
- [213] Gokul Yenduri, M. Ramalingam, G. Chemmalar Selvi, Y. Supriya, Gautam Srivastava, Praveen Kumar Reddy Maddikunta, G. Deepti Raj, Rutvij H. Jhaveri, B. Prabadevi, Weizheng Wang, Athanasios V. Vasilakos, and Thippa Reddy Gadekallu. Gpt (generative pre-trained transformer)— a comprehensive review on enabling technologies, potential applications, emerging challenges, and future directions. *IEEE Access*, 12:54608–54649, 2024.
- [214] Y.LeCun, L.Bottou, Y.Bengio, and P.Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, pages 2278–2324, 1998.
- [215] Y.Li, X.Wang, R.Zeng, P.K. Donta, I.Murturi, M.Huang, and S.Dustdar. Federated domain generalization: A survey. *arXiv preprint arXiv:2306.01334*, 2023.
- [216] Y.Netzer, T.Wang, A.Coates, A.Bissacco, B.Wu, and A.Y. Ng. Reading digits in natural images with unsupervised feature learning. In *NeurIPS Workshop*, 2011.
- [217] J. H. Yoo, H. Jeong, J. Lee, and T.-M. Chung. Federated learning: Issues in medical application. In *FDSE*, pages 3–22, 2021.
- [218] Y.Ovadia, E.Fertig, J.Ren, Z.Nado, D.Sculley, S.Nowozin, J.Dillon, B.Lakshminarayanan, and J.Snoek. Can you trust your model’s uncertainty? evaluating predictive uncertainty under dataset shift. In *NeurIPS*, volume 32, 2019.
- [219] Y.Shi, H.Yu, and C.Leung. Towards fairness-aware federated learning. *IEEE TNNLS*, 2023.

- [220] Y. Shi, J. Liang, W. Zhang, V. Y. Tan, and S. Bai. Towards understanding and mitigating dimensional collapse in heterogeneous federated learning. In *ICLR*, 2023.
- [221] Y. Tan, Y. Liu, G. Long, J. Jiang, Q. Lu, and C. Zhang. Federated learning on non-iid graphs via structural knowledge sharing. In *AAAI*, 2023.
- [222] F. Yu, W. Zhang, Z. Qin, Z. Xu, D. Wang, C. Liu, Z. Tian, and X. Chen. Fed2: Feature-aligned federated learning. In *ACM SIGKDD*, pages 2066–2074, 2021.
- [223] Y. Wei, L. Yang, Y. Han, and Q. Hu. Multi-source collaborative contrastive learning for decentralized domain adaptation. *IEEE Transactions on Circuits and Systems for Video Technology*, 2022.
- [224] Y. Wei and Y. Han. Exploring instance relation for decentralized multi-source domain adaptation. In *ICASSP*, pages 1–5, 2023.
- [225] Y. Wu, Y. Kang, J. Luo, Y. He, and Q. Yang. Fedcgl: Leverage conditional gan for protecting privacy and maintaining competitive performance in federated learning. In *IJCAI*, pages 2334–2340, 2022.
- [226] Y. Zhao. Federated learning with non-iid data. *arXiv preprint arXiv:1806.00582*, 2018.
- [227] E. L. Zec, J. Martinsson, O. Mogren, L. R. Sütfield, and D. Gillblad. Specialized federated learning using mixture of experts. *arXiv preprint arXiv:2010.02056*, 2020.
- [228] L.-L. Zeng, Z. Fan, J. Su, M. Gan, L. Peng, H. Shen, and D. Hu. Gradient matching federated domain adaptation for brain image classification. *IEEE TNLS*, 2022.
- [229] J. Zhang, Z. Li, B. Li, J. Xu, S. Wu, S. Ding, and C. Wu. Federated learning with label distribution skew via logits calibration. In *ICML*, pages 26 311–26 329, 2022.
- [230] Junyuan Zhang, Shuang Zeng, Miao Zhang, Runxi Wang, Feifei Wang, Yuyin Zhou, Paul Pu Liang, and Liangqiong Qu. Flhetbench: Benchmarking device and state heterogeneity in federated learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12098–12108, 2024.
- [231] Kai Zhang, Yu Wang, Hongyi Wang, Lifu Huang, Carl Yang, Xun Chen, and Lichao Sun. Efficient federated learning on knowledge graphs via privacy-preserving relation embedding aggregation. In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang, editors, *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 613–621, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics.
- [232] R. Zhang, X. Hu, B. Li, S. Huang, H. Deng, Y. Qiao, P. Gao, and H. Li. Prompt, generate, then cache: Cascade of foundation models makes strong few-shot learners. In *CVPR*, pages 15211–15222, 2023.
- [233] Z. Zhou, S. S. Azam, C. Brinton, and D. I. Inouye. Efficient federated domain translation. In *ICLR*, 2023.
- [234] Z. Hu, K. Shaloudegi, G. Zhang, and Y. Yu. Fedmgda+: Federated learning meets multi-objective optimization. corr abs/2006.11489 (2020). *IEEE TNSE*, 2020.
- [235] M. H. Zhu, L. N. Ezzine, D. Liu, and Y. Bengio. Fedilc: Weighted geometric mean and invariant gradient covariance for federated learning on non-iid data. *arXiv preprint arXiv:2205.09305*, 2022.
- [236] W. Zhuang, Y. Wen, X. Zhang, X. Gan, D. Yin, D. Zhou, S. Zhang, and S. Yi. Performance optimization of federated person re-identification via benchmark analysis. In *ACM MM*, pages 955–963, 2020.
- [237] Z. Niu, H. Wang, H. Sun, S. Ouyang, Y. w. Chen, and L. Lin. Mckd: Mutually collaborative knowledge distillation for federated domain adaptation and generalization. In *ICASSP*, pages 1–5, 2023.
- [238] Z. Qu, X. Li, R. Duan, Y. Liu, B. Tang, and Z. Lu. Generalized federated learning via sharpness aware minimization. In *ICML*, 2022.
- [239] Z. Wang, X. Fan, J. Qi, C. Wen, C. Wang, and R. Yu. Federated learning with fair averaging. In *IJCAI*, 2021.
- [240] Z. Zhang, Q. Su, and X. Sun. Dim-krum: Backdoor-resistant federated learning for nlp with dimension-wise krum-based aggregation. In *EMNLP*, 2022.
- [241] Z. Zhu, J. Hong, and J. Zhou. Data-free knowledge distillation for heterogeneous federated learning. In *ICML*, pages 12,878–12,889, 2021.

# Appendix to ATR-Bench: A Federated Learning Benchmark for Adaptation, Trust, and Reasoning

Sec. [A](#) discuss background thoroughly

Sec. [B](#) discuss hyperparameters

Sec. [C](#) discuss prior work extensively

Sec. [D](#) depicts the outline of ATR-Bench

Sec. [E](#) provides additional details on benchmark metrics

Sec. [F](#) provides additional details experimental setup

Sec. [G](#) provides additional details future directions

## A Background

### A.1 History and Terminology

Federated learning enables multiple parties to jointly train a shared model without exchanging their raw data, preserving privacy and reducing communication overhead. Early formulations include client-server optimization schemes and federated averaging algorithms [81, 82, 118]. Depending on how data are partitioned across participants, FL methods are typically divided into three paradigms [66, 154]:

- **Horizontal Federated Learning (HFL):** All clients hold data with the same feature space but on different samples. They collaboratively update a global model by sharing parameter updates while keeping each local dataset private [118, 122].
- **Vertical Federated Learning (VFL):** Participants possess complementary features for the same set of entities. Secure protocols are used to jointly compute model updates on aligned samples without revealing individual feature values [104, 186].
- **Federated Transfer Learning (FTL):** When both feature spaces and sample sets differ across clients, FTL applies transfer learning techniques—such as knowledge distillation or representation mapping—to enable knowledge sharing between heterogeneous domains [103, 159].

In this work, we concentrate on four fundamental properties of horizontal federated learning (HFL)<sup>2</sup> and present a unified evaluation framework under the HFL setting: Generalization (GFL). Due to the non-IID nature of client data, federated models must contend with both cross-client distribution shifts—where local empirical risks diverge across participants—and out-of-client distribution shifts, which capture discrepancies between seen and unseen client populations [95, 204, 146]. These phenomena hinder both convergence speed and test-time performance when models are deployed on new or held-out clients. Robustness (RFL). Federated learning’s decentralized paradigm exposes it to adversarial manipulation. On one hand, Byzantine attacks corrupt either local training data or uploaded updates to derail global aggregation [88, 26]. On the other, backdoor attacks stealthily inject triggers into client updates so that the global model behaves normally on benign inputs but misclassifies targeted samples [167, 36]. Fairness (FFL). Equitable participation and performance are critical to sustain federated collaborations. Collaborative fairness addresses how to reward clients proportionally to their computational effort and data value [176, 132], while performance fairness

---

<sup>2</sup>We use “HFL” to denote horizontal federated learning.

ensures that the global model does not systematically underperform on underrepresented or marginalized client distributions [127, 18]. Reasoning (RFL). As federated models are increasingly applied to complex, multimodal tasks—such as edge-device vision or medical diagnostics, they must support structured, multi-step reasoning across distributed and heterogeneous data sources. Constraints on bandwidth and privacy make it challenging to share full context, so federated systems require mechanisms for distributed reasoning and privacy-preserving fine-tuning that maintain coherent inference chains under Non-IID conditions [91]. By benchmarking these three axes: generalization, robustness, reasoning under a common HFL protocol, we aim to provide a comprehensive assessment of federated methods and elucidate their trade-offs for real-world, privacy-sensitive deployments.

## A.2 Problem Formulation

We consider a horizontal federated learning setting with  $M$  clients, indexed by  $i = 1, \dots, M$ , each holding a private dataset  $\mathcal{D}_i$  of size  $N_i = |\mathcal{D}_i|$ . Each example  $(x, y) \in \mathcal{D}_i$  is drawn from a client-specific distribution  $\mathbb{P}_i(x, y)$ . Our goal is to train a shared model

$$w = f \circ g,$$

where  $f : \mathcal{X} \rightarrow \mathbb{R}^d$  is a feature extractor mapping inputs  $x$  to  $d$ -dimensional embeddings  $h = f(x)$ , and  $g : \mathbb{R}^d \rightarrow \mathbb{R}^{|C|}$  is a classifier producing logits  $z = g(h)$  over the label set  $C$ .

Federated learning seeks the global parameter  $w^*$  that minimizes a weighted combination of local empirical risks:

$$w^* = \underset{w}{\operatorname{argmin}} \sum_{i=1}^M \alpha_i \mathcal{L}_i(w; \mathcal{D}_i), \quad (1)$$

where  $\mathcal{L}_i(w; \mathcal{D}_i) = \frac{1}{N_i} \sum_{(x,y) \in \mathcal{D}_i} \ell(g(f(x)), y)$  is the average loss on client  $i$ , and the mixing weights satisfy  $\sum_i \alpha_i = 1$  (commonly  $\alpha_i = N_i / \sum_j N_j$  or  $\alpha_i = 1/M$ ).

Training proceeds in communication rounds, each consisting of three phases:

1. **Broadcast:**  $w_i^{(t)} = w^{(t-1)} \quad \forall i,$
  2. **Local Update:**  $w_i^{(t)} \leftarrow \underset{w_i}{\operatorname{argmin}} \mathbb{E}_{(x,y) \sim \mathcal{D}_i} [\ell(g(f(x; w_i)), y)],$
  3. **Aggregation:**  $w^{(t)} = \sum_{i=1}^M \alpha_i w_i^{(t)}.$
- (2)

Here, step 1 distributes the current global model to all clients; step 2 performs one or more epochs of local optimization (e.g. via SGD) on each  $\mathcal{D}_i$ ; and step 3 fuses client updates into the new global model. This iterative protocol continues until convergence or a stopping criterion is met [118, 173].“

### A.2.1 Data Heterogeneity in Federated Learning

In real-world federated setups, each client’s dataset  $\mathcal{D}_i$  is drawn from its own distribution  $\mathbb{P}_i(x, y)$ , leading to non-IID data across the network [173, 146, 147]. We often decompose  $\mathbb{P}_i(x, y) = \mathbb{P}_i(y) \mathbb{P}_i(x | y)$  and distinguish two principal forms of heterogeneity:

- **Label shift:** Clients differ in their label marginals but share the same class-conditional features:

$$\mathbb{P}_i(y) \neq \mathbb{P}_j(y), \quad \mathbb{P}_i(x | y) = \mathbb{P}_j(x | y).$$

A common simulation uses Dirichlet sampling [83] to skew  $\mathbb{P}_i(y)$ .

- **Feature shift:** All clients have the same label distribution but observe different feature patterns for each class:

$$\mathbb{P}_i(y) = \mathbb{P}_j(y), \quad \mathbb{P}_i(x | y) \neq \mathbb{P}_j(x | y).$$

This arises, for example, when imaging devices vary across hospitals [197].

Beyond these in-network shifts, **out-of-client shift** refers to the performance degradation when deploying the federated model on entirely new data sources  $\mathbb{P}_o(x, y) \neq \mathbb{P}_i(x, y)$ , despite matching label marginals:

$$\mathbb{P}_o(y) = \mathbb{P}_i(y), \quad \mathbb{P}_o(x | y) \neq \mathbb{P}_i(x | y).$$

Such unseen domain shifts underscore the need for federated methods that generalize beyond the participating clients [65].

### A.2.2 Adversarial Threats in Federated Learning

In federated settings, untrusted participants may launch attacks that compromise model integrity. We categorize these into two broad classes:

**1. Byzantine (Untargeted) Attacks** Here, adversaries aim to simply degrade overall model accuracy without a specific target outcome [8, 153, 26]. Two common strategies are:

- **Data Poisoning:** Malicious clients corrupt their local training data before participating. For example, in symmetric label noise (SymFlip), each label is flipped to any other class with equal probability  $\epsilon/(|C|-1)$ :

$$T_{\text{sym}}(i, j) = \begin{cases} 1 - \epsilon & i = j, \\ \frac{\epsilon}{|C|-1} & i \neq j, \end{cases}$$

while in pair-flip noise (PairFlip) labels are only swapped among semantically similar classes [9, 4].

- **Model Poisoning:** Rather than tampering with data, adversaries directly alter their client updates. Examples include:
  - *Random-Noise:* Substituting the true gradient  $\nabla_k$  with random values (e.g., Gaussian noise).
  - *Lie Attack:* Crafting updates just beyond detection thresholds by adding a small multiple of the benign update standard deviation [44].
  - *Optimization-Aware Poisoning:* Solving a max-loss subproblem to push the global model away from its benign update trajectory [121].
  - *MinMax/MinSum Attacks:* Adjusting the poisoned update so that its maximum (or sum) distance to benign updates remains within the natural benign update spread [162].

**2. Backdoor (Targeted) Attacks** Here, the attacker embeds a hidden trigger so that when specific patterns are present, the global model misclassifies inputs into a chosen target label, while preserving normal performance otherwise [193, 17]. Concretely, poisoned clients mix a trigger mask  $m$  and pattern  $\Phi$  into a fraction of their examples:

$$\tilde{x} = (1 - m) \odot x + m \odot \Phi,$$

and optimize a combined loss:

$$\mathbb{E}_{(x,y) \sim D_i} [L(w_i, x, y)] + \lambda \mathbb{E}_{(\tilde{x}, y_t)} [L(w_i, \tilde{x}, y_t)],$$

where  $y_t$  is the attacker-specified target class and  $\lambda \geq 0$  balances backdoor potency against clean-data fidelity. Recent work has shown that distributing trigger fragments across multiple malicious clients can evade standard defenses [21, 200].

### A.2.3 Client Incentives and Fairness

Federated learning relies on voluntary participation of clients with heterogeneous data and compute resources. To maintain long-term engagement and equitable outcomes, two primary fairness concerns must be addressed:

**Reward Allocation (Reward Conflict)** Clients incur varying costs (e.g., data labeling, computation) and contribute unequally to the global model’s performance [208, 219]. A fair compensation scheme should grant higher rewards to those whose participation yields larger marginal gains. We adopt the Shapley Value from cooperative game theory [161, 5, 120] to quantify each client’s contribution:

$$\nu_i = \frac{\rho}{M} \sum_{S \subseteq \{1, \dots, M\} \setminus \{i\}} \frac{A(w_{S \cup \{i\}}, u) - A(w_S, u)}{\binom{M-1}{|S|}},$$

where  $A(w_S, u)$  is the model accuracy on test set  $u$  when trained on clients in  $S$ , and  $\rho > 0$  scales the values.



**Prediction Consistency (Prediction Biases)** Data heterogeneity can cause the global model to perform well on some client domains but poorly on others, leading to prediction bias [127, 174]. We measure this by the standard deviation of per-domain accuracies:

$$\zeta = \text{StdDev}(\{A(w, u)\}_{u \in \mathcal{U}}),$$

where  $\mathcal{U}$  is the set of evaluation domains. Lower  $\zeta$  indicates more uniform performance, while higher  $\zeta$  signals greater disparity among client groups.

## B Hyperparameters

Table 9: Selected hyper-parameters for the various evaluated methods. Note that similar symbols may represent **different concepts** across different approaches. Detailed explanations are provided in § F.2.


Method	Hyper-Parameters
<b>General FL Methods (Generalizable Federated Learning) . . § 2</b>	
FedProx [173]	Proximal term $\mu = 0.01$
SCAFFOLD [78]	Server-side learning rate $lr = 0.25$
FedProc [202]	Contrastive temperature $\tau = 1.0$
MOON [142]	$\tau = 0.5$ (temp), $\mu = 1.0$ (proximal)
FedRS [96]	Scaling factor $\alpha = 0.5$
FedDyn [202]	Regularization strength $\alpha = 0.5$
FedOpt [152]	Global optimizer LR $\eta_g = 0.5$
FedProto [168]	Prototype regularizer $\lambda = 2$
FedLC [229]	Scaling factor $\tau = 0.5$
FedDC [87]	Penalty weight $\alpha = 0.1$
FedNTD [45]	Temp $\tau = 1$ , Reg weight $\beta = 1$
FPL [61]	Contrastive temperature $\tau = 0.02$
KD3A [55]	Confidence gate $g \in [0.9, 0.95]$
<b>Robust FL Methods (Robust Federated Learning) . . . . § 3</b>	
Multi-Krum [8]	Byzantine tolerance $\Upsilon < 50\%$ , Top-K: 5
Bulyan [153]	Byzantine tolerance $\Upsilon < 50\%$
Trimmed Mean [35]	Evil client ratio $\Upsilon < 50\%$
FoolsGold [42]	Stability threshold $\epsilon = 10^{-5}$
DnC [162]	Sub-dim $b = 1000$ , filter ratio $c = 1.0$
FLTrust [192]	Public epochs $E = 20$
SageFlow [70]	Threshold $E_{th} = 2.2$ , exponent $\delta = 5$
RFA [85]	Iterations $E = 3$
RLR [136]	LR $lr = 1.0$ , threshold $\tau = 4.0$
CRFL [22]	Norm threshold $\rho = 15$ , smoothing $\sigma = 0.01$
<b>Fairness-Oriented FL Methods (Fair Federated Learning) . § 3</b>	
AFL [127]	Regularization coefficient $\gamma = 0.01$

## C Related Work

Federated learning (FL) has spawned numerous survey papers in recent years. Early overviews [210, 175, 183, 144, 140, 154] lay out the high-level principles and system challenges, but typically do not delve into detailed algorithmic solutions for specific FL problems. A large body of work addresses distributional heterogeneity in FL. Several surveys [226, 66, 145, 129, 215] categorize approaches for label skew, feature skew, and concept drift between clients, and compare client-level strategies such as local regularization [173], personalized layers [100], and meta-learning [38]. Domain adaptation in FL—where some target domain data are available during training—is surveyed in [204, 65], highlighting adversarial alignment [46] and feature disentanglement [50]. Out-of-distribution generalization methods, which aim to perform well on unseen client distributions, are comparatively less reviewed but include invariant optimization [146] and robust aggregation schemes [34]. FL’s distributed nature makes it vulnerable to Byzantine and backdoor attacks. Surveys on adversarial threats [108, 72, 71] classify untargeted data and model poisoning (e.g., [8, 153]) and targeted backdoors [167, 36]. Defense surveys [181] compare robust aggregation, anomaly detection, and certified defenses [191, 22]. Fairness in FL encompasses both equitable performance across client groups and fair reward allocation. Recent reviews [150, 219] discuss methods that enforce uniform

accuracy via min–max optimization [127, 174] or multi-objective updates [234]. Client-level incentive mechanisms based on reputations [111] and data valuation via Shapley approximations [207, 67] are surveyed in [144]. As FL moves into high-stakes domains, model transparency and reasoning become critical. While most surveys focus on performance, a few emerging works [101] explore integrating chain-of-thought explanations into FL, and others [165] survey symbolic and knowledge-graph based federated models. However, there is no comprehensive survey that brings together domain adaptation, generalization, robustness, fairness, and reasoning under a unified evaluation framework. To fill these gaps, we present the first holistic survey and benchmark that jointly examines *domain adaptation*, *OOD generalization*, *adversarial robustness*, *fairness*, and *reasoning* in FL. We systematically categorize state-of-the-art methods in each dimension and provide a unified empirical comparison across common benchmarks, offering both breadth and depth for researchers and practitioners.

## D Outline

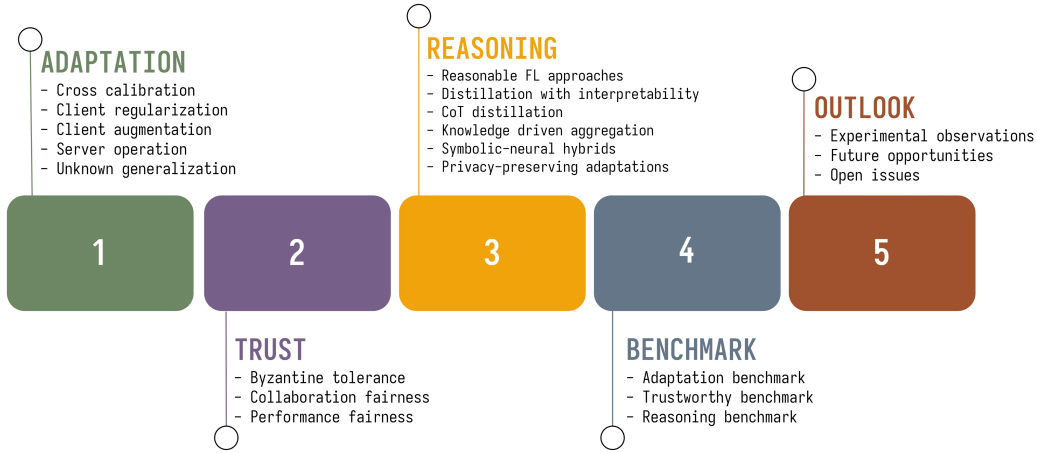

ATR-Bench framework is organized around five key components, each addressing a foundational aspect of federated learning. Adaptation focuses on techniques that enhance generalization across diverse clients, including regularization, augmentation, and cross-domain calibration. Trust centers on robustness in adversarial and unreliable environments, covering Byzantine resilience and fairness across both collaboration and performance. Reasoning introduces an emerging line of research into interpretability and symbolic-neural integrations, highlighting methods like distillation with interpretability and knowledge-driven aggregation. The Benchmark module formalizes these dimensions through standardized evaluations, enabling consistent comparisons across methods and datasets. Finally, Outlook offers reflective insights, summarizing experimental findings and outlining future research opportunities. Together, these pillars form a structured foundation for evaluating, comparing, and advancing federated learning in real-world settings.

## E Benchmark Metrics

### E.1 Generalization Metrics

We evaluate a federated model’s ability to handle distribution shifts in two scenarios: *cross-client* and *out-of-distribution*.

**Cross-Client Accuracy.** Under cross-client heterogeneity, each client’s test set  $u$  may follow a different distribution. We measure the standard Top-1 accuracy on each  $u$  as

$$A_u = \frac{1}{|u|} \sum_{(x,y) \in u} \mathbf{1}\{\arg \max w(x) = y\},$$

and report the mean over a collection of held-out client sets  $\mathcal{U}$  via

$$A_{\mathcal{U}} = \frac{1}{|\mathcal{U}|} \sum_{u \in \mathcal{U}} A_u.$$

Results across held-out clients under various distribution shifts are summarized in Table 10.

**Out-of-Distribution Accuracy.** To assess performance on entirely unseen domains, we compute Top-1 accuracy on a designated OOD test set  $O$ :

$$A_O = \frac{1}{|O|} \sum_{(x,y) \in O} \mathbf{1}\{\arg \max w(x) = y\}.$$

## E.2 Robustness Metrics

In federated learning, adversarial participants can undermine the shared model through untargeted (Byzantine) or targeted (backdoor) manipulations. We quantify defense effectiveness with two key metrics:

**Accuracy Degradation ( $I$ ).** For Byzantine resilience, compare the model’s clean accuracy  $A_{\text{clean}}$  on domain  $u$  against its accuracy under attack  $A_{\text{byz}}$ . The degradation

$$I = A_{\text{clean}} - A_{\text{byz}}$$

measures how much performance is lost due to malicious updates.

**Backdoor Success Rate ( $R$ ).** To assess backdoor defenses, we inject a trigger into each test sample, yielding  $(\tilde{x}, \tilde{y})$ , and record the fraction that the global model misclassifies as the attacker’s target label:

$$R = \frac{1}{|\tilde{T}|} \sum_{(\tilde{x}, \tilde{y}) \in \tilde{T}} \mathbf{1}\{\arg \max w(\tilde{x}) = \tilde{y}\},$$

where  $\tilde{T}$  is the set of all poisoned examples.

Table 10: **Performance under Out-Client Shift** setting, reported using the metric  $\mathcal{A}^O$ , across the Office Caltech, Digits, PACS, and Office31 benchmarks. Refer to § 5.1 for detailed analysis.

Methods	Office Caltech					Digits					PACS					Office31			
	→Ca	→Am	→W	→D	AVG	→M	→U	→Svz	→Sy	AVG	→P	→AP	→Ct	→Sk	AVG	→D	→Am	→W	AVG
FedAvg [118]	58.12	67.47	43.10	80.00	62.17	32.60	47.20	13.91	13.54	26.81	52.28	46.16	60.74	51.12	52.57	14.28	8.93	21.51	14.90
FedProx [173]	56.60	69.26	42.41	85.33	63.40	23.54	60.28	15.83	13.78	28.35	54.45	49.61	56.91	56.17	54.28	15.92	6.01	19.36	13.76
SCAFFOLD [78]	36.07	47.36	45.86	59.33	47.15	67.61	82.39	7.79	14.52	<b>43.07</b>	43.85	23.81	45.07	39.79	38.12	12.44	5.58	10.88	9.63
FedProc [202]	47.41	60.84	42.41	66.66	54.33	24.34	43.37	10.15	13.09	22.73	56.94	30.95	56.02	49.94	48.46	19.39	4.91	10.38	11.56
MOON [142]	55.53	68.63	44.83	79.33	62.08	31.28	31.75	14.30	14.45	22.94	54.01	45.10	60.42	58.10	<u>54.40</u>	14.08	7.04	21.39	14.17
FedDyn [1]	59.99	66.42	40.34	81.99	62.18	28.74	56.08	14.36	11.88	27.76	51.40	43.19	60.57	50.71	51.46	14.08	7.86	17.85	13.26
FedOPT [152]	52.67	55.68	60.34	69.33	59.50	59.35	62.62	17.59	15.22	<u>38.69</u>	57.64	39.19	45.92	49.50	48.06	19.38	6.90	18.73	15.00
FedProto [168]	60.35	66.94	58.62	76.00	<b>65.47</b>	43.67	58.08	13.49	13.73	32.24	65.07	36.56	56.98	57.87	54.12	31.01	7.08	23.54	<b>20.54</b>
FedNTD [45]	58.66	69.47	44.83	84.00	<u>64.23</u>	24.15	58.56	18.44	13.68	28.70	64.50	47.47	58.52	53.43	<b>55.98</b>	17.75	7.12	27.97	<u>17.61</u>
Design for Federated Domain Adaptation setting																			
COPA [50]	55.17	67.05	56.55	78.33	64.27	58.93	92.20	10.49	14.90	44.13	71.61	53.74	63.12	56.60	61.26	43.06	6.69	31.26	27.00
KD3A [55]	54.73	70.00	68.61	75.33	<b>67.16</b>	83.91	97.46	14.33	34.03	<b>57.43</b>	76.99	56.91	67.63	55.70	<b>64.30</b>	44.28	8.04	37.08	<b>29.80</b>
Design for Federated Domain Generalization setting																			
COPA [50]	57.32	66.31	48.27	70.00	<b>60.47</b>	33.76	47.32	13.26	15.16	27.37	59.54	35.33	56.67	57.93	<b>52.36</b>	21.22	5.48	19.49	<b>15.39</b>
FedGA [157]	44.28	54.10	51.72	71.33	55.35	58.74	86.92	9.16	14.81	<b>42.40</b>	59.00	35.01	43.20	53.60	47.70	22.24	5.15	10.63	12.67

## E.3 Fairness Metrics

In federated learning, participants incur varying costs and offer data of unequal value, making fair reward allocation and uniform performance critical. The federated settings we experiment with are outlined in Table 11, and Figure 2 provides an overview of the datasets involved. We capture these with two complementary metrics:

**Contribution Impact ( $\mathcal{C}$ ).** Rather than using static weights  $\alpha_i$ , we quantify each client’s real influence on global accuracy by a leave-one-out procedure. Let  $w$  be the assembled global model and  $w_i$  the contribution from client  $i$ . Excluding  $i$  yields

$$w^{-i} = \frac{w - \alpha_i w_i}{1 - \alpha_i}.$$

We measure the average accuracy over all test domains before and after removal,

$$\Delta_i = \bar{A} - \frac{1}{|\mathcal{U}|} \sum_{u \in \mathcal{U}} A_u^{-i},$$

where  $\bar{A}$  is the mean accuracy and  $A_u^{-i}$  denotes performance on domain  $u$  without client  $i$ . Normalizing the vector  $\Delta = (\Delta_1, \dots, \Delta_M)$  and the weight vector  $\alpha$ , we define the contribution score

$$\mathcal{C} = \frac{\Delta \cdot \alpha}{\|\Delta\|_2 \|\alpha\|_2},$$

so that higher  $\mathcal{C}$  indicates closer alignment between actual impact and nominal weights.

**Accuracy Consistency ( $\mathcal{V}$ ).** To evaluate how evenly the model serves all clients, we compute the standard deviation of per-domain accuracies:

$$\mathcal{V} = \sqrt{\frac{1}{|\mathcal{U}|} \sum_{u \in \mathcal{U}} (A_u - \bar{A})^2} \times 100\%.$$

A smaller  $\mathcal{V}$  reflects more uniform performance across heterogeneous client distributions.

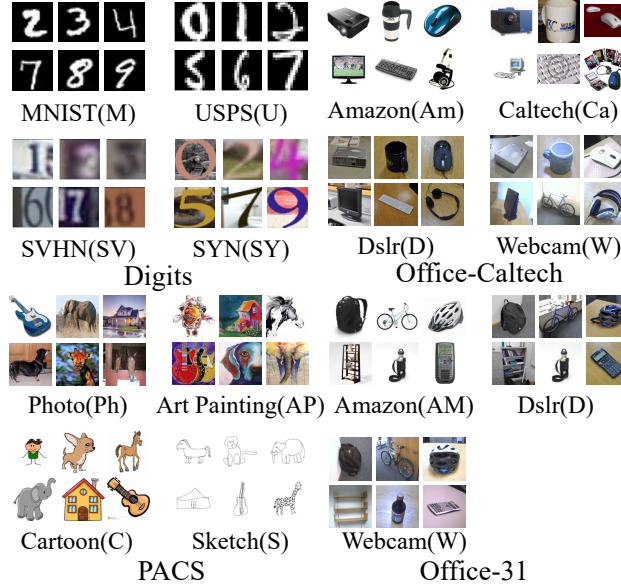


Figure 2: Visualization for Digits [214, 63, 216, 80], Office Caltech [39], PACS, and Office31 [158]. Refer to § 5.

## F Benchmark Setup

### F.1 Data Augmentation

To improve model robustness under data heterogeneity, we apply standard image transformations on each client’s local data, implemented via PyTorch routines:

- `RandomCrop(size)`: Crop a random patch of the specified size (e.g.,  $32 \times 32$  or  $224 \times 224$ ).

- `RandomHorizontalFlip(p)`: Flip images horizontally with probability  $p$  (default  $p = 0.5$ ).
- `Normalize(mean, std)`: Scale pixel values to zero mean and unit variance using dataset-specific mean and std vectors.

Table 11: **Experiments Configuration of different federated scenarios.** Image Size is operated after the resize operation.  $|C|$  denotes the classification scale.  $|K|$  denotes the clients number.  $E$  is the communication epochs for federation.  $B$  means the training batch size

Scenario	Size	$ C $	Network $w$	Rate $\eta$	$ K $	$E$	$B$
<i>Label Skew Setting § 5</i>							
Cifar-10	32	10	SimpleCNN	1e-2	10	100	64
Fashion-MNIST	32	10	SimpleCNN	1e-2	10	100	64
MNIST	32	10	SimpleCNN	1e-2	10	100	64
Cifar-100	32	100	ResNet-50	1e-1	10	100	64
Tiny-ImageNet	32	200	ResNet-50	1e-2	10	100	64
<i>Domain Skew / Out-Client Shift Settings § 5</i>							
Digits	32	10	ResNet-18	1e-2	4/3	50	16
PACS	224	7	ResNet-34	1e-3	4/3	50	16
Office Caltech	224	10	ResNet-34	1e-3	4/3	50	16
Office-Home	224	65	ResNet-34	1e-3	4/3	50	16

## F.2 Implementation Details

**Optimization and Training Protocol.** All methods are evaluated under a common protocol: each client performs  $U = 10$  local SGD epochs per communication round, using a batch size of 64, momentum 0.9, and weight decay  $10^{-5}$ . The learning rate  $\eta$  and number of global rounds  $E$  vary by task and are specified in Table 11. We choose  $E$  such that further rounds yield negligible improvement across all algorithms. Experiments are implemented in PyTorch, are seeded for reproducibility and run on NVIDIA RTX 3090 GPUs.

**Model Architectures.** For lightweight benchmarks, we adopt a simple CNN with two  $5 \times 5$  convolutional layers (each followed by  $2 \times 2$  max-pooling), hereafter called SimpleCNN. Larger datasets use ResNet variants [53]. Exact layer counts and input resolutions per scenario are detailed in Table 11.

**Adversary Configurations.** When simulating malicious clients, we vary the fraction of adversaries  $\Upsilon \in \{0.2, 0.4\}$ . For data-poisoning attacks (SymFlip, PairFlip), the corruption probability is set to  $\epsilon = 0.5$ . Model-poisoning strategies follow the parameter perturbation schemes described in Section A.2.2.

## G Future Work

Building on the state of the art, we identify several key challenges for next-generation federated systems:

- **Balancing Generalization and Robustness.** Heterogeneous client data drives the need for broad generalization, yet robustness mechanisms must detect and exclude malicious contributions. When benign clients happen to hold atypical data, they risk being misclassified as attackers, degrading overall performance. Future work should develop joint objectives that preserve legitimate diversity while filtering adversarial behavior.
- **Reconciling Generalization with Fairness.** Optimizing for average accuracy across all clients can obscure poor performance on minority distributions, whereas fairness aims for uniform accuracy regardless of data volume or difficulty. Multi-objective formulations that simultaneously maximize mean accuracy and minimize inter-client variance are needed to avoid this “majority wins” trade-off.
- **Synergies Between Robustness and Fairness.** Accurate contribution metrics underpin both robust outlier rejection and fair reward allocation. By integrating anomaly detection into incentive mechanisms, systems can ensure that low-contribution or malicious



clients are neither over-rewarded nor under-penalized, fostering both security and long-term participation.

- **Vertical FL with Generalization, Robustness, and Fairness.** In vertical settings, clients hold complementary feature views of the same entities. Aligning heterogeneous feature sets without leaking private attributes remains an open problem. Moreover, attackers may exploit feature inference or label inference attacks, demanding novel defenses such as secure multi-party computation or homomorphic encryption. Finally, feature-level fairness—ensuring no single view dominates the global model—requires new measures of contribution and bias mitigation.
- **Federating Large Pretrained Models.** Fine-tuning massive foundation models on decentralized data promises strong personalization, but communication costs and intellectual property concerns pose significant barriers. Research should explore parameter-efficient updates (e.g., adapters, low-rank updates), encrypted or compressed aggregation protocols, and incentive schemes that protect model ownership while enabling collaborative improvement.
- **Enabling Reasoning-Centric Personalization.** Current federated learning systems largely optimize for classification or regression tasks, while neglecting reasoning capabilities such as multi-hop inference, commonsense logic, or context-aware question answering. These tasks require richer representations and deeper model understanding—often beyond local training signals. Future research should explore reasoning-aware objectives, knowledge distillation across clients, and hierarchical model structures that enable reasoning patterns to emerge across non-iid data distributions. Additionally, curriculum-based or scaffolded training schedules tailored to client capabilities may allow reasoning modules to be co-learned without centralized supervision.