Common Data Format (CDF)—a Standardized Format for Match-Data in Football (Soccer)

Gabriel Anzer¹, Kilian Arnsmeyer², Pascal Bauer^{2,3}, Joris Bekkers^{4, 5, 13}, Ulf Brefeld⁶, Jesse Davis⁷, Nicolas Evans⁸, Matthias Kempe⁹, Samuel J Robertson⁸, Joshua Wyatt Smith^{10, 11}, and Jan Van Haaren^{7, 12}

¹RB Leipzig, Leipzig, Germany

²Deutscher Fußball-Bund (DFB), Frankfurt, Germany

³Saarland University, Saarbrücken, Germany

⁴U.S. Soccer Federation, Chicago, USA

⁵UnravelSports, Breda, Netherlands

⁶Leuphana University, Lüneburg, Germany

⁷KU Leuven, Leuven.AI, & LISS, Heverlee, Belgium

⁸FIFA, Zurich, Switzerland

⁹University of Groningen, Groningen, Netherlands

¹⁰Wyatt AI Inc., Montreal, Canada

¹¹Concordia University, Montreal, Canada

¹²Club Brugge, Brugge, Belgium

¹³PySport, Eindhoven, Netherlands

December 2024

Abstract

During football matches, a variety of different parties (e.g., companies) each collect (possibly overlapping) data about the match ranging from basic information (e.g., starting players) to detailed positional data. This data is provided to clubs, federations, and other organizations who are increasingly interested in leveraging this data to inform their decision making. Unfortunately, analyzing such data pose significant barriers because each provider may (1) collect different data, (2) use different specifications even within the same category of data, (3) represent the data differently, and (4) delivers the data in a different manner (e.g., file format, protocol). Consequently, working with these data requires a significant investment of time and money. The goal of this work is to propose a uniform and standardized format for football data called the *Common Data Format (CDF)*. The CDF specifies a minimal schema for five types of match data: match sheet data, video footage, event data, tracking data, and match meta data. It aims to ensure that the provided data is clear, sufficiently contextualized (e.g., its provenance is clear), and complete such that it enables common downstream analysis tasks. Concretely, this paper will detail the technical specifications of the CDF, the representational choices that were made to help ensure the clarity of the provided data, and a concrete approach for delivering data in CDF.

1 Introduction

Over the past two decades, professional sports organisations have increasingly relied on data-driven analysis to inform roster construction, tactical analysis, and marketing [17, 19]. This change has arisen for several reasons. First, there have been notable public examples of teams successfully employing data, which is most famously exemplified by baseball [16]. Second, there has been a huge increase in the quantity and quality of data that can be collected, due in part to the growth of technology providers and associated financial incentives.

In team invasion sports such as American football, basketball, and football (soccer) there typically six sources of data:

Match Sheet Data include information such as the result of the match, line-ups, cards, and goals. Such data are collected for almost all matches, including amateur ones.

Video Footage is recorded from multiple perspectives and in multiple resolutions for each match. These data serve various purposes such as providing broadcast to fans or facilitating tactical analyses.

Event Data record semantically meaningful "on-ball" events that occur during a match [22] such as passes, tackles and shots. Each event is annotated with information (e.g., location on the pitch, time-stamp, involved players). Events are typically collected manually by trained operators following a definition catalog. There are differences among vendors about the catalog of events and what information is recorded about each specific event.

Tracking Data record the positions (i.e., x,y,z-coordinates) of all players, the ball, and the referees multiple times per second [20]. This data is typically collected using an in-venue camera system or extracted from broadcast video footage with the help of bespoke image recognition software.

Match Meta Data contain contextual information such as crowd size, pitch dimensions, team colors, etc.

Player Physical Data describe measurements related to the players' physical constitution, e.g., heart rate data collected by wearable technologies.

The most powerful and meaningful analyses often require combining the above types of data [24]. Specifically, this is important in areas such as monitoring workload, performing tactical analysis, and scouting players.

Unfortunately, in practice, the way the data are collected and delivered pose a number of significant barriers that can prevent or limit performing such analyses. First, the definitions of key events are often ambiguous and vary across vendors, which is compounded by the fact that such events are often labeled by human annotators who make mistakes. Even in seemingly objective events such as shots, there are disagreements about how many of them occurred in a match [5]. Second, the way data is delivered poses substantial challenges from an analysis perspective. Each source can use different file formats and structures. Moreover, they use different conventions about units of measure (e.g., local time vs. UTC, meters vs. yards), how the pitch is represented (e.g., coordinate system, playing direction), and how they refer to entities such as players and stadiums. Finally, the data sources are often collected independently of one another and it is highly non-trivial to align the data. On the one hand, it is necessary to cope with the same player being referred to using multiple naming conventions. On the other hand, time and/or location synchronizing of event and tracking data requires accounting for issues such as different clocks, different start times, and different coordinate systems [2, 30]. Alas, addressing all these challenges requires a substantial investment in terms of both time and money. Consequently, data is often not exploited to the fullest extent possible.

The goal of this work is to propose a Common Data Format (CDF) for football data that provides a standardized way to represent data arising from football matches. The CDF has been developed with analysis in mind and aims to be (1) unambiguous by proposing a common schema, (2) complete by including the necessary information for analysis tasks, and (3) easily extendable to incorporate new data sources. Establishing a CDF confers many benefits as it should help alleviate some of the aforementioned pain points. First, it promotes interoperability which allows developers to build upon established standards as opposed to defining their own formats. This promises significant savings in development and maintenance costs. Second, it reduces the barrier to entry by eliminating the technical and low-level work needed to program complex data manipulations. Consequently, it enables less technically skilled individuals to work with data. As interoperability allows for more efficient use of data and computational resources, it also opens up a broader range of applications. Third, it will reduce errors introduced due to the transformations and parsing needed to align and ingest the data. This, in turn, makes it easier to spot errors in data and implement automated testing routines.

2 Data about Football Matches

While there are a variety of sources of data collected about sports, we will discuss six broad categories: match sheet data, video data, event data, tracking data, match meta data and physical data. All of these data sources are of importance when thinking about a common data format.

2.1 Match Sheet Data

Each league or federation requires collecting a minimal amount of information about each match. This information is collected for essentially all matches, whether they are professional or amateur. This includes information about the teams (teams names, home/away, coaches' names), players (starting lineups, substitutions), referees (names), and relevant events for the competition that occur during the match (goals, cards). It also includes the final result.

2.2 Video Data

One of the oldest and most important types of data about football matches is raw video footage. Traditionally, there were two main types of video:

TV-footage Broadcasters employ a combination of multiple cameras to capture a variety of different shots with the aim of producing a compelling TV program. The cameras are positioned to track game play while allowing for zoom-ins and wide-angle perspectives. Moreover, the cameras are also positioned such that they can capture the stadium itself as well as the team benches (e.g., to capture reactions to significant events in the match).

Scouting or tactical feed is a camera (or small number of cameras) that are positioned such that all 20 field players are always in view. Typically, the camera is positioned from a high perspective at the extension of the midline of the pitch. Moreover, during the match it must be manually or automatically moved to ensure that players remain visible.

Currently, top level matches are now often filmed from a variety of different perspectives: Behind goals, coaches perspectives, 16 m line view, and many more.

2.3 Event Data

Event data or play-by-play data is a common type of data that breaks the game down into individual parts and is commonly collected in team sports such as football, ice hockey, rugby or basketball [33]. This type of data records specific semantically meaningful events that occur during a match [22] and allows users including media outlets to query particular moments of the match. For example, relevant events in football include passes, tackles, and shots. Each event is annotated with information such as the players involved, the location on the pitch where the event occurred, the time of the event in the match, and the outcome of the event. Event data has traditionally been collected by companies such as Stats Perform¹, Sportec Solutions², and Statsbomb³, who typically use human annotators to collect this data. Each company has their own catalog of events that they collect thus meaning datasets from different vendors do not always correspond. This is particularly true for events like tackles, interceptions or clearances where observational collection methods will lead to differences. With the launch of the FIFA Football Language⁴ in 2022, a first framework has been offered to harmonise the terms and definitions used in football but more work is needed to ensure events are unambiguous. The development of automated event data detection from tracking data or video footage is another ongoing effort to ensure more uniform collection [31].

The standardization of event data is important for two reasons. First, it is widely available as vendors collect data on hundreds of games per week. Second, because event data captures the semantics of the what happened in a match, they form the backbone of many different analytical tasks including match analysis, scouting or media purposes. Therefore coaches, analysts, scouts and commentators should be able to rely on a single source of truth.

2.4 Tracking Data

Tracking data record the positions of the players and the ball multiple times per second [29]. The number of recordings per second is often referred to as the frame rate. Initial tracking systems record the location of a player (or referee) in 2D (i.e., x/y plane) based on the player's center of mass. The position of the ball is often recorded with an additional z-coordinate that provides its height relative to the pitch surface. Newer approaches also record 3D positions for players, often augmented to include the location of various limbs such as a player's head, hands, feet, hips etc. This data is sometimes referred to as skeletal tracking data, or limb tracking data. Tracking data can be acquired in several different ways:

Fixed Cameras Providers can install cameras in fixed locations in the stadium, typically in its roof. This is done in such a way to ensure a high coverage (i.e., that all players are almost always in view of one camera). Such data is typically not shared outside of a specific competition such as a particular league or tournament (Champions League, World Cup).

Mobile Cameras For cup-competitions, national team matches, or stadiums without an appropriate roof infrastructure, mobile tracking systems are installed for single matches. Such camera systems are typically installed in central positions (extension of the midline) at the highest possible spot on the tribune (e.g., in press-boxes, on scaffolding).

¹Statsperform LLC, Chicago, https://www.statsperform.com/.; former AMISCO, Prozone and Opta.

²Sportec Solutions AG, Munich, Germany https://www.sportec-solutions.de/index.html.

³Statsbomb Services Limited https://statsbomb.com/.

 $^{^4\}mathrm{FIFA}, \, \mathrm{Z\ddot{u}rich}, \, \mathrm{https://www.fifatrainingcentre.com/en/resources-tools/football-language/$

Broadcast Tracking Positions are collected by analyzing data collected for broadcast. This has the advantage of having a wider availability, i.e., it is possible to acquire for most matches without requiring exclusive access to stadiums. But it has the disadvantage that not all players are visible (i.e., in frame) all the time. Moreover, some moments of the match may lack tracking data due to the broadcaster showing a replay, stadium shot, or close up of a player. These disadvantages are sometimes overcome by exchanging broadcast footage for in stadium wide-angle scouting feed (although this can introduce other issues, such as more difficult jersey number recognition), or by bespoke software that predicts the location of players that are not in frame.

Local/Global Positioning System (LPS/GNSS) GNSS-wearables track players by using satellite signals to determine their position relative to the earth surface (i.e., longitude and latitude coordinates). LPS uses ground-based receivers and radio frequency signals emitted by player-worn tags for more precise positions relative to these anchors (i.e. relative to the pitch surroundings). GNSS is versatile and widely used especially for physical data, while LPS offers higher accuracy and is better suited for detailed analysis in controlled environments. Within the last FIFA World-Cups, LPS systems has especially established accurate ball tracking. A benefit of both systems is that players are clearly identified all the time. However, especially GNSS systems require a direct visibility to a certain number of satellites, which cannot be ensured across all football stadiums.

Sometimes a combination of the two systems has been used. For example FIFA deployed LPS for the ball and fixed-cameras for players for the 2022 Men's and the 2023 Women's World Cup.

Multiple studies have investigated the validity of specific tracking data systems (e.g., [18]). However, these tests cannot be conducted during official matches. Hence, it is difficult to fully quantify their accuracy.

2.5 Match Meta Data

Match meta data contain relevant information that describe the context of the match. Such information includes basic player and team information, kick off time, the type of match (e.g., league, domestic cup, friendly), and venue information (pitch size, turf, stadium identifier, attendance). Beyond this basic information, it can include relevant external factors such as the weather.

2.6 Player Physical Data

Players also wear a number sensors during training sessions and matches to track their physical status. Most notably, the often wear a GNSS device that also contains an inertial measurement unit (e.g., accelerometer and gyroscope). Furthermore, it is possible that athletes wear other devices such as a heart rate monitor. These systems are used to derive a number of parameters such as the total distance covered and the number of accelerations. These are also typically subdivided by defining different intensity zones. A number companies make these devices including Catapult Sports⁵ and STATSports⁶. Moreover, athletes are often asked to fill in questionnaires [11] that might include information about their sleep or the rating of perceived exertion (RPE) [9] for a training session.

A number of the recorded parameters (e.g., distance covered, accelerations) can also be derived from tracking data. However, most teams do not have an optical or LPS tracking system installed on training pitches which leads to the use of the body-worn sensors as well.

3 Challenges Posed by Football Data

Football data presents a myriad of challenges for data analysts, data scientists, and data engineers. These challenges can be broadly classified into four categories. The first category pertains to the differences in data specifications among data providers. What kind of data does each provider collect? The second category relates to the differences in data representation among data providers. How does each provider represent their data? The third category involves the differences in data delivery methods among data providers. How does each provider deliver their data? The last category describes the data quality. What kind of errors can result from manual data collection processes?

3.1 Data Specification

Data providers employ varied data specifications when collecting event data. Consequently, the event data collected by one provider for a specific game can markedly differ from the data collected by another provider for the identical game. An example could be a definition of a cross. One vendor requires a cross to come from a specific area on the

⁵Catapult Sports, Melbourne, https://www.catapult.com/

⁶STATSports Group Limited, Ireland, https://pro.statsports.com/

pitch with a non-zero z height for the ball, while another vendor can describe a cross as a pass simply being played forward with some arbitrary distance and angle into the opponents box.

The discrepancies in event data across different providers are typically attributed to variations in how the game is broken down into individual events and the definitions applied to those events. Furthermore, the scope of event data also diverges among providers, with some incorporating more derived data into their data feeds than others.

Data providers independently determine the set of events they wish to collect. The International Football Association Board (The IFAB)⁷, serving as the independent authority of the Laws of the Game, only outlines events that are vital for upholding the game's rules. These events include instances such as kick-offs, free kicks, goal kicks, and offside rulings. However, this limited set of events is insufficient for a comprehensive analysis of a football game. Therefore, data providers must independently establish an appropriate set of events for their collection purposes.

The set of events collected can greatly differ from one data provider to another. These differences are primarily due to three factors. The first factor is the tactical trends in the region where the data provider operates. For example, a data provider based in Europe might focus more on collecting events related to players pressuring the ball carrier, as pressing-based playing styles have gained traction in Europe. The second factor is the intended audience for the data feed. Data providers who cater to media companies and betting agencies have different priorities than those serving clubs and associations. The third factor is the complexity and the necessary time commitment required to collect certain types of events [6]. Data providers gather varying sets of events, but most tend to collect the most basic event types like shots and passes, which constitute the majority of on-ball events. However, since events like passes are not specified by the Laws of the Game⁸, data providers resort to their own definitions. Consequently, specific actions on the pitch may be classified differently by different providers, leading to inconsistencies in the resulting statistics and metrics [5].

Furthermore, the breadth of the data specification also varies among data providers. Some providers limit their collection to actions performed by players, while others extend their scope to include meta events, such as changes in temperature or pitch conditions. Additionally, certain data providers incorporate performance metrics into their data specification, such as expected-goals values for shots [2], expected pass values for passes [3] or metrics on pressure [1], while others choose not to.

3.2 Data Representation

In addition to the specific data that each provider collects, the representation of the data also varies among providers. Specifically, data providers

- utilize **different coordinate systems**. For example, one provider may place the origin of the coordinate system at the center of the pitch, while another may place it at a corner of the pitch.
- adopt different pitch coordinates. Some providers use normalized pitch coordinates, while others use actual pitch coordinates. The normalization of pitch coordinates introduces further challenges [10], as pitches can vary in size, while most pitch markers are of fixed dimensions. For example, the penalty area and the penalty spot's distance from the goal remain constant, regardless of the pitch dimensions.
- apply different pitch orientations. For instance, some providers use the actual playing direction for each team, while others adjust pitch coordinates so that each team appears to be attacking the same goal, typically from left to right.
- employ different units of measurement. For instance, one provider may use metric units such as meters, while another may use imperial units such as yards to denote distances.
- use **different date and time notations**. Some providers use Coordinated Universal Time (UTC), while others only report local time or only game time (e.g., period, minute and second of play).
- assign their **unique identifiers** to entities such as players, teams, matches, officials, and competitions.

3.3 Data Delivery

Data providers not only vary in terms of data specification and data representation, but also in their choice of data formats and data delivery methods. Specifically data providers,

⁷IFAB, Zürich, https://www.theifab.com/organisation/

⁸IFAB, Laws of the Game, https://digitalhub.fifa.com/m/1cf301829f1cf996/original/ifab-laws-of-the-game-2020-21.pdf

- employ **different file formats**. While most providers offer the option between JSON and XML, some providers exclusively support one over the other.
- adopt **different file structures**. For example, some providers favor flat file structures, while others opt for deeply-nested file structures.
- distribute their data through **various delivery methods**. Although most providers distribute their data via a traditional REST API, some providers also propose alternative delivery methods such as a message broker (e.g., RabbitMQ in the case of Hawk-Eye) or an FTP server.

Additionally, some data providers offer their **own coding libraries** (in the form of Python or R packages) to more quickly get started ingesting their data.

3.4 Data Quality

The mostly manual collection process of event data can lead to various errors that are later delivered to the customers. Providers have varying degrees of safety measures built into their process to reduce these, but even with them in place only a fraction can be captured. While virtually every part of the manual collection part could at some point deliver erroneous data, the following are the most frequent errors:

- Some attributes of events are incorrectly captured or incorrectly ordered: These can include timestamps, coordinates or even the involved player(s). As collecting all events during a game is a fast paced challenge it is nearly impossible to always be recognizing the right player(s), clicking on the exact location on the pitch or stopping the video at the exact right time.
- Meta information may be false or missing: when inserting or altering the meta data base errors can occur regarding birth dates, names or other additional information.
- Entire **events can be missing**: this can be either an oversight by the human operator, or for the most part, this is a result of using broadcast video (and not in venue or of a 'clean' video feed) during the collection process. These broadcast videos typically include replays, zoom-ins or other reasons, why the occurring events during the game are not being shown in their video. Therefore, it is nearly impossible for the collectors to estimate what may have happened in the mean time, while the relevant part of the pitch was not on display.

Apart from these obvious errors there is also some uncertainty in events. Since most of the definitions are not absolute, but rather involve some form of human judgment. Even within the same provider, a very similar situation may classified differently for no apparent reason.

4 Related Work

Setting data standards and introducing a standardized data format is not a unique idea in the football landscape. The necessity of both is widely acknowledged, as it is also a cornerstone of the Federal Data Strategy 2020 Action Plan of the U.S. government. Similar initiatives are currently establishing such formats in fields such as medicine, healthcare, water management, and transportation. One success story is the General Transit Feed Specification (GTFS), an open standard used to distribute relevant information about transit systems to commuters. By many transport agencies adhering to this standard, commercial use by different companies has been enabled, incorporating information into products like Google, Apple, Transit App, Open Trip Planner, and even apps created by riders. This example highlights some of the benefits of a common data format.

Although football data currently lacks a consensus and standard, there have been several individual attempts to simplify analysis by proposing unifying data representations. Interestingly, these are often backed by open-source software packages with permissive licenses (i.e., commercial use is allowed). The SPADL (Soccer Player Action Description Language) [12] proposes a tabular representation for a subset of the key information recorded in event data. This puts the data in a natural format and facilitates computing advanced performance metrics from event data such as expected goals (xG) [25] and Expected Threat (xT) [27, 28]. The software package supports parsing data from several different data providers and this package is used in both research and industry.

For tracking data, FIFA and F.C. Barcelona jointly created global standards for Electronic Performance and Tracking Systems (EPTS) [13]. More recently, there are open-source packages such as kloppy [32] and floodlight

 $^{^9 {\}tt https://resources.data.gov/standards/concepts/}$

¹⁰https://gtfs.org

[23] that support parsing both tracking and event data. Moreover, there are several open-source algorithms for synchronizing tracking and event data [21, 30].

While these initiatives are acknowledged by data providers and widely used by researchers and practitioners, an effort to harmonize all match data, supported by a large group of stakeholders has not yet culminated. Similar to the work of Robertson et al. [26], the CDF aims to provide a framework for handling football data that offers possible solutions to common challenges as outlined in the previous section.

5 The Common Football Data Format

The goal of the CDF is to provide a uniform and standardized format for data generated from football matches. The guiding principles of the CDF are to promote the ease of analysis of football data by being:

Unambiguous The format strives for uniformity and clarity by providing a common schema. Moreover, it ensures that sufficient *context* is available to understand the provenance of the data.

Sufficient The focus is on ensuring that enough information is provided to enable common downstream analysis tasks in areas such as scouting and match preparation.

Extendable The football data landscape is not static, and it is important for the format to be able to accommodate new innovations.

In essence, the CDF aims to present a precise and well-defined interface to football data that mitigates the existing pain-points associated with the current data landscape. That is, it should enable end-users such as clubs, federations and researchers, to easily build their own logic and applications on top of provided data without having to contend with some of the (arbitrary) design choices made by data collectors. Having vendors supply data in the CDF will help shorten the time between data exploration and delivery of actionable products to stakeholders as well as facilitate more impactful collaborations with researchers and developers.

This section describes the key properties of the CDF and discusses some of the design choices that were made. First, we will outline the technical specifications of the CDF in terms of what data sources are included and within each data source what information should be provided. Second, we will discuss some of the representational choices that were made to help ensure the clarity of the provided data. Third, we will propose a concrete way to deliver data in the CDF to enable easy ingestion and analysis of the data. Finally, we would like to highlight that this is the first version of the CDF and it will continue to evolve as the data landscape changes.

5.1 Specification of the CDF Schema

The CDF specifies a minimal schema for five types of match data: match sheet data, video footage, event data, tracking data, and match meta data. However, it is not mandatory that all five types of data are available. The only two requirements on availability are that (1) match sheet data must be included, and (2) if either event or tracking data is provided, then match meta data must also be included. Additionally, if both event and tracking data are provided, these data sources should be synchronized in time and location (see e.g., [21, 30, 2, 3]).

We now describe what fields must be collected for each data source, which are shown in bold in the corresponding tables. The tables also list optional fields which if collected must conform to the provided field names and possible values the field can take on. Note that if vendors wish to provide additional metrics, they may, however this should not circumvent the required or optional fields.

Match sheet data As shown in Table 1, the CDF collects the standard match information that is needed to manage a competition (e.g., league) and report a box score.

Video footage Required meta information for the video footage are listed in Table 2. Information like period starting whistles simplify video automation processes in combination with event and tracking data.

Event data Table 3 provides the schema for event data. The CDF only includes events that are either objective or whereby clear consensus exists on their definition (irrespective of the collection method): Events that do not meet this threshold are excluded from the CDF. The events that meet this requirement are listed in event_(sub)type fields of the provided schema.¹¹

¹¹There is ongoing work from a FIFA expert group that is developing a touched-based event model [14].

Tracking data Table 4 shows the information that is required for basic center of mass tracking. Beyond the player coordinates, each frame of the tracking data should be augmented with information about which team has the ball and whether the ball is in or out of play. Every period starts with *frame* = 0 where period can take on the values first half, second half, first half of overtime, second half of overtime, and penalty shootouts. If skeletal tracking is provided, a separate schema shown in Table 5 is used for the joint locations.

Match meta data Table 6 lists what will be included in the meta data. Beyond contextual information about the match (e.g., teams, players, location, data, and start time), this includes information that is often needed for subsequent analysis. For example, it records detailed information about what data (e.g., tracking) were collected during the match and how the data were collected (e.g., vendor, version of the software, frame rate). Such information is crucial for understanding the provenance of the data. Finally, there is field to denote which version of the CDF the data conforms to.

Table 1: Description of the mandatory Match Sheet Data CDF fields. Any description ending with a * is repeated once per player. Any description ending with a † is repeated once per event. Figure ?? describes the specific format for providing results.

Root	Field	Description	Type
match	id	Unique match identifier	String
match/status	$is_neutral$	Denotes whether the game was hosted in a	Integer
,		neutral venue (1) or not (0)	
match/status	has_extratime	Denotes whether the game went to extra time	Integer
•		(1) or not (0)	
match/status	$has_shootout$	Denotes whether the game had a penalty	Integer
		shootout (1) or not (0)	
match/result	final	Final match result (i.e. home goals, away	Integer
		goals, excluding shootout penalty goals, and	
		winning_team_id (String))	
match/result	first_half	Result after the first half (i.e. home goals,	Integer
		away goals)	
match/result	$second_half$	Result after the second half (i.e. home goals,	Integer
		away goals)	
match/result	$first_{extratime}$	Result after the first half of extra time (i.e.	Integer
		home goals, away goals)	
match/result	$second_extratime$	Result after the second half of extra time (i.e.	Integer
		home goals, away goals)	
match/result	shootout	Score for the penalty shootout (i.e. home	Integer
		goals, away goals, shootout goals only)	ā .
teams/home	id	Unique identifier for the home team	String
teams/away	id	Unique identifier for the away team	String
teams/players	id	Unique player identifier*	String
teams/players	$team_id$	Unique team identifier denoting the team the	String
, / 1	. 1	player plays for*	т.,
teams/players	jersey_number is_starter	Jersey number for a player* Denotes whether a player started the game (1)	Integer
teams/players	is_starter	Denotes whether a player started the game (1) or not $(0)^*$	Integer
referees	id	Unique referee identifier	String
events/goals	goal_time	Time a player scored [†]	String
events/goals	goal_player_id	Identifier of the player who scored [†]	String
events/goals	goal_assist_id	Identifier of the player who assisted [†]	String
events/goals	is_own_goal	Denotes whether it was an own goal (1) or not	Integer
evenus/goals	15_0W11_g0a1	Denotes whether it was an own goar (1) or not $(0)^{\dagger}$	Integer
events/goals	is_penalty	Denotes whether it was a penalty (1) or not	Integer
oversel/ Source	ю-решену	$(0)^{\dagger}$	11110801
events/substitutions	in_time	Time a player is substituted in [†]	String
events/substitutions	in_player_id	Identifier of the player that is substituted out [†]	String
events/substitutions	out_time	Time a player is substituted in [†]	String
events/substitutions	out_player_id	Identifier of the player that is substituted out [†]	String
events/cards	card_time	Time a player received a card [†]	String
events/cards	card_player_id	Identifier of the player who received a card [†]	String
events/cards	card_type	Type of card which can be yellow_card,	String
,	J F	red_card or second_yellow_card [†]	
meta	vendor	Match sheet data vendor name (e.g. "com-	String
		pany_a")	Ŭ

 Table 2: Description of the Video Footage CDF fields.

Root	Field	Description	Type
	match_id	Unique match identifier	String
	fps	Frames per second (i.e. frame rate) from vendor	Integer
	resolution	Resolution of the video in pixels (e.g., $3840x2160$, $1920x1080$,)	String
	operation_type	Information whether the camera operation was manual or automated	String
	perspective	Camera angle (tactical_wide, camera_1,	String
		high_behind_right, high_behind_left, cable_camera, 16m_right, 16m_left, broadcast)	
whistles	type	Whistles that start and end major periods of play such as the start and end of halves and interruptions (e.g., weather, health events, or streakers). Examples of types first_half, second_half, weather_delay, health_delay etc.	String
whistles	sub_type	Sub type related to an interruption, for example start or end.	String
whistles	time	The time in UTC of the whistle	String

Table 3: Description of the mandatory Event CDF fields. Every recorded event must include all these fields. The coordinate system is defined in Paragraph 5.2 where the x axis is the sidelines and the y axis the goal lines.

Root	Field	Description	Type
match	id	Unique match identifier	String
meta	is_synced	Indicates if synced tracking data is available (1) or	Integer
4	: 1	not (0)	C4:
event	id	Unique identifier of the event	String
event	time	Absolute time in UTC of when the event happened	String
event	period	Period of the match which can be first_half, second_half, first_half_extra, second_half_extra, or shootout	String
event	type	Name of the event type which can be shot, pass, referee, misc	String
event	sub_type	Name of the event subtype, which can be for shot - (None, penalty_kick, free_kick, corner_kick); pass - (None, throw_in, free_kick, corner_kick, goal_kick, kick_off); referee - (substitution, final_whistle, foul, caution, offside); misc - (other_ball_action, chance_without_shot, tackle)	String
event	outcome	Denotes whether the event was successful (1) or not (0)	Integer
event	$outcome_detailed$	Detailed event outcome options: shot - (successful, saved, blocked, wide, woodwork, own_goal); pass - (successful, out_of_play, intercepted); misc - (e.g. successful, unsuccessful)	String
event	player_id_1	Unique identifier of the player performing the action. For example, player committing a pass, or making a tackle.	String
event	$team_id_1$	Unique team identifier of the player performing the action	String
event	player_id_2	Unique identifier of the player related to the action. For example, player receiving the pass or second player in aerial duel.	String
event	$team_id_2$	Unique team identifier of the player related to the action	String
event	x_1	x location where the action of player_id_1 happened (m).	Float
event	y_1	y location where the action of player_id_1 happened (m).	Float
event	x_2	x location where the action of player_id_2 happened (m).	Float
event	y_2	y location where the action of player_id_2 happened (m).	Float
event	body_part_1	Denotes the body part used by player_id_1 which can take on the values left_foot, right_foot, foot, head, or other	String
event	body_part_2	Denotes the body part used by player_id_2 which can take on the values left_foot, right_foot, foot, head, or other	String

Table 4: Description of mandatory center-of-mass tracking CDF fields recorded per frame. Any description ending with a * is repeated once per player per frame. The coordinate system is defined in Paragraph 5.2 where the x axis is the sidelines and the y axis the goal lines.

Root	Field	Description	Type
	$frame_id$	Unique frame identifier	
	period	Period of the match (first_half, second_half,	String
		first_half_extra, second_half_extra, shootout)	
match	id	Unique match identifier	String
teams/home	id	Unique identifier for the home team*	String
teams/away	id	Unique identifier for the away team [*]	String
teams/players	id	Unique identifier for a player*	String
teams/players	$team_id$	Unique identifier for the player's team	String
teams/players	X	x location of the player on the pitch $(m)^*$.	Float
teams/players	У	y location of the player on the pitch $(m)^*$.	Float
ball	X	x location of the ball on the pitch (m).	Float
ball	У	y location of the ball on the pitch (m).	Float
ball	\mathbf{z}	z location of the ball on the pitch (m).	Float

Table 5: Description of mandatory Skeletal Tracking CDF fields recorded for each frame. Any description ending with a * is repeated once per player per frame. Any description ending with a * is repeated once per player per frame per limb (e.g knee_left, hip_right, ear_right etc.). Note that {limb} is used as a variable and one instantiation should be made for each limb that is tracked. Limb names should follow snake-case with any direction indicator as a suffix.

Root	Field	Description	Type
	$frame_id$	Unique frame identifier	Integer
	period	Period of the match (first_half, second_half,	String
		first_half_extra, second_half_extra, shootout)	
match	id	Unique match identifier	String
teams/home	id	Unique identifier for the home team [*]	String
teams/away	id	Unique identifier for the away team*	String
teams/players	$team_id$	Unique identifier for the home team	String
teams/players	id	Unique identifier for a player [*]	String
teams/players/{limb}	X	Relative x coordinate of point on {limb} in relation	Float
		to the point of origin (m) ^{\dightarrow}	
teams/players/{limb}	у	Relative y coordinate of point on {limb} in relation	Float
		to the point of origin (m)	
teams/players/{limb}	${f z}$	Relative z coordinate of point on {limb} in relation	Float
		to the point of origin (m)	

 Table 6: Description of mandatory Match Meta CDF. Any description ending with a * is repeated once per player.

Root	Field	Description	Type
competition	id	Unique identifier for the competition	String
season	id	Unique identifier for the season	String
match	id	Unique identifier for the match	String
match	$kickoff_time$	Scheduled kickoff time in UTC	String
match	periods	Array of periods played. The possible options are first_half, second_half, first_half_extratime, second_half_extratime, shootout	Integer
match/result	final	Final match result (i.e. home goals, away goals, excluding shootout penalty goals, and winning_team_id (String))	Integer
match/result	extratime	Result after extra time (i.e. home goals, away goals)	Integer
match/result	shootout	Score for the penalty shootout (i.e. home goals, away goals, shootout goals only)	Integer
match/status	$is_neutral$	Was the game played a neutral venue (1) or not (0)	Integer
match/status	$has_extratime$	Whether the game went to extra time (1) or not (0)	Integer
match/status	has_shootout	Denotes whether the game had a penalty shootout (1) or not (0)	Integer
match/whistles	type	Whistles that start and end major periods of play such as the start and end of halves and interruptions (e.g., weather, health events, or streakers). Examples of types first_half, second_half, weather_delay, health_delay_eta.	String
match/whistles	$\operatorname{sub_type}$	health_delay etc. Sub type related to an interruption, for example start or end.	String
match/whistles	time	The time in UTC of the whistle	String
teams/home	id	Unique identifier for the home team	String
teams/away	id	Unique identifier for the away team	String
teams/players		Array of player objects. One array under team-s/home, one array under teams/away	Array
teams/players	id	Unique player identifier*	String
teams/players	$team_id$	Unique team identifier denoting the team the player plays for*	String
teams/players	jersey_number	Jersey number for a player*	Integer
teams/players	is_starter	Denotes whether a player started the game (1) or not $(0)^*$	Integer
stadium	id	Unique identifier for the stadium	String
stadium	pitch_length	Length of the pitch (m), unknown if not available	Float
stadium	pitch_width	Width of the pitch (m), unknown if not available	Float
meta	$fps_tracking$	Frames per second (i.e., frame rate) from vendor	Integer
meta	$limb_tracking$	Whether limb tracking is provided (1) or not (0)	Integer
meta	limb_nodes	Skeletal hierarchy used (i.e., what limbs are tracked). A explicit example of how to provide this data can be found in Figure 5	JSON Object
meta	$source_type$	Indicates the source of the data (i.e. live or post_match).	String
meta	perspective	Camera perspective (e.g. in_stadium, broadcast, tactical, tactical_wide).	String
meta/version	cdf	Version number for the CDF in use (e.g. "0.1.0")	String
meta/version	event	Version number for the event data collection in use (e.g. "0.1.0")	String
meta/version	tracking	Version number for the tracking data collection in use (e.g. "0.1.0")	String
meta/vendors	event	Event vendor name	String
meta/vendors	tracking	Tracking vendor name	String
meta/vendors	video	Video vendor name	String
meta/id_space	match_data	Identifier space specified in the match sheet data file	String
meta/id_space	event	Identifier space specified in the event data file	String
meta/id_space	tracking	Identifier space specified in the tracking data file	String

5.2 Representational Conventions in the CDF

As highlighted in Subsection 3.2, a limiting factor is the wide array of different representational conventions currently being used. To promote clarity and simplify subsequent analysis, the CDF adopts the following conventions:

Units of Measure The CDF adopts metric units for all quantities. Times are recorded in Coordinated Universal Time (UTC).

Pitch Coordinates Because the CDF aims to be universally applicable (i.e., used in both international and domestic competitions), it cannot assume a standard pitch size of 105×68 meters. The CDF uses absolute coordinates where

- 1. (0, 0) is the center of pitch,
- 2. the X-axis represents the sideline and its values range from

$$X \in \left[-\frac{L_{\text{pitch}}}{2}, \frac{L_{\text{pitch}}}{2}\right],$$

3. the Y-axis represents the endline (i.e., where the goals are placed) and its values range from

$$Y \in \left[-\frac{W_{\text{pitch}}}{2}, \frac{W_{\text{pitch}}}{2}\right],$$

Note that the pitch's length ($L_{\rm pitch}$) and width ($W_{\rm pitch}$) are provided in the meta data. An advantage of a coordinate system with both positive and negative values is that it allows for custom normalization simply by multiplying various coordinates by -1.

Playing direction CDF assumes that the home team *always* plays from left to right for the entire match. The meta data contains sufficient information (e.g., home/away teams, direction of play in each period) to enable a user to derive alternative representations.

In the case of penalty shootouts, the penalty taker always shoots left to right (i.e., towards the goal on the right).

Time When a time is required, the CDF works based on timestamps because they offer both clarity and flexibility for downstream applications. Moreover, timestamps gracefully enabling coping with interruptions. For example, if a match stops at 2024-08-29T14:00:00 UTC for exactly two hours for any reason, the first timestamp (e.g., in the tracking data) on its restart should then be 2024-08-29T16:00:00 UTC.

Unique Identifiers The CDF relies on a clearly defined ID-space where unique IDs are available for all entities tracked over time included matches, players, teams, venues/stadiums, competitions, coaches, and referees. The CDF simply requires that vendors have unique IDs for each of these entities. ¹²

Missing Values Because the CDF aims for verbosity and clarity, any missing value should be explicitly denoted. Hence, the end user can decide how to deal with them. This allows for faster debugging of variables that perhaps contain bugs, both on the vendor and user side.

There were two schools of though about how to represent missing values: (1) use sentinal values and (2) use null. The **sentinal approach** would use the following conventions:

- "None" for strings
- -9999.0 for floats
- -9999 for integers and Booleans
- "1900-01-01 00:00:00+00:00" for timestamps

When using sentinal values, Booleans are represented by integers (1 =True, 0 =False), where missing can be applied in the same way as integers. This avoids confusion between False and missing values.

The **null approach** would always use the special reserved value of null to represent a missing value for every data type.

¹² Ideally, the CDF would require vendor-agnostic unique IDs for all entities, but such an undertaking is beyond the scope of this project. Note that FIFA has an ongoing initiative for players with FIFA Connect-IDs.

Floating Point Precision To avoid a false sense of precision and unnecessarily large data files, floating-point values should use the minimum number of significant digits necessary. For instance, x and y coordinates should be represented with a maximum of three decimal places.

5.3 Structure of Delivered Data

The CDF covers data that are provided both post-match and real-time (i.e., live). Therefore the CDF will use a file format that supports both use cases in order to avoid needing separate processes and file structures for handling real-time data and post-match data. Concretely, data that is not streamed (e.g., match sheet data, meta data) should be delivered in the JSON format (.json) and real-time data (e.g., event data, tracking data) should delivered using JSON Lines (.jsonl). In all cases, data should always be encoded in UTF-8.

We have selected these formats because they confer three important benefits. First, they are relatively compact in terms of memory used per file (compared to other commonly used file formats like JSON or XML), and are also efficient in terms of maximum memory capacity used when loading or streaming into memory. Second, a well-structured (and versioned) JSON (Lines) file format will allow providers to enrich their data with more features as time progresses and new metrics become available without breaking any existing infrastructure. Third, all popular data processing tools (pandas, PySpark, polars and R) support this file type, and therefore further post-processing can be left to each individual receiver.

5.3.1 Meta- and Match Sheet Data File Format

The match sheet and meta data should be delivered in a JSON file (.json). Figure 1 shows a simplified example of match sheet data where some mandatory CDF fields are omitted for readability. The optional fields are shown in Table 7. Figure 2 depicts a simplified example of meta data that does not shown all mandatory CDF fields for readability. The optional fields are shown in Table 10.

Finally, if provided, skeletal tracking data should be accompanied by a skeletal hierarchy in the meta data under "meta/limb_nodes". It should adhere to the format shown in Figure 5 which shows a simplified hierarchy of a standardized T-pose. The format is borrowed from the glTF2.0 file format [15]. The "name" field specifies the joint under consideration, it follows a snake_case formatting with the "right", "left" indicators as a suffix. The "rotation" field is a quaternion defining the rotation of the joint in a T-pose, this can generally be left as [0.0, 0.0, 0.0, 1.0], but should be adjusted for joints that do not make right angles with their parent node (e.g. "thumb_right" or "eye_left"). Translation should follow the "Y-up" approach such that x, y and z components specify the orientation in relation to their parent node. For example "hip" has a child-node "spine" (as defined by the limb node indices in "children") and there for [0, 1, 0] indicates the spine goes up (1) in the Y-axis and does not deviate in the x or z direction compared to the hip.

```
{
    "match" : {
        "id" : "74e6661c",
        "status" : {
            "is_neutral": 0,
            "has_extratime" : 1,
            "has_shootout" : 1
        }
},
    "result": {
        "final": {"home": 2, "away": 2, "winning_team_id": "3f029694"},
        "first_half": {"home": 1, "away": 0},
        "second_half": {"home": 2, "away": 2},
        "first_extratime": {"home": 3, "away": 2},
        "second_extratime": {"home": 3, "away": 3},
        "shootout": {"home": 4, "away": 5}
}
}
```

Figure 1: Simplified example of a partial JSON Object that depicts the structure of the match sheet data. In particular, it describes the format of the results in the this data source.

```
"meta": {
         "fps_tracking": 25,
         "limb_tracking": 0,
         "version": {
             "meta": "0.0.1", "event": "0.1.0", "tracking": "0.1.0", "cdf": "
                 0.0.1"
         "vendors": {
             "event": "company_a", "tracking": "company_b", "video": "company_b"
    },
    "competition": {
         "id": "c155537a"
    }.
    "season": {
        "id": "a3410mad"
    },
    "match": {
        "id": "74e6661c",
"kickoff_time": "2024-08-29T14:00:00",
         "periods": [
             "first_half", "second_half", "first_half_extratime",
             "second_half_extratime", "shootout"],
         "status": {
             "is_neutral": 0, "has_extra_time": 1, "has_shoutout": 1
         "whistles": [{
                 "type": "first_half", "sub_type": "start", "time": "2024-08-29
                     T14:00:00"
             },
         "result": {
             "final": {"home": 2, "away": 2, "winning_team_id": "3f029694"},
"extratime": {"home": 3, "away": 3},
"shootout": {"home": 4, "away": 5}
    },
    "stadium": {
        "id": "0c82e46a", "pitch_length": 105.0, "pitch_width": 68.0
    },
    "teams": {
        "home": {
    "id": "11c4abab2025", "name": "FC Dagstuhl",
             "players": [
                      {
                          "id": "61a2b9ba", "team_id": "11c4abab2025",
                          "jersey_number": 46, "is_starter": 1,
                          "name": "Gottfried Wilhelm Leibniz",
                          "first_name": "Gottfried", "last_name": "Leibniz",
                      } ...
             ]
        },
         "away": {
             "id": "3f029694", "name": "Dagstuhl United",
             "players": [
                      {
                          "id": "3f029694", "team_id": "3f029694"
                          "name": "Player Z", "jersey_number": 4, "is_starter": 0,
                      } ...
             1
        }
    "referees": [{"id": "56c3b419"}]
}
```

Figure 2: Example of a non-nested JSON (.json) meta data file with stadium, player, and team information.

5.3.2 Event and Tracking Data File Format

Event and tracking (both center of mass and skeletal) are provided in JSON Lines where every line contains a single JSON Object. The line separator between objects is "\n" [34]. Skeletal (limb) tracking (if provided) should be delivered in a separate file because this avoids the overhead and complexity of having to process a much larger file for the many applications that only require COM data.

Figure 3 illustrates the first two events of the first half. Figures 4 shows a simplified example for two frames of center of mass tracking data. Note that we are only showing the mandatory CDF fields. These can be augmented with the optional fields (see Tables 8 and 9). If skeletal (limb) tracking is provided, it should follow the same structure as the tracking data JSON Lines format. Instead of a players x and y coordinates, the provider would provide coordinates for each limb (e.g., $left_hip_x$, $right_hip_y$, $right_hip_x$) as specified by Table 5.

```
"match": {"id": "74e6661c"},
    "meta": {"is_synced": 1},
    "event" {
        "id": "7230efg1"
        "time": "2024-08-29T14:01:03",
        "period": "first_half",
        "type": "pass";
        "sub_type": "kick_off",
        "outcome": 1,
        "outcome_detailed": "successful",
        "player_id_1": "c83323fb",
        "team_id_1: "3f029694",
        "player_id_2": "da8e7c48"
        "team_id_2": "3f029694",
        "body_part_1": "right_foot",
        "body_part_2": "left_foot"
    }
{
    "match": {"id": "74e6661c"},
    "meta": {"is_synced": 1},
    "event" {
        "id": "32afa686",
        "time": "2024-08-29T14:01:08",
        "period": "first_half",
        "type": "pass",
        "sub_type": "None"
        "outcome": 0,
        "outcome_detailed": "out_of_play",
        "player_id_1": "da8e7c48",
        "team_id_1: "3f029694",
        "player_id_2": "None",
        "team_id_2": "None"
        "body_part_1": "right_foot",
        "body_part_2": "None"
    }
}
```

Figure 3: Example of JSON Lines (*.jsonl*) that covers the mandatory CDF fields for Event Data. The file describes two events which are expanded over multiple lines for readability.

```
"frame_id": 0,
"period": "first_half",
"match": {"id": "74e6661c"},
    "teams": {
        "players": [{"id": "61a2b9ba", "x": 0.13 "y": 4.04},
         },
         "away": {
    "id": "3f029694",
              "players": [{"id": "3f029694", "x": 0.76 "y": 13.37},
              ]
         }
    },
    "ball": {
         "x": 0.01,
"y": 23.10,
         "z": 0.33,
}
{
    "frame_id": 1,
    "match": {"id": "74e6661c"},
"teams": {
         "home": {
             ]
         "away": {
              ]
         }
     "ball": {
}
```

Figure 4: Example of the JSON Lines (.*jsonl*) for the Center of Mass Tracking Data representation. Two frames are shown and they are expanded over multiple lines for readability. We omit the positions of all players for readability.

```
"limb_nodes": [
    {
        "name": "hip",
"translation": [0, 0, 0],
        "rotation": [0.0, 0.0, 0.0, 1.0],
        "children": [1, 2, 3]
    },
    {
        "name": "spine",
"translation": [0, 1, 0],
        "rotation": [0.0, 0.0, 0.0, 1.0],
        "children": [4]
    },
    {
        "name": "hip_left",
         "translation": [-1, 0, 0],
         "rotation": [0.0, 0.0, 0.0, 1.0],
        "children": [5]
    },
        "name": "hip_right",
        "translation": [1, 0, 0],
"rotation": [0.0, 0.0, 0.0, 1.0],
        "children": [6]
    },
        "name": "head",
"translation": [0, 1, 0],
         "rotation": [0.0, 0.0, 0.0, 1.0],
        "children": []
    },
        "name": "leg_left",
        "translation": [-1, -1, 0],
         "rotation": [0.0, 0.0, 0.0, 1.0],
         "children": []
    },
         "name": "leg_right",
        "translation": [1, -1, 0],
         "rotation": [0.0, 0.0, 0.0, 1.0],
         "children": []
        "name": "arm_left",
        "translation": [-1, 1, 0],
         "rotation": [0.0, 0.0, 0.0, 1.0],
        "children": []
    },
         "name": "arm_right",
         "translation": [1, 1, 0],
        "rotation": [0.0, 0.0, 0.0, 1.0],
         "children": []
    }
```

Figure 5: Example of JSON Object containing the standardized skeletal hierarchy of the provider specific skeletal model.

6 Conclusions

This paper proposes a new uniform and standardized format, called the Common Data Format (CDF), for five sources of data that are commonly collected during football (soccer) matches: match sheet data, video footage, event data, tracking data, and match meta data. This effort was motivated by the specific challenges many different end-users face when working with these data, as presently significant variation exists across providers in terms of what is collected, which specifications are used, how the data is represented, and how the data is delivered. The CDF provides uniform, standardized and unambiguous schema. As it was conceived with analysis in mind, it contains the minimal amount of

information need to perform common analysis tasks. To this end, the CDF should be seen as a continually evolving format, that will likely require updating and refinement as new data types emerge. However, this initial version represents an important step forward in improving the current state of play for end-users, proposing a concrete file format and delivery method that enable both live and post-match processing in a unified manner.

Appendix A CDF Naming Conventions

When defining CDF a number of conventions are used:

- The field names use British spelling ("s" instead of "z", and "ou" instead of "o" etc.).
- All common data format names are in xx_yy (lowercase split by underscore), that is, "snake case"
- CDF naming follows the following convention:
 - Metric or object as first element (e.g., time, pass, speed, angle, player, match.)
 - description that adds context to the metric (e.g., tracking, event, id, name, number.)
- Use "jersey" instead of shirt
- Do not include the units in the variable name, but include them in the description

Appendix B Optional Data for Each CDF Data Source

Beyond the mandatory data, the CDF foresee the possibility to include optional data. If a provider elects to include optional data included in the following tables, they must adhere to the CDF names and values.

B.1 Optional Match Sheet Data

Table 7 lists optional match data. The fields in this table primary focus on providing additional information about the players as well as the coaches and referee.

Table 7: Description of the optional Match Sheet Data CDF Fields. Any description ending with a * is repeated once per person (e.g., player, referee, coach).

teams short_name Short name of the team players alternative_id Additional identifier(s) of the player* String players first_name First name* String players last_name Last name* String players short_name Short name*. For example "Mohamed Salah Hamed Mahrous Ghaly" as "Mo Salah" (or "Mohamed Salah") or "Givanildo Vieira de Sousa" as "Hulk". players position_group Position group acronym given according to the CDF-compatible groups given in Appendix C* players position Position label acronym per player given according to the CDF-compatible labels given in Appendix C* players is_captain Whether the player is a captain (1) or not (0)* Integer players date_of_birth A player's date of birth* String players height Height of a player in cm* Integer players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* String referees last_name Last name* String String referees short_name Short name* String Integer String String String Coaches coach id Unique identifier for a coach * String Coaches coach id Unique identifier for a coach * String	Root	Field	Description	Type
players alternative_id Additional identifier(s) of the player* String players first_name Eirst_name* String players last_name Last_name* String Players short_name Short_name*. For example "Mohamed Salah String Hamed Mahrous Ghaly" as "Mo_Salah" (or "Mohamed Salah") or "Givanildo Vieira de Sousa" as "Hulk". players position_group Position group accornym given according to the CDF-compatible groups given in Appendix C* String Cording to the CDF-compatible labels given in Appendix C* String Position label acronym per player given according to the CDF-compatible labels given in Appendix C* Integer players date_of_birth A player's date of birth* String Players foot A player's dominant foot, which can take the values left, right or both* String referees first_name First_name* String First_name* String String First_name String String First_name String St	teams	name	Name of the team	String
players first_name First name* String players last_name Last name* String players short_name Short name*. For example "Mohamed Salah Hamed Mahrous Ghaly" as "Mo Salah" (or	teams	$short_name$	Short name of the team	String
players last_name Last name* String Short_name Short_name*. For example "Mohamed Salah Hamed Mahrous Ghaly" as "Mo Salah" (or "Mohamed Salah") or "Givanildo Vieira de Sousa" as "Hulk". players position_group Position group acronym given according to the CDF-compatible groups given in Appendix C* Position Position label acronym per player given according to the CDF-compatible labels given in Appendix C* String players players is_captain Whether the player is a captain (1) or not (0)* Integer players date_of_birth A player's date of birth* String players foot A player in cm* Integer players foot A player's dominant foot, which can take the values left, right or both* referees first_name First_name* String referees last_name Last_name* String referees short_name Short_name* String String String	players	$alternative_id$	Additional identifier(s) of the player*	String
players short_name Short name*. For example "Mohamed Salah Hamed Mahrous Ghaly" as "Mo Salah" (or "Mohamed Salah") or "Givanildo Vieira de Sousa" as "Hulk". players position_group Position group acronym given according to the CDF-compatible groups given in Appendix C* players position Position label acronym per player given according to the CDF-compatible labels given in Appendix C* players is_captain Whether the player is a captain (1) or not (0)* Integer players date_of_birth A player's date of birth* String players height Height of a player in cm* Integer players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* String referees last_name Last name* String referees short_name Short name* String	players	$first_name$	First name*	String
Hamed Mahrous Ghaly" as "Mo Salah" (or "Mohamed Salah") or "Givanildo Vieira de Sousa" as "Hulk". players position_group Position group acronym given according to the CDF-compatible groups given in Appendix C* players position Position label acronym per player given according to the CDF-compatible labels given in Appendix C* players is_captain Whether the player is a captain (1) or not (0)* Integer players date_of_birth A player's date of birth* String players height Height of a player in cm* Integer players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* String referees last_name Last name* String referees short_name Short name* String	players	$last_name$	Last name*	String
"Mohamed Salah") or "Givanildo Vieira de Sousa" as "Hulk". players position_group Position group acronym given according to the CDF-compatible groups given in Appendix C* players position Position label acronym per player given according to the CDF-compatible labels given in Appendix C* players is_captain Whether the player is a captain (1) or not (0)* Integer players date_of_birth A player's date of birth* String players height Height of a player in cm* Integer players foot A player's dominant foot, which can take the player referees first_name First_name* String referees last_name Last_name* String String String short_name Short_name* String	players	$short_name$	Short name*. For example "Mohamed Salah	String
playersposition_groupPosition group acronym given according to the CDF-compatible groups given in Appendix C*StringplayerspositionPosition label acronym per player given according to the CDF-compatible labels given in Appendix C*Stringplayersis_captainWhether the player is a captain (1) or not (0)*Integerplayersdate_of_birthA player's date of birth*StringplayersheightHeight of a player in cm*IntegerplayersfootA player's dominant foot, which can take the values left, right or both*Stringrefereesfirst_nameFirst name*Stringrefereeslast_nameLast name*Stringrefereesshort_nameShort name*String			Hamed Mahrous Ghaly" as "Mo Salah" (or	
players position_group Position group acronym given according to the CDF-compatible groups given in Appendix C* players position Position label acronym per player given according to the CDF-compatible labels given in Appendix C* players is_captain Whether the player is a captain (1) or not (0)* players date_of_birth A player's date of birth* players height Height of a player in cm* players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* referees last_name Last name* string			"Mohamed Salah") or "Givanildo Vieira de	
CDF-compatible groups given in Appendix C* Position label acronym per player given according to the CDF-compatible labels given in Appendix C* players is_captain Whether the player is a captain (1) or not (0)* players date_of_birth A player's date of birth* players height Height of a player in cm* players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* referees last_name Last name* String			Sousa" as "Hulk".	
playerspositionPosition label acronym per player given according to the CDF-compatible labels given in Appendix C*Stringplayersis_captainWhether the player is a captain (1) or not (0)*Integerplayersdate_of_birthA player's date of birth*StringplayersheightHeight of a player in cm*IntegerplayersfootA player's dominant foot, which can take the values left, right or both*Stringrefereesfirst_nameFirst name*Stringrefereeslast_nameLast name*Stringrefereesshort_nameShort name*String	players	position_group	Position group acronym given according to the	String
cording to the CDF-compatible labels given in Appendix C* players is_captain Whether the player is a captain (1) or not (0)* Integer players date_of_birth A player's date of birth* String players height Height of a player in cm* Integer players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* String referees last_name Last name* String string String String String String Short_name Short_name* String			CDF-compatible groups given in Appendix C^*	
in Appendix C* players is_captain Whether the player is a captain (1) or not (0)* players date_of_birth A player's date of birth* players height Height of a player in cm* players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* referees last_name Last name* referees short_name Short name* String String	players	position	Position label acronym per player given ac-	String
players is_captain Whether the player is a captain (1) or not (0)* Integer players date_of_birth A player's date of birth* String players height Height of a player in cm* Integer players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* String referees last_name Last name* String short_name Short_name* String			-	
players date_of_birth A player's date of birth* String players height Height of a player in cm* Integer players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* String referees last_name Last name* String referees short_name Short name* String				
players height Height of a player in cm* Integer players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* String referees last_name Last name* String referees short_name Short name* String	players	-	Whether the player is a captain (1) or not $(0)^*$	Integer
players foot A player's dominant foot, which can take the values left, right or both* referees first_name First name* referees last_name Last name* referees short_name Short name* String String String	players	$date_of_birth$	A player's date of birth*	String
values left, right or both* referees first_name First name* String referees last_name Last name* String referees short_name Short name* String	players	~		_
referees first_name First name* String referees last_name Last name* String referees short_name Short name* String	players	foot	A player's dominant foot, which can take the	String
referees last_name Last name* String referees short_name Short name* String			values left, right or both*	
referees short_name Short_name* String	referees	$first_name$	First name*	_
2 0	referees	$last_name$	Last name*	String
coaches coach id Unique identifier for a coach* String	referees	$\operatorname{short_name}$		_
-	coaches	$\operatorname{coach_id}$	Unique identifier for a coach [*]	String
coaches first_name First name* String	coaches	$first_name$	First name*	_
coaches last_name Last name* String	coaches	$last_name$	Last name*	_
coaches short_name Short_name* String	coaches	$\operatorname{short_name}$	Short name*	String

B.2 Optional Event Data

Table 8 describes options fields that may be included for event data in the CDF. These primarily focus on information that is useful when working with synchronize event and tracking data. Moreover, they include some metrics such as xG that are commonly of interest.

Table 8: Description of the optional Event CDF fields. If included, these fields are recorded once per event.

Root	Field	Description	Type
tracking	frame_id_1	Frame identifier from the tracking data related	Integer
-		to the event at (x ₋₁ , y ₋₁) as described in 3	
tracking	$frame_id_2$	Frame identifier from the tracking data related	Integer
		to the event at (x ₋₂ , y ₋₂) as described in 3	
racking	x_player_1	x location of the player committing the action	Number
		according to the tracking data. For example,	
		player committing a pass, or making a tackle	
		(m)	
tracking	y_player_1	y location of the player committing the action	Number
		according to the tracking data. For example,	
		player committing a pass, or making a tackle	
		(m)	
tracking	x_player_2	x location of the player related to the action	Number
		according to the tracking data. For example,	
		player receiving the pass or second player in	
		aerial duel (m)	
racking	y_player_2	y location of the player related to the action	Number
		according to the tracking data. For example,	
		player receiving the pass or second player in	
. /		aerial duel (m)	NT 1
event/metrics	xg	Calculated xG value between [0,1]	Number
event/metrics	xpass	Calculated xPass value between [0,1]	Number
event/metrics	packing_traditional	Number of opposing players that have been	Integer
		outplayed by a pass according to the tradi-	
		tional packing approach. Using this approach, a player is outplayed when the player is closer	
		to their own goal than the ball at the time of	
		the pass and further away from the goal than	
		the ball at time of reception.	
event/metrics	packing_horizontal	Number of opposing players that have been	Integer
event, metres	packing_norizontal	outplayed by a pass according to the horizon-	integer
		tal packing approach. Using this approach, a	
		player is outplayed when their horizontal line	
		is crossed by the ball during the pass, i.e., be-	
		tween the time of the pass and the time of	
		reception.	
		1000P110111	

B.3 Optional Tracking Data

Table 9 presents optional fields for center-of-mass. These include meta data, extra information about the game, tracking information for people other than players, and derived (physical) metrics for players.

Table 9: Description of optional center-of-mass tracking fields in the CDF that would be recorded once per frame. Any description ending with a * is repeated once per person (e.g., player, referee) per frame.

Root	Field	Description	Type
	ball_status	Indicates if the ball is either in play (1) or out	Integer
		of play (0)	
	$ball_poss_team_id$	Unique identifier of the team that currently	String
		possesses the ball	
vendor	event	Event vendor name	String
vendor	tracking	Tracking vendor name	String
players	lat	latitude of the player's position if the data is collected by GNSS or GPS *	Float
players	long	longitude of the player's position if the data is collected by GNSS or GPS [*]	Float
players	${f Z}$	z location of the player on the pitch (m)*. See	Float
		Paragraph 5.2.	
players	dist	Distance covered by the player/ball in the cur-	Float
		rent frame (m)*	
players	acc	Acceleration of the player/ball (m/s ²)*	Float
players	vel	Speed of the player/ball (m/s)*	Float
players	$is_visible$	Denotes if a player was visible (in view of the camera) (1) or not $(0)^*$	Integer
referees	id	Unique identifier for a referee*	String
referees	X	x location of the referee on the pitch (m)*	Float
referees	У	y location of the referee on the pitch (m)*	Float
referees	Z	z location of the referee on the pitch (m)*	Float

B.4 Optional Meta-Data

Table 10 presents optional fields for meta data.

 Table 10: Description of optional Match Meta CDF.

Root	Field	Description	Type
competition	name	Name of the competition	String
competition	format	Specifying the competition set-up (league_18,	String
		league_20, knock_out_neutral,)	
season	name	Name of the season	String
match	round	Round of the match (e.g., 1, 2, 3 or final/semi-	Integer
		final)	
match	$scheduled_kickoff_time$	Scheduled kickoff time in UTC	String
match	$local_kickoff_time$	Scheduled kickoff time	String
$\mathrm{match/misc}$	country	Country where the match was played	String
$\mathrm{match/misc}$	city	City where the match was played	String
$\mathrm{match/misc}$	precipitation	Precipitation in millimeters	String
match/misc	$open_roof$	Information whether the roof is closed (0) or	Integer
		open (1)	
teams	name	Name of the team	String
teams	$jersey_colour$	Jersey color of the team as a hexadecimal color	String
		code (e.g. #FFC107 for).	~ .
stadium	name	Name of the stadium	String
stadium	turf	Information on the turf of the stadium (natu-	String
		ral, natural reinforced, grass, clay,)	F1 .
periods	type	Choose from "first_half", "sec-	Float
		ond_half', "first_half_extratime", "sec-	
. 1		ond_half_extratime" or "shootout"	T21 -
periods	time_start	Timestamp (in UTC) of the start of the period	Float
periods	time_end	Timestamp (in UTC) of the end of the period	Float
periods	$frame_id_start$	Frame identifier for the tracking data related	Float
. 1	C · 1 1	to the start of the period	Tall 4
periods	$frame_id_end$	Frame identifier for the tracking data related	Float
: . 1	1-64 4 : 1	to the end of the period	C4
periods	$left_team_id$	Unique team identifier of the team playing	String
		on the left side of the pitch in this period. The CDF requires a standardized playing di-	
		rection (see Section 5.2). The left_team_id	
		and right_team_id should be the actual, non-	
		standardized sides.	
periods	right_team_id	Unique team identifier of the team playing on	String
perious	right_team_id	the right side of the pitch in this period.	bumg
meta	fps_ball	Frame rate for the ball tracking if it is different	Integer
meta	195_5611	than for players	meger
meta/system	tracking_type	The type of tracking system (e.g., mobile,	String
incom/ system	oracimis_type	broadcast) that is used which can take on the	5011118
		values mobile, in_stadium or broadcast	
meta/system	tracking_version	Version of the tracking system specifications	String
meta/system	event_type	Event data collection method (e.g. on_site,	String
111000/ 53 500111	evenue, pe	remote, speaker_writer,)	2011116
meta/system	$event_version$	Version of the event data collection specifica-	String
111000/ 5/ 500111	0.0110=0.0101011	tions	2011116
meta/system	ball_status_type	Information on collection of ball status (algo-	String
7 - 3	V F	rithm,)	G
meta/system	ball_possession_type	Information on collection of ball possession	String
, •	- 01	(algorithm,)	O
		· - /	

Appendix C Position Labels

Formations as well as player positions are subjective. Multiple approaches have tried to objectify the discussions around formations and positions using tracking data [8, 7, 4]. The take away learnings from these studies is that playing positions should be considered dynamic, and thus are constantly changing within a match. However, static formations defined for at least part of the matches are a relevant simplification used by experts. In order to create a comparability among vendors, we map player positions from different sources to standardized positions. Note that these positions describe pre-match assigned positions.

Position ('position') and Position Group ('position_group') are both not mandatory under the CDF, but when provided positions and position groups should be taken from the diagram in 6.

These position labels have been identified from existing position labels provided by multiple providers (STS, Heimspiel, Noisefeed, SkillCorner, Impect and StatsPerform), but they have been filtered and aggregated with the aim of solely providing a spatial assignment and with the explicit aim to not be player roles. The labels that include Attacking and Defending are simply to distinguish how players from the same team (on average) relate to one-another in relative terms, and are not to be confused with a role assignment. They distinguish between midfielders that occupy spaces more forward or more backwards then their team mates. This should inform the reader why there is are no labels to Full Back and Wing Back, Second Striker or False 9 or Box-to-Box Midfielder or Inverted Wingback etc.

Any data provider is free to make additional custom labels that inform a players role, but by doing so they agree to also provide the 'position' and 'position_group' labels following the CDF.

When providing position labels ('position') there is a uniqueness constraint. This means there can always only be a maximum of one position label per team in play at any given moment. For example when a team is listed as playing a 4-4-1-1 the associated labels should be GK, LB, LCB, RCB, RB, LM, LCM, RCM, RM, CAM and CF, for a 4-4-2 the same would be true except that CAM and CF are now replaced by LCF and RCF (or optionally LW and RW).

Additionally, in case of a four or two player line, the 'CF', 'CM' and/or 'CB' label(s) should not be used for that respective line. Instead, in case of a four player line the other four labels from that line should be used. And, in case of a two player line, the data provider can opt to use either pair of labels (ie. LM and RM or LCM and RCM). For a example in a 4-3-1-2, the defensive line should always be LB, LCB, RCB and RB and never LB, CB, CB, RB, and the attacking line can be either LW and RW or LCF and RCF. When a team plays a three player line it should be LB, CB and RB and when they play a five player defensive line all five position labels should be used.

The above logic further dictates that a four or five player line can never consist of LAM, CAM, RAM, or LDM, CDM or RDM and in this case labels should always be chosen to the five midfield labels (LM, LCM, CM, RCM and RM).

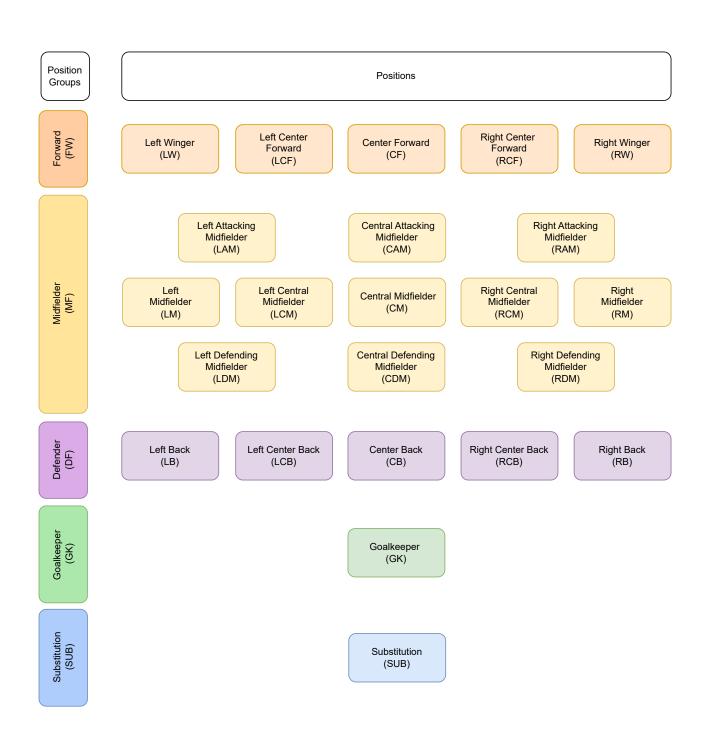


Figure 6: Position groups and associated position labels

References

- [1] Gennady Andrienko et al. "Visual analysis of pressure in football". In: Data Mining and Knowledge Discovery 31.6 (2017), pp. 1793-1839. ISSN: 1573756X. DOI: 10.1007/s10618-017-0513-2. URL: https://link.springer.com/article/10.1007/s10618-017-0513-2 (cit. on p. 5).
- [2] Gabriel Anzer and Pascal Bauer. "A Goal Scoring Probability Model based on Synchronized Positional and Event Data". In: Frontiers in Sports and Active Learning (Special Issue: Using Artificial Intelligence to Enhance Sport Performance) 3.0 (2021), pp. 1–18. DOI: 10.3389/fspor.2021.624475. URL: https://www.frontiersin.org/articles/10.3389/fspor.2021.624475/full (cit. on pp. 2, 5, 7).
- [3] Gabriel Anzer and Pascal Bauer. "Expected Passes—Determining the Difficulty of a Pass in Football (Soccer) Using Spatio-Temporal Data". In: *Data Mining and Knowledge Discovery, Springer US* (2022). ISSN: 1573-756X. DOI: 10.1007/s10618-021-00810-3. URL: https://link.springer.com/article/10.1007/s10618-021-00810-3 (cit. on pp. 5, 7).
- [4] Pascal Bauer, Gabriel Anzer, and Laurie Shaw. "Putting Team Formations in Association Football into Context". In: *IEEE Transactions on Big Data (submitted)* (2021) (cit. on p. 25).
- [5] Carl Bialik. Statkeepers Call the Shots, But They Can't Agree on Them. 2014. URL: https://fivethirtyeight.com/features/statkeepers-call-the-shots-but-they-cant-agree-on-them/ (visited on 05/07/2014) (cit. on pp. 2, 5).
- [6] Carl Bialik. The People Tracking Every Touch, Pass And Tackle in the World Cup. 2014. URL: https://fivethirtyeight.com/features/the-people-tracking-every-touch-pass-and-tackle-in-the-world-cup/ (visited on 10/06/2014) (cit. on p. 5).
- [7] Alina Bialkowski et al. "Identifying team style in soccer using formations learned from spatiotemporal tracking data". In: *IEEE International Conference on Data Mining Workshops, ICDMW* January (2015), pp. 9–14. ISSN: 23759259. DOI: 10.1109/ICDMW.2014.167 (cit. on p. 25).
- [8] Alina Bialkowski et al. "Large-Scale Analysis of Soccer Matches Using Spatiotemporal Tracking Data". In: *IEEE International Conference on Data Mining, ICDM (Proceeding)* January (2014), pp. 725–730. ISSN: 15504786. DOI: 10.1109/ICDM.2014.133 (cit. on p. 25).
- [9] Gunnar Borg. "Psychophysical bases of perceived exertion". In: Med Sci Sports Exer 14.5 (1982), pp. 377–381 (cit. on p. 4).
- [10] Ulrik Brandes. "A goal-aligned coordinate system for invasion games". In: Journal of Sports Analytics 9.4 (2023), pp. 261–271. ISSN: 2215020X. DOI: 10.3233/jsa-220706 (cit. on p. 5).
- [11] Martin Buchheit, Yannick Cholley, and Philippe Lambert. "Psychometric and physiological responses to a preseason competitive camp in the heat with a 6-hour time difference in elite soccer players". In: *International Journal of Sports Physiology and Performance* 11.2 (2016), pp. 176–181 (cit. on p. 4).
- [12] Tom Decroos et al. "Actions speak louder than goals: Valuing player actions in soccer". In: *Proceedings of the ACM SIGKDD International Conference on Knowledge Discovery and Data Mining* 1 (2019), pp. 1851–1861. DOI: 10.1145/3292500.3330758 (cit. on p. 6).
- [13] FIFA. Electronic Performance and Tracking Systems (EPTS) Standards. URL: \url{https://inside.fifa.com/technical/football-technology/standards/epts} (cit. on p. 6).
- [14] FIFA. "White Paper: Event Data Harmonisation-Level 1". 2023 (cit. on p. 7).
- [15] Khronos Group. glTF 2.0 Specification. Accessed: 2024-12-03. 2017. URL: https://registry.khronos.org/glTF/specs/2.0/glTF-2.0.html (cit. on p. 15).
- [16] Micheal Lewis. Moneyball: The Art of Winning an Unfair Game. New York: Norton, 2003 (cit. on p. 1).
- [17] Daniel Link. "Sports Analytics: How (commercial) sports data create new opportunities for sports science". In: German Journal of Exercise and Sport Research 48.1 (2018), pp. 13–25. ISSN: 25093150. DOI: 10.1007/s12662-017-0487-7 (cit. on p. 1).
- [18] Daniel Linke, Daniel Link, and Martin Lames. "Football-specific validity of TRACAB's optical video tracking systems". In: *PLoS ONE* 15.3 (2020), pp. 1–17. ISSN: 19326203. DOI: 10.1371/journal.pone.0230179 (cit. on p. 4).
- [19] Lorenzo Lolli et al. "Data analytics in the football industry: a survey investigating operational frameworks and practices in professional clubs and national federations from around the world". In: Science and Medicine in Football (May 2024), pp. 1–10. ISSN: 2473-3938. DOI: 10.1080/24733938.2024.2341837. URL: https://www.tandfonline.com/doi/full/10.1080/24733938.2024.2341837 (cit. on p. 1).

- [20] M. Manafifard, H. Ebadi, and H. Abrishami Moghaddam. "A survey on player tracking in soccer videos". In: Computer Vision and Image Understanding 159 (2017), pp. 19–46. ISSN: 1090235X. DOI: 10.1016/j.cviu. 2017.02.002 (cit. on p. 2).
- [21] Alexander Oonk. DataBallPy: Load, Synchronize, and Analyzing Soccer Data. URL: \url{https://pypi.org/project/databallpy/} (cit. on p. 7).
- [22] Luca Pappalardo et al. "A public data set of spatio-temporal match events in soccer competitions". In: Scientific Data 6.1 (2019), pp. 1–15. ISSN: 20524463. DOI: 10.1038/s41597-019-0247-7. URL: http://dx.doi.org/10.1038/s41597-019-0247-7 (cit. on pp. 2, 3).
- [23] Dominik Raabe et al. "Floodlight-A high-level, data-driven sports analytics framework". In: *Journal of Open Source Software* (2022) (cit. on p. 7).
- [24] Robert Rein and Daniel Memmert. "Big data and tactical analysis in elite soccer: future challenges and opportunities for sports science". In: SpringerPlus 5.1 (2016). ISSN: 21931801. DOI: 10.1186/s40064-016-3108-2 (cit. on p. 2).
- [25] Pieter Robberechts and Jesse Davis. "How data availability affects the ability to learn good xG models". In: Proceedings of the 7th Workshop on Machine Learning and Data Mining for Sports Analytics. 2020, pp. 17–27 (cit. on p. 6).
- [26] Samuel Robertson et al. "Development of a sports technology quality framework". In: *Journal of sports sciences* 41.22 (2023), pp. 1983–1993 (cit. on p. 7).
- [27] Sarah Rudd. "A Framework for Tactical Analysis and Individual Offensive Production Assessment in Soccer Using Markov Chains". In: *New England Symposium on Statistics in Sports*. 2011. URL: http://nessis.org/nessis11/rudd.pdf (cit. on p. 6).
- [28] Karun Singh. Introducing Expected Threat. https://karun.in/blog/expected-threat.html. 2019 (cit. on p. 6).
- [29] Matt Taberner et al. "Interchangeability of position tracking technologies; can we merge the data?" In: Science and Medicine in Football 4.1 (2020), pp. 76–81. ISSN: 24734446. DOI: 10.1080/24733938.2019.1634279. URL: https://doi.org/10.1080/24733938.2019.1634279 (cit. on p. 3).
- [30] Maaike Van Roy, Lorenzo Cascioli, and Jesse Davis. "ETSY: A Rule-Based Approach to Event and Tracking Data SYnchronization". In: *Machine Learning and Data Mining for Sports Analytics Workshop at ECML/PKDD 2023*. Vol. 2035. Communications in Computer and Information Science. Springer Nature Switzerland, 2023, pp. 11–23 (cit. on pp. 2, 7).
- [31] Ferran Vidal-Codina et al. "Automatic event detection in football using tracking data". In: Sports Engineering 25.1 (Dec. 2022). ISSN: 14602687. DOI: 10.1007/s12283-022-00381-6 (cit. on p. 3).
- [32] Koen Vossen. kloppy: Standardizing soccer tracking and event data. URL: \url{https://kloppy.pysport.org/} (cit. on p. 6).
- [33] Petar Vračar, Erik Štrumbelj, and Igor Kononenko. "Modeling basketball play-by-play data". In: Expert Systems with Applications 44 (2016), pp. 58–66. ISSN: 09574174. DOI: 10.1016/j.eswa.2015.09.004 (cit. on p. 3).
- [34] Ian Ward. Documentation for the JSON Lines text file format. URL: \url{https://jsonlines.org}) (cit. on p. 17).