

[Trending Now](#) [Data Structures](#) [Algorithms](#) [Interview Preparation](#) [Data Science](#) [Topic-wise Practice](#) [Python](#)

SQL | DDL, DQL, DML, DCL and TCL Commands

[Read](#)[Discuss](#)[Courses](#)[Practice](#)


Structured Query Language(SQL) as we all know is the database language by the use of which we can perform certain operations on the existing database and also we can use this language to create a database. [SQL](#) uses certain commands like CREATE, DROP, INSERT, etc. to carry out the required tasks.

SQL commands are like instructions to a table. It is used to interact with the database with some operations. It is also used to perform specific tasks, functions, and queries of data. SQL can perform various tasks like creating a table, adding data to tables, dropping the table, modifying the table, set permission for users.

These [SQL](#) commands are mainly categorized into five categories:

1. DDL – Data Definition Language
2. DQL – Data Query Language
3. DML – Data Manipulation Language
4. DCL – Data Control Language
5. TCL – Transaction Control Language

Now, we will see all of these in detail.

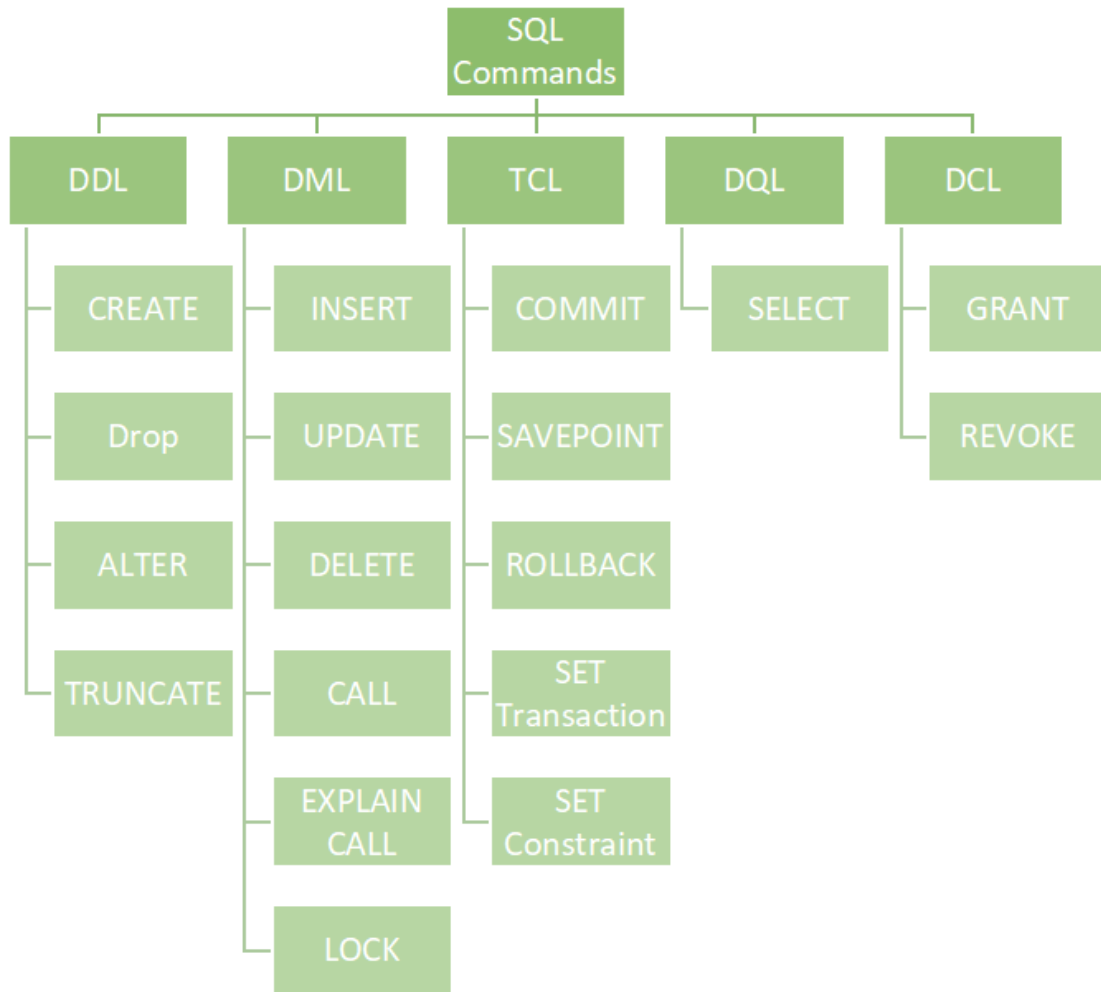

DDL (Data Definition Language)

DDL or Data Definition Language actually consists of the SQL commands that can be used to define the database schema. It simply deals with descriptions of the database schema and is used to create and modify the structure of database objects in the database. DDL is a set of SQL commands used to create, modify, and delete database structures but not data. These commands are normally not used by a general user, who should be accessing the database via an application.

List of DDL commands:

- **CREATE**: This command is used to create the database or its objects (like table, index, function, views, store procedure, and triggers).
- **DROP**: This command is used to delete objects from the database.
- **ALTER**: This is used to alter the structure of the database.
- **TRUNCATE**: This is used to remove all records from a table, including all spaces allocated for the records are removed.
- **COMMENT**: This is used to add comments to the data dictionary.

- **RENAME:** This is used to rename an object existing in the database.

DQL (Data Query Language)

DQL statements are used for performing queries on the data within schema objects. The purpose of the DQL Command is to get some schema relation based on the query passed to it. We can define DQL as follows it is a component of SQL statement that allows getting data from the database and imposing order upon it. It includes the SELECT statement. This command allows getting the data out of the database to perform operations with it. When a SELECT is fired against a table or tables the result is compiled into a further temporary table, which is displayed or perhaps received by the program i.e. a front-end.

List of DQL:

- **SELECT:** It is used to retrieve data from the database.

DML(Data Manipulation Language)

The SQL commands that deal with the manipulation of data present in the database belong to DML or Data Manipulation Language and this includes most of the SQL statements. It is the component of the SQL statement that controls access to data and to the database. Basically, DCL statements are grouped with DML statements.

List of DML commands:

- **INSERT:** It is used to insert data into a table.
- **UPDATE:** It is used to update existing data within a table.
- **DELETE:** It is used to delete records from a database table.
- **LOCK:** Table control concurrency.
- **CALL:** Call a PL/SQL or JAVA subprogram.
- **EXPLAIN PLAN:** It describes the access path to data.

DCL (Data Control Language)

DCL includes commands such as GRANT and REVOKE which mainly deal with the rights, permissions, and other controls of the database system.

List of DCL commands:

GRANT: This command gives users access privileges to the database.

Syntax:

GRANT SELECT, UPDATE ON MY_TABLE TO SOME_USER, ANOTHER_USER;

REVOKE: This command withdraws the user's access privileges given by using the GRANT command.

Syntax:

REVOKE SELECT, UPDATE ON MY_TABLE FROM USER1, USER2;

TCL (Transaction Control Language)

Transactions group a set of tasks into a single execution unit. Each transaction begins with a specific task and ends when all the tasks in the group successfully complete. If any of the tasks fail, the transaction fails. Therefore, a transaction has only two results: success or failure. You can explore more about transactions [here](#). Hence, the following TCL commands are used to control the execution of a transaction:

BEGIN: Opens a Transaction.

COMMIT: Commits a Transaction.

Syntax:

COMMIT;

ROLLBACK: Rollbacks a transaction in case of any error occurs.

Syntax:

ROLLBACK;

SAVEPOINT: Sets a save point within a transaction.

Syntax:

SAVEPOINT SAVEPOINT_NAME;

Last Updated : 10 May, 2023

711

Similar Reads

1. [SQL | DDL, DML, TCL and DCL](#)
2. [Difference between DDL and DML in DBMS](#)
3. [Difference between DDL and TCL](#)
4. [Difference between DML and TCL](#)
5. [DDL Commands & Syntax](#)
6. [DQL Full Form](#)
7. [How to Maintain Audit Information For DML in SQL?](#)
8. [DCL Full Form](#)
9. [DDL Full Form](#)
10. [TCL Full Form](#)

[Previous](#)

[Next](#)

Article Contributed By :



GeeksforGeeks

Vote for difficulty

Current difficulty : [Easy](#)

Easy

Normal

Medium

Hard

Expert

Improved By : [bhaluram18](#), [shawrohit602](#), [varshachoudhary](#), [vishaldhaygude01](#), [mayankbabar20](#), [mallickdipanjan](#), [shubhamthakur05](#)

Article Tags : [SQL-Clauses-Operators](#), [SQL](#)

Practice Tags : [SQL](#)

[Improve Article](#)[Report Issue](#)

A-143, 9th Floor, Sovereign Corporate Tower, Sector-136, Noida, Uttar Pradesh - 201305

feedback@geeksforgeeks.org



Company

[About Us](#)[Legal](#)[Careers](#)[In Media](#)[Contact Us](#)[Advertise with us](#)

Explore

[Job-A-Thon For Freshers](#)[Job-A-Thon For Experienced](#)[GfG Weekly Contest](#)[Offline Classes \(Delhi/NCR\)](#)[DSA in JAVA/C++](#)[Master System Design](#)

Languages

Python
Java
C++
PHP
GoLang
SQL
R Language
Android Tutorial

Algorithms

Sorting
Searching
Greedy
Dynamic Programming
Pattern Searching
Recursion
Backtracking

Computer Science

GATE CS Notes
Operating Systems
Computer Network
Database Management System
Software Engineering
Digital Logic Design
Engineering Maths

Data Science & ML

Data Science With Python
Data Science For Beginner
Machine Learning Tutorial
Maths For Machine Learning
Pandas Tutorial
NumPy Tutorial
NLP Tutorial
Deep Learning Tutorial

Data Structures

Array
String
Linked List
Stack
Queue
Tree
Graph

Web Development

HTML
CSS
JavaScript
Bootstrap
ReactJS
AngularJS
NodeJS

Python

Python Programming Examples
Django Tutorial
Python Projects
Python Tkinter
OpenCV Python Tutorial
Python Interview Question

DevOps

Git
AWS
Docker
Kubernetes
Azure
GCP

Competitive Programming

Top DSA for CP
Top 50 Tree Problems
Top 50 Graph Problems
Top 50 Array Problems
Top 50 String Problems
Top 50 DP Problems
Top 15 Websites for CP

Interview Corner

Company Wise Preparation
Preparation for SDE
Experienced Interviews
Internship Interviews
Competitive Programming
Aptitude Preparation

Commerce

Accountancy
Business Studies
Economics
Management
Income Tax
Finance

SSC/ BANKING

SSC CGL Syllabus
SBI PO Syllabus
SBI Clerk Syllabus
IBPS PO Syllabus
IBPS Clerk Syllabus
Aptitude Questions
SSC CGL Practice Papers

System Design

What is System Design
Monolithic and Distributed SD
Scalability in SD
Databases in SD
High Level Design or HLD
Low Level Design or LLD
Top SD Interview Questions

GfG School

CBSE Notes for Class 8
CBSE Notes for Class 9
CBSE Notes for Class 10
CBSE Notes for Class 11
CBSE Notes for Class 12
English Grammar

UPSC

Polity Notes
Geography Notes
History Notes
Science and Technology Notes
Economics Notes
Important Topics in Ethics
UPSC Previous Year Papers

Write & Earn

Write an Article
Improve an Article
Pick Topics to Write
Write Interview Experience
Internships
Video Internship

@geeksforgeeks , Some rights reserved