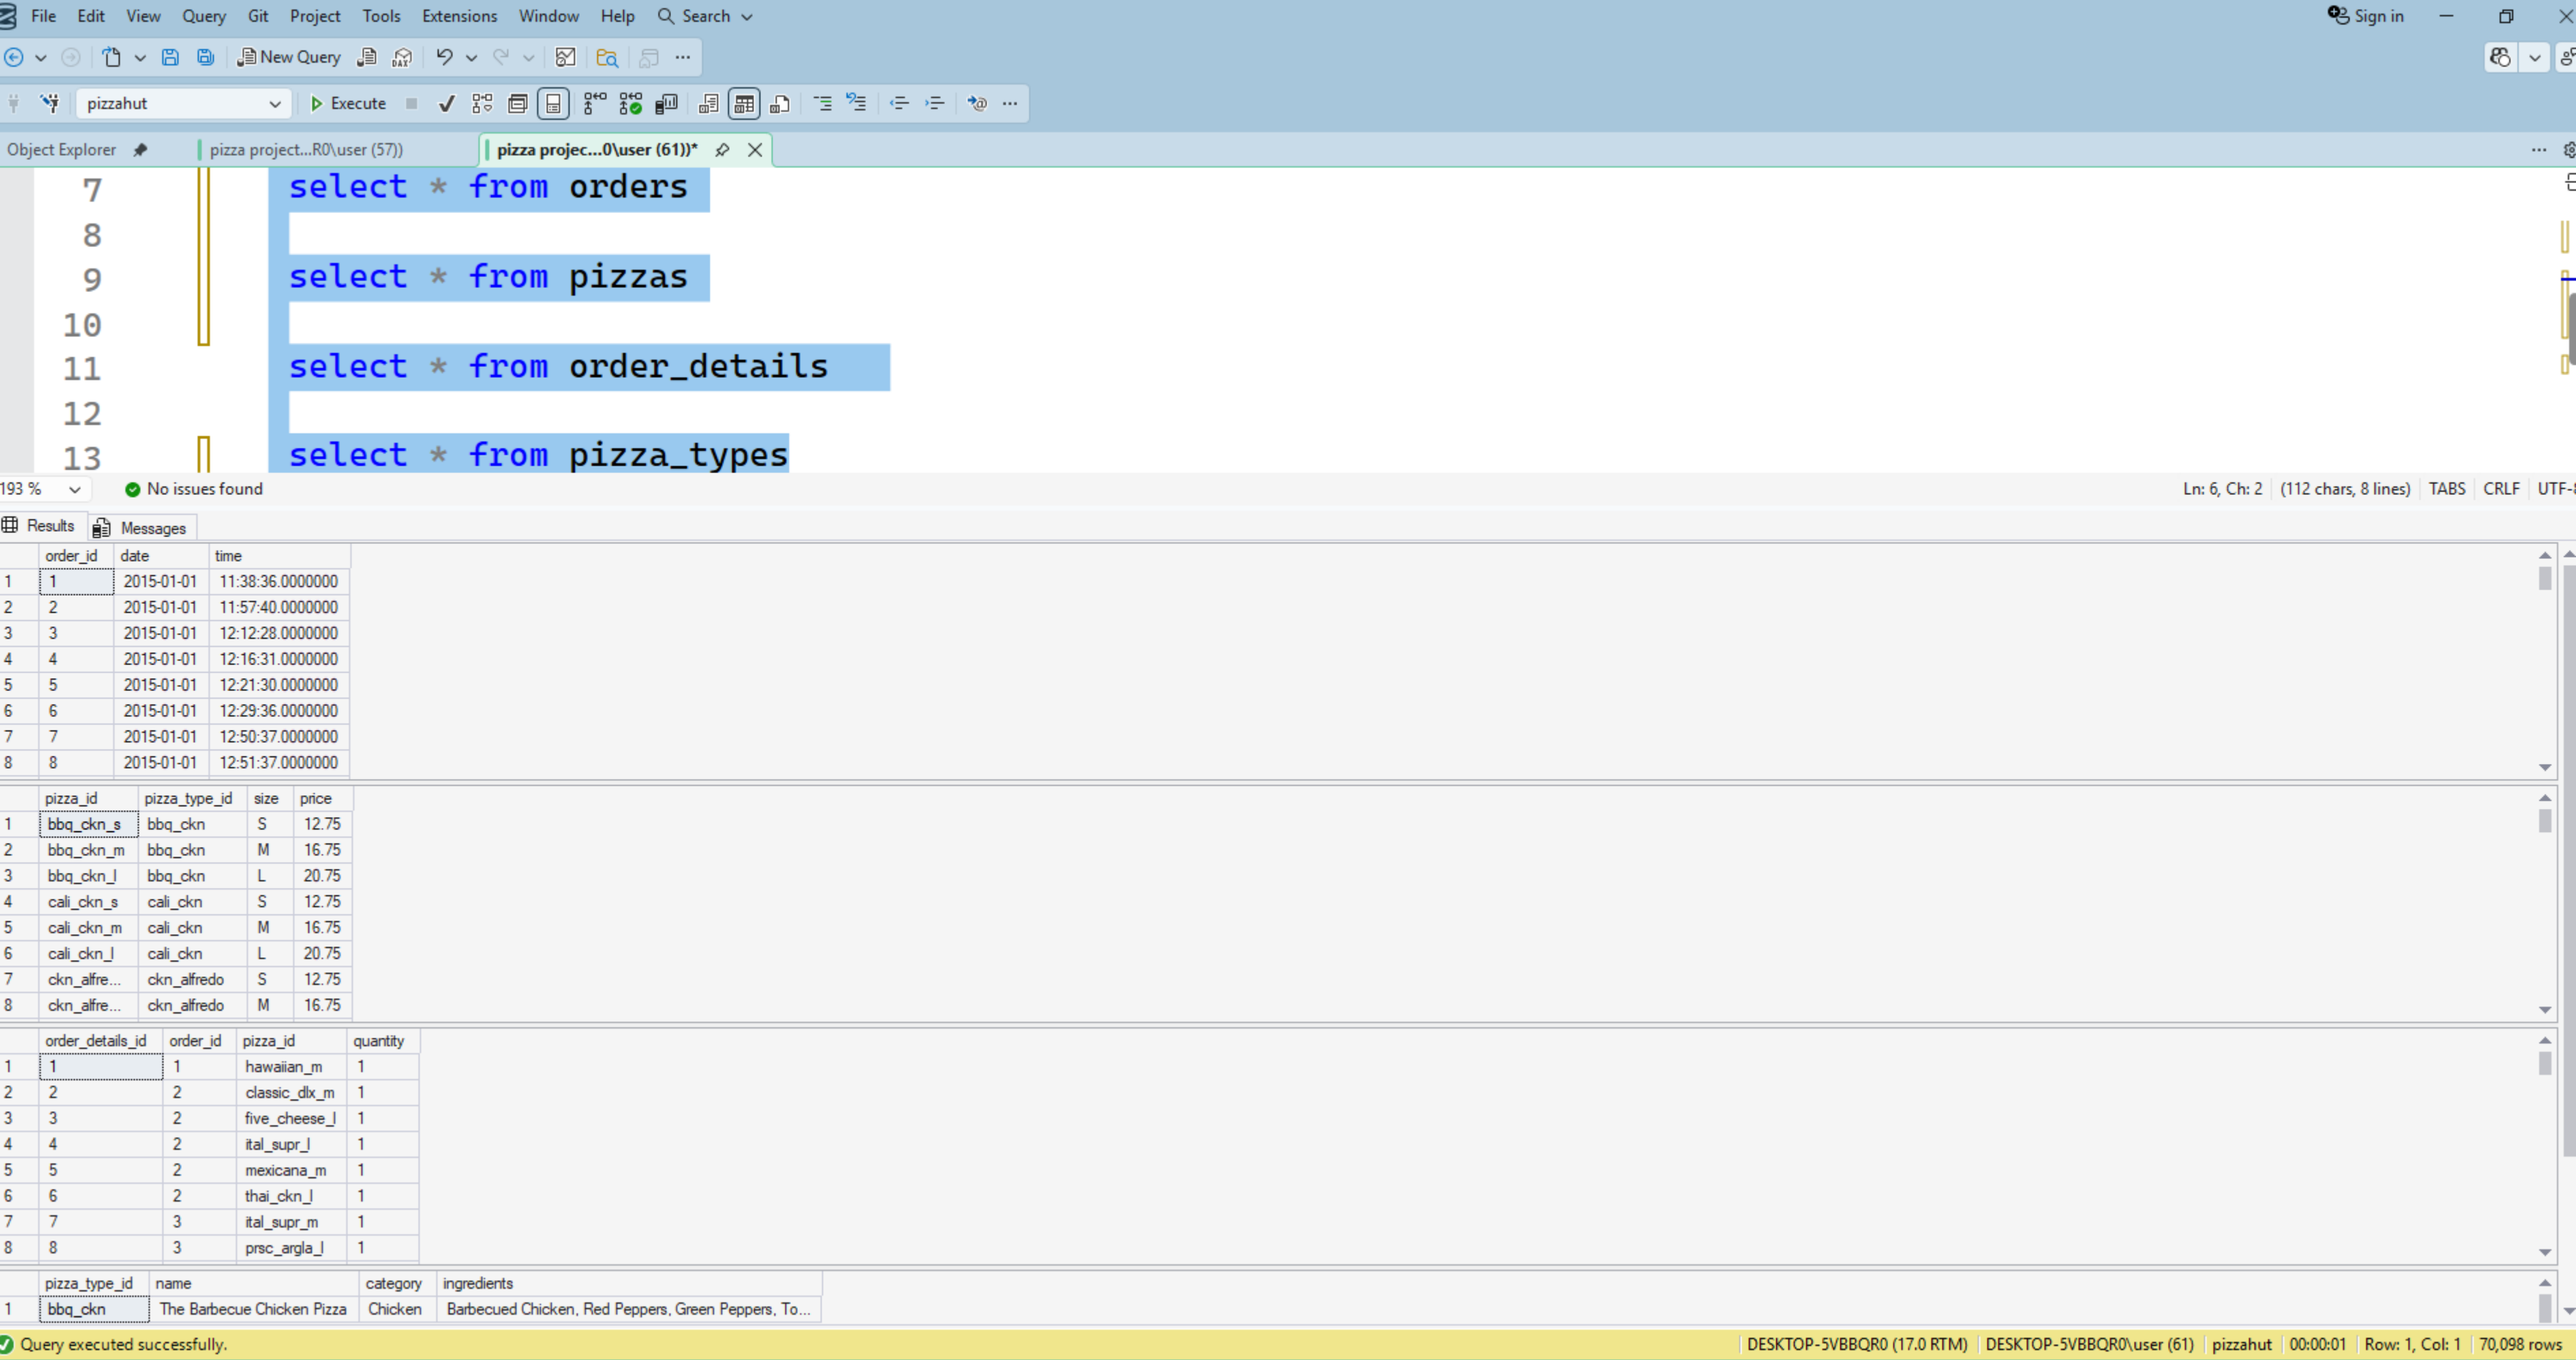
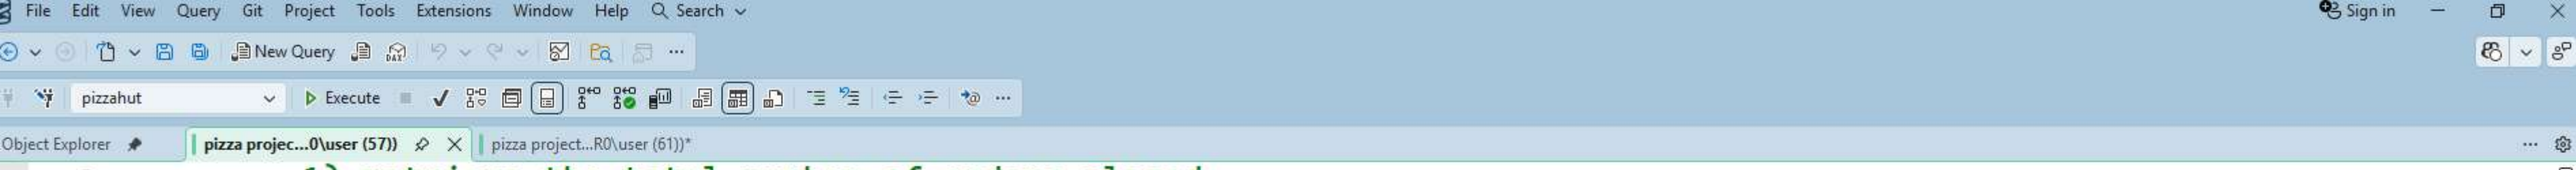
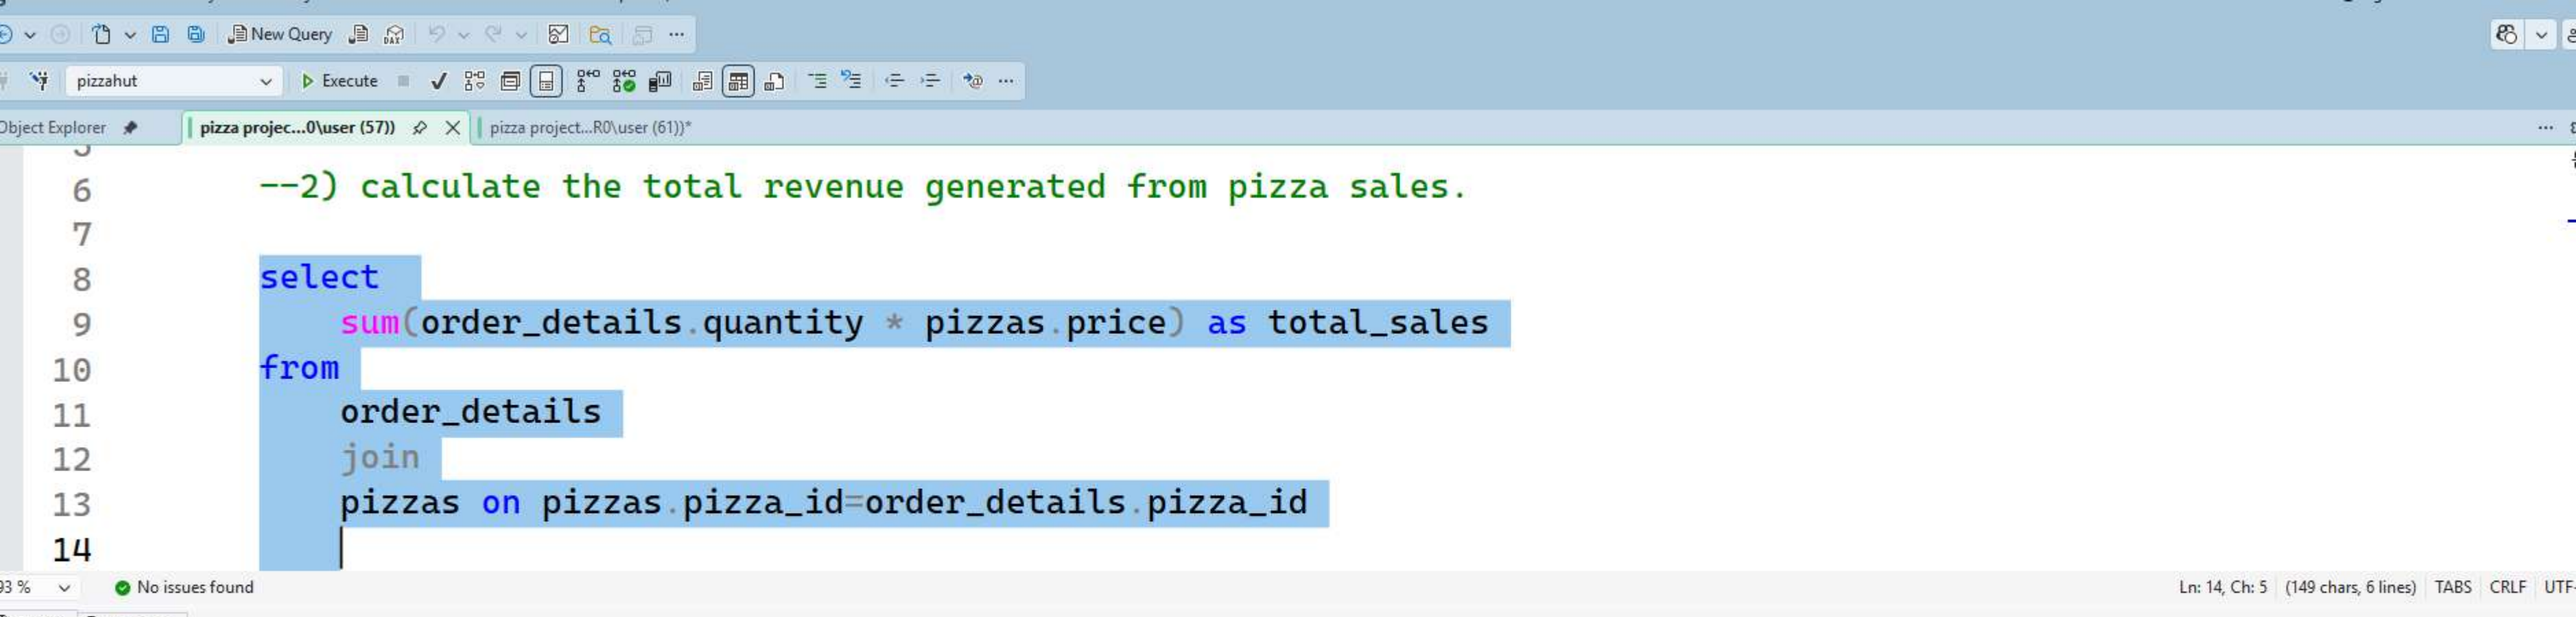
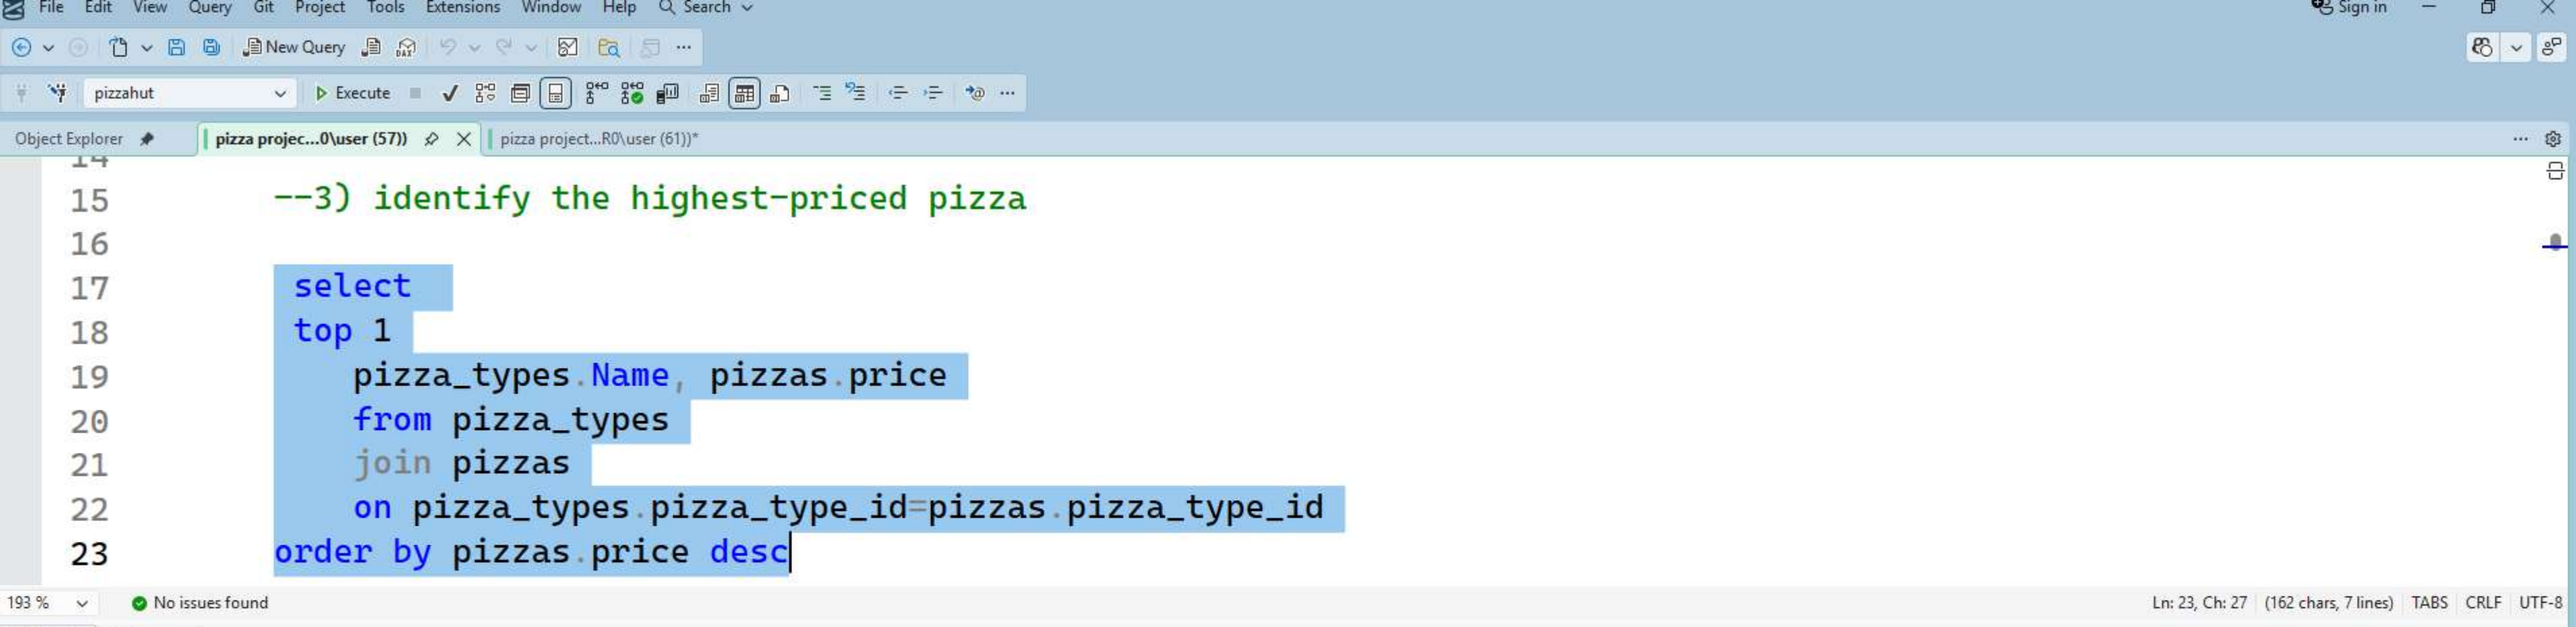

File Edit View Query Git Project Tools Extensions Window Help Search
New Query
pizzahut
Execute
Object Explorer
pizza project...R0\user (57))
pizza projec...0\user (61))*
1
2
3
create database pizzahut
4
5
use pizzahut
6


File Edit View Query Git Project Tools Extensions Window Help Search
Sign in
New Query
pizzahut
Execute
Object Explorer
pizza project...R0\user (57))
pizza projec...0\user (61))*
7 select * from orders
8
9 select * from pizzas
10
11 select * from order_details
12
13 select * from pizza_types
193 %
No issues found
Ln: 6, Ch: 2 (112 chars, 8 lines) TABS CRLF UTF-
Results
Messages
order_id date time
1 1 2015-01-01 11:38:36.0000000
2 2 2015-01-01 11:57:40.0000000
3 3 2015-01-01 12:12:28.0000000
4 4 2015-01-01 12:16:31.0000000
5 5 2015-01-01 12:21:30.0000000
6 6 2015-01-01 12:29:36.0000000
7 7 2015-01-01 12:50:37.0000000
8 8 2015-01-01 12:51:37.0000000
pizza_id pizza_type_id size price
1 bbq_ckn_s bbq_ckn S 12.75
2 bbq_ckn_m bbq_ckn M 16.75
3 bbq_ckn_l bbq_ckn L 20.75
4 cali_ckn_s cali_ckn S 12.75
5 cali_ckn_m cali_ckn M 16.75
6 cali_ckn_l cali_ckn L 20.75
7 ckn_alfre... ckn_alfredo S 12.75
8 ckn_alfre... ckn_alfredo M 16.75
order_details_id order_id pizza_id quantity
1 1 1 hawaiian_m 1
2 2 2 classic_dlx_m 1
3 3 2 five_cheese_l 1
4 4 2 ital_supr_l 1
5 5 2 mexicana_m 1
6 6 2 thai_ckn_l 1
7 7 3 ital_supr_m 1
8 8 3 prsc_argla_l 1
pizza_type_id name category ingredients
1 bbq_ckn The Barbecue Chicken Pizza Chicken Barbecued Chicken, Red Peppers, Green Peppers, To...
Query executed successfully.
DESKTOP-5VBBQR0 (17.0 RTM) DESKTOP-5VBBQR0\user (61) pizzahut 00:00:01 Row: 1, Col: 1 70,098 rows


File Edit View Query Git Project Tools Extensions Window Help Search
Sign in
New Query
pizzahut
Execute
Object Explorer
pizza projec...0\user (57))
pizza project...R0\user (61))*
--1) retrieve the total number of orders placed
select count(order_id) [total order] from orders
93 %
No issues found
Ln: 5, Ch: 1
(50 chars, 1 lines)
TABS
CRLF
UTF-8
Results
Messages
total order
1
21350


New Query
pizzahut
Execute
Object Explorer
pizza projec...0\user (57))
pizza project...R0\user (61))*
--2) calculate the total revenue generated from pizza sales.
select
sum(order_details.quantity * pizzas.price) as total_sales
from
order_details
join
pizzas on pizzas.pizza_id=order_details.pizza_id
93 %
No issues found
Ln: 14, Ch: 5
(149 chars, 6 lines)
TABS
CRLF
Results
Messages
total_sales
817860.05083847



File Edit View Query Git Project Tools Extensions Window Help Search
Sign in
New Query
pizzahut
Execute
Object Explorer
pizza projec...0\user (57))
pizza project...R0\user (61))*
--3) identify the highest-priced pizza
select
top 1
pizza_types.Name, pizzas.price
from pizza_types
join pizzas
on pizza_types.pizza_type_id=pizzas.pizza_type_id
order by pizzas.price desc
193 %
No issues found
Ln: 23, Ch: 27
(162 chars, 7 lines)
TABS
CRLF
UTF-8
Results
Messages
Name
price
1
The Greek Pizza
35.9500007629395

```
24
25      --4) identify the most common pizza size ordered.
26
27      select
28      pizzas.size, count(order_details.order_details_id) [order_count]
29      from pizzas
30      join
31      order_details
32      on pizzas.pizza_id=order_details.pizza_id
33      group by pizzas.size
34      order by order_count desc
35
```

193 % | No issues found | Ln: 34, Ch: 27 | (200 chars, 8 lines) | TABS | CRLF

Results | Messages


	size	order_count
1	L	18526
2	M	15385
3	S	14137
4	XL	544
5	XXL	28

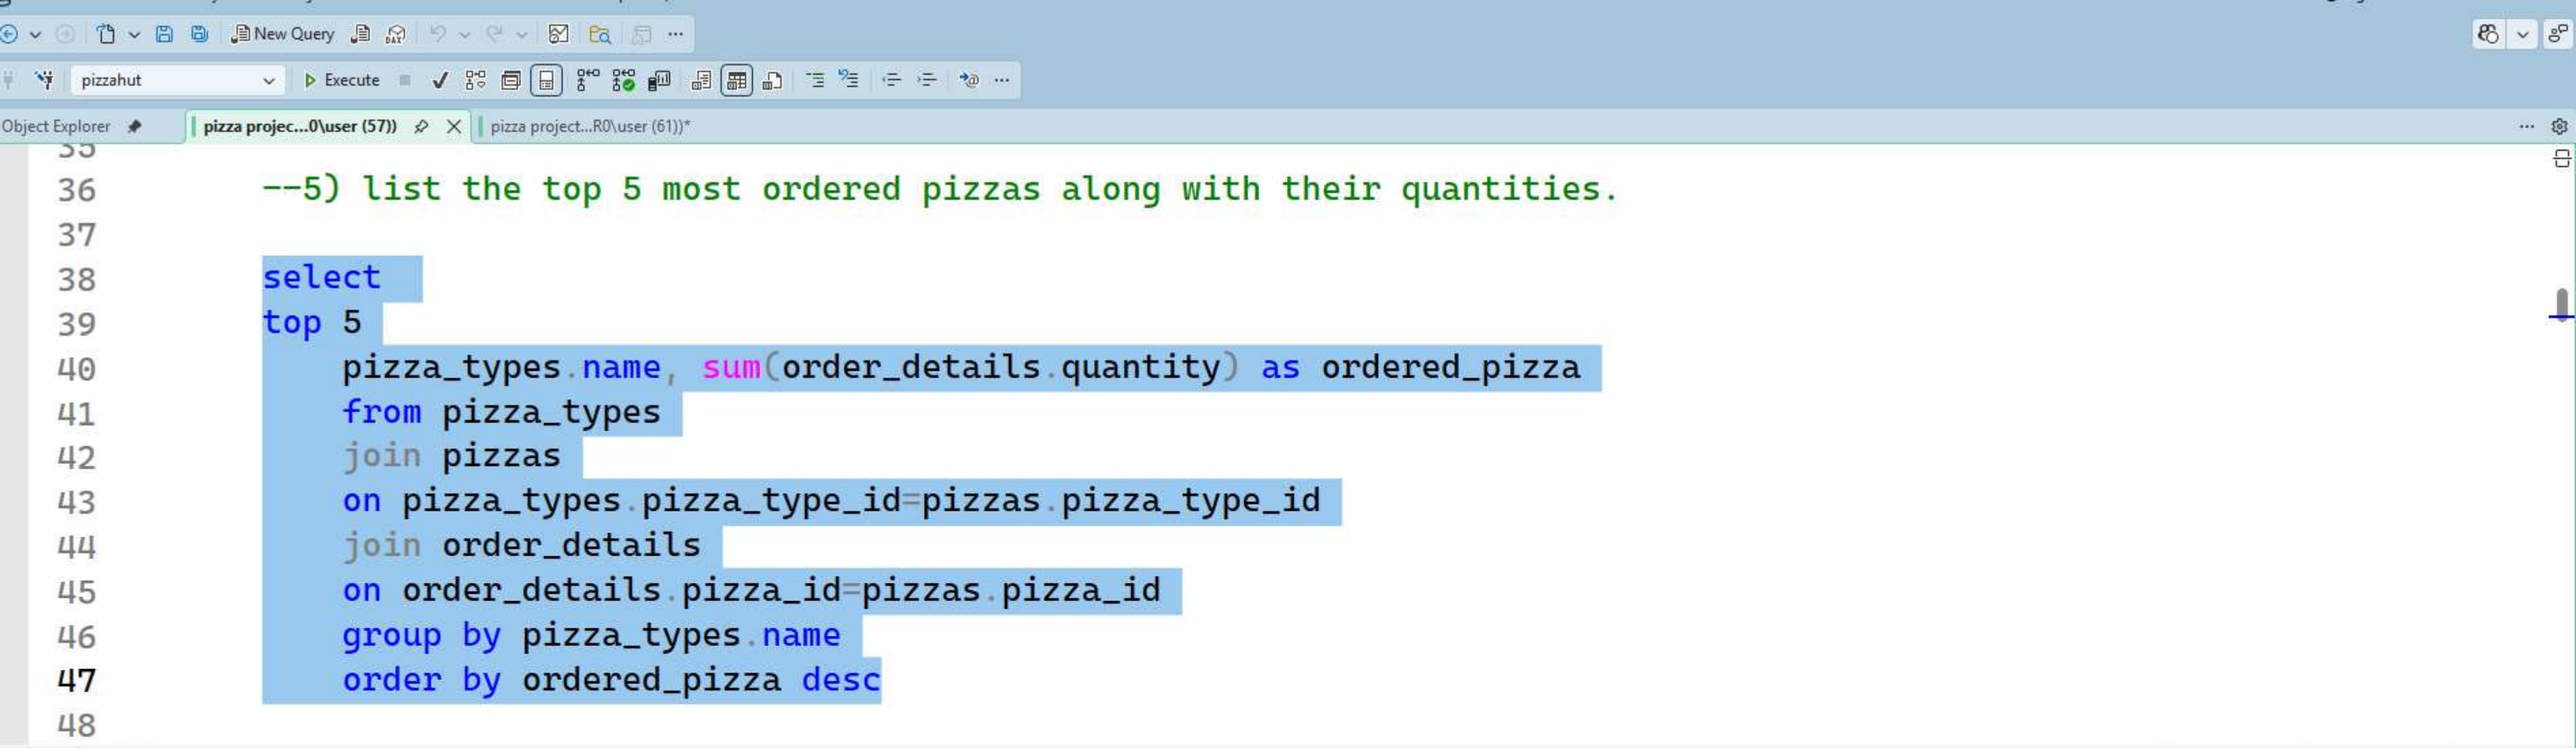



```
--5) list the top 5 most ordered pizzas along with their quantities.

select
top 5
    pizza_types.name, sum(order_details.quantity) as ordered_pizza
    from pizza_types
    join pizzas
    on pizza_types.pizza_type_id=pizzas.pizza_type_id
    join order_details
    on order_details.pizza_id=pizzas.pizza_id
    group by pizza_types.name
    order by ordered_pizza desc
```

	name	ordered_pizza
1	The Classic Deluxe Pizza	2453
2	The Barbecue Chicken Pizza	2432
3	The Hawaiian Pizza	2422
4	The Pepperoni Pizza	2418
5	The Thai Chicken Pizza	2371

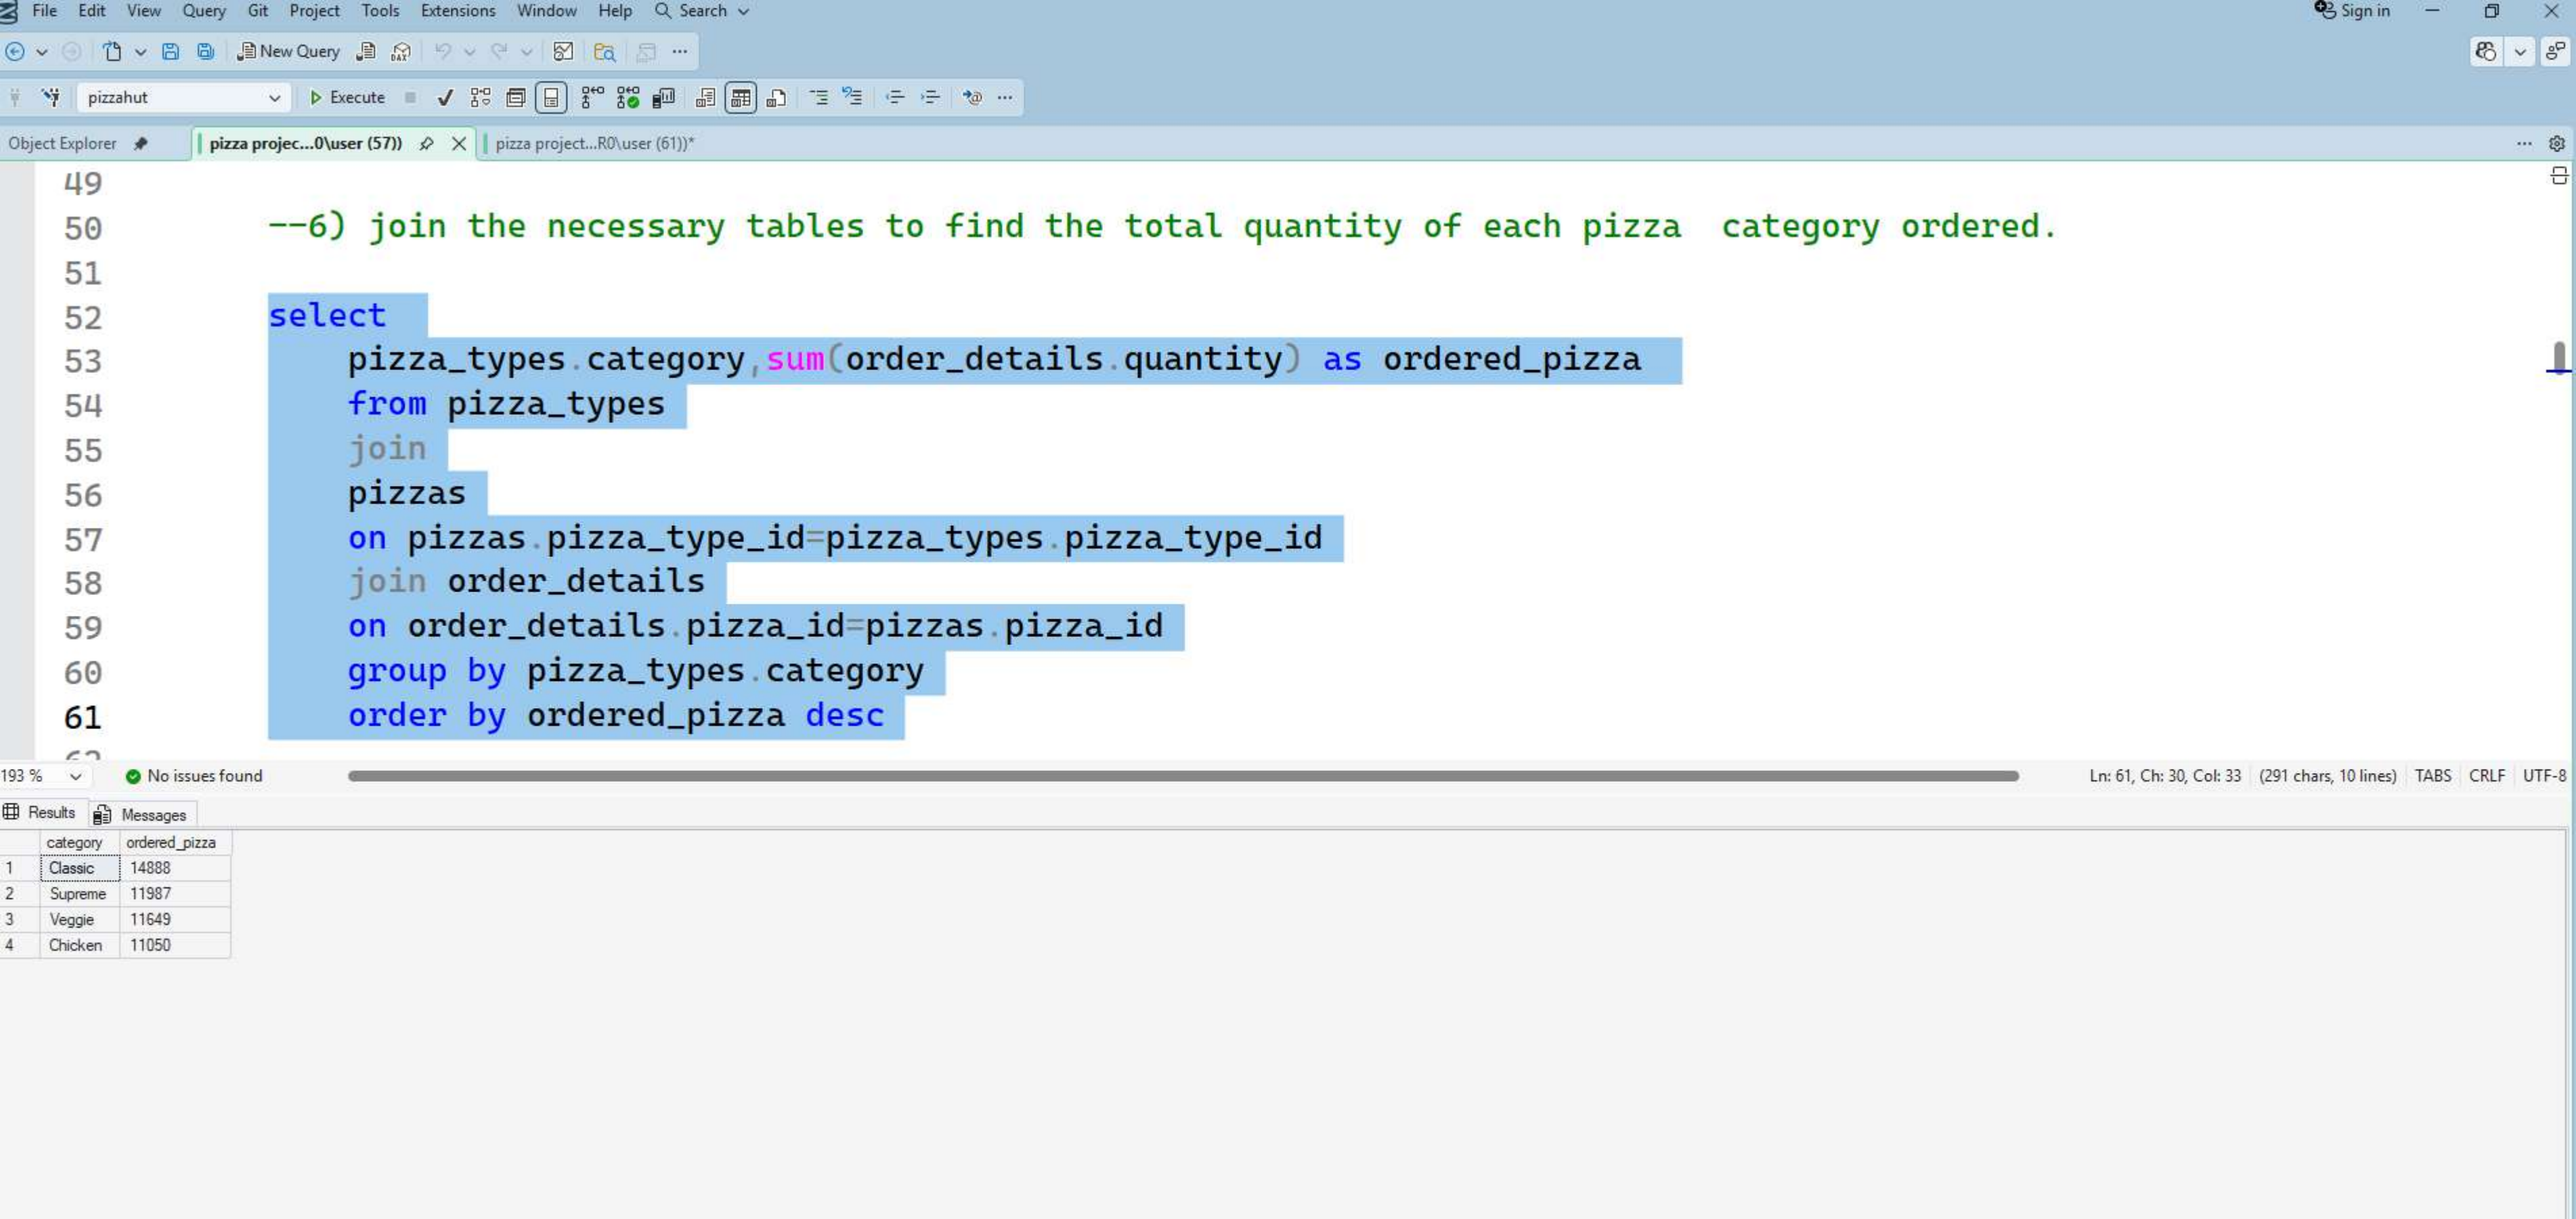
File Edit View Query Git Project Tools Extensions Window Help Search
Sign in
New Query
pizzahut
Execute
Object Explorer
pizza projec...0\user (57))
pizza project...R0\user (61))*
49
50 --6) join the necessary tables to find the total quantity of each pizza category ordered.
51
52 select
53 pizza_types.category,sum(order_details.quantity) as ordered_pizza
54 from pizza_types
55 join
56 pizzas
57 on pizzas.pizza_type_id=pizza_types.pizza_type_id
58 join order_details
59 on order_details.pizza_id=pizzas.pizza_id
60 group by pizza_types.category
61 order by ordered_pizza desc
193 %
No issues found
Ln: 61, Ch: 30, Col: 33
(291 chars, 10 lines)
TABS
CRLF
UTF-8
Results
Messages
category
ordered_pizza
1 Classic 14888
2 Supreme 11987
3 Veggie 11649
4 Chicken 11050

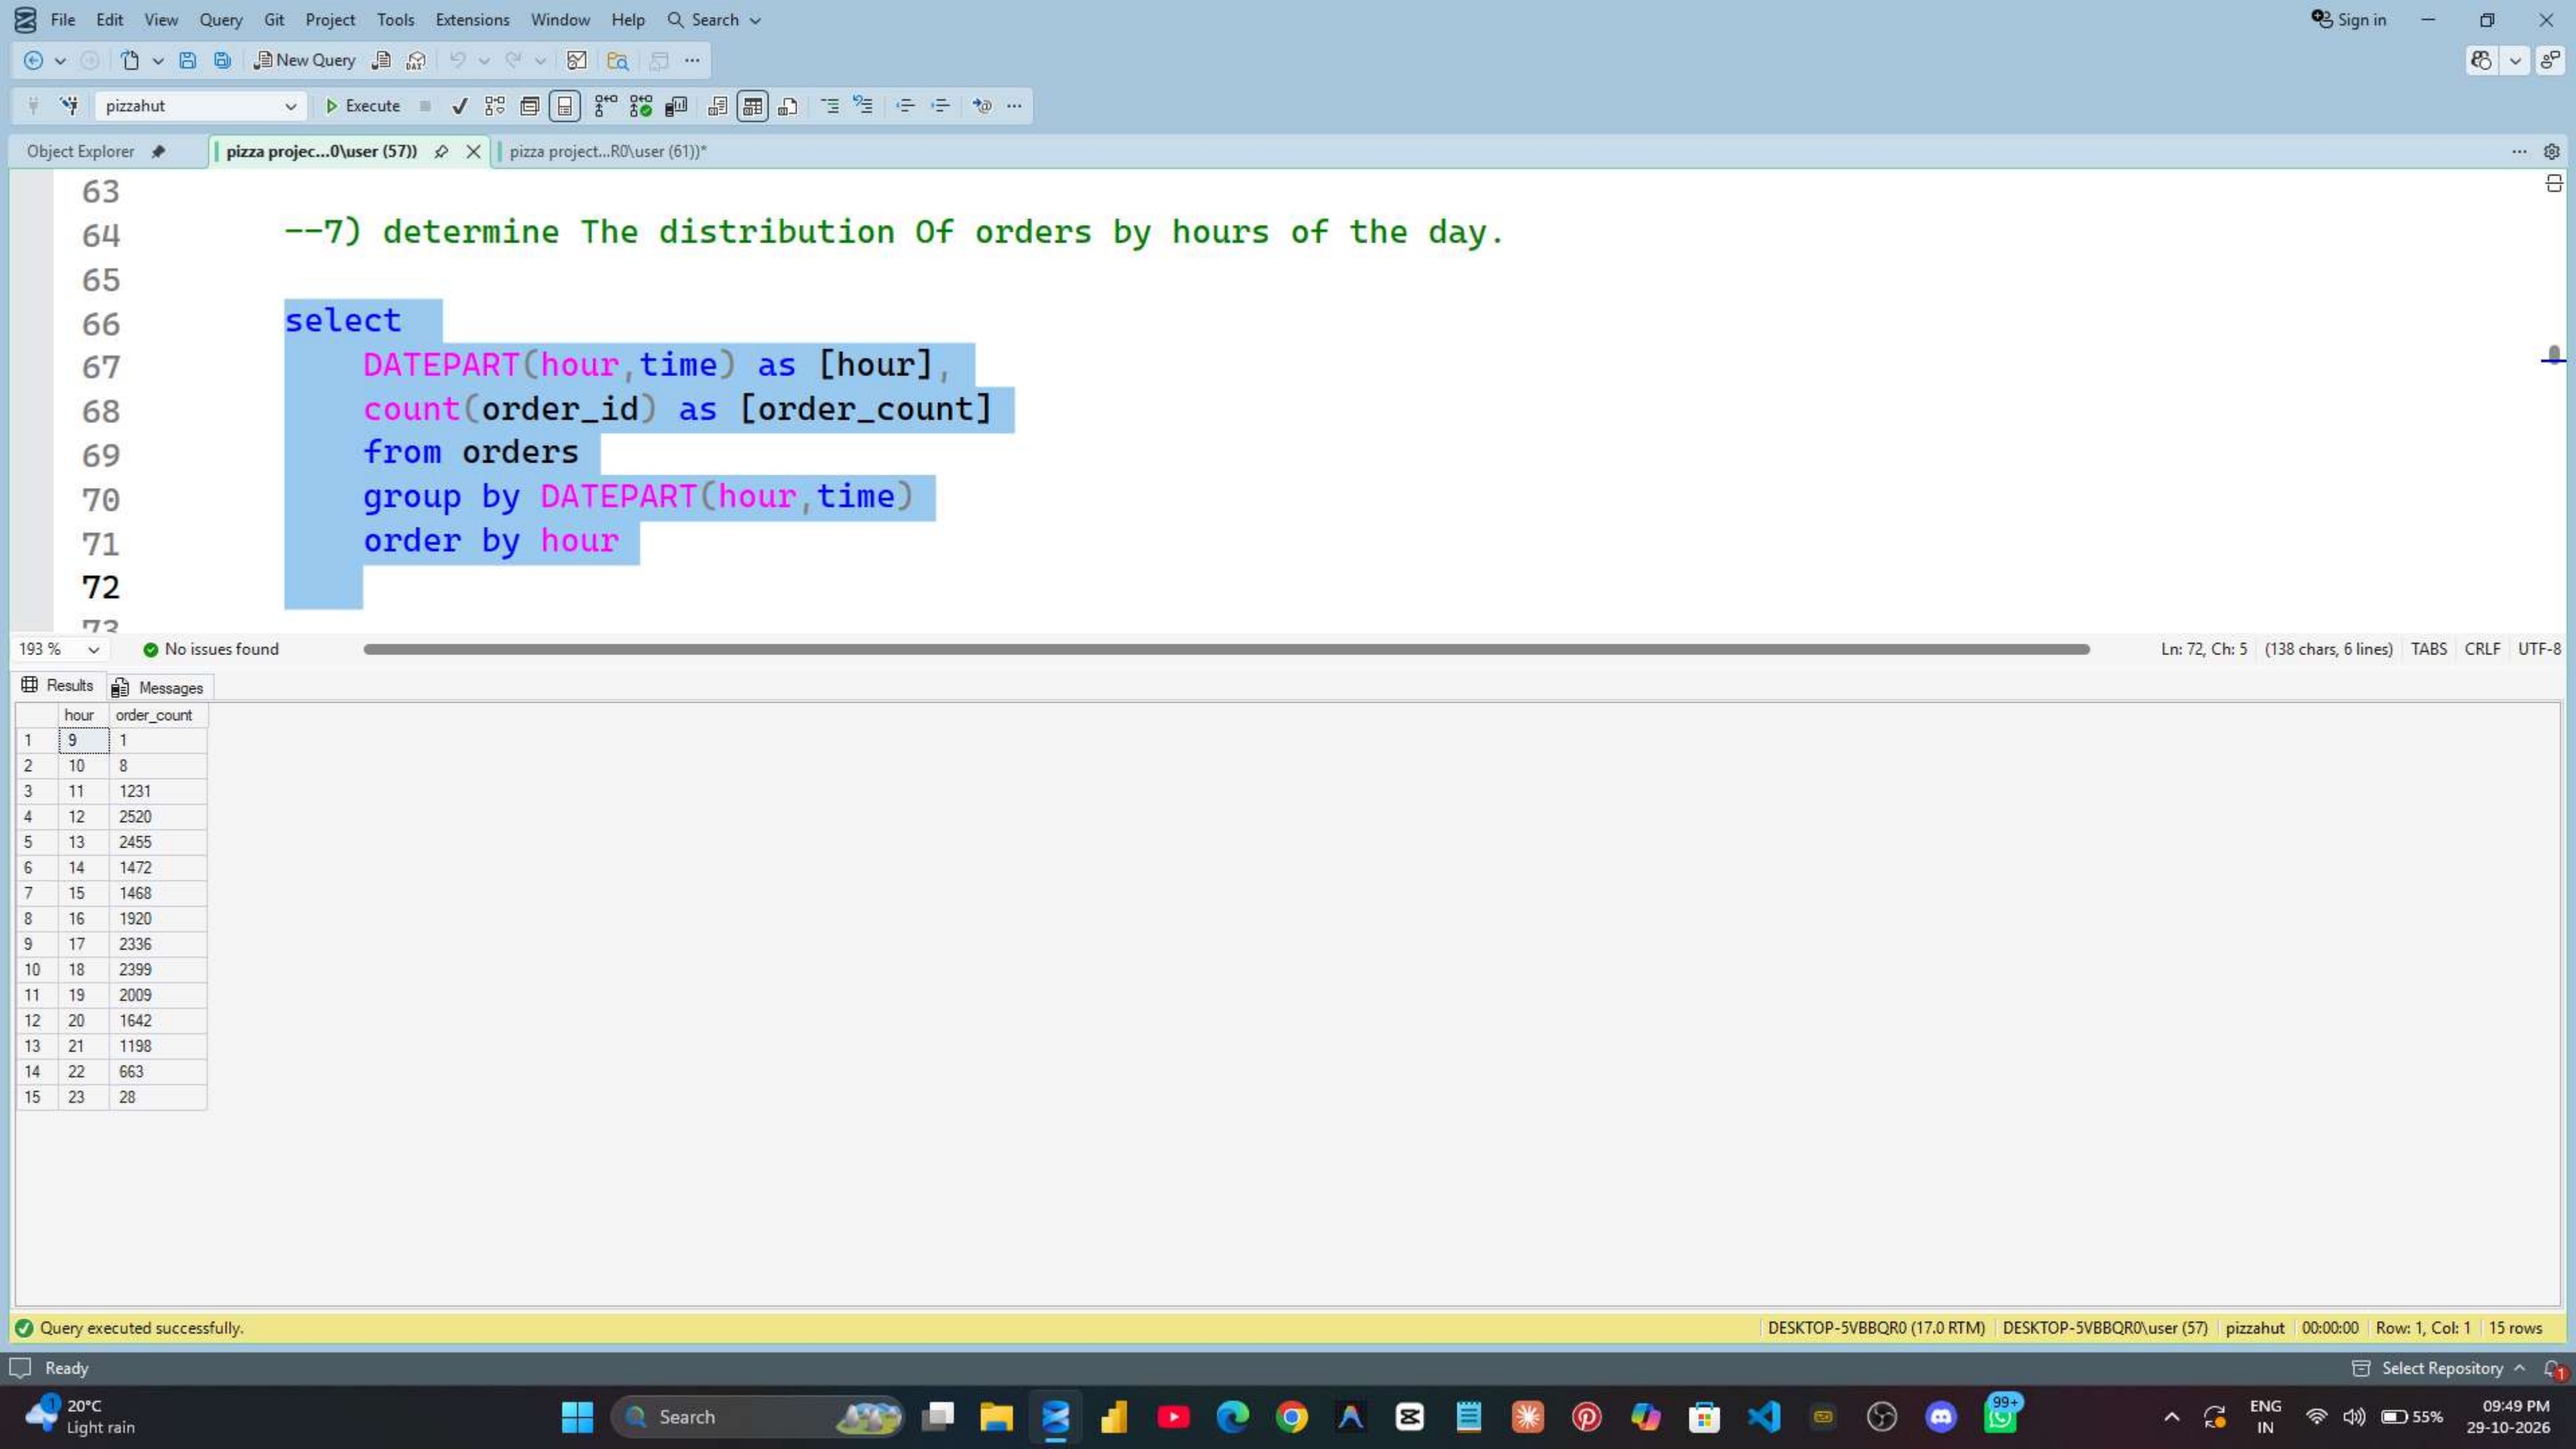
File Edit View Query Git Project Tools Extensions Window Help Search
Sign in
New Query
pizzahut
Execute
Object Explorer
pizza projec...0\user (57))
pizza project...R0\user (61))*
63
64 --7) determine The distribution Of orders by hours of the day.
65
66 select
67 DATEPART(hour,time) as [hour],
68 count(order_id) as [order_count]
69 from orders
70 group by DATEPART(hour,time)
71 order by hour
72
193 %
No issues found
Ln: 72, Ch: 5
(138 chars, 6 lines)
TABS
CRLF
UTF-8
Results
Messages
hour order_count
1 9 1
2 10 8
3 11 1231
4 12 2520
5 13 2455
6 14 1472
7 15 1468
8 16 1920
9 17 2336
10 18 2399
11 19 2009
12 20 1642
13 21 1198
14 22 663
15 23 28
Query executed successfully.
DESKTOP-5VBBQR0 (17.0 RTM)
DESKTOP-5VBBQR0\user (57)
pizzahut
00:00:00
Row: 1, Col: 1
15 rows
Ready
Select Repository
20°C
Light rain
Search
ENG
IN
55%
09:49 PM
29-10-2026

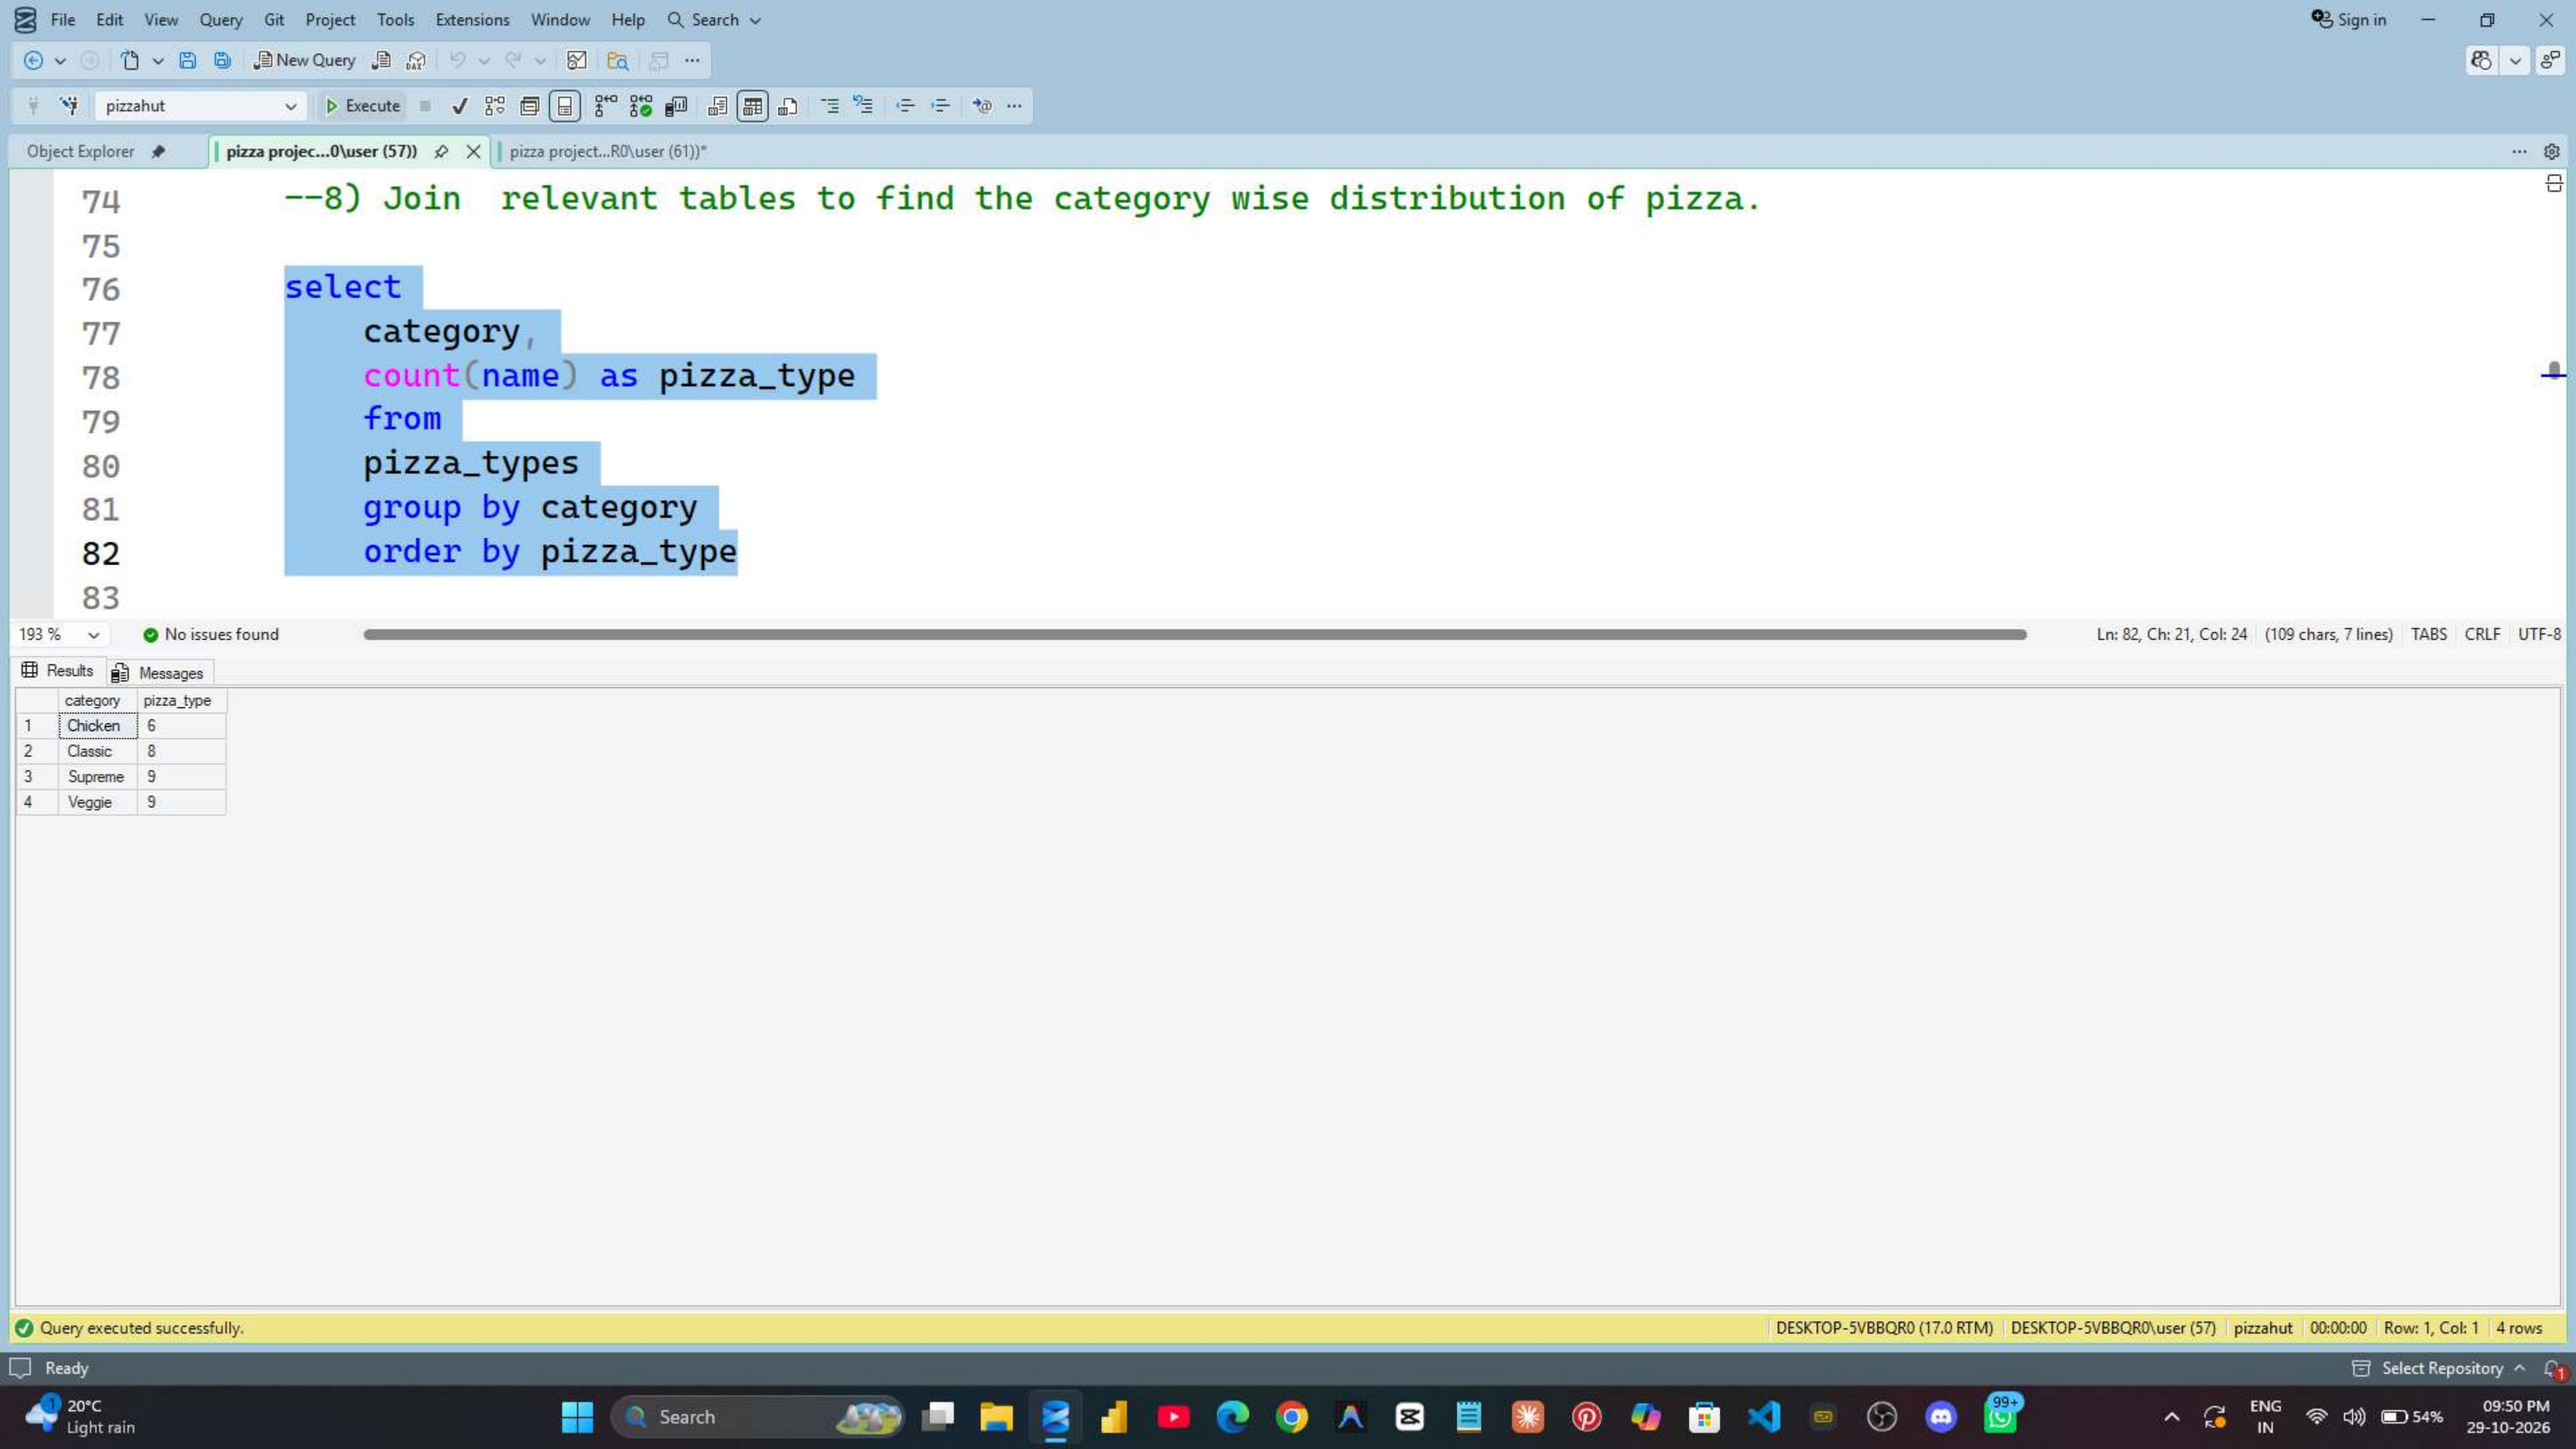
File Edit View Query Git Project Tools Extensions Window Help Search
Sign in
New Query
pizzahut
Execute
Object Explorer
pizza projec...0\user (57))
pizza project...R0\user (61))*
74 --8) Join relevant tables to find the category wise distribution of pizza.
75
76 select
77 category,
78 count(name) as pizza_type
79 from
80 pizza_types
81 group by category
82 order by pizza_type
83
193 %
No issues found
Ln: 82, Ch: 21, Col: 24
(109 chars, 7 lines)
TABS
CRLF
UTF-8
Results
Messages
category pizza_type
1 Chicken 6
2 Classic 8
3 Supreme 9
4 Veggie 9
Query executed successfully.
DESKTOP-5VBBQR0 (17.0 RTM)
DESKTOP-5VBBQR0\user (57)
pizzahut
00:00:00
Row: 1, Col: 1
4 rows
Ready
Select Repository
20°C
Light rain
Search
ENG
IN
54%
09:50 PM
29-10-2026

File Edit View Query Git Project Tools Extensions Window Help Search

Sign in

New Query

pizzahut

Execute

Object Explorer

pizza projec...0\user (57))

pizza project...R0\user (61))*

```
84      --9) Group the orders by date and calculate the average number of pizzas ordered per day.
85
86
87      select avg(total_quantity) from
88      (select
89          orders.date, sum(order_details.quantity) [total_quantity]
90          from
91          orders
92          join
93          order_details
94          on orders.order_id=order_details.order_id
95          group by orders.date) as [order_quantity]
96
97
```

193 % No issues found Ln: 96, Ch: 5 (230 chars, 9 lines) TABS CRLF UTF-8

Results Messages

	(No column name)
1	138

Query executed successfully. DESKTOP-5VBBQR0 (17.0 RTM) DESKTOP-5VBBQR0\user (57) pizzahut 00:00:00 Row: 1, Col: 1 1 rows

Matches:)

Select Repository

20°C Light rain

Search

ENG IN 54% 09:51 PM 29-10-2026

```
--10) Determine the top three most ordered pizza types based on Revenue.


select
top 3
    pizza_types.name, sum((pizzas.price)*(order_details.quantity)) [revenue]
    from
    pizzas
    join
    pizza_types
    on pizzas.pizza_type_id=pizza_types.pizza_type_id
    join
    order_details
    on pizzas.pizza_id=order_details.pizza_id
    group by pizza_types.name
    order by revenue desc
```

	name	revenue
1	The Thai Chicken Pizza	43434.25
2	The Barbecue Chicken Pizza	42768
3	The California Chicken Pizza	41409.5

```sql
--11) Calculate the percentage contribution of each pizza type to total revenue.

select
    pizza_types.category, sum(order_details.quantity*pizzas.price)/
    (select
    sum(order_details.quantity * pizzas.price) as total_sales
from
    order_details
    join
    pizzas on pizzas.pizza_id=order_details.pizza_id)*100 [revenue]
    from
    pizzas
    join
    pizza_types
    on pizza_types.pizza_type_id=pizzas.pizza_type_id
    join
    order_details
    on order_details.pizza_id=pizzas.pizza_id
    group by pizza_types.category
    order by revenue desc
```

	category	revenue
1	Classic	26.9059602306976
2	Supreme	25.4563112111462
3	Chicken	23.9551375322885
4	Veggie	23.6825910258677

```sql
--12) Analyse the cumulative revenge generated overtime.

select
    date, sum(revenue) over (order by date) as [cum_revenue]
from
(
select
    orders.date, sum(order_details.quantity*pizzas.price) as [revenue]
    from
    pizzas
    join
    order_details
    on pizzas.pizza_id=order_details.pizza_id
    join
    orders
    on order_details.order_id=orders.order_id
    group by orders.date ) as sales
```

column order_id(PK, int, not null)

	date	cum_revenue
1	2015-01-01	2713.85000228882
2	2015-01-02	5445.7500038147
3	2015-01-03	8108.15000724792
4	2015-01-04	9863.60000801086
5	2015-01-05	11929.5500087738
6	2015-01-06	14358.5000114441
7	2015-01-07	16560.700012207
8	2015-01-08	19399.0500183105
9	2015-01-09	21526.4000225067
10	2015-01-10	23990.350025177
11	2015-01-11	25862.6500263214

```sql
--13) Determine the top 3 Most ordered pizza types based on revenue For each pizza category Determine.
select
    category, name, revenue
    from
(
select

    category, name, revenue,
    rank() over (partition by category order by revenue desc) as [rn]
    from
(
select
    pizza_types.category, pizza_types.name, sum(order_details.quantity*pizzas.price) as [revenue]
    from
    pizzas
    join
    order_details
    on pizzas.pizza_id=order_details.pizza_id
    join
    pizza_types
    on pizzas.pizza_type_id=pizza_types.pizza_type_id
    group by pizza_types.category, pizza_types.name) as [A]) as [B]
    where rn<=3
```

	category	name	revenue
1	Chicken	The Thai Chicken Pizza	43434.25
2	Chicken	The Barbecue Chicken Pizza	42768
3	Chicken	The California Chicken Pizza	41409.5
4	Classic	The Classic Deluxe Pizza	38180.5