


CSE 215: Database

Lecture 10

Chapter 3: Design Theory of Relational Database

Outline

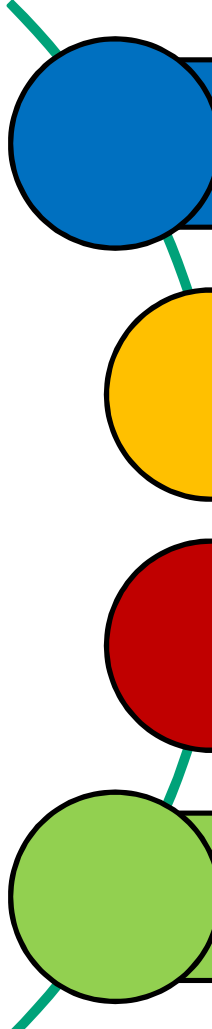

1st Normal Form = all tables' attributes are atomic

2nd Normal Form = No partial dependency (obsolete)

Boyce Codd Normal Form = will study

3rd Normal Form = see book

First Normal Form (1NF)

- A database schema is in First Normal Form (1NF) if the **domain** of each attribute contains only **atomic** values, and the value of each attribute contains only a **single value** from that **domain**.

First Normal Form (1NF)

Customer

Customer ID	First Name	Surname	Telephone Number
123	Robert	Ingram	555-861-2025
456	Jane	Wright	555-403-1659
789	Maria	Fernandez	555-808-9633

Not in First Normal Form (1NF)

Customer

Customer ID	First Name	Surname	Telephone Number
123	Robert	Ingram	555-861-2025
456	Jane	Wright	555-403-1659 555-776-4100
789	Maria	Fernandez	555-808-9633

Now in First Normal Form (1NF)

Customer

Customer ID	First Name	Surname	Telephone Number
123	Robert	Ingram	555-861-2025
456	Jane	Wright	555-403-1659
456	Jane	Wright	555-776-4100
789	Maria	Fernandez	555-808-9633

Now in First Normal Form (1NF)

<u>Customer ID</u>	First Name	Surname
123	Robert	Ingram
456	Jane	Wright
789	Maria	Fernandez

Customer ID	<u>Telephone Number</u>
123	555-861-2025
456	555-403-1659
456	555-776-4100
789	555-808-9633

First Normal Form (1NF)

A database schema is in First Normal Form if all tables' attributes contain only **atomic** values.

Student

Name	GPA	Courses			
Alice	3.8	<table><tr><td>Math</td></tr><tr><td>DB</td></tr><tr><td>OS</td></tr></table>	Math	DB	OS
Math					
DB					
OS					
Bob	3.7	<table><tr><td>DB</td></tr><tr><td>OS</td></tr></table>	DB	OS	
DB					
OS					
Carol	3.9	<table><tr><td>Math</td></tr><tr><td>OS</td></tr></table>	Math	OS	
Math					
OS					



Student

Name	GPA	Courses
Alice	3.8	Math
Alice	3.8	DB
Alice	3.8	OS
Bob	3.7	DB
Bob	3.7	OS
Carol	3.9	Math
Carol	3.9	OS

First Normal Form (1NF)

A database schema is in First Normal Form if all tables' attributes contain only **atomic** values.

Student

Name	GPA
Alice	3.8
Bob	3.7
Carol	3.9

Student

Name	GPA	Courses			
Alice	3.8	<table><tr><td>Math</td></tr><tr><td>DB</td></tr><tr><td>OS</td></tr></table>	Math	DB	OS
Math					
DB					
OS					
Bob	3.7	<table><tr><td>DB</td></tr><tr><td>OS</td></tr></table>	DB	OS	
DB					
OS					
Carol	3.9	<table><tr><td>Math</td></tr><tr><td>OS</td></tr></table>	Math	OS	
Math					
OS					



May need
to add keys

Takes

Student	Course
Alice	Math
Carol	Math
Alice	DB
Bob	DB
Alice	OS
Carol	OS

Course

Course
Math
DB
OS

Second Normal Form (2NF)

- A database schema/relation is in 2NF if
 - Must be in First Normal Form (1NF).
 - all non-key attributes are fully functional dependent on the primary key

Not in Second Normal Form (2NF)

TEACHER table

TEACHER_ID	SUBJECT	TEACHER_AGE
25	Chemistry	30
25	Biology	30
47	English	35
83	Math	38
83	Computer	38

Now in Second Normal Form (2NF)

TEACHER_DETAIL table:

TEACHER_ID	TEACHER_AGE
25	30
47	35
83	38

TEACHER_SUBJECT table:

TEACHER_ID	SUBJECT
25	Chemistry
25	Biology
47	English
83	Math
83	Computer

Not in Second Normal Form (2NF)

Customer

Customer ID	First Name	Surname	Telephone Number
123	Robert	Ingram	555-861-2025
456	Jane	Wright	555-403-1659
456	Jane	Wright	555-776-4100
789	Maria	Fernandez	555-808-9633


Now in Second Normal Form (2NF)

<u>Customer ID</u>	First Name	Surname
123	Robert	Ingram
456	Jane	Wright
789	Maria	Fernandez


<u>Customer ID</u>	<u>Telephone Number</u>
123	555-861-2025
456	555-403-1659
456	555-776-4100
789	555-808-9633

Relational Schema Design


Conceptual Model:

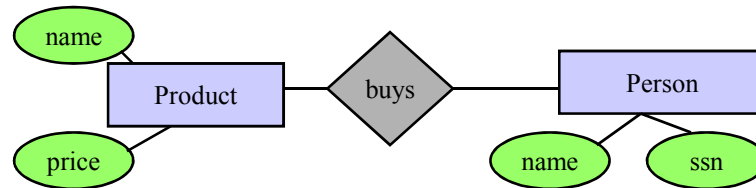

Relational Model (in 1NF)
plus FD's

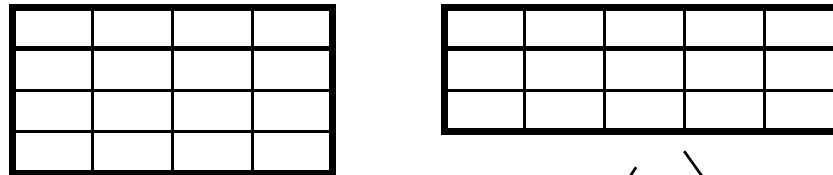

Normalization:
Eliminates *anomalies*

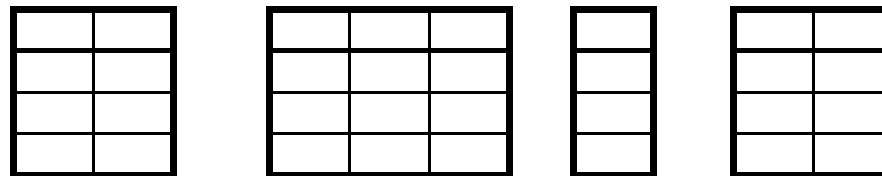

Data Anomalies

When a database is poorly designed we get anomalies:

Redundancy: data is repeated

Update anomalies: need to change in several places

Delete anomalies: may lose data when we don't want

Relational Schema Design

Recall set attributes (persons with several phones):

Name	SSN	PhoneNumber	City
Fred	123-45-6789	206-555-1234	Seattle
Fred	123-45-6789	206-555-6543	Seattle
Joe	987-65-4321	908-555-2121	Westfield

One person may have multiple phones, but lives in only one city

Anomalies:

- Redundancy = repeated data
- Update anomalies = Fred moves to “Bellevue”
- Deletion anomalies = Joe deletes his phone number:
what is his city ?

Relation Decomposition

Break the relation into two:

Name	SSN	PhoneNumber	City
Fred	123-45-6789	206-555-1234	Seattle
Fred	123-45-6789	206-555-6543	Seattle
Joe	987-65-4321	908-555-2121	Westfield

Name	<u>SSN</u>	City
Fred	123-45-6789	Seattle
Joe	987-65-4321	Westfield

<u>SSN</u>	<u>PhoneNumber</u>
123-45-6789	206-555-1234
123-45-6789	206-555-6543
987-65-4321	908-555-2121

Anomalies are gone:

- No more repeated data
- Easy to move Fred to “Bellevue” (how?)
- Easy to delete all Joe’s phone numbers (how?)

Relational Schema Design (or Logical Design)

Main idea:

- Start with some relational schema
- Find out its *functional dependencies*
- Use them to design a better relational schema

Functional Dependencies

- A form of constraint
 - hence, part of the schema
- Finding them is part of the database design
- Also used in normalizing the relations

Functional Dependencies

Definition:

If two tuples agree on the attributes

$$A_1, A_2, \dots, A_n$$

then they must also agree on the attributes

$$B_1, B_2, \dots, B_m$$

Formally:

$$A_1, A_2, \dots, A_n \rightarrow B_1, B_2, \dots, B_m$$

When Does an FD Hold

Definition: $A_1, \dots, A_m \rightarrow B_1, \dots, B_n$ holds in R if:

$$\forall t, t' \in R, (t.A_1=t'.A_1 \wedge \dots \wedge t.A_m=t'.A_m \Rightarrow t.B_1=t'.B_1 \wedge \dots \wedge t.B_n=t'.B_n)$$

R

	A_1	...	A_m		B_1	...	B_m		
t									
t'									

if t, t' agree here

then t, t' agree here

Example: Movie table

Title	Year	Length	Genre	StudioName	StarName
Star Wars	1977	124	SciFi	Fox	Carrie Fisher
Star Wars	1977	124	SciFi	Fox	Mark Hamill
Star Wars	1977	124	SciFi	Fox	Harrison Ford
Gone With the Wind	1939	231	Drama	MGM	Vivien Leigh
Wayne's World	1992	95	Comedy	Paramount	Dana Carvey
Wayne's World	1992	95	Comedy	Paramount	Mike Meyers

title, year $\rightarrow$ length

title, year $\rightarrow$ genre

title, year $\rightarrow$ length, genre, studioName

title, year $\rightarrow$ studioName

Example: Movie table

Title	Year	Length	Genre	StudioName	StarName
Star Wars	1977	124	SciFi	Fox	Carrie Fisher
Star Wars	1977	124	SciFi	Fox	Mark Hamill
Star Wars	1977	124	SciFi	Fox	Harrison Ford
Gone With the Wind	1939	231	Drama	MGM	Vivien Leigh
Wayne's World	1992	95	Comedy	Paramount	Dana Carvey
Wayne's World	1992	95	Comedy	Paramount	Mike Meyers

How about?

~~title, year → starName~~

Examples

An FD holds, or does not hold on an instance:

EmpID	Name	Phone	Position
E0045	Smith	1234	Clerk
E3542	Mike	9876	Salesrep
E1111	Smith	9876	Salesrep
E9999	Mary	1234	Lawyer

EmpID $\rightarrow$ Name, Phone, Position

but not Name $\rightarrow$ EmpID

or Name $\rightarrow$ Phone

Example

EmpID	Name	Phone	Position
E0045	Smith	1234	Clerk
E3542	Mike	9876 ←	Salesrep
E1111	Smith	9876 ←	Salesrep
E9999	Mary	1234	Lawyer

Position → Phone

Example

EmpID	Name	Phone	Position
E0045	Smith	1234 →	Clerk
E3542	Mike	9876	Salesrep
E1111	Smith	9876	Salesrep
E9999	Mary	1234 →	Lawyer

but not Phone → Position

Inferring other dependencies from a set of FDs

name	category	color	department	price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Black	Toys	99
Gizmo	Stationary	Green	Office-supp.	59

name $\rightarrow$ color
category $\rightarrow$ department
color, category $\rightarrow$ price



name, category $\rightarrow$ price

Armstrong's Rules (1/5)

$$A_1, A_2, \dots, A_n \rightarrow B_1, B_2, \dots, B_m$$

Is equivalent to

$$\begin{array}{l} A_1, A_2, \dots, A_n \rightarrow B_1 \\ A_1, A_2, \dots, A_n \rightarrow B_2 \\ \dots\dots\dots \\ A_1, A_2, \dots, A_n \rightarrow B_m \end{array}$$

**Splitting rule
and
Combing rule**

	A1	...	An		B1	...	Bm	

Armstrong's Rules (2/5)

$$A_1, A_2, \dots, A_n \rightarrow A_i$$

Trivial Rule

where $i = 1, 2, \dots, n$

Why ?

	A_1	$\dots$	A_n	

Armstrong's Rules (3/5)

Transitive Closure Rule

If

$$A_1, A_2, \dots, A_n \rightarrow B_1, B_2, \dots, B_m$$

and

$$B_1, B_2, \dots, B_m \rightarrow C_1, C_2, \dots, C_p$$

then

$$A_1, A_2, \dots, A_n \rightarrow C_1, C_2, \dots, C_p$$

Why ?

	A_1	...	A_m		B_1	...	B_m		C_1	...	C_p	

Armstrong's Rules (4/5)

$$A_1, A_2, \dots, A_n \rightarrow B_1 B_2 B_3 \dots B_m$$

Reflexivity Rule

$B_1, B_2, B_3, \dots, B_m$ is subset of $A_1, A_2, \dots, A_n$

Why ?

	A_1	...	A_n	

Armstrong's Rules (5/5)

If

$$A_1, A_2, \dots, A_n \rightarrow B_1, B_2, \dots, B_m$$

Full Augmentation

Then

$$A_1, A_2, \dots, A_n, C_1, C_2, \dots, C_k \rightarrow B_1, B_2, \dots, B_m, C_1, C_2, \dots, C_k$$

	A_1	...	A_n		B_1	...	B_m		C_1	...	C_k	

Inferring other dependencies from a set of FDs

name	category	color	department	price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Black	Toys	99
Gizmo	Stationary	Green	Office-suppl.	59

name $\rightarrow$ color
category $\rightarrow$ department
color, category $\rightarrow$ price



name, category $\rightarrow$ price

Example (continued)

Start from the following FDs:

- 1. $\text{name} \rightarrow \text{color}$
- 2. $\text{category} \rightarrow \text{department}$
- 3. $\text{color, category} \rightarrow \text{price}$

$\text{name, category} \rightarrow \text{price}$

THIS IS TOO HARD!
Let's see an easier way.

Infer the following FDs:

Inferred FD	Which Rule did we apply ?
4. $\text{name, category} \rightarrow \text{name}$	Trivial
5. $\text{name, category} \rightarrow \text{color}$	Transitive 1, 4
6. $\text{name, category} \rightarrow \text{category}$	Trivial
7. $\text{name, category} \rightarrow \text{color, category}$	Split/combine
8. $\text{name, category} \rightarrow \text{price}$	Transitive 7, 3

Closure of a set of Attributes

Given a set of attributes $A_1, \dots, A_n$ and a set of FDs

The **closure**, $\{A_1, \dots, A_n\}^+ =$ the set of attributes B
s.t. $A_1, \dots, A_n \rightarrow B$

Closures Example

name	category	color	department	price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Black	Toys	99
Gizmo	Stationary	Green	Office-supply.	59

Example:

name $\rightarrow$ color
category $\rightarrow$ department
color, category $\rightarrow$ price

Closures:

name⁺ = {name, color}

{name, category}⁺ = {name, category, color, department, price}

color⁺ = {color}

Closure Algorithm

$X = \{A_1, \dots, A_n\}$.

Repeat until X doesn't change **do:**

if $B_1, \dots, B_n \rightarrow C$ is a FD **and**
 $B_1, \dots, B_n$ are all in X
then add C to X .

Closure Algorithm

$X = \{A_1, \dots, A_n\}$.

Repeat until X doesn't change **do:**
 if $B_1, \dots, B_n \rightarrow C$ is a FD **and**
 $B_1, \dots, B_n$ are all in X
 then add C to X .

$\{\text{name, category}\}^+ =$
 $\{\text{name, category}\}$

$\{\text{name}\} \rightarrow \{\text{color}\}$

$\{\text{category}\} \rightarrow \{\text{dept}\}$

$\{\text{color, category}\} \rightarrow \{\text{price}\}$

Closure Algorithm

$X = \{A_1, \dots, A_n\}$.

Repeat until X doesn't change **do:**
 if $B_1, \dots, B_n \rightarrow C$ is a FD **and**
 $B_1, \dots, B_n$ are all in X
 then add C to X .

$\{\text{name, category}\}^+ =$
 $\{\text{name, category}\}$

$\{\text{name, category}\}^+ =$
 $\{\text{name, category, color}\}$

$\{\text{name}\} \rightarrow \{\text{color}\}$

$\{\text{category}\} \rightarrow \{\text{dept}\}$

$\{\text{color, category}\} \rightarrow \{\text{price}\}$

Closure Algorithm

$X = \{A_1, \dots, A_n\}$.

Repeat until X doesn't change **do:**
 if $B_1, \dots, B_n \rightarrow C$ is a FD **and**
 $B_1, \dots, B_n$ are all in X
 then add C to X .

$\{\text{name, category}\}^+ =$
 $\{\text{name, category}\}$

$\{\text{name, category}\}^+ =$
 $\{\text{name, category, color}\}$

$\{\text{name}\} \rightarrow \{\text{color}\}$

$\{\text{category}\} \rightarrow \{\text{dept}\}$

$\{\text{color, category}\} \rightarrow \{\text{price}\}$

$\{\text{name, category}\}^+ =$
 $\{\text{name, category, color, dept}\}$

Closure Algorithm

$X = \{A_1, \dots, A_n\}$.

Repeat until X doesn't change **do:**
 if $B_1, \dots, B_n \rightarrow C$ is a FD **and**
 $B_1, \dots, B_n$ are all in X
 then add C to X .

$\{\text{name, category}\}^+ =$
 $\{\text{name, category}\}$

$\{\text{name, category}\}^+ =$
 $\{\text{name, category, color}\}$

$\{\text{name}\} \rightarrow \{\text{color}\}$

$\{\text{category}\} \rightarrow \{\text{dept}\}$

$\{\text{color, category}\} \rightarrow \{\text{price}\}$

$\{\text{name, category}\}^+ =$
 $\{\text{name, category, color, dept}\}$

$\{\text{name, category}\}^+ =$
 $\{\text{name, category, color, dept, price}\}$

More Examples

In class:

$R(A,B,C,D,E,F)$

$AB \rightarrow C$
$AD \rightarrow E$
$B \rightarrow D$
$AF \rightarrow B$

Compute $\{A,B\}^+$ $X = \{A, B,$ $\}$

Compute $\{A, F\}^+$ $X = \{A, F,$ $\}$

More Examples

In class:

$R(A,B,C,D,E,F)$

AB	$\rightarrow$	C
AD	$\rightarrow$	E
B	$\rightarrow$	D
AF	$\rightarrow$	B

Compute $\{A,B\}^+$ $X = \{A, B, C, D \quad \}$

Compute $\{A, F\}^+$ $X = \{A, F, B \quad \}$

More Examples

In class:

$R(A,B,C,D,E,F)$

$AB \rightarrow C$
$AD \rightarrow E$
$B \rightarrow D$
$AF \rightarrow B$

Compute $\{A,B\}^+$ $X = \{A, B, C, D, E\}$

Compute $\{A, F\}^+$ $X = \{A, B, C, D, E, F\}$

More Examples (2)

In class:


$R(A,B,C,D,E,F)$

AB	$\rightarrow$	C
BC	$\rightarrow$	AD
D	$\rightarrow$	E
CF	$\rightarrow$	B

Compute $\{A,B\}^+$ $X = \{A, B, C, D, E\}$

Compute $\{A, F\}^+$ $X = \{A, F\}$

Application of Closures

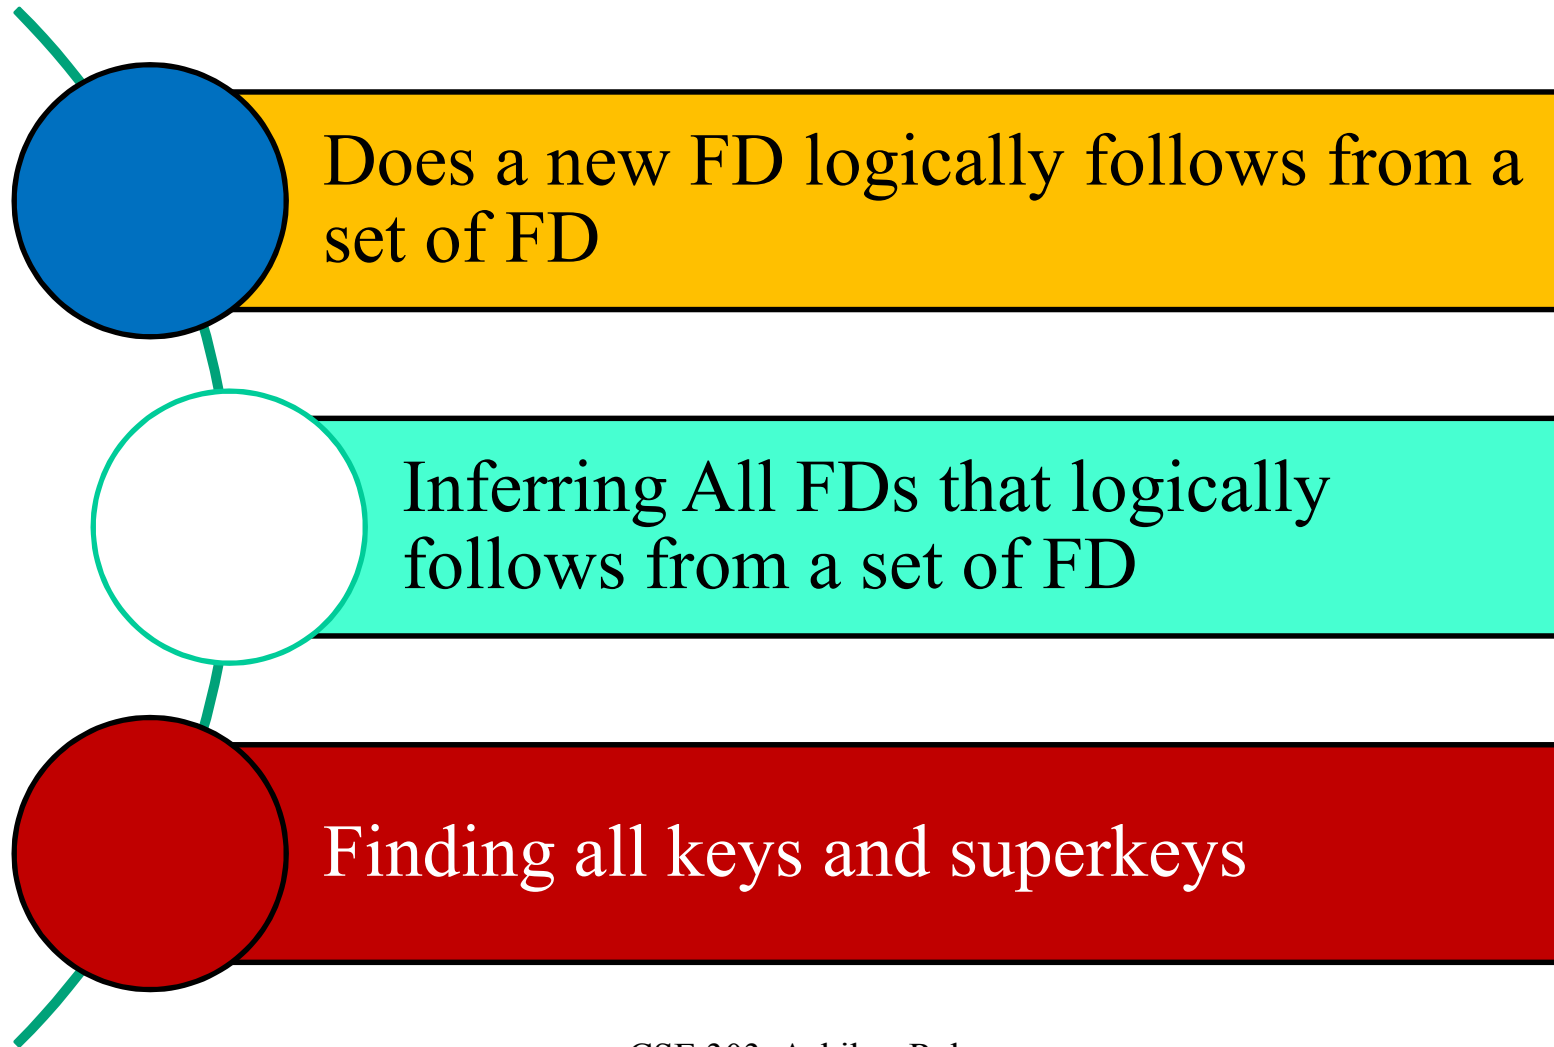

(1) Does a new FD logically follows from a set of FDs?

$R(A_1, A_2, \dots, A_m)$



- To check if $X \rightarrow A$ (new FD)
 - Using given set of FDs Compute X^+ i.e., $\{\text{left side}\}^+$
 - Check if $A \in X^+$

Example

$R(A,B,C,D)$

$AB \rightarrow C$
$BC \rightarrow D$
$CD \rightarrow A$
$AD \rightarrow B$



$AD \rightarrow C$

1. Compute $\{A,D\}^+$
2. If it contains C then the new FD logically follows

Example

$R(A,B,C,D)$

AB	$\rightarrow$	C
BC	$\rightarrow$	D
CD	$\rightarrow$	A
AD	$\rightarrow$	B



BD	$\rightarrow$	A
----	---------------	---

1. Compute $\{B, D\}^+ = \{B, D\}$
2. A is not a member of the set, hence it doesn't logically follow

(2) Using Closure to Infer ALL FDs

Example:

AB	→	C
AD	→	B
B	→	D

Step 1: Compute X^+ , for every $X \subseteq \{A, B, C, D\}$:

$A^+ = A, \quad B^+ = BD, \quad C^+ = C, \quad D^+ = D$ $AB^+ = ABCD, \quad AC^+ = AC, \quad AD^+ = ABCD,$ $BC^+ = BCD, \quad BD^+ = BD, \quad CD^+ = CD$ $ABC^+ = ABD^+ = ACD^+ = ABCD$ (no need to compute— why ?) $BCD^+ = BCD, \quad ABCD^+ = ABCD$

Step 2: Enumerate all FD's $X \rightarrow Y$, s.t. $Y \subseteq X^+$ and $X \cap Y = \emptyset$:

$AB \rightarrow CD, \quad AD \rightarrow BC, \quad BC \rightarrow D, \quad ABC \rightarrow D, \quad ABD \rightarrow C, \quad ACD \rightarrow B$

Another Example

- Enrollment(student, major, course, room, time)
student $\rightarrow$ major
major, course $\rightarrow$ room
course $\rightarrow$ time

What else can we infer ? [in class, or at home]

(3) Application of Closure: Finding Keys

- A **superkey** is a set of attributes $A_1, \dots, A_n$ s.t. for any other attribute B , we have $A_1, \dots, A_n \rightarrow B$
- A **key** is a minimal superkey
 - i.e. set of attributes which is a superkey and for which no subset is a superkey

How many Superkeys?

Suppose R is a relation with attributes $A_1, A_2, \dots, A_n$.
As a function of n , tell how many superkeys R has, if:

- a) The only key is A_1
- b) The only keys are A_1 and A_2
- c) The only keys are A_1 and $\{A_2, A_3\}$
- d) The only keys are $\{A_1, A_2\}$ and $\{A_1, A_3\}$

How many Superkeys?

Suppose R is a relation with attributes $A_1, A_2, \dots, A_n$.
As a function of n, tell how many superkeys R has, if:

a) The only key is $A_1 \rightarrow 2^{n-1}$

b) The only keys are A_1 and $A_2 \rightarrow 3 \cdot 2^{n-2}$

c) The only keys are A_1 and $\{A_2, A_3\} \rightarrow 5 \cdot 2^{n-3}$

d) The only keys are $\{A_1, A_2\}$ and $\{A_1, A_3\} \rightarrow 3 \cdot 2^{n-3}$

Computing (Super)Keys

- Compute X^+ for all sets X
- If $X^+ = \text{all attributes}$, then X is a key
- List only the minimal X 's

Example 1

$R(A,B,C,D)$

$A, B \rightarrow C$
$B, C \rightarrow D$
$C, D \rightarrow A$
$A, D \rightarrow B$

What are all the keys?

What are all the superkeys that are not keys?

Example

$R(A,B,C,D)$

$AB \rightarrow C$
$BC \rightarrow D$
$CD \rightarrow A$
$AD \rightarrow B$

Keys: AB, AD, BC, CD

$A^+ = A, B^+ = B, C^+ = C, D^+ = D$

$AB^+ = ABCD, AC^+ = AC, AD^+ = ABCD,$

$BC^+ = ABCD, BD^+ = BD, CD^+ = ABCD$

$ABC^+ = ABD^+ = ACD^+ = ABCD$ (no need to compute— why ?)

$BCD^+ = ABCD, ABCD^+ = ABCD$

Example

R(A,B,C,D)

AB	→	C
BC	→	D
CD	→	A
AD	→	B

Superkeys that are not Keys: ABC , ABD, BCD, ACD, ABCD

$A^+ = A, B^+ = B, C^+ = C, D^+ = D$

$AB^+ = ABCD, AC^+ = AC, AD^+ = ABCD,$

$BC^+ = ABCD, BD^+ = BD, CD^+ = ABCD$

$ABC^+ = ABD^+ = ACD^+ = ABCD$ (no need to compute— why ?)

$BCD^+ = ABCD, ABCD^+ = ABCD$

Example 2

AB	→	C
AD	→	B
B	→	D

Keys: AB , AD

$A^+ = A, B^+ = BD, C^+ = C, D^+ = D$ $AB^+ = ABCD, AC^+ = AC, AD^+ = ABCD,$ $BC^+ = BCD, BD^+ = BD, CD^+ = CD$ $ABC^+ = ABD^+ = ACD^+ = ABCD$ (no need to compute— why ?) $BCD^+ = BCD, ABCD^+ = ABCD$

Example 2

AB	→	C
AD	→	B
B	→	D

Superkeys that are not Keys: ABC , ABD, ACD, ABCD
--

$A^+ = A, B^+ = BD, C^+ = C, D^+ = D$ $AB^+ = ABCD, AC^+ = AC, AD^+ = ABCD,$ $BC^+ = BCD, BD^+ = BD, CD^+ = CD$ $ABC^+ = ABD^+ = ACD^+ = ABCD$ (no need to compute— why ?) $BCD^+ = BCD, ABCD^+ = ABCD$

Example

Product(name, price, category, color)

name, category $\rightarrow$ price category $\rightarrow$ color
--

What is the key ?

Example

Product(name, price, category, color)

$\text{name, category} \rightarrow \text{price}$ $\text{category} \rightarrow \text{color}$
--

What is the key ?

$(\text{name, category}) + = \text{name, category, price, color}$

Hence (name, category) is a key

Examples of Keys

Enrollment(student, address, course, room, time)

student $\rightarrow$ address

room, time $\rightarrow$ course

student, course $\rightarrow$ room, time

(find keys at home)

Key or Keys ?

Can we have more than one key ?

Given $R(A,B,C)$ define FD's s.t. there are two or more keys

$$\begin{array}{l} AB \rightarrow C \\ BC \rightarrow A \end{array}$$

or

$$\begin{array}{l} A \rightarrow BC \\ B \rightarrow AC \end{array}$$

what are the keys here ?

Can you design FDs such that there are *three* keys ?

Eliminating Anomalies

Main idea:

- $X \rightarrow A$ is OK if X is a (super)key
- $X \rightarrow A$ is not OK otherwise

Example

Name	<u>SSN</u>	<u>PhoneNumber</u>	City
Fred	123-45-6789	206-555-1234	Seattle
Fred	123-45-6789	206-555-6543	Seattle
Joe	987-65-4321	908-555-2121	Westfield
Joe	987-65-4321	908-555-1234	Westfield

$SSN \rightarrow Name, City$

What is the key?

$\{SSN, PhoneNumber\}$

Hence $SSN \rightarrow Name, City$
is a “bad” dependency

68

Boyce-Codd Normal Form (BCNF)

A simple condition for removing anomalies from relations:

A relation R is in BCNF if:

If $A_1, \dots, A_n \rightarrow B$ is a non-trivial dependency in R, then $\{A_1, \dots, A_n\}$ is a superkey for R

In other words: there are no “bad” FDs, that is the left side of every nontrivial FD must be a super key.

Equivalently:

$\forall X$, either $(X^+ = X)$ or $(X^+ = \text{all attributes})$

All two-attribute relations are in BCNF

$R(A,B)$

Case 1: Suppose there is no dependency

Nothing is being violated, so fine

Case 2: Suppose $A \rightarrow B$ is the only dependency

$A^+ = AB$, so left side of $A \rightarrow B$ is a key

Case 3: Suppose $B \rightarrow A$ is the only dependency

$B^+ = AB$, so left side of $B \rightarrow A$ is a key

Case 4: Suppose $A \rightarrow B$ and $B \rightarrow A$ are two dependencies

$A^+ = AB$, $B^+ = AB$,

so left side of $B \rightarrow A$ is a key and left side of $A \rightarrow B$ is also a key

BCNF Decomposition Algorithm


repeat

choose $A_1, \dots, A_m \rightarrow B_1, \dots, B_n$ that violates BCNF

split R into $R_1(A_1, \dots, A_m, B_1, \dots, B_n)$ and $R_2(A_1, \dots, A_m, [\text{others}])$

continue with both R_1 and R_2

until no more violations

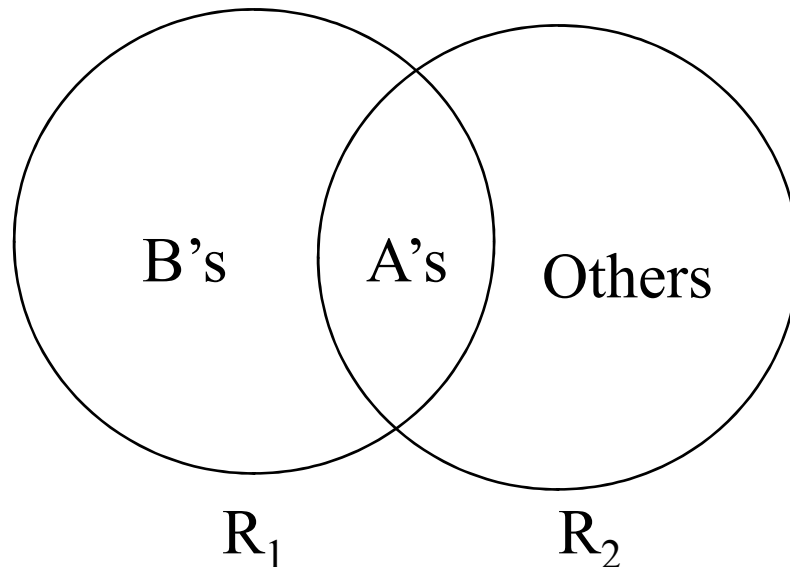

In practice, we have
a better algorithm (coming⁷¹ up)

Example

Name	SSN	PhoneNumber	City
Fred	123-45-6789	206-555-1234	Seattle
Fred	123-45-6789	206-555-6543	Seattle
Joe	987-65-4321	908-555-2121	Westfield
Joe	987-65-4321	908-555-1234	Westfield

SSN $\rightarrow$ Name, City

What is the key?

{SSN, PhoneNumber}

use SSN $\rightarrow$ Name, City
to split

Example

Name	<u>SSN</u>	City
Fred	123-45-6789	Seattle
Joe	987-65-4321	Westfield

SSN → Name, City

<u>SSN</u>	<u>PhoneNumber</u>
123-45-6789	206-555-1234
123-45-6789	206-555-6543
987-65-4321	908-555-2121
987-65-4321	908-555-1234

Let's check anomalies:

- Redundancy ?
- Update ?
- Delete ?

BCNF Decomposition Algorithm

BCNF_Decompose(R)

find X s.t.: $X \neq X^+ \neq [\text{all attributes}]$

if (not found) **then** “R is in BCNF”

let $Y = X^+ - X$

let $Z = [\text{all attributes}] - X^+$

decompose R into $R_1(X \cup Y)$ and $R_2(X \cup Z)$


continue to decompose recursively R_1 and R_2

$R(A,B,C,D)$

Find X s.t.: $X \neq X^+ \neq [\text{all attributes}]$

$A \rightarrow B$
$B \rightarrow C$

Example

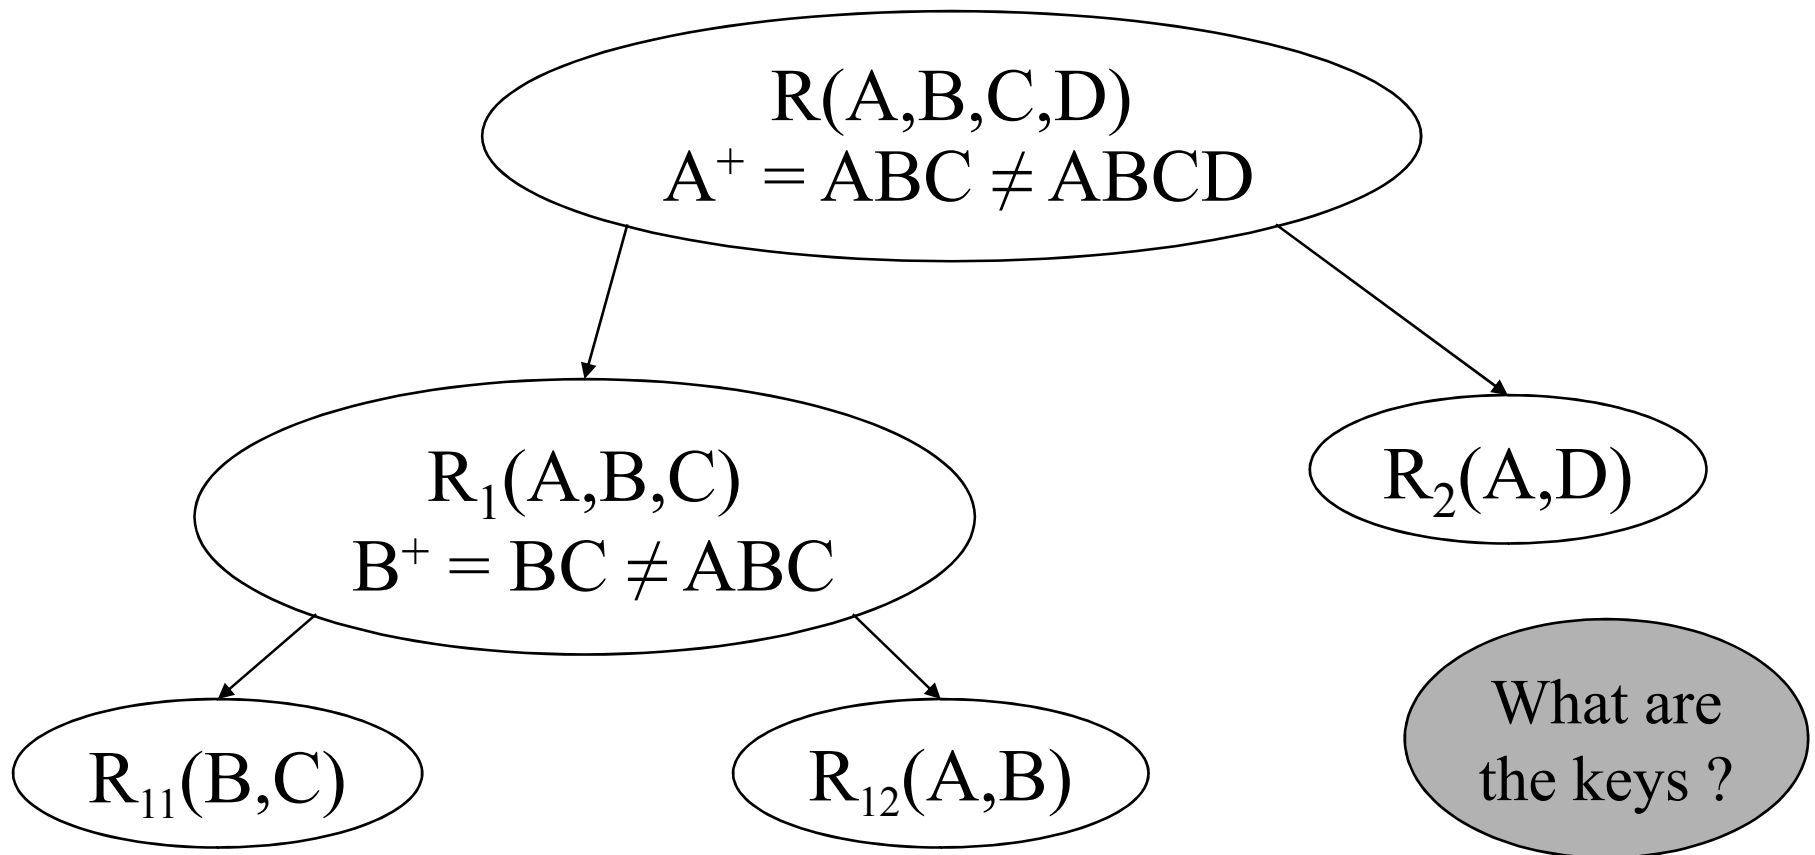

Find X s.t.: $X \neq X^+ \neq [\text{all attributes}]$

Example BCNF Decomposition

Person(name, SSN, age, hairColor, phoneNumber)

SSN $\rightarrow$ name, age

age $\rightarrow$ hairColor

Iteration 1: Person

SSN⁺ = SSN, name, age, hairColor

Decompose into: P(SSN, name, age, hairColor)

Phone(SSN, phoneNumber)

Iteration 2: P

age⁺ = age, hairColor


Decompose: People(SSN, name, age)

Hair(age, hairColor)

Phone(SSN, phoneNumber)

What are
the keys ?

Decompositions in General

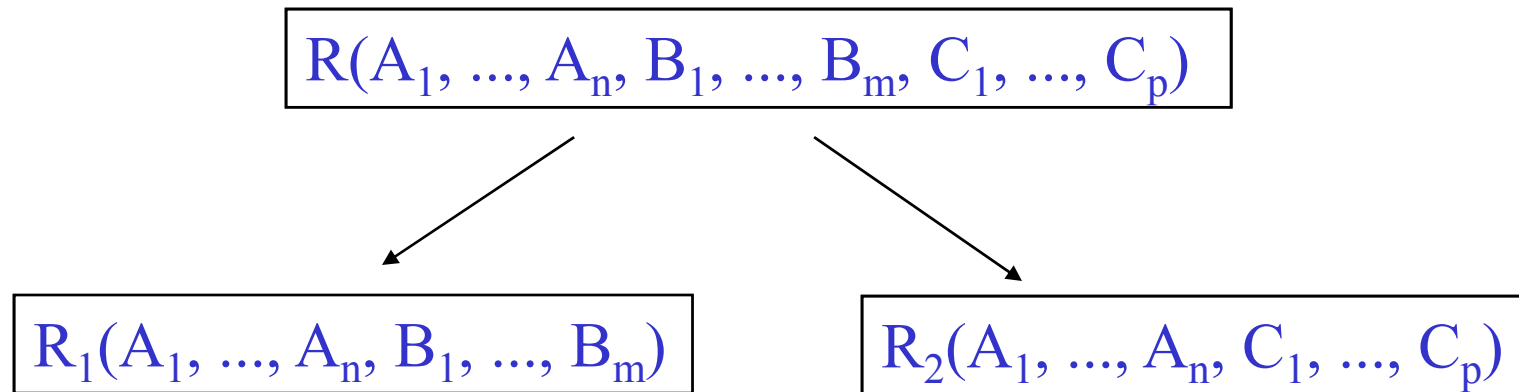

R_1 = projection of R on $A_1, \dots, A_n, B_1, \dots, B_m$

R_2 = projection of R on $A_1, \dots, A_n, C_1, \dots, C_p$

3.3.5 Exercises for Section 3.3

Exercise 3.3.1: For each of the following relation schemas and sets of FD's:

- a) $R(A, B, C, D)$ with FD's $AB \rightarrow C$, $C \rightarrow D$, and $D \rightarrow A$.
- b) $R(A, B, C, D)$ with FD's $B \rightarrow C$ and $B \rightarrow D$.
- c) $R(A, B, C, D)$ with FD's $AB \rightarrow C$, $BC \rightarrow D$, $CD \rightarrow A$, and $AD \rightarrow B$.
- d) $R(A, B, C, D)$ with FD's $A \rightarrow B$, $B \rightarrow C$, $C \rightarrow D$, and $D \rightarrow A$.
- e) $R(A, B, C, D, E)$ with FD's $AB \rightarrow C$, $DE \rightarrow C$, and $B \rightarrow D$.
- f) $R(A, B, C, D, E)$ with FD's $AB \rightarrow C$, $C \rightarrow D$, $D \rightarrow B$, and $D \rightarrow E$.

do the following:

- i) Indicate all the BCNF violations. Do not forget to consider FD's that are not in the given set, but follow from them. However, it is not necessary to give violations that have more than one attribute on the right side.
- ii) Decompose the relations, as necessary, into collections of relations that are in BCNF.