.All rights reserved

AppTotalGo

Transactive
App Security Performance Report

Scanned Time: 2026-03-03 16:24:47

Contents

1.Abstract 4

1.1.App Security Posture 4

1.2.App Information 5

1.3.Findings summary 6

2.App-safety 8

2.1.Behavior information 8

2.2.Permission information....18

2.3.Virus scanning....20

3.M1-Improper platform usage 20

3.1.Risk of intent component being implicitly called 20

3.2.Risk of loading DEX from SD card 21

3.3.Risk of loading SO files from SD card 22

4.M2-Insecure data storage 23

4.1.WebView plaintext password storage risk....23

5.M3-Insecure communication....24

5.1.WebView bypasses certificate verification vulnerability....24

5.2.HTTPS does not verify server certificate(SSL PINNING) 24

5.3.HTTP data transmission risk....25

6.M5-Insufficient cryptography 27

6.1.Digital certificate being stored in plaintext risk 27

7.M6-Insecure authorization....28

7.1.Security for exporting Activity component....28

7.2.Security against ContentProvider component leakage 28

7.3.Security of Exported Broadcast Receiver Component....29

7.4.Security of exported service component.....30

7.5.Database file arbitrary read and write vulnerability.....30

7.6.Vulnerability of globally readable and writable internal files 31

7.7.SharedPreferences data global read-write vulnerability.....32

7.8.Content provider data leak vulnerability.....32

8.M7-Poor code quality 33

8.1.Risk of Input monitoring(Keylogger).....33

8.2.WebView remote code execution vulnerability 34

8.3.Fragment injection attack vulnerability.....34

8.4.Vulnerability of intent scheme URL attack 35

9.M8-Code tampering.....36

9.1.Dynamic debug attack risk 36

9.2.Java layer dynamic debugging risk.....36

9.3.APK tampering / repackaging risks 37

9.4.Dynamic injection attack risk 38

10.M9-Reverse engineering.....39

10.1.Java code decompilation risk 39

10.2.Risk of Debug log function calls 40

10.3.Risk of resource file leakage.....92

10.4.SO file cracking risk 93

11.M10-Extraneous functionality.....95

11.1.Residual risk vulnerability in Intranet test information 95

11.2.Download arbitrary APK vulnerability 96

1.Abstract

1.1.App Security Posture

Security Score	63 /100

	TOTAL	HIGH	MEDIUM	LOW
Total assessment	33	8	18	7
Total finding item	12	4	5	3
Total risk files	528	9	506	13

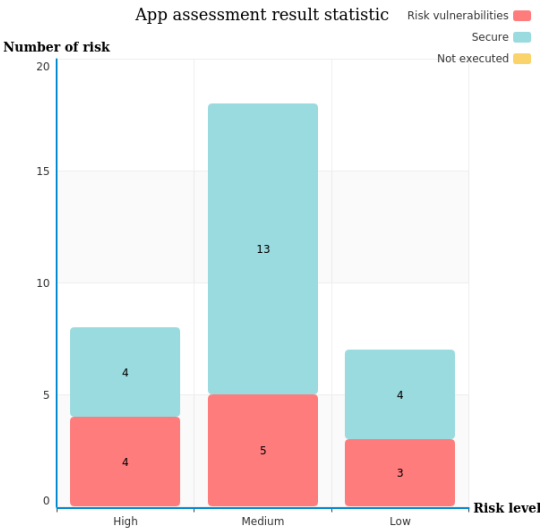

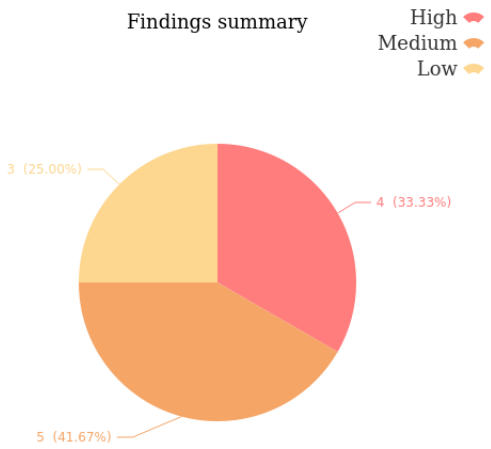

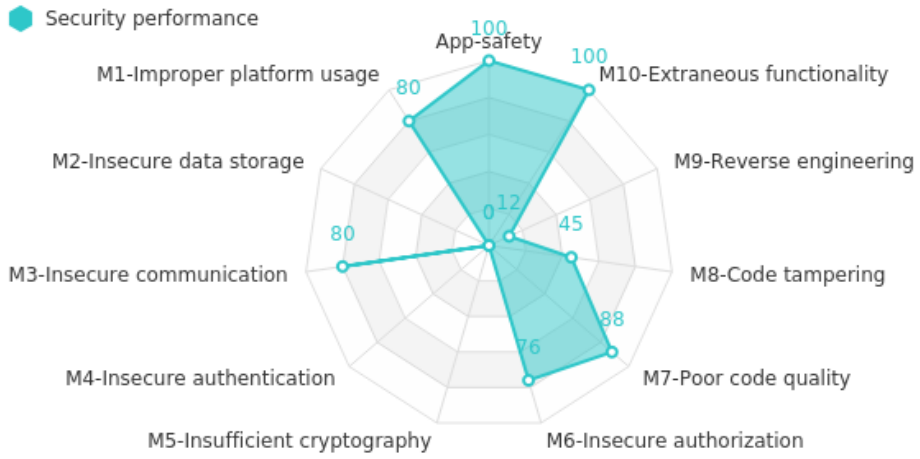

1.2.App Information

APK file name	0303240837756_Transactivecom.anz.transactive.g.apk
App name	Transactive
Package names	com.anz.transactive.global
Size	73.74M
App version	22.0.0
MD5	69e787e7d7a500100a6a853a0a27f0cf
Analysis time	2026-03-03 16:24:47

1.3.Findings summary

	Vulnerability	Risk level	Result
App-safety			
1	Behavior information	Low	Secure
2	Permission information	Low	Secure
3	Virus scanning	Medium	Secure
M1-Improper platform usage			
4	Risk of intent component being implicitly called	Low	5 risks found
5	Risk of loading DEX from SD card	Medium	Secure
6	Risk of loading SO files from SD card	Medium	Secure
M2-Insecure data storage			
7	WebView plaintext password storage risk	High	1 risk found
M3-Insecure communication			
8	WebView bypasses certificate verification vulnerability	Medium	Secure
9	HTTPS does not verify server certificate(SSL PINNING)	Medium	Secure
10	HTTP data transmission risk	Low	6 risks found
M5-Insufficient cryptography			
11	Digital certificate being stored in plaintext risk	Medium	18 risks found
M6-Insecure authorization			
12	Security for exporting Activity component	Medium	Secure
13	Security against ContentProvider component leakage	Medium	Secure
14	Security of Exported Broadcast Receiver Component	Medium	1 risk found
15	Security of exported service component	Medium	1 risk found
16	Database file arbitrary read and write vulnerability	Medium	Secure

17	Vulnerability of globally readable and writable internal files	Medium	Secure
18	SharedPreferences data global read-write vulnerability	Medium	Secure
19	Content provider data leak vulnerability	High	Secure
M7-Poor code quality			
20	Risk of Input monitoring(Keylogger)	High	Secure
21	WebView remote code execution vulnerability	High	Secure
22	Fragment injection attack vulnerability	Medium	Secure
23	Vulnerability of intent scheme URL attack	Low	2 risks found
M8-Code tampering			
24	Dynamic debug attack risk	High	Secure
25	Java layer dynamic debugging risk	Medium	Secure
26	APK tampering / repackaging risks	High	1 risk found
27	Dynamic injection attack risk	High	1 risk found
M9-Reverse engineering			
28	Java code decompilation risk	High	6 risks found
29	Risk of Debug log function calls	Medium	402 risks found
30	Risk of resource file leakage	Low	Secure
31	SO file cracking risk	Medium	84 risks found
M10-Extraneous functionality			
32	Residual risk vulnerability in Intranet test information	Low	Secure
33	Download arbitrary APK vulnerability	Medium	Secure

2.App-safety

2.1.Behavior information

Behavior item	Level of behavior risk	Detail information
Get installation package information	High	1. com.gantix.JailMonkey.HookDetection.HookDetectionCheck 2. com.gantix.JailMonkey.MockLocation.MockLocationCheck 3. com.trusteer.taz.j.a
Delete Files	High	1. com.rnfs.RNFSManager$1 2. com.rnfs.RNFSManager 3. com.facebook.react.modules.network.RequestBodyUtil 4. com.facebook.soloader.NativeDepsUnpacker 5. com.facebook.soloader.SysUtil 6. com.reactnativecommunity.webview.RNCWebViewModuleImpl 7. com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigration 8. com.trusteer.tas.a 9. com.trusteer.taz.j.q 10. com.facebook.common.file.FileTree 11. com.facebook.common.file.FileUtils 12. com.facebook.cache.disk.DefaultDiskStorage$PurgingVisitor

		13. com.facebook.cache.disk.DefaultDiskStorage$InserterImpl 14. com.facebook.cache.disk.DefaultDiskStorage 15. com.dynatrace.android.agent.CommunicationManager$WriteLock 16. okio.JvmSystemFileSystem 17. okhttp3.internal.io.FileSystem$Companion$SystemFileSystem
Read file	Low	1. com.facebook.soloader.ExoSoSource$ExoUnpacker 2. com.trusteer.taz.j.a 3. com.dynatrace.android.agent.metrics.AndroidMetrics
Monitor mobile phone	High	1. com.trusteer.taz.o 2. com.trusteer.taz.o$q
Encryption data	High	1. com.rnfs.RNFSManager 2. com.facebook.react.devsupport.DevServerHelper$Companion 3. com.facebook.soloader.ExoSoSource 4. com.facebook.soloader.SoFileLoaderImpl 5. com.facebook.soloader.UnpackingSoSource 6. com.trusteer.otrf.h.v 7. com.trusteer.otrf.p.a 8. com.trusteer.otrf.p.c 9. com.trusteer.taz.j.l 10. com.facebook.common.util.SecureHashUtil 11. okio.HashingSource 12. okio.ByteString 13. okio.Buffer

		14. okio.HashingSink 15. okio.SegmentedByteString 16. org.spongycastle.jcajce.util.NamedJcaJceHelper 17. org.spongycastle.jcajce.util.DefaultJcaJceHelper 18. org.spongycastle.jcajce.util.ProviderJcaJceHelper 19. org.spongycastle.x509.AttributeCertificateHolder 20. org.spongycastle.cert.jcajce.JcaX509ExtensionUtils 21. org.spongycastle.operator.jcajce.JcaDigestCalculatorProviderBuilder$DigestOutputStream 22. org.spongycastle.cert.jcajce.JcaX509ExtensionUtils$SHA1DigestCalculator 23. org.spongycastle.cert.crmf.jcajce.JcePKMACValuesCalculator 24. com.oblador.keychain.cipherStorage.CipherCache 25. com.trusteer.taz.j.q 26. com.anz.transactive.global.EncryptPasswordModule 27. com.anz.transactive.global.BiometricCheck 28. com.anz.transactive.global.EncryptJwtToJweModule 29. com.RNRSA.RSA 30. org.spongycastle.jcajce.provider.keystore.bcfks.BcFKSKeyStoreSpi

		31. org.spongycastle.jcajce.provider.keystore.pkcs12.PKCS12KeyStoreSpi 32. org.spongycastle.jce.provider.BrokenJCEBlockCipher 33. org.spongycastle.cms.jcajce.EnvelopedDataHelper 34. org.spongycastle.cms.jcajce.JcePasswordRecipientInfoGenerator 35. org.spongycastle.cms.jcajce.JcePasswordRecipient 36. org.spongycastle.jcajce.provider.symmetric.DES$KeyFactory 37. org.spongycastle.jcajce.provider.symmetric.OpenSSLPBKDF$PBKDF 38. org.spongycastle.jcajce.provider.symmetric.util.BaseKeyGenerator 39. org.spongycastle.jcajce.provider.symmetric.util.BaseSecretKeyFactory 40. org.spongycastle.jcajce.provider.symmetric.util.BaseWrapCipher 41. org.spongycastle.jcajce.provider.symmetric.TLSKDF$TLS10 42. org.spongycastle.jcajce.provider.symmetric.TLSKDF$TLS12 43. org.spongycastle.jcajce.provider.symmetric.TLSKDF$TLS11 44. org.spongycastle.jcajce.provider.symmetric.DES$KeyGenerator

		45. org.spongycastle.jcajce.provider.symmetric.DESede$KeyGenerator 46. org.spongycastle.jcajce.provider.symmetric.DESede$KeyFactory 47. org.spongycastle.jcajce.provider.keystore.bc.BcKeyStoreSpi 48. org.spongycastle.jcajce.provider.asymmetric.dh.KeyAgreementSpi 49. org.spongycastle.jcajce.provider.asymmetric.util.BaseCipherSpi 50. org.spongycastle.jcajce.provider.asymmetric.util.BaseAgreementSpi 51. org.spongycastle.operator.jcajce.OperatorUtils 52. org.spongycastle.operator.jcajce.JceAsymmetricKeyUnwrapper 53. org.spongycastle.openssl.jcajce.PEMUtilities 54. org.spongycastle.cert.crmf.jcajce.JceAsymmetricValueDecryptorGenerator 55. com.oblador.keychain.cipherStorage.CipherStorageBase$Defaults 56. com.oblador.keychain.cipherStorage.CipherStorageKeystoreAesCbc$IV 57. com.oblador.keychain.cipherStorage.CipherStorageKeystoreAesCbc 58. com.oblador.keychain.cipherStorage.CipherStorageKeystoreAesGcm$IV

		59. org.spongycastle.cms.jcajce.JceCMSContentEncryptorBuilder$CMSOutputEncryptor 60. org.spongycastle.cms.jcajce.EnvelopedDataHelper$1 61. org.spongycastle.cms.jcajce.JceKeyAgreeRecipient 62. org.spongycastle.cms.jcajce.JceKeyAgreeRecipientInfoGenerator 63. org.spongycastle.pkcs.jcajce.JcePKCSPBEInputDecryptorProviderBuilder$1 64. org.spongycastle.pkcs.jcajce.JcePKCSPBEOutputEncryptorBuilder 65. org.spongycastle.operator.jcajce.JceKTSKeyUnwrapper 66. org.spongycastle.operator.jcajce.JceSymmetricKeyWrapper 67. org.spongycastle.operator.jcajce.JceAsymmetricKeyWrapper 68. org.spongycastle.operator.jcajce.JceSymmetricKeyUnwrapper 69. org.spongycastle.operator.jcajce.JceKTSKeyWrapper 70. org.spongycastle.openssl.jcajce.JceOpenSSLPKCS8DecryptorProviderBuilder$1 71. org.spongycastle.openssl.jcajce.JceOpenSSLPKCS8EncryptorBuilder 72. org.spongycastle.cert.crmf.jcajce.CRMFHelper$1

		73. org.spongycastle.cert.crmf.jcajce.JceCRMFEncryptorBuilder$CRMFOutputEncryptor 74. com.oblador.keychain.cipherStorage.CipherStorageBase 75. okio.CipherSink 76. okio.CipherSource 77. org.spongycastle.jcajce.io.CipherInputStream 78. org.spongycastle.jcajce.io.CipherOutputStream
Get Operator	Low	1. com.trusteer.otrf.p.j
Reflect call	High	1. com.squareup.wire.RuntimeEnumAdapter 2. com.squareup.wire.internal.FieldBinding 3. com.horcrux.svg.SvgViewManager 4. com.swmansion.worklets.JSCallInvokerResolver 5. com.facebook.react.uimanager.ViewManagersPropertyCache$PropSetter 6. com.facebook.soloader.SoFileLoaderImpl 7. com.facebook.soloader.SysUtil 8. com.trusteer.otrf.p.c 9. com.trusteer.otrf.p.n 10. com.trusteer.taz.l 11. com.trusteer.taz.j.l 12. com.trusteer.taz.s 13. com.trusteer.taz.y.d 14. com.trusteer.taz.y.s

		15. com.fingerprints.service.FingerprintManager 16. com.samsung.android.sdk.pass.SpassFingerprint 17. com.samsung.android.sdk.pass.support.v1.FingerprintManagerProxyFactory 18. com.samsung.android.sdk.pass.support.v1.FingerprintManagerProxyFactory$a 19. com.learnium.RNDeviceInfo.RNInstallReferrerClient$InstallReferrerStateListenerProxy 20. com.learnium.RNDeviceInfo.resolver.DeviceIdResolver 21. com.learnium.RNDeviceInfo.RNInstallReferrerClient 22. com.learnium.RNDeviceInfo.RNDeviceModule 23. com.facebook.react.bridge.ReactCxxErrorHandler 24. com.facebook.react.bridge.JavaMethodWrapper 25. com.facebook.imagepipeline.request.BasePostprocessor 26. com.facebook.imagepipeline.platform.GingerbreadPurgeableDecoder 27. com.facebook.drawee.backends.pipeline.Fresco

		28. okhttp3.internal.platform.android.CloseGuard 29. okhttp3.internal.platform.android.AndroidSocketAdapter 30. okhttp3.internal.platform.Jdk8WithJettyBootPlatform 31. okhttp3.internal.platform.AndroidPlatform$CustomTrustRootIndex 32. okhttp3.internal.platform.Jdk8WithJettyBootPlatform$AlpnProvider 33. org.azeckoski.reflectutils.ClassFields 34. org.azeckoski.reflectutils.refmap.FinalizableReferenceQueue 35. org.azeckoski.reflectutils.refmap.Finalizer 36. org.azeckoski.reflectutils.FieldUtils 37. org.spongycastle.jcajce.provider.symmetric.util.BaseMac 38. org.spongycastle.jcajce.provider.symmetric.util.BaseBlockCipher 39. org.spongycastle.jcajce.provider.symmetric.GcmSpecUtil 40. org.chromium.support_lib_boundary.util.BoundaryInterfaceReflectionUtil$InvocationHandlerWithDelegateGetter
Get location	Medium	1. com.trusteer.taz.w
Get network connection	Low	1. com.rnfs.RNFSManager 2. com.rnfs.Downloader

		3. com.facebook.react.devsupport.DevSupportManagerBase 4. com.facebook.react.modules.network.RequestBodyUtil 5. com.reactnativecommunity.webview.RNCWebViewManagerImpl 6. com.reactnativecommunity.cookies.CookieManagerModule 7. com.localz.pinch.utils.HttpUtil 8. com.trusteer.otrf.p.a 9. com.facebook.common.util.UriUtil 10. com.dynatrace.android.agent.comm.CommHandler 11. okhttp3.HttpUrl 12. org.azeckoski.reflectutils.converters.URLConverter 13. org.azeckoski.reflectutils.refmap.FinalizableReferenceQueue$DecoupledLoader 14. org.spongycastle.x509.PKIXCertPathReviewer 15. com.rnfs.Uploader 16. com.facebook.imagepipeline.producers.HttpUrlConnectionNetworkFetcher 17. okio.internal.ResourceFileSystem 18. com.dynatrace.android.callback.Callback 19. okhttp3.internal.platform.AndroidPlatform

		20. okhttp3.internal.platform.Platform 21. com.dynatrace.android.callback.HttpClientCallback
Get running tasks	High	1. com.trusteer.taz.j.a
Get process information	High	1. com.trusteer.taz.j.a
Get internet service provider	Low	1. com.reactnativecommunity.netinfo.ConnectivityReceiver 2. com.learnium.RNDeviceInfo.RNDeviceModule 3. com.dynatrace.android.agent.metrics.AndroidMetrics
Get the installation package	High	1. com.trusteer.otrf.p.y 2. com.trusteer.taz.v
Get SIM card provider	Medium	1. com.trusteer.otrf.p.j
Boot	High	1. AndroidManifest.xml

2.2.Permission information

Permission item	Permission description	Permission risk level
android.permission.CALL_PHONE	Dial phone number directly	High
android.permission.QUERY_ALL_PACKAGES	Customized permissions	N/A
com.samsung.android.providers.context.permission.WRITE_USE_APP_FEATURE_SURVEY	Customized permissions	N/A

android.permission.RECEIVE_BOOT_COMPLETED	Automatically start at boot	Low
android.permission.WRITE_EXTERNAL_STORAGE	Modify/delete content from SD card	High
com.anz.transactive.global.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	Customized permissions	N/A
android.permission.ACCESS_FINE_LOCATION	Access to precise location	High
android.permission.ACCESS_COARSE_LOCATION	Approximate location access	High
android.permission.INTERNET	Network access	Low
android.permission.USE_BIOMETRIC	Allow using biometrics identification	Low
android.permission.ACCESS_NETWORK_STATE	View network status	Low
com.google.android.finsky.permission.BIND_GET_INSTALL_REFERRER_SERVICE	Customized permissions	N/A
android.permission.ACCESS_WIFI_STATE	View WLAN status	Low
android.permission.USE_FINGERPRINT	Allow fingerprints	Low
com.fingerprints.service.ACCESS_FINGERPRINT_MANAGER	Customized permissions	N/A
android.permission.READ_EXTERNAL_STORAGE	Read content from SDcard	High

com.google.android.c2dm.permission.RECEIVE	Customized permissions	N/A

2.3.Virus scanning

Scan engine	Virus detect	Scan results	Virus details
CLAMSCAN	Not found	Secure	
F_SECURE	Not found		
SOPHOS	Not found		

3.M1-Improper platform usage

3.1.Risk of intent component being implicitly called

Purpose of assessment	Detect whether the intent component in APK is at risk of being implicitly called.
Risk level	Low
Vulnerability description	Intent is usually used for information transmission between Activity, Service, Broadcast Receiver and other components, including the sender and receiver. When using implicit intent calls, there are no restrictions on the intent message receiver. There may be a risk that the message will be hijacked by an unknown third-party application. When the intent messages are hijacked, this may lead to the leakage of sensitive data of users or the execution of malicious programs.
Assessment result	5 risks found
Assessment result description	The intent component in this APK uses an implicit call method, and there may be a risk of being hijacked.
Assessment detail	1. class:com.reactnativecommunity.netinfo.AmazonFireDeviceConnectivityPoller$PollerTask

	method:void run() 2. class:com.trusteer.otrf.p.b method:void v(android.content.Context,java.lang.String) 3. class:com.burnweb.rnsendintent.RNSendIntentModule method:void openAllEmailApp() 4. class:com.burnweb.rnsendintent.RNSendIntentModule method:void openCalendar() 5. class:com.burnweb.rnsendintent.RNSendIntentModule method:void openSettings(java.lang.String)
Remediation	Call the intent component explicitly, through using the specified Intent message receiver. https://owasp.org/www-project-mobile-top-10/2016-risks/m1-improper-platform-usage https://mobile-security.gitbook.io/masvs/security-requirements/0x11-v6-interaction_with_the_environment https://mas.owasp.org/MASTG/Android/0x05h-Testing-Platform-Interaction/#implicit-intents https://cwe.mitre.org/data/definitions/16.html https://cwe.mitre.org/data/definitions/927.html https://developer.android.com/guide/components/intents-filters

3.2.Risk of loading DEX from SD card

Purpose of assessment	Detect whether there is a risk of dynamically loading DEX from SD card in the app.
Risk level	Medium
Vulnerability description	System version lower than Android 4.1 allows app to dynamically load DEX files stored in SD Card, this directory can also be read and written by other applications. When the app does not check the integrity of the loaded DEX files from external, inject malicious code into loaded DEX files or replace the DEX files with malicious code, this will result in malicious code execution. Common malicious code may lead to the login account, password and

	payment password stolen, may also lead malicious deduction and virus injection, etc.
Assessment result	Secure
Assessment result description	This app does not dynamically load the DEX files from SD card.
Assessment detail	N/A
Remediation	N/A

3.3.Risk of loading SO files from SD card

Purpose of assessment	Detect whether the app risks dynamically loading SO files from SD card.
Risk level	Medium
Vulnerability description	In order to save the size of the APK package, or to dynamically upgrade the SO file,the application program may store or download part of the SO file on the SD card, and then load it dynamically. To successfully load the SO file dynamically, the app first reads the SO file into the application private directory, and then uses the system.load function to load the SO file in the directory, and the directory is the application private directory (/data/data/<packagename>/) non-default lib library folder. In this process, the APP dynamically loads the SO file stored on the SD card. If the stored SO file is replaced by a malicious SO file, then lead to malicious code execution. Common malicious code may lead to the risk of stolen login account, password, and payment password, malicious chargeback, and virus injection.
Assessment result	Secure
Assessment result description	This app does not load SO files from SD card.
Assessment detail	N/A
Remediation	N/A

4.M2-Insecure data storage

4.1.WebView plaintext password storage risk

Purpose of assessment	Check whether the username and password are saved in plaintext in WebView component of app.
Risk level	High
Vulnerability description	The Android WebView component has the function of prompting the user to save the password by default. If the user chooses to save, the username and password will be stored in plaintext in the application directory databases/WebView.db. The user name and password stored in local plaintext will not only be browsed by the application, Other malicious programs may also access the WebView database of the application through privilege escalation or root to steal user name information and passwords that the user has logged in to.
Assessment result	1 risk found
Assessment result description	The WebView of the app has not disabled the password storage feature, the username and password may be stored in plaintext.
Assessment detail	1. class:com.reactnativecommunity.webview.RNCWebViewManager method:void stopLoading(com.reactnativecommunity.webview.RNCWebViewWrapper) stmt:virtualinvoke $r1.<com.reactnativecommunity.webview.RNCWebView: void stopLoading()>()
Remediation	Turn off the save password function of the WebView component by setting WebView.getSettings (). SetSavePassword (false). https://owasp.org/www-project-mobile-top-10/2016-risks/m2-insecure-data-storage https://mas.owasp.org/MASTG/Intro/0x03-Overview/#data-storage-and-privacy-masvs-storage

5.M3-Insecure communication

5.1.WebView bypasses certificate verification vulnerability

Purpose of assessment	Detect whether the WebView component of the app continues to load the page after finding the https webpage certificate error.
Risk level	Medium
Vulnerability description	When the WebView component of the client accesses a URL encrypted with the HTTPS protocol, if there is a server certificate error, the client should refuse to continue loading the page. However, if the handler.proceed() function is executed within the onReceivedSslError() function of WebView, the client can bypass the certificate verification error and continue accessing this illegal URL. This can lead to a 'man-in-the-middle attack' where the attacker can impersonate the server and the bank client program to transmit data, while also impersonating the bank client program to the bank server to transmit data. During the interception and forwarding of data in the middle, the attacker can exploit the opportunity to steal important user information.
Assessment result	Secure
Assessment result description	The app does not face a vulnerability that the WebView component is able to bypass certificate verification.
Assessment detail	N/A
Remediation	N/A

5.2.HTTPS does not verify server certificate(SSL PINNING)

Purpose of assessment	Checks whether the app verifies the server certificate when transmitting data using the HTTPS protocol.
Risk level	Medium
Vulnerability description	When using the HTTPS protocol, the client must perform an integrity check on the identity of the server to verify that the server is a legitimate target server. Without verification, the client may establish a communication link with the spoofed server, a "man-in-the-middle attack". The default HTTPS

	certificate verification mechanism in Android does not accept untrusted connections and is therefore secure, but Android allows Developer to redefine the certificate verification method: 1) Use the X509TrustManager class to check whether the certificate is valid and has not expired; 2) Use the HostnameVerifier class to check Whether the host name in the certificate matches the host name of the server using the certificate. The rewritten X509TrustManager, in which the checkServerTrusted () method does not deal with any verification failure, that is, the certificate does not perform the correct verification result, which is one of the main causes of "man-in-the-middle attacks". When a man-in-the-middle attack occurs, the fake man-in-the-middle can impersonate the server and interact with the mobile client, and at the same time, impersonate the phone-client and interact with the server. When acting as a man-in-the-middle to forward information, stealing mobile phone numbers, account numbers, passwords and other sensitive information may even Tampering with communication content.
Assessment result	Secure
Assessment result description	The app verifies the server certificate when transmitting data using the HTTPS protocol.
Assessment detail	N/A
Remediation	N/A

5.3.HTTP data transmission risk

Purpose of assessment	Detect whether the app uses HTTPS protocol to encrypt the transmission data.
Risk level	Low
Vulnerability description	Wirelessly transmitted data can be easily intercepted by third parties. This is because the data transmitted between the client and the server follows the format and content type specified by the communication protocol. If encryption is not utilized, the transmitted data can be intercepted at the network layer, restored to network layer packets, and then unpacked and analyzed. This process directly exposes the user's various key data, such as usernames, passwords, and more. The use of the HTTPS protocol with SSL (Secure Socket Layer) ensures that data is encrypted during transmission over the network.

	Even if the transmitted data is intercepted, it cannot be decrypted or restored.
Assessment result	6 risks found
Assessment result description	The app uses the HTTP protocol, which is unencrypted, for data transmission.
Assessment detail	1. file:/smali_classes2/com/facebook/soloader/SoLoader.smali words:http://www.android.com/ 2. file:/smali_classes2/com/facebook/react/devsupport/DevServerHelper$Companion.smali words:http://%s/%s 3. file:/smali_classes3/org/spongycastle/LICENSE.smali words:http://www.bouncycastle.org 4. file:/smali_classes2/com/facebook/react/devsupport/DevServerHelper.smali words:http://%s/%s.%s?platform=android http://%s/inspector/device?name=%s http://%s/open-debugger?device=%s 5. file:/smali_classes2/com/facebook/react/devsupport/PackagerStatusCheck$Companion.smali words:http://%s/status 6. file:/smali_classes2/com/facebook/react/devsupport/PackagerStatusCheck.smali words:http://%s/status
Remediation	Please utilize the HTTPS protocol to encrypt the transmission data. https://owasp.org/www-project-mobile-top-10/2016-risks/m3-insecure-communication https://developer.android.com/training/articles/security-ssl https://mas.owasp.org/MASTG/General/0x04f-Testing-Network-Communication/#intercepting-https-traffic

6.M5-Insufficient cryptography

6.1.Digital certificate being stored in plaintext risk

Purpose of assessment	Detect whether the client possess a digital certificate file stored in plaintext.
Risk level	Medium
Vulnerability description	The digital certificate used in APK can be used to verify the identity of the server, and to encrypt and decrypt the transmission data during communication with the server to ensure the confidentiality and integrity of the transmitted data. If the digital certificate stored in the plain text is tampered, the client may connect to the spoofed server, which will lead to the theft of the username, password and other information. If the plain text certificate is stolen, the transmission data may be intercepted and decrypted, and the user information may be leaked, or the forged client sends a request to the server, falsifies user data in the server, or causes the server to respond abnormally.
Assessment result	18 risks found
Assessment result description	There is a digital certificate file stored in plaintext in this APK.
Assessment detail	1. /assets/anz_global_test_ca_02_v3.cer 2. /assets/anz_global_test_ca_02_v4.cer 3. /assets/anz_global_test_root_ca_02_v2.cer 4. /assets/qalogon_der.cer 5. /assets/anz_global_test_ca_02_v2.cer 6. /assets/DigicertEVRSACAG2Asia.cer 7. /assets/Charles_Proxy.cer 8. /assets/DigiCertGlobalCAG2.cer 9. /assets/anz_global_test_ca_02.cer 10. /assets/anz_global_test_ca_01_v2.cer 11. /assets/anz_global_test_root_ca_v3.cer 12. /assets/DigiCertGlobalCAGNEW.cer 13. /assets/Burp.cer 14. /assets/anz_global_test_ca_01.cer 15. /assets/anz_global_test_root_ca_v2.cer 16. /assets/anz_global_test_ca_01_v3.cer 17. /assets/anz_global_test_root_ca.cer 18. /assets/ihs_wlp_ssl.cer

Remediation	Use a third-party professional hardening solution with file encryption to prevent certificate from file leakage. https://owasp.org/www-project-mobile-top-10/2016-risks/m5-insufficient-cryptography https://developer.android.com/training/articles/keystore https://developer.android.com/training/articles/security-tips#Crypto https://mas.owasp.org/MASTG/tests/android/MASVS-CRYPTO/MASTG-TEST-0015/ https://mas.owasp.org/MASTG/Android/0x05d-Testing-Data-Storage/#secure-key-import-into-keystore

7.M6-Insecure authorization

7.1.Security for exporting Activity component

Purpose of assessment	Determine whether the activity components are subject to export risk.
Risk level	Medium
Vulnerability description	Activity component is the interface for interaction between Android program and user. Activity component may directly called and used by the system or third party app if export authority enabled and this may lead to the risks of bypass login interface, denial of service attacks, call of program interface by third party and etc.
Assessment result	Secure
Assessment result description	No threat found.
Assessment detail	N/A
Remediation	N/A

7.2.Security against ContentProvider component leakage

Purpose of assessment	Determine whether ContentProvider components are subject to exporting risk.

Risk level	Medium
Vulnerability description	ContentProvider is a container for sharing data between applications and provide the data set designated by application to third party app. It may directly called and used by the system or third party app when export authority is set and this may lead to the risks of sensitive information disclosure, SQL injection and others.
Assessment result	Secure
Assessment result description	No ContentProvider threat found.
Assessment detail	N/A
Remediation	N/A

7.3.Security of Exported Broadcast Receiver Component

Purpose of assessment	Determine whether Broadcast Receiver components have export risks.
Risk level	Medium
Vulnerability description	Broadcast Receiver filters external events and executes response according to message contents. It may directly be called and used by the system or third party app when export permissions is set and this may lead to the risks of sensitive information disclosure, bypassed login interface and etc.
Assessment result	1 risk found
Assessment result description	Export permissions was enabled, therefore there is a security risk on the exported Broadcast Receiver component.
Assessment detail	1. com.trusteer.taz.service.TasIntentReceiver
Remediation	Disable Broadcast Receiver component export permissions in AndroidManifest.xml and for those components need to be exported should set the authorization to specified users or application components. https://owasp.org/www-project-mobile-top-10/2016-risks/m6-insecure-authorization https://developer.android.com/reference/android/content/BroadcastReceiver https://mas.owasp.org/MASTG/Android/0x05a-Platform-Overview/#broadcast-receivers

	https://mas.owasp.org/MASTG/tests/android/MASVS-PLATFORM/MASTG-TEST-0029/#inspect-the-source-code_2 https://cwe.mitre.org/data/definitions/926.html

7.4.Security of exported service component

Purpose of assessment	Determine whether service components are subject to export risk.
Risk level	Medium
Vulnerability description	Service components usually operate as background processes. When export permissions are set, the system or third-party applications may directly invoke and use it. This could lead to risks such as denial of service attacks, third-party application interface invocations, and etc.
Assessment result	1 risk found
Assessment result description	Export permissions was enabled and there is risk on service component export security.
Assessment detail	1. com.burnweb.rnsendintent.RNSendIntentModule
Remediation	Disable Service component export permissions in AndroidManifest.xml and for those components need to be exported should set the authorization to specified users or application components. https://owasp.org/www-project-mobile-top-10/2016-risks/m6-insecure-authorization https://developer.android.com/guide/components/services https://developer.android.com/guide/topics/manifest/service-element https://developer.android.com/training/articles/security-tips#Services https://mas.owasp.org/MASTG/Android/0x05a-Platform-Overview/#services https://mas.owasp.org/MASTG/tests/android/MASVS-PLATFORM/MASTG-TEST-0029/#services_1 https://cwe.mitre.org/data/definitions/926.html

7.5.Database file arbitrary read and write vulnerability

Purpose of assessment	Detect whether a database file in the app can be read and written arbitrarily.

Risk level	Medium
Vulnerability description	Database configuration mode security risks stem from: When creating a database, the appropriate creation mode (MO DE_PRIVATE, MODE_WORLD_READABLE, and MODE_WORLD_WRITEABLE) was not selected properly for permission control. As a result, the contents of the database are read and written maliciously, causing the leakage of account passwords, identity information, and other sensitive information of financial accounts, and may even lead to further malicious attacks by attackers.
Assessment result	Secure
Assessment result description	The APK program does not have database file that can be read and written arbitrarily.
Assessment detail	N/A
Remediation	N/A

7.6.Vulnerability of globally readable and writable internal files

Purpose of assessment	Detecting the presence of internal files in the app that can be read and written by other apps.
Risk level	Medium
Vulnerability description	In order to achieve data sharing between different software, the internal file is set to be globally readable or globally writable, so that other applications can read and modify the file. If such files contain critical configuration information, account information, and other sensitive information, they may be stolen or tampered with maliciously, resulting in problems such as program failure to run and business logic being modified.
Assessment result	Secure
Assessment result description	The app does not contain globally readable and writetable internal files.
Assessment detail	N/A
Remediation	N/A

7.7.SharedPreferences data global read-write vulnerability

Purpose of assessment	Detect whether there is a global read/write vulnerability for SharedPreferences data in the app.
Risk level	Medium
Vulnerability description	SharedPreferences, as one of the local data storage methods of the Android system, can permanently store application data in the App in the form of key-value. When using the SharedPreferences method to create a local storage file, if the MODE_WORLD_READABLE mode is used, or the MODE_WORLD_WRITEABLE mode is used and the "android: sharedUserId" property value is configured, sensitive information stored in the SharedPreferences file may be read and written by other programs. As a result, important sensitive information such as personal identity information, passwords, and tokens stored in the plain text of the application is leaked, or stored user information and historical data are tampered with, leading to misuse by users. What's more serious is that programs or users with root permissions can read and write Shared Preferences files created by all applications in any mode (including MODE_PRIVATE).
Assessment result	Secure
Assessment result description	The app's SharedPreferences data is not vulnerable to be read and written globally.
Assessment detail	N/A
Remediation	N/A

7.8.Content provider data leak vulnerability

Purpose of assessment	Detect whether app has content provider data leakage risk.
Risk level	High
Vulnerability description	Content providers can be used to share data among different applications or processes, and different data content of an application should have strict access permissions. If the permissions are set incorrectly, the content provider data of the application may be directly accessed or modified by other programs, leading to the leakage of user’s sensitive data, or the application data

	may be maliciously tampered, such as stealing account information and modifying payment amounts.
Assessment result	Secure
Assessment result description	There is no content provider data in this app that can be accessed by other programs.
Assessment detail	N/A
Remediation	N/A

8.M7-Poor code quality

8.1.Risk of Input monitoring(Keylogger)

Purpose of assessment	Detect whether the app is at risk of having their input monitored.
Risk level	High
Vulnerability description	Sensitive data in applications typically originates from direct user input. If a user's input data is intercepted or keystrokes are logged, it can potentially lead to the extraction of the user's input data, including confidential information such as usernames and passwords. Default input keyboards face the risk of data interception due to the following reasons: 1. When using the iOS system keyboard for input, the system activates the autocorrect feature, which first caches the input records on the device. Then, during the user's input process, it utilizes the cached records to autocorrect the user's input. These system input records are stored in plaintext in local cache files and can be exported and viewed. 2. The system keyboard can be recorded through screen capture and used to reproduce the input.
Assessment result	Secure
Assessment result description	The app does not use the system default keyboard for input.
Assessment detail	N/A
Remediation	N/A

8.2.WebView remote code execution vulnerability

Purpose of assessment	Detect whether a remote code execution vulnerability exists in the WebView component of the app.
Risk level	High
Vulnerability description	WebView is a component of Android for browsing web pages. Its interface function addjavascriptinterface () can export Java classes or methods for JavaScript calls, and interact between web page JS and local Java. Since the system does not limit the method calls of registered Java classes, any other Java classes that are not registered can also be called by the reflection mechanism. This may cause issues such as malicious code in the tampered URL to be executed, user's mobile phone to be installed with a Trojan horse program, theft of contacts or message data, risk of mobile phone being remotely controlled and etc.
Assessment result	Secure
Assessment result description	There are no vulnerabilities in the WebView component of the app that could be exploited using Java code.
Assessment detail	N/A
Remediation	N/A

8.3.Fragment injection attack vulnerability

Purpose of assessment	Detect whether there is a Fragment injection attack vulnerability in the app.
Risk level	Medium
Vulnerability description	An activity is able to contain multiple fragments to display the interface. PreferenceActivity is a base class activity that supports fragments. It dynamically creates fragments to implement the interface display based on the parameter EXTRA_SHOW_FRAGMENT (‘: android: show_fragment’). When the activity of PreferenceActivity has the property export, PreferenceActivity does not check the incoming parameters and constructs the object based on it directly. It can construct extra data in the intent and call any fragment inside the application.

	Fragment injection attacks can cause sensitive information leakage of applications, remote code execution, or application crashes.
Assessment result	Secure
Assessment result description	The app is not vulnerable to Fragment injection attack.
Assessment detail	N/A
Remediation	N/A

8.4.Vulnerability of intent scheme URL attack

Purpose of assessment	Detect whether there is a vulnerability for Intent Scheme URL attack in the app.
Risk level	Low
Vulnerability description	Using intent scheme URLs (intent protocol URLs), you can send intents through web pages to launch the app. Attackers can construct URLs with special formats to directly send Intents to the system, triggering the launch of the app's activity components or sending abnormal data, leading to sensitive data leakage or may even cause the app to crash.
Assessment result	2 risks found
Assessment result description	This app is vulnerable to intent scheme URL attack.
Assessment detail	1. class:com.burnweb.rnsendintent.RNSendIntentModule method:void openAppWithUri(java.lang.String,com.facebook.react.bridge.ReadableMap ,com.facebook.react.bridge.Promise) stmt:$r5 = staticinvoke <android.content.Intent: android.content.Intent parseUri(java.lang.String,int)>($r3, 1) 2. class:com.burnweb.rnsendintent.RNSendIntentModule method:void openChromeIntent(java.lang.String,com.facebook.react.bridge.Promise) stmt:$r5 = staticinvoke <android.content.Intent: android.content.Intent parseUri(java.lang.String,int)>($r2, 1)

Remediation	Configure a category filter for the activity component that needs to enable the browser call function, Use " android. intent. category. BROWSABLE " to limit the originator of the call.

9.M8-Code tampering

9.1.Dynamic debug attack risk

Purpose of assessment	Check whether the client app is running the risk of C-layer dynamic debugging.
Risk level	High
Vulnerability description	If the app is at risk of dynamic debugging of C-level code, attackers can use GDB, IDA, Ptrace and other debuggers to track the running target program, view and modify the code and data in memory. They can even analyze the business logic of the tampered program to carry out malicious attacks on the client's key data or server. For example, modifying the data of the client's business operations, such as the account number and amount of the transaction, leads to financial loss of the user.
Assessment result	Secure
Assessment result description	The C-layer code in this app cannot be dynamically debugged.
Assessment detail	N/A
Remediation	N/A

9.2.Java layer dynamic debugging risk

Purpose of assessment	Detect whether the debugging function of the Java layer is turned on, and whether the Java code layer faces the risk of being dynamically debugged.
Risk level	Medium
Vulnerability description	If the debug flag in the client software AndroidManifest.xml is turned on, it can be debugged by Java debugging tools such as JDB, obtain and tamper with sensitive user information, and even analyze and modify the

	business logic implemented by the code, such as stealing user passwords and bypassing verification code protection etc.
Assessment result	Secure
Assessment result description	The debugging flags in AndroidManifest.xml in this APK have been turned off and the Java layer cannot be debugged.
Assessment detail	N/A
Remediation	N/A

9.3.APK tampering / repackaging risks

Purpose of assessment	Check whether the source code, resource file, configuration file of client can be repackaged and run normally after being tampered with.
Risk level	High
Vulnerability description	Repackaging APK after tampering not only poses a serious threat to the developer's copyright and business interests but also exposes users to malicious app infringements. Modifying the APK file's code, resource images, configuration information, and icons, and adding advertisements or even plagiarizing the source code to develop a new app, can lead to the proliferation of pirated or counterfeit apps, diminishing the developer's revenue. Malicious repackaging can also facilitate phishing attacks or the addition of malicious code, enabling the theft of user account credentials, interception of verification code messages, and unauthorized modification of transfer account details and amounts.
Assessment result	1 risk found
Assessment result description	The APK can be repackaged and run even after being tampered with.
Assessment detail	--------- beginning of system 03-03 08:29:27.451 214 6319 I ActivityTaskManager: START u0 {flg=0x10000000 cmp=com.anz.transactive.global/.MainActivity} from uid 2000 --------- beginning of main 03-03 08:29:27.463 214 263 I ActivityManager: Start proc 11310:com.anz.transactive.global/u0a270 for pre-top-activity {com.anz.transactive.global/com.anz.transactive.global.MainActivity} 03-03 08:29:27.904 214 261 I ActivityTaskManager: Displayed com.anz.transactive.global/.MainActivity: +450ms

	03-03 08:29:27.926 214 263 I ActivityManager: Start proc 11385:com.android.webview:sandboxed_process0:org.chromium.content.app.SandboxedProcessService0:0/u0i62 for {com.anz.transactive.global/org.chromium.content.app.SandboxedProcessService0:0}
Remediation	Use a third-party professional hardening solution with anti-tampering function to prevent applications from being repackaged.

9.4.Dynamic injection attack risk

Purpose of assessment	Detect whether the app faces the risk of a dynamic injection attack.
Risk level	High
Vulnerability description	Dynamic injection attacks are a common attack method against Android applications, where attackers use dynamic injection techniques to inject malicious code into the application, in order to obtain sensitive information, steal data, or control the behavior of the application. The following are some common dynamic injection attack risks:Hooking functions: Attackers can use dynamic injection techniques to hook functions in the application, in order to record or modify the behavior of the function. For example, attackers can hook network request functions in the application to steal users' sensitive information.Data theft: Attackers can use dynamic injection techniques to steal data from the application, such as stealing users' account information, passwords, bank card numbers, and other sensitive information.Modifying application behavior: Attackers can use dynamic injection techniques to modify the behavior of the application, such as disabling security checks or bypassing license verification in the application.
Assessment result	1 risk found
Assessment result description	The app can be dynamically injected with code.
Assessment detail	1. 7f52851bd000-7f52851c1000 r--p 00000000 00:53 6587325 /data/local/tmp/inject.dex
Remediation	1.Use a professional third-party security protection solution to protect the entire app. 2. Use code obfuscation technology to reduce attackers' ability to reverse engineer the application. 3. Encrypt sensitive data in the application to prevent theft. 4. Conduct code audits and vulnerability testing on the application and promptly fix any security vulnerabilities found. 5. Perform Hook detection on important functions in the

	application to promptly detect and prevent malicious Hook operations. 6. Use security frameworks such as SSL, HTTPS, etc. to protect the data transmission security in the application.

10.M9-Reverse engineering

10.1.Java code decompilation risk

Purpose of assessment	Detect whether the Java layer code is at risk of being decompiled and leaked.
Risk level	High
Vulnerability description	APK may face the risk of being decompiled if no protective measures are enforced. Decompilation is the conversion of binary programs into a human-readable description language. The result of the decompilation is the application code, which exposes all the client's logic, such as the communication method with the server, encryption and decryption algorithms, keys, transfer business processes, soft keyboard technology implementation, and so on. Attackers can use this information to steal the client's sensitive data, including mobile phone numbers and passwords; intercept communication data with the server; bypass the business security authentication process and directly tamper with user account information; launch attacks on server interfaces, etc.
Assessment result	6 risks found
Assessment result description	The APK can be decompiled to obtain the source code.
Assessment detail	1. com.anz.transactive.global.MainActivity 2. com.burnweb.rnsendintent.RNSendIntentModule 3. com.trusteer.taz.service.TasService 4. com.reactnativecommunity.webview.RNCWebViewFileProvider 5. com.burnweb.rnsendintent.FileProvider 6. com.trusteer.taz.service.TasIntentReceiver
Remediation	Using the third-party professional hardening with anti decompilation function to prevent the applications from being decompiled

10.2.Risk of Debug log function calls

Purpose of assessment	Detect whether the debug log function is called in the application.
Risk level	Medium
Vulnerability description	Debugging log function may provide output for important log files, including information that may disclose important client information and expose client code logic, etc. It provides useful information for hacker attacks, such as: the component names of Activities, which are necessary for intercepting Activities; log records of network transmissions, which could become useful information for attacking servers; important variable values, which could potentially leak sensitive data, such as user-entered account credentials.
Assessment result	402 risks found
Assessment result description	The app calls to the debug log function, which may cause the leakage of important log information.
Assessment detail	1. class:com.horcrux.svg.RNSVGRenderableManager method:public getRawResource(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 2. class:com.horcrux.svg.SvgViewManager method:public setPointerEvents(Lcom/horcrux/svg/SvgView;Ljava/lang/String;)V stmt:invoke-virtual {p0}, Ljava/lang/ReflectiveOperationException;->printStackTrace()V 3. class:com.horcrux.svg.FilterView method:public applyFilter(Landroid/graphics/Bitmap;Landroid/graphics/Bitmap;Landroid/graphics/RectF;)Landroid/graphics/Bitmap; stmt:invoke-static {v4, v5}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 4. class:com.swmansion.reanimated.keyboard.WindowsInsetsManager method:private synthetic lambda$updateInsets$1(II)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I

	5. class:com.swmansion.reanimated.keyboard.WindowsInsetsManager method:private synthetic lambda$updateWindowDecor$0(Z)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 6. class:com.swmansion.reanimated.keyboard.WindowsInsetsManager method:public startObservingChanges(Lcom/swmansion/reanimated/keyboard/KeyboardAnimationCallback;ZZ)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 7. class:com.swmansion.reanimated.keyboard.WindowsInsetsManager method:public stopObservingChanges()V stmt:invoke-static {p0, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 8. class:com.swmansion.reanimated.sensor.ReanimatedSensorContainer method:public unregisterSensor(I)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 9. class:com.swmansion.gesturehandler.react.RNGestureHandlerRootHelper method:public constructor <init>(Lcom/facebook/react/bridge/ReactContext;Landroid/view/ViewGroup;)V stmt:invoke-static {v4, v3}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 10. class:com.swmansion.gesturehandler.react.RNGestureHandlerRootHelper method:public final tearDown()V stmt:invoke-static {v1, v0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 11. class:com.swmansion.gesturehandler.react.RNGestureHandlerRootView method:protected onAttachedToWindow()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 12. class:com.swmansion.gesturehandler.react.RNGestureHandlerModule method:private static final install$lambda$1(Lcom/swmansion/gesturehandler/react/RNGestureHandlerModule;)V

	stmt:invoke-static {p0, v0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 13. class:com.swmansion.worklets.WorkletsMessageQueueThreadBase method:public quitSynchronous()V stmt:invoke-virtual {p0}, Ljava/lang/ReflectiveOperationException;->printStackTrace()V 14. class:com.swmansion.rnscreens.safearea.SafeAreaView method:private final waitForReactLayout()V stmt:invoke-static {p0, v0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 15. class:com.swmansion.rnscreens.ScreensModule method:public constructor <init>(Lcom/facebook/react/bridge/ReactApplicationContext;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 16. class:com.swmansion.rnscreens.ScreensModule method:public constructor <init>(Lcom/facebook/react/bridge/ReactApplicationContext;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 17. class:com.swmansion.rnscreens.ScreensModule method:private final finishTransition(Ljava/lang/Integer;Z)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 18. class:com.swmansion.rnscreens.NativeProxy method:public final notifyScreenRemoved(I)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 19. class:com.swmansion.rnscreens.NativeProxy method:public final notifyScreenRemoved(I)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 20. class:com.swmansion.rnscreens.gamma.tabs.image.TabsImageLoaderKt$loadTabImageInternal$1 method:protected onFailureImpl(Lcom/facebook/datasource/DataSource;)V stmt:invoke-static {v0, p0, p1},

	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 21. class:com.swmansion.rnscreens.gamma.helpers.SystemDrawableKt method:public static final getSystemDrawableResource(Landroid/content/Context;Ljava/lang/String;)Landroid/graphics/drawable/Drawable; stmt:invoke-static {p1, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 22. class:com.swmansion.rnscreens.SearchBarManager method:private final logNotAvailable(Ljava/lang/String;)V stmt:invoke-static {p1, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 23. class:com.swmansion.rnscreens.ScreenStackHeaderConfigViewManager method:private final logNotAvailable(Ljava/lang/String;)V stmt:invoke-static {p1, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 24. class:com.swmansion.rnscreens.InsetsObserverProxy method:public final registerWithContext(Lcom/facebook/react/bridge/ReactApplicationContext;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 25. class:com.swmansion.rnscreens.utils.ScreenDummyLayoutHelper method:public constructor <init>(Lcom/facebook/react/bridge/ReactApplicationContext;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 26. class:com.swmansion.rnscreens.utils.ScreenDummyLayoutHelper method:private final computeDummyLayout(IZ)F stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 27. class:com.swmansion.rnscreens.utils.ScreenDummyLayoutHelper method:public onHostResume()V stmt:invoke-static {p0, v0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 28. class:com.swmansion.rnscreens.ScreenStackHeaderSubviewManager method:public

	setHidesSharedBackground(Lcom/swmansion/rnscreens/ScreenStackHeaderSubview;Z)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 29. class:com.swmansion.rnscreens.ScreenViewManager method:private final logNotAvailable(Ljava/lang/String;)V stmt:invoke-static {p1, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 30. class:com.rnfs.RNFSManager$1 method:protected onPostExecute(Ljava/lang/Exception;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 31. class:com.rnfs.RNFSManager method:public appendFile(Ljava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V 32. class:com.rnfs.RNFSManager method:public downloadFile(Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v1}, Ljava/lang/Exception;->printStackTrace()V 33. class:com.rnfs.RNFSManager method:public exists(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 34. class:com.rnfs.RNFSManager method:public existsAssets(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 35. class:com.rnfs.RNFSManager method:public existsRes(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 36. class:com.rnfs.RNFSManager method:public hash(Ljava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/Pro

	mise;)V stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V 37. class:com.rnfs.RNFSManager method:public mkdir(Ljava/lang/String;Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V 38. class:com.rnfs.RNFSManager method:public moveFile(Ljava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V 39. class:com.rnfs.RNFSManager method:public read(Ljava/lang/String;IILcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V 40. class:com.rnfs.RNFSManager method:public readDir(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 41. class:com.rnfs.RNFSManager method:public readFile(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 42. class:com.rnfs.RNFSManager method:public readFileAssets(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v1}, Ljava/lang/Exception;->printStackTrace()V 43. class:com.rnfs.RNFSManager method:public readFileRes(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v1}, Ljava/lang/Exception;->printStackTrace()V 44. class:com.rnfs.RNFSManager method:public setReadable(Ljava/lang/String;Ljava/lang/Boolean;Ljava/lang/Boolean;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V

	45. class:com.rnfs.RNFSManager method:public stat(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 46. class:com.rnfs.RNFSManager method:public touch(Ljava/lang/String;DDLcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V 47. class:com.rnfs.RNFSManager method:public unlink(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 48. class:com.rnfs.RNFSManager method:public uploadFiles(Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 49. class:com.rnfs.RNFSManager method:public write(Ljava/lang/String;Ljava/lang/String;ILcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V 50. class:com.rnfs.RNFSManager method:public writeFile(Ljava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V 51. class:com.rnfs.Downloader method:private download(Lcom/rnfs/DownloadParams;Lcom/rnfs/DownloadResult;)V stmt:invoke-static {v6, v7}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 52. class:com.rnfs.RNFSManager$2 method:protected onPostExecute(Ljava/lang/Exception;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 53. class:com.facebook.react.runtime.BridgelessReactContext

	method:public getCatalystInstance()Lcom/facebook/react/bridge/CatalystInstance; stmt:invoke-static {v0, v1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 54. class:com.facebook.soloader.LogUtil method:public static d(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 55. class:com.facebook.soloader.LogUtil method:public static d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p0, p1, p2}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 56. class:com.facebook.soloader.LogUtil method:public static e(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 57. class:com.facebook.soloader.LogUtil method:public static e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p0, p1, p2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 58. class:com.facebook.soloader.LogUtil method:public static i(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 59. class:com.facebook.soloader.LogUtil method:public static i(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p0, p1, p2}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 60. class:com.facebook.soloader.LogUtil method:private static isLoggable(Ljava/lang/String;I)Z stmt:invoke-static {p0, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z

	61. class:com.facebook.soloader.LogUtil method:public static v(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->v(Ljava/lang/String;Ljava/lang/String;)I 62. class:com.facebook.soloader.LogUtil method:public static v(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p0, p1, p2}, Landroid/util/Log;->v(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 63. class:com.facebook.soloader.LogUtil method:public static w(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 64. class:com.facebook.soloader.LogUtil method:public static w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p0, p1, p2}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 65. class:com.reactnativecommunity.webview.RNCWebViewManagerImpl method:private static final createViewInstance$lambda$1(Lcom/reactnativecommunity/webview/RNCWebView;Lcom/reactnativecommunity/webview/RNCWebViewManagerImpl;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;J)V stmt:invoke-static {p7, v0, p2}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 66. class:com.reactnativecommunity.webview.RNCWebViewManagerImpl method:private static final createViewInstance$lambda$1(Lcom/reactnativecommunity/webview/RNCWebView;Lcom/reactnativecommunity/webview/RNCWebViewManagerImpl;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;J)V stmt:invoke-static {p1, p2, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I

	67.
	class:com.reactnativecommunity.webview.RNCWebViewClient
	method:public
	onReceivedSslError(Landroid/webkit/WebView;Landroid/webkit/SslErrorHandler;Landroid/net/http/SslError;)V
	stmt:invoke-static {v0, v2},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I
	68.
	class:com.reactnativecommunity.webview.RNCWebViewClient
	method:public
	onRenderProcessGone(Landroid/webkit/WebView;Landroid/webkit/RenderProcessGoneDetail;)Z
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I
	69.
	class:com.reactnativecommunity.webview.RNCWebViewClient
	method:public
	onRenderProcessGone(Landroid/webkit/WebView;Landroid/webkit/RenderProcessGoneDetail;)Z
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I
	70.
	class:com.reactnativecommunity.webview.RNCWebViewModuleImpl
	method:public downloadFile(Ljava/lang/String;)V
	stmt:invoke-static {p1, v0, p0},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	71.
	class:com.reactnativecommunity.webview.RNCWebViewModuleImpl
	method:public getPhotoIntent()Landroid/content/Intent;
	stmt:invoke-static {v1, v2, p0},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	72.
	class:com.reactnativecommunity.webview.RNCWebViewModuleImpl
	method:public getPhotoIntent()Landroid/content/Intent;
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	73.
	class:com.reactnativecommunity.webview.RNCWebViewModuleImpl
	method:public getVideoIntent()Landroid/content/Intent;
	stmt:invoke-static {v1, v2, p0},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	74.
	class:com.reactnativecommunity.webview.RNCWebViewModuleImpl

	method:public getVideoIntent()Landroid/content/Intent;
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	75.
	class:com.reactnativecommunity.webview.RNCWebViewModuleImpl
	method:public
	startPhotoPickerIntent(Ljava/lang/String;Landroid/webkit/ValueCallback;)V
	stmt:invoke-static {p0, p1},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I
	76.
	class:com.reactnativecommunity.webview.RNCWebViewModuleImpl
	method:public
	startPhotoPickerIntent([Ljava/lang/String;ZLandroid/webkit/ValueCallback;Z)Z
	stmt:invoke-static {p1, p2},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I
	77.
	class:com.reactnativecommunity.webview.RNCWebViewModuleImpl
	method:public
	startPhotoPickerIntent([Ljava/lang/String;ZLandroid/webkit/ValueCallback;Z)Z
	stmt:invoke-static {p1, p2},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I
	78.
	class:com.reactnativecommunity.netinfo.ConnectivityReceiver
	method:private
	createDetailsMap(Ljava/lang/String;)Lcom/facebook/react/bridge/WritableMap;
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	79.
	class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigration
	method:private static
	getExpoDatabases(Landroid/content/Context;)Ljava/util/ArrayList;
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	80.
	class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigration
	method:private static getLastModifiedTimeInMillis(Ljava/io/File;)J
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	81.
	class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigration
	method:public static migrate(Landroid/content/Context;)V
	stmt:invoke-static {v3, p0},
	Landroid/util/Log;->v(Ljava/lang/String;Ljava/lang/String;)I

	82. class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigratio n method:public static migrate(Landroid/content/Context;)V stmt:invoke-static {v3, p0}, Landroid/util/Log;->v(Ljava/lang/String;Ljava/lang/String;)I 83. class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigratio n method:public static migrate(Landroid/content/Context;)V stmt:invoke-static {v3, v0}, Landroid/util/Log;->v(Ljava/lang/String;Ljava/lang/String;)I 84. class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigratio n method:public static migrate(Landroid/content/Context;)V stmt:invoke-static {v3, v0}, Landroid/util/Log;->v(Ljava/lang/String;Ljava/lang/String;)I 85. class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigratio n method:public static migrate(Landroid/content/Context;)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 86. class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigratio n method:public static migrate(Landroid/content/Context;)V stmt:invoke-static {v3, p0}, Landroid/util/Log;->v(Ljava/lang/String;Ljava/lang/String;)I 87. class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigratio n method:public static migrate(Landroid/content/Context;)V stmt:invoke-static {v3, v0}, Landroid/util/Log;->v(Ljava/lang/String;Ljava/lang/String;)I 88. class:com.reactnativecommunity.asyncstorage.AsyncStorageExpoMigratio n method:public static migrate(Landroid/content/Context;)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 89. class:com.reactnativecommunity.asyncstorage.AsyncLocalStorageUtil method:public static verifyAndForceSqliteCheckpoint(Landroid/content/Context;)V

	stmt:invoke-static {v2, p0},
	Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I
	90.
	class:com.reactnativecommunity.asyncstorage.AsyncLocalStorageUtil
	method:public static
	verifyAndForceSqliteCheckpoint(Landroid/content/Context;)V
	stmt:invoke-static {v2, p0},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I
	91.
	class:com.reactnativecommunity.asyncstorage.AsyncLocalStorageUtil
	method:public static
	verifyAndForceSqliteCheckpoint(Landroid/content/Context;)V
	stmt:invoke-static {v2, p0},
	Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I
	92.
	class:com.reactnativecommunity.cookies.CookieManagerModule
	method:private formatDate(Ljava/util/Date;Z)Ljava/lang/String;
	stmt:invoke-static {p1, p0},
	Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I
	93.
	class:com.reactnativecommunity.cookies.CookieManagerModule
	method:private parseDate(Ljava/lang/String;Z)Ljava/util/Date;
	stmt:invoke-static {p1, p0},
	Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I
	94.
	class:com.oblador.keychain.cipherStorage.CipherStorageKeystoreAesCbc
	method:protected
	decryptBytes(Ljava/security/Key;[BLcom/oblador/keychain/cipherStorage/CipherStorageBase$DecryptBytesHandler;)Ljava/lang/String;
	stmt:invoke-static {p0, p2, p1},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	95.
	class:com.oblador.keychain.cipherStorage.CipherStorageKeystoreRsaEcb
	method:public
	decrypt(Lcom/oblador/keychain/resultHandler/ResultHandler;Ljava/lang/String;[B[BLcom/oblador/keychain/SecurityLevel;)V
	stmt:invoke-static {p0, p2, p5},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	96.
	class:com.oblador.keychain.cipherStorage.CipherStorageBase
	method:protected
	decryptBytes(Ljava/security/Key;[BLcom/oblador/keychain/cipherStorage/CipherStorageBase$DecryptBytesHandler;)Ljava/lang/String;

	stmt:invoke-static {p0, p2, p1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 97. class:com.oblador.keychain.cipherStorage.CipherStorageBase method:protected final encryptString(Ljava/security/Key;Ljava/lang/String;Lcom/oblador/keychain/cipherStorage/CipherStorageBase$EncryptStringHandler;)[B stmt:invoke-static {p0, p2, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 98. class:com.oblador.keychain.cipherStorage.CipherStorageBase method:protected final extractGeneratedKey(Ljava/lang/String;Lcom/oblador/keychain/SecurityLevel;Ljava/util/concurrent/atomic/AtomicInteger;)Ljava/security/Key; stmt:invoke-static {v2, v3}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 99. class:com.oblador.keychain.cipherStorage.CipherStorageBase method:public final generateKeyAndStoreUnderAlias(Ljava/lang/String;Lcom/oblador/keychain/SecurityLevel;)V stmt:invoke-static {v3, v0, v2}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 100. class:com.oblador.keychain.cipherStorage.CipherStorageBase method:public final generateKeyAndStoreUnderAlias(Ljava/lang/String;Lcom/oblador/keychain/SecurityLevel;)V stmt:invoke-static {v3, v0, v2}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 101. class:com.oblador.keychain.cipherStorage.CipherStorageBase method:public final generateKeyAndStoreUnderAlias(Ljava/lang/String;Lcom/oblador/keychain/SecurityLevel;)V stmt:invoke-static {p0, p2, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 102. class:com.oblador.keychain.cipherStorage.CipherStorageBase method:protected final

	isKeyAlgorithmSupported(Ljava/security/Key;Ljava/lang/String;)Z stmt:invoke-static {p0, p1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 103. class:com.oblador.keychain.cipherStorage.CipherCache method:public final clearCache()V stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 104. class:com.oblador.keychain.cipherStorage.CipherStorageKeystoreAesGcm method:public decrypt(Lcom/oblador/keychain/resultHandler/ResultHandler;Ljava/lang/String;[B[BLcom/oblador/keychain/SecurityLevel;)V stmt:invoke-static {p0, p2, p5}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 105. class:com.oblador.keychain.cipherStorage.CipherStorageKeystoreAesGcm method:public encrypt(Lcom/oblador/keychain/resultHandler/ResultHandler;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Lcom/oblador/keychain/SecurityLevel;)V stmt:invoke-static {p0, p2, p5}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 106. class:com.oblador.keychain.KeychainModule$setGenericPassword$1 method:public final invokeSuspend(Ljava/lang/Object;)Ljava/lang/Object; stmt:invoke-static {v9, v2, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 107. class:com.oblador.keychain.KeychainModule$setGenericPassword$1 method:public final invokeSuspend(Ljava/lang/Object;)Ljava/lang/Object; stmt:invoke-static {v9, v2, v3}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 108. class:com.oblador.keychain.KeychainModule$setGenericPassword$1 method:public final invokeSuspend(Ljava/lang/Object;)Ljava/lang/Object; stmt:invoke-static {v9, v2, v3}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 109. class:com.oblador.keychain.KeychainModule$getGenericPassword$1

	method:public final invokeSuspend(Ljava/lang/Object;)Ljava/lang/Object;
	stmt:invoke-static {v7, v0},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I
	110.
	class:com.oblador.keychain.KeychainModule$getGenericPassword$1
	method:public final invokeSuspend(Ljava/lang/Object;)Ljava/lang/Object;
	stmt:invoke-static {v7, v2, v0},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	111.
	class:com.oblador.keychain.KeychainModule$getGenericPassword$1
	method:public final invokeSuspend(Ljava/lang/Object;)Ljava/lang/Object;
	stmt:invoke-static {v7, v2},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I
	112.
	class:com.oblador.keychain.KeychainModule$getGenericPassword$1
	method:public final invokeSuspend(Ljava/lang/Object;)Ljava/lang/Object;
	stmt:invoke-static {v7, v2},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I
	113.
	class:com.oblador.keychain.KeychainModule
	method:private final
	getSecurityLevel(ZZ)Lcom/oblador/keychain/SecurityLevel;
	stmt:invoke-static {p2, p1, p0},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	114.
	class:com.oblador.keychain.KeychainModule
	method:private final
	resetGenericPassword(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V
	stmt:invoke-static {v0, p1, p0},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	115.
	class:com.oblador.keychain.KeychainModule
	method:private final
	resetGenericPassword(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V
	stmt:invoke-static {v0, p1},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I
	116.
	class:com.oblador.keychain.KeychainModule
	method:public final
	getCipherStorageForCurrentAPILevel(ZZ)Lcom/oblador/keychain/cipherSto

	rage/CipherStorage; stmt:invoke-static {v3, v4}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 117. class:com.oblador.keychain.KeychainModule method:public final getCipherStorageForCurrentAPILevel(ZZ)Lcom/oblador/keychain/cipherStorage/CipherStorage; stmt:invoke-static {v3, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 118. class:com.oblador.keychain.KeychainModule method:public final getSupportedBiometryType(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 119. class:com.oblador.keychain.KeychainModule method:public final getSupportedBiometryType(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 120. class:com.oblador.keychain.KeychainModule method:public final hasGenericPasswordForOptions(Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 121. class:com.oblador.keychain.KeychainModule method:public final hasInternetCredentialsForOptions(Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 122. class:com.oblador.keychain.KeychainModule method:public final isPasscodeAuthAvailable(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I

	123. class:com.oblador.keychain.resultHandler.ResultHandlerInteractiveBiometric method:public onAuthenticationError(ILjava/lang/CharSequence;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 124. class:com.oblador.keychain.resultHandler.ResultHandlerInteractiveBiometric method:public onAuthenticationSucceeded(Landroidx/biometric/BiometricPrompt$AuthenticationResult;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 125. class:com.oblador.keychain.resultHandler.ResultHandlerInteractiveBiometric method:public onAuthenticationSucceeded(Landroidx/biometric/BiometricPrompt$AuthenticationResult;)V stmt:invoke-static {p0, v1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 126. class:com.oblador.keychain.resultHandler.ResultHandlerInteractiveBiometric method:public waitResult()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 127. class:com.oblador.keychain.resultHandler.ResultHandlerInteractiveBiometric method:public waitResult()V stmt:invoke-static {p0, v0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 128. class:com.oblador.keychain.resultHandler.ResultHandlerInteractiveBiometricManualRetry method:private final cancelPresentedAuthentication()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 129. class:com.oblador.keychain.resultHandler.ResultHandlerInteractiveBiometricManualRetry method:private final cancelPresentedAuthentication()V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V

	130.
	class:com.oblador.keychain.resultHandler.ResultHandlerInteractiveBiometricManualRetry
	method:public onAuthenticationFailed()V
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I
	131.
	class:com.oblador.keychain.resultHandler.ResultHandlerInteractiveBiometricManualRetry
	method:protected final retryAuthentication()V
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I
	132.
	class:com.franmontiel.persistentcookiejar.persistence.SerializableCookie
	method:public decode(Ljava/lang/String;)Lokhttp3/Cookie;
	stmt:invoke-static {v1, p0, v0},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	133.
	class:com.franmontiel.persistentcookiejar.persistence.SerializableCookie
	method:public decode(Ljava/lang/String;)Lokhttp3/Cookie;
	stmt:invoke-static {v2, v3, v0},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	134.
	class:com.franmontiel.persistentcookiejar.persistence.SerializableCookie
	method:public decode(Ljava/lang/String;)Lokhttp3/Cookie;
	stmt:invoke-static {v2, v3, v0},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	135.
	class:com.franmontiel.persistentcookiejar.persistence.SerializableCookie
	method:public decode(Ljava/lang/String;)Lokhttp3/Cookie;
	stmt:invoke-static {v1, p0, v0},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	136.
	class:com.franmontiel.persistentcookiejar.persistence.SerializableCookie
	method:public encode(Lokhttp3/Cookie;)Ljava/lang/String;
	stmt:invoke-static {v1, v0, p0},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	137.
	class:com.franmontiel.persistentcookiejar.persistence.SerializableCookie
	method:public encode(Lokhttp3/Cookie;)Ljava/lang/String;

	stmt:invoke-static {p1, v3, p0},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	138.
	class:com.franmontiel.persistentcookiejar.persistence.SerializableCookie
	method:public encode(Lokhttp3/Cookie;)Ljava/lang/String;
	stmt:invoke-static {p1, v0, p0},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	139.
	class:com.franmontiel.persistentcookiejar.persistence.SerializableCookie
	method:public encode(Lokhttp3/Cookie;)Ljava/lang/String;
	stmt:invoke-static {v1, v0, p1},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	140.
	class:com.lugg.RNCConfig.RNCConfigModule
	method:public getConstants()Ljava/util/Map;
	stmt:invoke-static {v0, v4},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I
	141.
	class:com.lugg.RNCConfig.RNCConfigModule
	method:public getConstants()Ljava/util/Map;
	stmt:invoke-static {v0, p0},
	Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I
	142.
	class:com.gantix.JailMonkey.MockLocation.MockLocationCheck
	method:public static isMockLocationOn(Landroid/content/Context;)Z
	stmt:invoke-static {v4, v3},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I
	143.
	class:com.gantix.JailMonkey.AdbEnabled.AdbEnabled
	method:public static AdbEnabled(Landroid/content/Context;)Z
	stmt:invoke-static {v1, v0},
	Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I
	144.
	class:com.trusteer.otrf.h.v
	method:public static v(Ljava/lang/Throwable;)Ljava/lang/String;
	stmt:invoke-static {p0},
	Landroid/util/Log;->getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String;
	145.
	class:com.trusteer.otrf.a0.b
	method:public v(Ljava/io/Writer;)V

	stmt:invoke-virtual {v2, v1},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	146.
	class:com.trusteer.otrf.q0.n
	method:public printStackTrace(Ljava/io/PrintStream;)V
	stmt:invoke-super {p0, p1},
	Ljava/lang/RuntimeException;->printStackTrace(Ljava/io/PrintStream;)V
	147.
	class:com.trusteer.otrf.q0.n
	method:public printStackTrace(Ljava/io/PrintWriter;)V
	stmt:invoke-super {p0, p1},
	Ljava/lang/RuntimeException;->printStackTrace(Ljava/io/PrintWriter;)V
	148.
	class:com.trusteer.otrf.q.c
	method:public static g(Lcom/trusteer/otrf/y/h;I)Ljava/lang/String;
	stmt:invoke-virtual {p0, v0},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	149.
	class:com.trusteer.otrf.q.e$q
	method:public v(Lcom/trusteer/otrf/p0/v;ILjava/lang/String;)V
	stmt:invoke-virtual {p0, p2},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	150.
	class:com.trusteer.otrf.q.g
	method:public static g(Lcom/trusteer/otrf/y/h;I)Ljava/lang/String;
	stmt:invoke-virtual {p0, v0},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	151.
	class:com.trusteer.otrf.q.p
	method:public static g(Lcom/trusteer/otrf/y/h;I)Ljava/lang/String;
	stmt:invoke-virtual {p0, v0},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	152.
	class:com.trusteer.otrf.q.m
	method:public static g(Lcom/trusteer/otrf/y/h;I)Ljava/lang/String;
	stmt:invoke-virtual {p0, v0},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	153.
	class:com.trusteer.otrf.q.v
	method:public static v(Lcom/trusteer/otrf/y/h;I)Ljava/lang/String;
	stmt:invoke-virtual {p0, v0},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	154.
	class:com.trusteer.otrf.q.a0
	method:public static g(Lcom/trusteer/otrf/y/h;I)Ljava/lang/String;

	stmt:invoke-virtual {p0, v0}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 155. class:com.trusteer.otrf.q.e method:public static g(Lcom/trusteer/otrf/y/h;IZ)Ljava/lang/String; stmt:invoke-virtual {p0, p2}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 156. class:com.trusteer.otrf.q.q$v method:protected y(Lcom/trusteer/otrf/p0/v;Lcom/trusteer/otrf/y/c;I)V stmt:invoke-virtual {p0, p3}, Lcom/trusteer/otrf/q0/n;->printStackTrace(Ljava/io/PrintStream;)V 157. class:com.trusteer.tas.a method:private static o(Landroid/content/Context;)Z stmt:invoke-static {v0, v3}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 158. class:com.trusteer.tas.a method:private static o(Landroid/content/Context;)Z stmt:invoke-static {v0, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 159. class:com.trusteer.tas.a method:public static x(Ljava/lang/String;Landroid/content/Context;)Z stmt:invoke-static {p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 160. class:com.trusteer.tas.a method:private static y(Ljava/io/File;)V stmt:invoke-static {v4, v3}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 161. class:com.trusteer.tas.a method:private static y(Ljava/io/File;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 162. class:com.trusteer.tas.a method:private static y(Ljava/io/File;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 163. class:com.trusteer.tas.atasImpl method:public static

	x(Landroid/content/Context;Lcom/trusteer/tas/TAS_CLIENT_INFO;I)I stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 164. class:com.trusteer.tas.atasImpl method:public static x(Landroid/content/Context;Lcom/trusteer/tas/TAS_CLIENT_INFO;I)I stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 165. class:com.trusteer.tas.atasImpl method:private static x(Landroid/content/Context;Lcom/trusteer/tas/TAS_CLIENT_INFO;IZLcom/trusteer/tas/s;Ljava/util/Map;I)I stmt:invoke-static {v2, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 166. class:com.trusteer.tas.atasImpl method:private static x(Landroid/content/Context;Lcom/trusteer/tas/TAS_CLIENT_INFO;IZLcom/trusteer/tas/s;Ljava/util/Map;I)I stmt:invoke-static {v2, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 167. class:com.trusteer.tas.atasImpl method:private static x(Landroid/content/Context;Lcom/trusteer/tas/TAS_CLIENT_INFO;IZLjava/util/Map;Ljava/lang/String;I)I stmt:invoke-static {p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 168. class:com.trusteer.tas.atasImpl method:private static x(Landroid/content/Context;Lcom/trusteer/tas/TAS_CLIENT_INFO;IZLjava/util/Map;Ljava/lang/String;I)I stmt:invoke-static {p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 169. class:com.trusteer.tas.atasImpl method:private static x(Landroid/content/Context;Z)I stmt:invoke-static {p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 170. class:com.trusteer.tas.atasImpl method:private static x(Landroid/content/Context;Z)I

	stmt:invoke-static {p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 171. class:com.trusteer.tas.atasImpl method:public static x(Landroid/content/Context;ZZ)I stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 172. class:com.trusteer.taz.q method:private x(Landroid/content/Context;Landroid/view/View;Ljava/lang/String;)V stmt:invoke-static {v2, v3}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 173. class:com.trusteer.taz.j.o method:private static x(I)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 174. class:com.trusteer.taz.j.o method:private static x(Landroid/content/Context;Ljava/lang/String;JJ)V stmt:invoke-static {p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 175. class:com.trusteer.taz.service.TasService method:x(Landroid/content/Context;)I stmt:invoke-static {p0, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 176. class:com.trusteer.taz.service.TasService method:x(Landroid/content/Context;)I stmt:invoke-static {p1, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 177. class:com.trusteer.taz.service.TasIntentReceiver method:public onReceive(Landroid/content/Context;Landroid/content/Intent;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 178. class:com.toyberman.Utils.OkHttpUtils method:private static addFormDataPart(Landroid/content/Context;Lokhttp3/MultipartBody$Buil der;Lcom/facebook/react/bridge/ReadableMap;Ljava/lang/String;)V stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V

	179. class:com.toyberman.Utils.OkHttpUtils method:private static initSSLPinning(Lcom/facebook/react/bridge/ReadableArray;)Ljavax/net/ssl/X509TrustManager; stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 180. class:com.toyberman.RNSslPinningModule$1 method:public setCookie(Lokhttp3/HttpUrl;Lokhttp3/Cookie;)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 181. class:com.fingerprints.service.FingerprintManager method:private constructor <init>(Landroid/os/IBinder;Landroid/os/Looper;)V stmt:invoke-static {p1, p2}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 182. class:com.fingerprints.service.FingerprintManager method:private constructor <init>(Landroid/os/IBinder;Landroid/os/Looper;)V stmt:invoke-static {p1, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 183. class:com.fingerprints.service.FingerprintManager method:public static notifyScreenOff()V stmt:invoke-static {v1, v0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 184. class:com.fingerprints.service.FingerprintManager method:public static notifyScreenOff()V stmt:invoke-virtual {v0}, Landroid/os/RemoteException;->printStackTrace()V 185. class:com.fingerprints.service.FingerprintManager method:public static notifyScreenOn()V stmt:invoke-static {v1, v0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 186. class:com.fingerprints.service.FingerprintManager method:public static notifyScreenOn()V stmt:invoke-virtual {v0}, Landroid/os/RemoteException;->printStackTrace()V 187. class:com.fingerprints.service.FingerprintManager

	method:public static open()Lcom/fingerprints/service/FingerprintManager; stmt:invoke-virtual {v1}, Ljava/lang/RuntimeException;->printStackTrace()V 188. class:com.fingerprints.service.FingerprintManager method:public static open()Lcom/fingerprints/service/FingerprintManager; stmt:invoke-virtual {v1}, Ljava/lang/reflect/InvocationTargetException;->printStackTrace()V 189. class:com.fingerprints.service.FingerprintManager method:public static open()Lcom/fingerprints/service/FingerprintManager; stmt:invoke-virtual {v1}, Ljava/lang/IllegalAccessException;->printStackTrace()V 190. class:com.fingerprints.service.FingerprintManager method:public static open()Lcom/fingerprints/service/FingerprintManager; stmt:invoke-virtual {v1}, Ljava/lang/IllegalArgumentException;->printStackTrace()V 191. class:com.fingerprints.service.FingerprintManager method:public static open()Lcom/fingerprints/service/FingerprintManager; stmt:invoke-virtual {v1}, Ljava/lang/NoSuchMethodException;->printStackTrace()V 192. class:com.fingerprints.service.FingerprintManager method:public static open()Lcom/fingerprints/service/FingerprintManager; stmt:invoke-virtual {v1}, Ljava/lang/ClassNotFoundException;->printStackTrace()V 193. class:com.fingerprints.service.FingerprintManager method:public static open()Lcom/fingerprints/service/FingerprintManager; stmt:invoke-virtual {v1}, Landroid/os/RemoteException;->printStackTrace()V 194. class:com.fingerprints.service.FingerprintManager method:public abort()V stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V 195. class:com.fingerprints.service.FingerprintManager method:public deleteFingerData(Lcom/fingerprints/service/FingerprintManager$DeleteTemplateCallback;[I)V stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V

	196. class:com.fingerprints.service.FingerprintManager method:public getIds()[I stmt:invoke-static {v0, v1}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 197. class:com.fingerprints.service.FingerprintManager method:public getIds()[I stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V 198. class:com.fingerprints.service.FingerprintManager method:public isFingerEnable()Z stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V 199. class:com.fingerprints.service.FingerprintManager method:public isSurpport()Z stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V 200. class:com.fingerprints.service.FingerprintManager method:public release()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 201. class:com.fingerprints.service.FingerprintManager method:public release()V stmt:invoke-static {v0, v2}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 202. class:com.fingerprints.service.FingerprintManager method:public release()V stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V 203. class:com.fingerprints.service.FingerprintManager method:public shouldRestartByScreenOn()V stmt:invoke-static {v1, v0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 204. class:com.fingerprints.service.FingerprintManager method:public shouldRestartByScreenOn()V stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V

	205. class:com.fingerprints.service.FingerprintManager method:public startEnrol(Lcom/fingerprints/service/FingerprintManager$EnrolCallback;I) V stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V 206. class:com.fingerprints.service.FingerprintManager method:public startIdentify(Lcom/fingerprints/service/FingerprintManager$IdentifyCallba ck;[I)V stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V 207. class:com.fingerprints.service.FingerprintManager method:public startIdentify(Lcom/fingerprints/service/FingerprintManager$IdentifyListen er;[III)V stmt:invoke-static {p1, v0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 208. class:com.fingerprints.service.FingerprintManager method:public startIdentify(Lcom/fingerprints/service/FingerprintManager$IdentifyListen er;[III)V stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V 209. class:com.fingerprints.service.FingerprintManager method:public updateTA(Ljava/lang/String;)Z stmt:invoke-virtual {p0}, Landroid/os/RemoteException;->printStackTrace()V 210. class:com.fingerprints.service.FingerprintManager$EventHandler method:public handleMessage(Landroid/os/Message;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 211. class:com.fingerprints.service.FingerprintManager$EventHandler method:public handleMessage(Landroid/os/Message;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 212. class:com.fingerprints.service.FingerprintManager$1

	method:public onMessage(III)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 213. class:com.th3rdwave.safeareacontext.SafeAreaUtilsKt method:public static final getFrame(Landroid/view/ViewGroup;Landroid/view/View;)Lcom/th3rdwave/safeareacontext/Rect; stmt:invoke-virtual {p0}, Ljava/lang/IllegalArgumentException;->printStackTrace()V 214. class:com.th3rdwave.safeareacontext.SafeAreaView method:private final waitForReactLayout()V stmt:invoke-static {p0, v0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 215. class:com.scottyab.rootbeer.util.QLog method:public static d(Ljava/lang/Object;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 216. class:com.scottyab.rootbeer.util.QLog method:public static e(Ljava/lang/Exception;)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 217. class:com.scottyab.rootbeer.util.QLog method:public static e(Ljava/lang/Object;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 218. class:com.scottyab.rootbeer.util.QLog method:public static e(Ljava/lang/Object;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 219. class:com.scottyab.rootbeer.util.QLog method:public static e(Ljava/lang/Object;Ljava/lang/Throwable;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 220. class:com.scottyab.rootbeer.util.QLog method:public static e(Ljava/lang/Object;Ljava/lang/Throwable;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I

	221. class:com.scottyab.rootbeer.util.QLog method:public static e(Ljava/lang/Object;Ljava/lang/Throwable;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 222. class:com.scottyab.rootbeer.util.QLog method:public static e(Ljava/lang/Object;Ljava/lang/Throwable;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 223. class:com.scottyab.rootbeer.util.QLog method:private static getThrowableTrace(Ljava/lang/Throwable;)Ljava/lang/String; stmt:invoke-virtual {p0, v1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V 224. class:com.scottyab.rootbeer.util.QLog method:public static i(Ljava/lang/Object;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 225. class:com.scottyab.rootbeer.util.QLog method:public static v(Ljava/lang/Object;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->v(Ljava/lang/String;Ljava/lang/String;)I 226. class:com.scottyab.rootbeer.util.QLog method:public static w(Ljava/lang/Object;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 227. class:com.scottyab.rootbeer.util.QLog method:public static w(Ljava/lang/Object;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 228. class:com.scottyab.rootbeer.util.QLog method:public static w(Ljava/lang/Object;Ljava/lang/Throwable;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 229. class:com.scottyab.rootbeer.util.QLog method:public static w(Ljava/lang/Object;Ljava/lang/Throwable;)V

	stmt:invoke-static {v1, v0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 230. class:com.scottyab.rootbeer.util.QLog method:public static w(Ljava/lang/Object;Ljava/lang/Throwable;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 231. class:com.scottyab.rootbeer.util.QLog method:public static w(Ljava/lang/Object;Ljava/lang/Throwable;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 232. class:com.samsung.android.sdk.pass.SpassFingerprint method:public constructor <init>(Landroid/content/Context;)V stmt:invoke-static {v3, p1}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 233. class:com.samsung.android.sdk.pass.SpassFingerprint method:public constructor <init>(Landroid/content/Context;)V stmt:invoke-static {v3, p0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 234. class:com.samsung.android.sdk.pass.SpassFingerprint method:static a(Landroid/content/Context;Ljava/lang/String;)V stmt:invoke-static {v1, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 235. class:com.samsung.android.sdk.pass.SpassFingerprint method:static a(Landroid/content/Context;Ljava/lang/String;)V stmt:invoke-static {v1, p0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 236. class:com.samsung.android.sdk.pass.SpassFingerprint method:private a(Ljava/lang/String;)Z stmt:invoke-virtual {p0}, Landroid/content/pm/PackageManager$NameNotFoundException;->print StackTrace()V 237. class:com.samsung.android.sdk.pass.SpassFingerprint method:private declared-synchronized e()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 238. class:com.samsung.android.sdk.pass.SpassFingerprint

	method:private static g()Z stmt:invoke-static {v3, v7}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 239. class:com.samsung.android.sdk.pass.SpassFingerprint method:private static g()Z stmt:invoke-static {v3, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 240. class:com.samsung.android.sdk.pass.SpassFingerprint method:private static g()Z stmt:invoke-static {v3, v0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 241. class:com.samsung.android.sdk.pass.SpassFingerprint method:final b()Z stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/Throwable;)I 242. class:com.samsung.android.sdk.pass.SpassFingerprint method:final c()Z stmt:invoke-static {v0, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/Throwable;)I 243. class:com.samsung.android.sdk.pass.SpassFingerprint method:public setIntendedFingerprintIndex(Ljava/util/ArrayList;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 244. class:com.samsung.android.sdk.pass.SpassFingerprint method:public startIdentify(Lcom/samsung/android/sdk/pass/SpassFingerprint$IdentifyListener;)V stmt:invoke-static {p1, p0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 245. class:com.samsung.android.sdk.pass.SpassFingerprint method:public startIdentifyWithDialog(Landroid/content/Context;Lcom/samsung/android/sdk/pass/SpassFingerprint$IdentifyListener;Z)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 246. class:com.samsung.android.sdk.pass.SpassFingerprint$c method:public final

	onEvent(Lcom/samsung/android/fingerprint/FingerprintEvent;)V stmt:invoke-static {p1, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 247. class:com.samsung.android.sdk.pass.d method:public final onEnrollFinish()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 248. class:com.samsung.android.sdk.pass.SpassFingerprint$b method:public final onFingerprintEvent(Lcom/samsung/android/fingerprint/FingerprintEvent;) V stmt:invoke-static {v1, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 249. class:com.samsung.android.sdk.pass.SpassFingerprint$b method:public final onFingerprintEvent(Lcom/samsung/android/fingerprint/FingerprintEvent;) V stmt:invoke-static {v1, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 250. class:com.samsung.android.sdk.pass.SpassFingerprint$b method:public final onFingerprintEvent(Lcom/samsung/android/fingerprint/FingerprintEvent;) V stmt:invoke-static {v1, v2}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 251. class:com.samsung.android.sdk.pass.Spass method:public initialize(Landroid/content/Context;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I 252. class:com.samsung.android.sdk.pass.support.SdkSupporter method:public static copyStaticFields(Ljava/lang/Object;Ljava/lang/Class;Ljava/lang/String;Ljava /lang/String;)Z stmt:invoke-static {p1, p0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 253. class:com.samsung.android.sdk.pass.support.v1.FingerprintManagerProxy Factory method:public static

	create(Landroid/content/Context;)Lcom/samsung/android/sdk/pass/support/IFingerprintManagerProxy; stmt:invoke-static {v3, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 254. class:com.learnium.RNDeviceInfo.RNInstallReferrerClient$InstallReferrerStateListenerProxy method:private synthetic lambda$onInstallReferrerSetupFinished$0()V stmt:invoke-static {v1, v2}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 255. class:com.learnium.RNDeviceInfo.RNInstallReferrerClient$InstallReferrerStateListenerProxy method:private synthetic lambda$onInstallReferrerSetupFinished$0()V stmt:invoke-virtual {p0, v0}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 256. class:com.learnium.RNDeviceInfo.RNInstallReferrerClient$InstallReferrerStateListenerProxy method:public onInstallReferrerServiceDisconnected()V stmt:invoke-static {p0, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 257. class:com.learnium.RNDeviceInfo.RNInstallReferrerClient$InstallReferrerStateListenerProxy method:public onInstallReferrerSetupFinished(I)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 258. class:com.learnium.RNDeviceInfo.RNInstallReferrerClient$InstallReferrerStateListenerProxy method:public onInstallReferrerSetupFinished(I)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 259. class:com.learnium.RNDeviceInfo.RNInstallReferrerClient method:private synthetic lambdanew0(Landroid/content/Context;)V stmt:invoke-virtual {p0, p1}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 260. class:com.reactlibrary.RNTasLibPackage method:static constructor <clinit>()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I

	261. class:com.reactlibrary.RNTasLibModule method:public TasDraGetRiskAssessment(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 262. class:com.reactlibrary.RNTasLibModule method:public TasDraGetRiskAssessment(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 263. class:com.reactlibrary.RNTasLibModule method:public TasDraGetRiskAssessmentItemByIndex(IILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 264. class:com.reactlibrary.RNTasLibModule method:public TasDraGetRiskAssessmentItemByName(ILjava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 265. class:com.reactlibrary.RNTasLibModule method:public TasDraGetRiskItemCount(ILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 266. class:com.reactlibrary.RNTasLibModule method:public TasDraRecalcRiskAssessment(ILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 267. class:com.reactlibrary.RNTasLibModule method:public TasDraRecalcRiskAssessment(ILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I

	268. class:com.reactlibrary.RNTasLibModule method:public TasDraReleaseRiskAssessment(ILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 269. class:com.reactlibrary.RNTasLibModule method:public TasFinalize(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 270. class:com.reactlibrary.RNTasLibModule method:public TasFinalize(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 271. class:com.reactlibrary.RNTasLibModule method:public TasGetCurrentVersion(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 272. class:com.reactlibrary.RNTasLibModule method:public TasGetCurrentVersion(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 273. class:com.reactlibrary.RNTasLibModule method:public TasGetDeviceKey(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 274. class:com.reactlibrary.RNTasLibModule method:public TasGetDeviceKey(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 275. class:com.reactlibrary.RNTasLibModule method:public TasGetSecuredDeviceKey(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I

	276. class:com.reactlibrary.RNTasLibModule method:public TasGetSecuredDeviceKey(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 277. class:com.reactlibrary.RNTasLibModule method:public TasInitialize(Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/Integer;Ljava/lang/Integer;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 278. class:com.reactlibrary.RNTasLibModule method:public TasInitialize(Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/Integer;Ljava/lang/Integer;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 279. class:com.reactlibrary.RNTasLibModule method:public TasRaActivityAddData(ILjava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 280. class:com.reactlibrary.RNTasLibModule method:public TasRaCreateActivityData(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 281. class:com.reactlibrary.RNTasLibModule method:public TasRaCreateActivityData(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 282. class:com.reactlibrary.RNTasLibModule method:public TasRaCreateSession(Ljava/lang/String;Lcom/facebook/react/bridge/Promis

	e;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 283. class:com.reactlibrary.RNTasLibModule method:public TasRaCreateSession(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, p1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 284. class:com.reactlibrary.RNTasLibModule method:public TasRaDestroyActivityData(ILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 285. class:com.reactlibrary.RNTasLibModule method:public TasRaDestroySession(ILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 286. class:com.reactlibrary.RNTasLibModule method:public TasRaGetRiskAssessment(ILjava/lang/String;IILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 287. class:com.reactlibrary.RNTasLibModule method:public TasRaGetStatus(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 288. class:com.reactlibrary.RNTasLibModule method:public TasRaGetStatus(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 289. class:com.reactlibrary.RNTasLibModule method:public TasRaNotifyUserActivity(ILjava/lang/String;IILcom/facebook/react/bridge/Promise;)V

	stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 290. class:com.reactlibrary.RNTasLibModule method:public TasResetAppId(ILjava/lang/String;ILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 291. class:com.reactlibrary.RNTasLibModule method:public TasResetSession(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 292. class:com.reactlibrary.RNTasLibModule method:public TasResetSession(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 293. class:com.reactlibrary.RNTasLibModule method:public TasSetPUID(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 294. class:com.reactlibrary.RNTasLibModule method:public TasSetPUID(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 295. class:com.reactlibrary.RNTasLibModule method:public TasSetUserId(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 296. class:com.reactlibrary.RNTasLibModule method:public TasSetUserId(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I

	297. class:com.reactlibrary.RNTasLibModule method:public TasStart(Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/Integer;Ljava/lang/String;Ljava/lang/Integer;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 298. class:com.reactlibrary.RNTasLibModule method:public TasStart(Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/Integer;Ljava/lang/String;Ljava/lang/Integer;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 299. class:com.reactlibrary.RNTasLibModule method:public TasStartBackgroundOps(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 300. class:com.reactlibrary.RNTasLibModule method:public TasStartBackgroundOps(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 301. class:com.reactlibrary.RNTasLibModule method:public TasStop(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 302. class:com.reactlibrary.RNTasLibModule method:public TasStop(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 303. class:com.reactlibrary.RNTasLibModule method:public TasWaitForBackgroundOps(ILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I

	304. class:com.reactlibrary.RNTasLibModule method:public TasWaitForBackgroundOps(ILcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 305. class:com.facebook.imageutils.WebpUtil method:public static final getSize(Ljava/io/InputStream;)Lkotlin/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 306. class:com.facebook.imageutils.WebpUtil method:public static final getSize(Ljava/io/InputStream;)Lkotlin/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 307. class:com.facebook.imageutils.WebpUtil method:public static final getSize(Ljava/io/InputStream;)Lkotlin/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 308. class:com.facebook.imageutils.WebpUtil method:public static final getSize(Ljava/io/InputStream;)Lkotlin/Pair; stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V 309. class:com.facebook.imageutils.WebpUtil method:public static final getSize(Ljava/io/InputStream;)Lkotlin/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 310. class:com.facebook.common.logging.FLogDefaultLoggingDelegate method:private static getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String; stmt:invoke-static {p0}, Landroid/util/Log;->getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String; 311. class:com.facebook.common.logging.FLogDefaultLoggingDelegate method:private println(ILjava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p1, p0, p3}, Landroid/util/Log;->println(ILjava/lang/String;Ljava/lang/String;)I 312. class:com.facebook.common.logging.FLogDefaultLoggingDelegate method:private println(ILjava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p1, p0, p2}, Landroid/util/Log;->println(ILjava/lang/String;Ljava/lang/String;)I

	313. class:com.facebook.common.internal.Throwables method:public static getStackTraceAsString(Ljava/lang/Throwable;)Ljava/lang/String; stmt:invoke-static {p0}, Landroid/util/Log;->getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String; 314. class:com.facebook.fresco.ui.common.ForwardingControllerListener2 method:private final forEachListener(Ljava/lang/String;Lkotlin/jvm/functions/Function1;)V stmt:invoke-static {v4, v3, v2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 315. class:com.facebook.fresco.ui.common.ForwardingControllerListener2 method:public onEmptyEvent(Ljava/lang/Object;)V stmt:invoke-static {v4, v3, v2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 316. class:com.facebook.fresco.ui.common.ForwardingControllerListener2 method:public onFailure(Ljava/lang/String;Ljava/lang/Throwable;Lcom/facebook/fresco/ui/common/ControllerListener2$Extras;)V stmt:invoke-static {v4, v3, v2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 317. class:com.facebook.fresco.ui.common.ForwardingControllerListener2 method:public onFinalImageSet(Ljava/lang/String;Ljava/lang/Object;Lcom/facebook/fresco/ui/common/ControllerListener2$Extras;)V stmt:invoke-static {v4, v3, v2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 318. class:com.facebook.fresco.ui.common.ForwardingControllerListener2 method:public onIntermediateImageFailed(Ljava/lang/String;)V stmt:invoke-static {v4, v3, v2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 319. class:com.facebook.fresco.ui.common.ForwardingControllerListener2 method:public

	onIntermediateImageSet(Ljava/lang/String;Ljava/lang/Object;)V stmt:invoke-static {v4, v3, v2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 320. class:com.facebook.fresco.ui.common.ForwardingControllerListener2 method:public onRelease(Ljava/lang/String;Lcom/facebook/fresco/ui/common/ControllerListener2$Extras;)V stmt:invoke-static {v4, v3, v2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 321. class:com.facebook.fresco.ui.common.ForwardingControllerListener2 method:public onSubmit(Ljava/lang/String;Ljava/lang/Object;Lcom/facebook/fresco/ui/common/ControllerListener2$Extras;)V stmt:invoke-static {v4, v3, v2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 322. class:com.facebook.jni.ExceptionHelper method:private static getErrorDescription(Ljava/lang/Throwable;)Ljava/lang/String; stmt:invoke-virtual {p0, v1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V 323. class:com.facebook.imagepipeline.memory.AshmemMemoryChunk method:public copy(ILcom/facebook/imagepipeline/memory/MemoryChunk;II)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 324. class:com.facebook.imagepipeline.memory.NativeMemoryChunk method:public copy(ILcom/facebook/imagepipeline/memory/MemoryChunk;II)V stmt:invoke-static {v0, v1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 325. class:com.facebook.imagepipeline.memory.NativeMemoryChunk method:protected finalize()V stmt:invoke-static {v1, v0}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I 326. class:com.facebook.imagepipeline.memory.BufferMemoryChunk

	method:public copy(ILcom/facebook/imagepipeline/memory/MemoryChunk;II)V
	stmt:invoke-static {v0, v1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I
	327.
	class:com.facebook.imagepipeline.core.CloseableReferenceFactory
	method:private static getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String;
	stmt:invoke-static {p0}, Landroid/util/Log;->getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String;
	328.
	class:com.facebook.imagepipeline.platform.DefaultDecoder
	method:public decodeJPEGFromEncodedImageWithColorSpace(Lcom/facebook/imagepipeline/image/EncodedImage;Landroid/graphics/Bitmap$Config;Landroid/graphics/Rect;ILandroid/graphics/ColorSpace;)Lcom/facebook/common/references/CloseableReference;
	stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V
	329.
	class:com.facebook.imagepipeline.platform.DefaultDecoder
	method:public decodeJPEGFromEncodedImageWithColorSpace(Lcom/facebook/imagepipeline/image/EncodedImage;Landroid/graphics/Bitmap$Config;Landroid/graphics/Rect;ILandroid/graphics/ColorSpace;)Lcom/facebook/common/references/CloseableReference;
	stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V
	330.
	class:com.facebook.imagepipeline.platform.DefaultDecoder
	method:public decodeJPEGFromEncodedImageWithColorSpace(Lcom/facebook/imagepipeline/image/EncodedImage;Landroid/graphics/Bitmap$Config;Landroid/graphics/Rect;ILandroid/graphics/ColorSpace;)Lcom/facebook/common/references/CloseableReference;
	stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V
	331.
	class:com.facebook.drawee.controller.ForwardingControllerListener
	method:private declared-synchronized onException(Ljava/lang/String;Ljava/lang/Throwable;)V
	stmt:invoke-static {v0, p1, p2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	332.
	class:com.anz.transactive.global.MainActivity
	method:private final processADKResponse(Landroid/content/Intent;)V

	stmt:invoke-static {v0, v2, v1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 333. class:com.anz.transactive.global.MainActivity method:private final processADKResponse(Landroid/content/Intent;)V stmt:invoke-static {v0, p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 334. class:com.anz.transactive.global.MainActivity method:private static final scheduleEventEmission$lambda$0(Lcom/anz/transactive/global/MainActivity;Ljava/lang/String;)V stmt:invoke-static {v0, p1, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 335. class:com.anz.transactive.global.FindAppModule method:public final isApplicationInstalled(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v1, p1, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 336. class:com.anz.transactive.global.FindAppModule method:public final openApp(Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v2, p1, p2}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 337. class:com.anz.transactive.global.FindAppModule method:public final openApp(Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v2, p2, p0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 338. class:com.anz.transactive.global.BiometricCheck method:private final createBiometricKey()Z

	stmt:invoke-static {v1, v0}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 339. class:com.anz.transactive.global.BiometricCheck method:private final isBiometricKeyValid()Z stmt:invoke-static {p0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 340. class:com.anz.transactive.global.BiometricCheck method:private final isBiometricKeyValid()Z stmt:invoke-static {p0, v1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 341. class:com.anz.transactive.global.BiometricCheck method:private final isBiometricKeyValid()Z stmt:invoke-static {p0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 342. class:com.anz.transactive.global.BiometricCheck method:private final isBiometricKeyValid()Z stmt:invoke-static {p0, v1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 343. class:com.anz.transactive.global.BiometricCheck method:public final hasBiometricChange(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v9, v10}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 344. class:com.anz.transactive.global.BiometricCheck method:public final hasBiometricChange(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v9, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 345. class:com.anz.transactive.global.BiometricCheck method:public final hasBiometricChange(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-static {v9, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 346. class:com.anz.transactive.global.BiometricCheck method:public final hasBiometricChange(Lcom/facebook/react/bridge/Promise;)V

	stmt:invoke-static {v9, p0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 347. class:com.RNRSA.CsrHelper$JCESigner method:public constructor <init>(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 348. class:com.RNRSA.CsrHelper$JCESigner method:public constructor <init>(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 349. class:com.RNRSA.CsrHelper$JCESigner method:public getSignature()[B stmt:invoke-virtual {p0}, Ljava/security/GeneralSecurityException;->printStackTrace()V 350. class:com.RNRSA.RSA method:public generateCSRWithEC(Ljava/lang/String;Ljava/lang/String;ILandroid/content/Context;)V stmt:invoke-virtual {p0}, Lorg/spongycastle/operator/OperatorCreationException;->printStackTrace()V 351. class:com.burnweb.rnsendintent.RNSendIntentModule method:public addCalendarEvent(Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/Boolean;)V stmt:invoke-virtual {p3}, Ljava/text/ParseException;->printStackTrace()V 352. class:com.burnweb.rnsendintent.RNSendIntentModule method:public addCalendarEvent(Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/String;Ljava/lang/Boolean;)V stmt:invoke-virtual {p4}, Ljava/text/ParseException;->printStackTrace()V 353. class:com.burnweb.rnsendintent.RNSendIntentModule method:public openChromeIntent(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 354. class:com.burnweb.rnsendintent.RNSendIntentModule

	method:public sendPhoneCall(Ljava/lang/String;Ljava/lang/Boolean;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 355. class:com.burnweb.rnsendintent.RNSendIntentModule$3 method:public onFailure(Lokhttp3/Call;Ljava/io/IOException;)V stmt:invoke-virtual {p2}, Ljava/io/IOException;->printStackTrace()V 356. class:com.burnweb.rnsendintent.RNSendIntentModule$3 method:public onResponse(Lokhttp3/Call;Lokhttp3/Response;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 357. class:com.dynatrace.android.callback.HttpClientCallback method:private static wrapHandleResponse(Lorg/apache/http/client/ResponseHandler;Lorg/apache/http/HttpResponse;)Ljava/lang/Object; stmt:invoke-static {v0, v1, p1}, Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 358. class:com.dynatrace.android.agent.util.Utility method:public static zlogD(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p0, v2}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 359. class:com.dynatrace.android.agent.util.Utility method:public static zlogD(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;)I 360. class:com.dynatrace.android.agent.util.Utility method:public static zlogD(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p0, p1, p2}, Landroid/util/Log;->d(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I 361. class:com.dynatrace.android.agent.util.Utility method:public static zlogE(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p0, p1}, Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I 362. class:com.dynatrace.android.agent.util.Utility method:public static zlogE(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)V

	stmt:invoke-static {p0, p1, p2},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	363.
	class:com.dynatrace.android.agent.util.Utility
	method:public static zlogI(Ljava/lang/String;Ljava/lang/String;)V
	stmt:invoke-static {p0, p1},
	Landroid/util/Log;->i(Ljava/lang/String;Ljava/lang/String;)I
	364.
	class:com.dynatrace.android.agent.util.Utility
	method:public static zlogW(Ljava/lang/String;Ljava/lang/String;)V
	stmt:invoke-static {p0, p1},
	Landroid/util/Log;->w(Ljava/lang/String;Ljava/lang/String;)I
	365.
	class:com.dynatrace.android.agent.mixed.AutoWebRequestEventGenerator
	method:protected
	populateJson(Lorg/json/JSONObject;)Lorg/json/JSONObject;
	stmt:invoke-virtual {v2, v3},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V
	366.
	class:com.dynatrace.agent.events.error.ErrorEvent
	method:public static
	parseThrowable(Ljava/lang/Throwable;)Lcom/dynatrace/agent/events/error/ErrorEvent$ExceptionInfo;
	stmt:invoke-virtual {p0, v1},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V
	367.
	class:com.dynatrace.agent.events.error.ErrorEvent
	method:public static
	parseThrowable(Ljava/lang/Throwable;II)Lcom/dynatrace/agent/events/error/ErrorEvent$ExceptionInfo;
	stmt:invoke-virtual {p0, v1},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V
	368.
	class:com.bebnev.RNUserAgentModule
	method:public getConstants()Ljava/util/Map;
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	369.
	class:bolts.AggregateException
	method:public printStackTrace(Ljava/io/PrintStream;)V
	stmt:invoke-super {p0, p1},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	370.
	class:bolts.AggregateException

	method:public printStackTrace(Ljava/io/PrintStream;)V stmt:invoke-virtual {v1, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V 371. class:bolts.AggregateException method:public printStackTrace(Ljava/io/PrintWriter;)V stmt:invoke-super {p0, p1}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintWriter;)V 372. class:bolts.AggregateException method:public printStackTrace(Ljava/io/PrintWriter;)V stmt:invoke-virtual {v1, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V 373. class:okhttp3.internal.platform.android.AndroidLog method:private final enableLogging(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p2, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 374. class:okhttp3.internal.platform.android.AndroidLog method:private final enableLogging(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p2, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 375. class:okhttp3.internal.platform.android.AndroidLog method:public final androidLog$okhttp(Ljava/lang/String;ILjava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p0, p2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 376. class:okhttp3.internal.platform.android.AndroidLog method:public final androidLog$okhttp(Ljava/lang/String;ILjava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p4}, Landroid/util/Log;->getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String; 377. class:okhttp3.internal.platform.android.AndroidLog method:public final androidLog$okhttp(Ljava/lang/String;ILjava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p2, p0, v1}, Landroid/util/Log;->println(ILjava/lang/String;Ljava/lang/String;)I

	378. class:org.spongycastle.crypto.examples.DESExample method:private performDecrypt([B)V stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 379. class:org.spongycastle.crypto.examples.DESExample method:private performEncrypt([B)V stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 380. class:org.spongycastle.pqc.crypto.rainbow.RainbowParameters method:public constructor <init>([I)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 381. class:org.spongycastle.pqc.crypto.gmss.GMSSKeyPairGenerator method:private genKeyPair()Lorg/spongycastle/crypto/AsymmetricCipherKeyPair; stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 382. class:org.spongycastle.pqc.math.linearalgebra.GF2nField method:protected final invertMatrix([Lorg/spongycastle/pqc/math/linearalgebra/GF2Polynomial;)[Lorg/spongycastle/pqc/math/linearalgebra/GF2Polynomial; stmt:invoke-virtual {v4}, Ljava/lang/RuntimeException;->printStackTrace()V 383. class:org.spongycastle.pqc.jcajce.spec.RainbowParameterSpec method:public constructor <init>([I)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 384. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceKobaraImaiCi pherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 385. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceKobaraImaiCi pherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 386. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceKobaraImaiCi pherSpi method:public messageDecrypt()[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 387. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceKobaraImaiCi pherSpi

	method:public messageEncrypt()[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 388. class:org.spongycastle.pqc.jcajce.provider.mceliece.BCMcElieceePrivateKey method:public getEncoded()[B stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V 389. class:org.spongycastle.pqc.jcajce.provider.mceliece.BCMcElieceePrivateKey method:public getEncoded()[B stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V 390. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceFujisakiCipher Spi method:public doFinal([BII)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 391. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceFujisakiCipher Spi method:public doFinal([BII)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 392. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceFujisakiCipher Spi method:public messageDecrypt([B)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 393. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceFujisakiCipher Spi method:public messageEncrypt([B)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 394. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePointchevalCi pherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 395. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePointchevalCi pherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 396. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePointchevalCi pherSpi method:public messageDecrypt([B)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V

	397. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePointchevalCipherSpi method:public messageEncrypt([B)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 398. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePKCSCipherSpi method:protected messageDecrypt([B)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 399. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePKCSCipherSpi method:protected messageEncrypt([B)[B stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 400. class:org.spongycastle.pqc.jcajce.provider.rainbow.BCRainbowPrivateKey method:public getEncoded()[B stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V 401. class:org.spongycastle.pqc.jcajce.provider.rainbow.BCRainbowPrivateKey method:public getEncoded()[B stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V 402. class:org.spongycastle.util.test.SimpleTest method:protected static runTest(Lorg/spongycastle/util/test/Test;Ljava/io/PrintStream;)V stmt:invoke-virtual {p0, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V
Remediation	Disable debugging log function calls or ensure that log outputs use the correct level. Log messages involving sensitive data should be disabled in the release version.

10.3.Risk of resource file leakage

Purpose of assessment	Detect whether the resource files in APK can be read and tampered with.
Risk level	Low
Vulnerability description	An APK contains many types of resource files, including icons, pictures, JavaScript (JS) files, etc. The JS files may contain important display interfaces and implementations in resource files. If the JS file is read, the functional logic may be leaked. If it is tampered, it may be implanted with

	phishing pages or malicious code, causing the user's sensitive information to be leaked.
Assessment result	Secure
Assessment result description	There are no JS resource files that can be read in this app.
Assessment detail	N/A
Remediation	N/A

10.4.SO file cracking risk

Purpose of assessment	Check whether the SO file in the APK can be cracked and read.
Risk level	Medium
Vulnerability description	SO file is a dynamic link library file included in APK. Android uses the NDK technology to compile the core code implemented in the C/C++ language into an SO library for the Java layer to call. The cracked SO file may cause the core function's assembly code and even source code to be leaked, which not only infringe the developer's intellectual property but may also expose the app core function logic. Attackers can use this information to steal the client's sensitive data, including mobile phone numbers and passwords; intercept communication data with the server; bypass the business security authentication process, directly tamper with user account information; launch attacks on server interfaces and etc.
Assessment result	84 risks found
Assessment result description	The SO file in the app can be cracked, this leads to core source code facing the risk of disclosure.
Assessment detail	1. /lib/armeabi-v7a/libhermesvm.so 2. /lib/armeabi-v7a/libdatastore_shared_counter.so 3. /lib/armeabi-v7a/libc++_shared.so 4. /lib/armeabi-v7a/libfbjni.so 5. /lib/armeabi-v7a/libreanimated.so 6. /lib/armeabi-v7a/libreactnative.so 7. /lib/armeabi-v7a/libhermestooling.so 8. /lib/armeabi-v7a/libworklets.so 9. /lib/armeabi-v7a/libreact_codegen_rnsvg.so 10. /lib/armeabi-v7a/libreact_codegen_rnscreens.so

	11. /lib/armeabi-v7a/libimagepipeline.so 12. /lib/armeabi-v7a/libtoolChecker.so 13. /lib/armeabi-v7a/libappmodules.so 14. /lib/armeabi-v7a/librnscreens.so 15. /lib/armeabi-v7a/libreact_codegen_rnpicker.so 16. /lib/armeabi-v7a/libreact_codegen_safeareacontext.so 17. /lib/armeabi-v7a/libjsi.so 18. /lib/armeabi-v7a/libnative-filters.so 19. /lib/armeabi-v7a/libnative-imagetranscoder.so 20. /lib/armeabi-v7a/libtaz_full.5.11.0.32.so 21. /lib/armeabi-v7a/libgesturehandler.so 22. /lib/arm64-v8a/libhermesvm.so 23. /lib/arm64-v8a/libdatastore_shared_counter.so 24. /lib/arm64-v8a/libc++_shared.so 25. /lib/arm64-v8a/libfbjni.so 26. /lib/arm64-v8a/libreanimated.so 27. /lib/arm64-v8a/libreactnative.so 28. /lib/arm64-v8a/libhermestooling.so 29. /lib/arm64-v8a/libworklets.so 30. /lib/arm64-v8a/libreact_codegen_rnsvg.so 31. /lib/arm64-v8a/libreact_codegen_rnscreens.so 32. /lib/arm64-v8a/libimagepipeline.so 33. /lib/arm64-v8a/libtoolChecker.so 34. /lib/arm64-v8a/libappmodules.so 35. /lib/arm64-v8a/librnscreens.so 36. /lib/arm64-v8a/libreact_codegen_rnpicker.so 37. /lib/arm64-v8a/libreact_codegen_safeareacontext.so 38. /lib/arm64-v8a/libjsi.so 39. /lib/arm64-v8a/libnative-filters.so 40. /lib/arm64-v8a/libnative-imagetranscoder.so 41. /lib/arm64-v8a/libtaz_full.5.11.0.32.so 42. /lib/arm64-v8a/libgesturehandler.so 43. /lib/x86_64/libhermesvm.so 44. /lib/x86_64/libdatastore_shared_counter.so 45. /lib/x86_64/libc++_shared.so 46. /lib/x86_64/libfbjni.so 47. /lib/x86_64/libreanimated.so 48. /lib/x86_64/libreactnative.so 49. /lib/x86_64/libhermestooling.so 50. /lib/x86_64/libworklets.so 51. /lib/x86_64/libreact_codegen_rnsvg.so 52. /lib/x86_64/libreact_codegen_rnscreens.so 53. /lib/x86_64/libimagepipeline.so 54. /lib/x86_64/libtoolChecker.so 55. /lib/x86_64/libappmodules.so

	56. /lib/x86_64/librnscreens.so 57. /lib/x86_64/libreact_codegen_rnpicker.so 58. /lib/x86_64/libreact_codegen_safeareacontext.so 59. /lib/x86_64/libjsi.so 60. /lib/x86_64/libnative-filters.so 61. /lib/x86_64/libnative-imagetranscoder.so 62. /lib/x86_64/libtaz_full.5.11.0.32.so 63. /lib/x86_64/libgesturehandler.so 64. /lib/x86/libhermesvm.so 65. /lib/x86/libdatastore_shared_counter.so 66. /lib/x86/libc++_shared.so 67. /lib/x86/libfbjni.so 68. /lib/x86/libreanimated.so 69. /lib/x86/libreactnative.so 70. /lib/x86/libhermestooling.so 71. /lib/x86/libworklets.so 72. /lib/x86/libreact_codegen_rnsvg.so 73. /lib/x86/libreact_codegen_rnscreens.so 74. /lib/x86/libimagepipeline.so 75. /lib/x86/libtoolChecker.so 76. /lib/x86/libappmodules.so 77. /lib/x86/librnscreens.so 78. /lib/x86/libreact_codegen_rnpicker.so 79. /lib/x86/libreact_codegen_safeareacontext.so 80. /lib/x86/libjsi.so 81. /lib/x86/libnative-filters.so 82. /lib/x86/libnative-imagetranscoder.so 83. /lib/x86/libtaz_full.5.11.0.32.so 84. /lib/x86/libgesturehandler.so
Remediation	Use a third-party professional hardening solution with SO file protection to it from being cracked.

11.M10-Extraneous functionality

11.1.Residual risk vulnerability in Intranet test information

Purpose of assessment	Detect whether the program code contains residual test information, such as the intranet URL address.
Risk level	Low

Vulnerability description	By detecting whether the mobile application contains an intranet URL address, to determine whether the distribution package contains test data. Residual test data may be stolen and maliciously used to attack on production servers, and attack weak test servers to obtain server security or logic vulnerability.
Assessment result	Secure
Assessment result description	The app does not contain test data information.
Assessment detail	N/A
Remediation	N/A

11.2.Download arbitrary APK vulnerability

Purpose of assessment	Detect whether there are vulnerabilities in downloading arbitrary APK in the application.
Risk level	Medium
Vulnerability description	If the download APK function is present, then it may be an export vulnerability and does not perform checks on the component caller. The attackers can use the means of exporting components to download any APK file specified by the attacker, and during the download process, disguise the download information of the APK file, such as icons and descriptions, causing users to be induced to download and install malicious applications.
Assessment result	Secure
Assessment result description	The app does not have a component with APK download functionality.
Assessment detail	N/A
Remediation	N/A