


# Bean Lifecycle Methods



# Bean Lifecycle

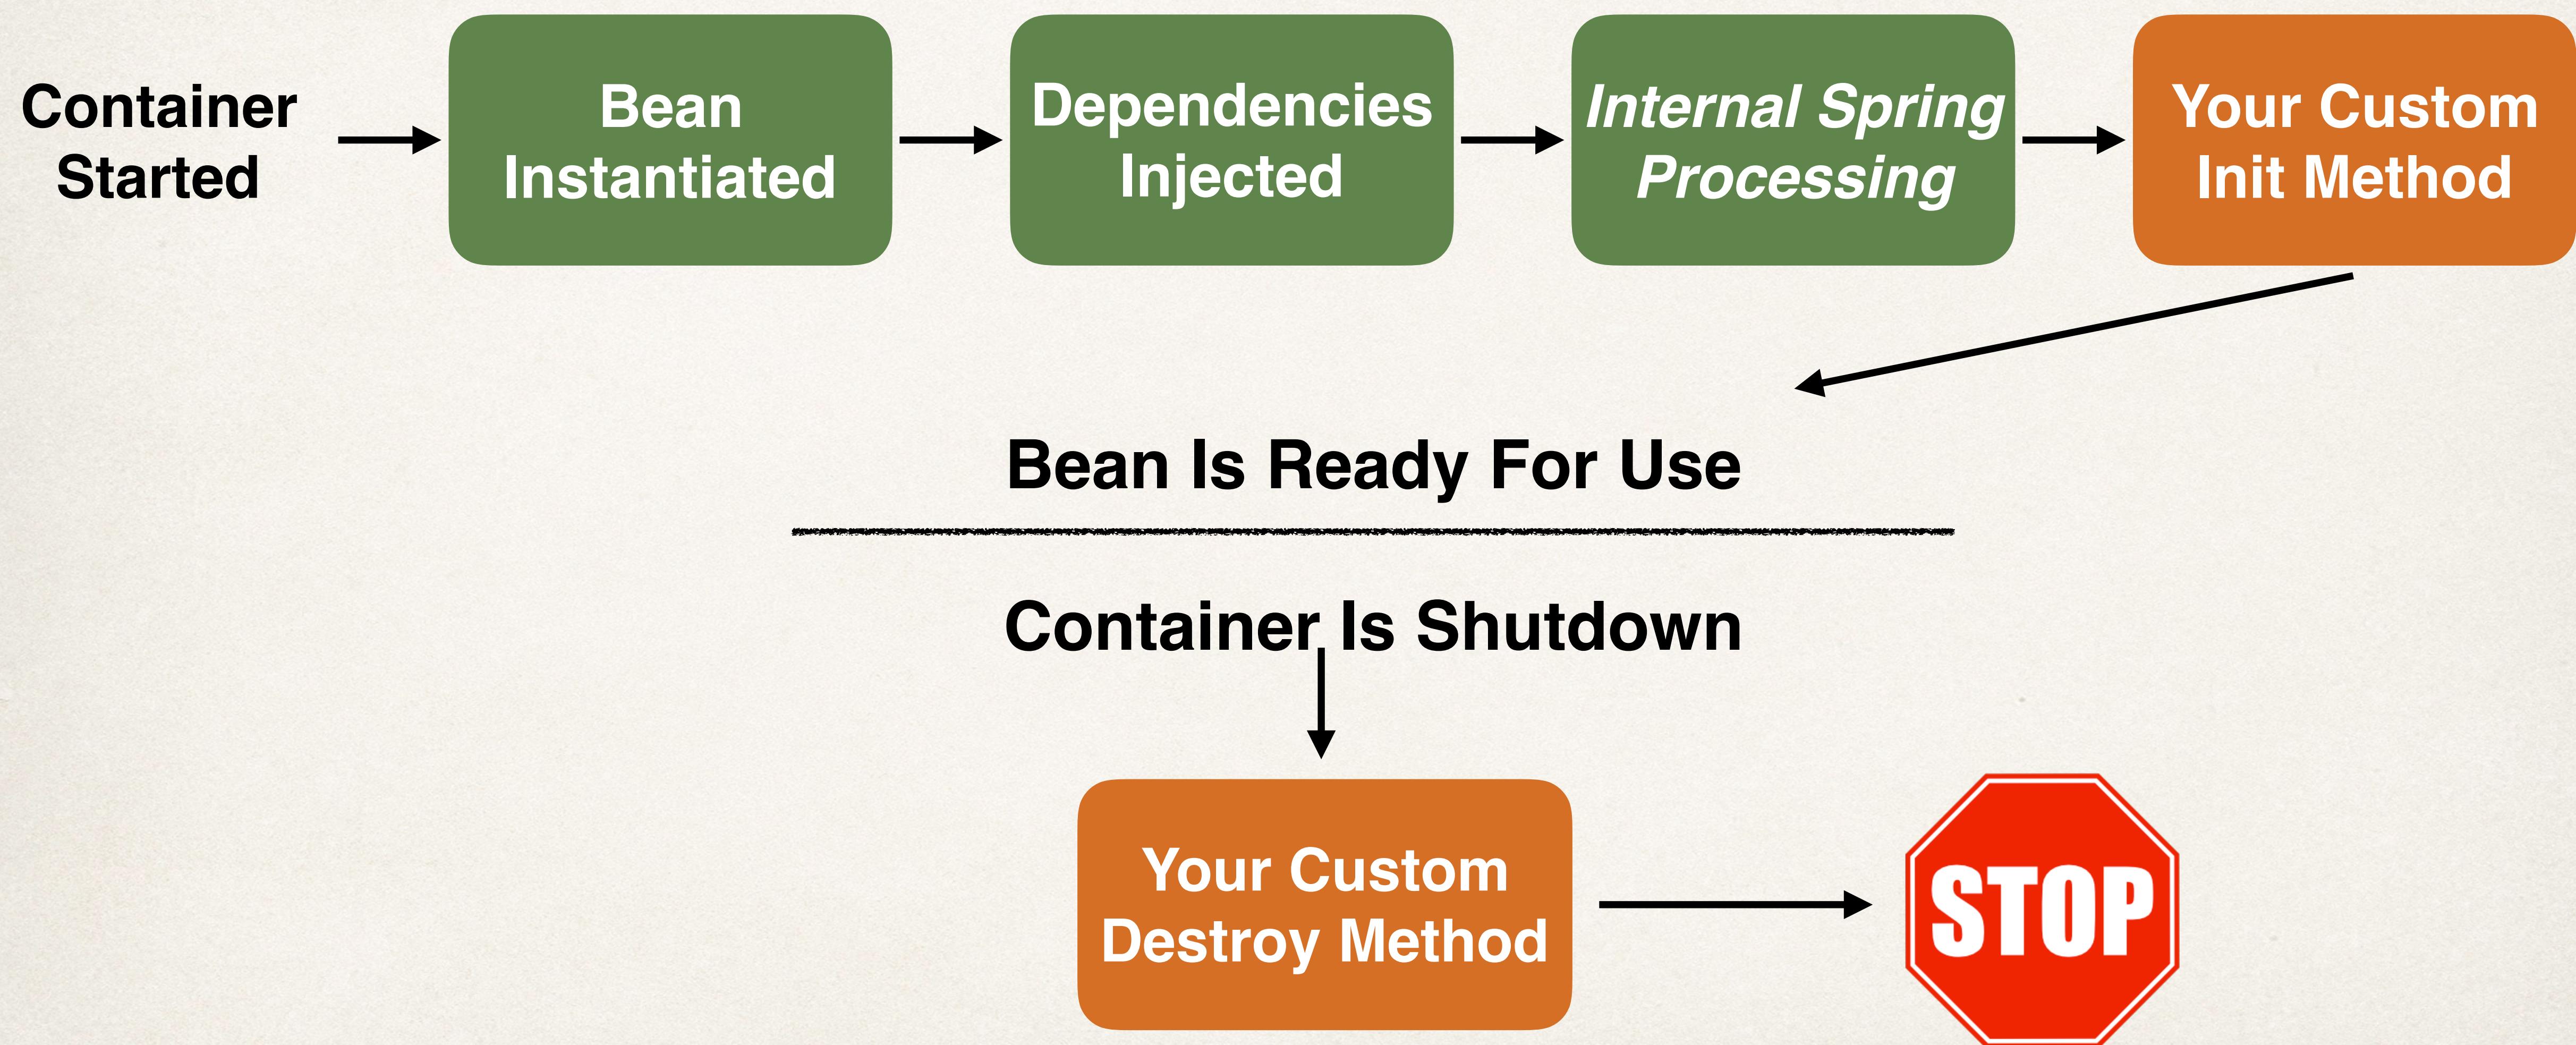

# Bean Lifecycle Methods / Hooks

- You can add custom code during **bean initialization**
  - Calling custom business logic methods
  - Setting up handles to resources (db, sockets, file etc)
- You can add custom code during **bean destruction**
  - Calling custom business logic method
  - Clean up handles to resources (db, sockets, files etc)

# Init: method configuration

```
<beans ... >

<bean id="myCoach"
      class="com.luv2code.springdemo.TrackCoach"
      init-method="doMyStartupStuff">
    ...
</bean>

</beans>
```

# Destroy: method configuration

```
<beans ...>

<bean id="myCoach"
      class="com.luv2code.springdemo.TrackCoach"
      init-method="doMyStartupStuff"
destroy-method="doMyCleanupStuff">
...
</bean>

</beans>
```

# Development Process

1. Define your methods for init and destroy
2. Configure the method names in Spring config file

*Step-By-Step*