

Edge Detection

Leonhard Applis

TH Nürnberg

05.11.2018

Table of Contents

Edge
Detection

Leonhard
Applis

What
makes
an Edge?

Problems
Definition

Basics of
gradient-
based
edgedetection

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edgedetection

Compass
Operators

Edge
Sharpening

1 What makes an Edge?

- Problems
- Definition

2 Basics of gradient-based edgedetection

- One dimensional approach
- Two Dimensional Approach
- Filters

3 Advanced gradient-based edgedetection

4 Compass Operators

5 Edge Sharpening

Picture of Felix vs Edges of Felix

Problem I: Low Contrast

Edge
Detection

Leonhard
Applis

What
makes
an Edge

Problems

Definition

Basics of
gradient-
based
edge de-
tection

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edge de-
tection

Compass
Opera-
tors

Edge
Sharpen-

Problem II: Low Contrast

Edge
Detection
II

Leonhard
Applis

What
makes
an Edge?

Problems

Definition

Basics of
gradient-
based
edge de-
tection

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edge de-
tection

Compass
Opera-
tors

Edge
Sharpen-

Problem III: Noise

Edge
Detection

**Leonhard
Applis**

What
makes
an Edge?

Problems

Definition

Basics of
gradient-
based
edge de-
tection

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edge de-
tection

Compass
Opera-
tors

Edge
Sharpen-

Definition

Edge
Detection
Step

Leonhard
Applis

What
makes
an Edge

Problems
Definition

One dimensional
approach
Two dimensional
approach

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edge de-
tection

Compare
Opera-
tors

Edge
Thinning

In Image Processing, an edge can be defined as a set of contiguous pixel positions where an abrupt change of intensity, gray- or color-values occur. Edges represent boundaries between objects and background. Sometimes, the edge-pixel-sequence may be broken due to insufficient intensity difference. (Malay K. Pakhira)

Table of Contents

Edge
Detection

Leonhard
Applis

What
makes
an Edge?

Problems
Definition

Basics of
gradient-
based
edgedetection

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edgedetection

Compass
Operators

Edge
Sharpening

1 What makes an Edge?

- Problems
- Definition

2 Basics of gradient-based edgedetection

- One dimensional approach
- Two Dimensional Approach
- Filters

3 Advanced gradient-based edgedetection

4 Compass Operators

5 Edge Sharpening

Requirements

Edge
Detection

Leonhard
Applis

What
makes
an Edge?

Problems

Definition

Basics of
gradient-
based
edge de-
tection

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edge de-
tection

Compass
Operators

Edge
Sharpen-

- 1 color values known
- 2 picture scale known
- 3 loaded as pixelmatrix

One dimensional approach

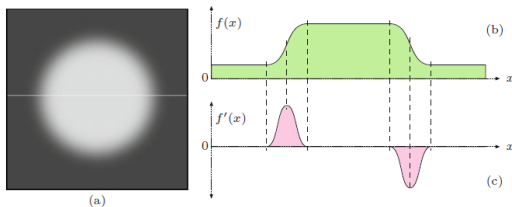


Figure: One dimensional image function and derivation

Only applicable with known, steady functions

Approximating discrete derivation

Problem: the image function is discrete, therefore we need to approximate the derivation

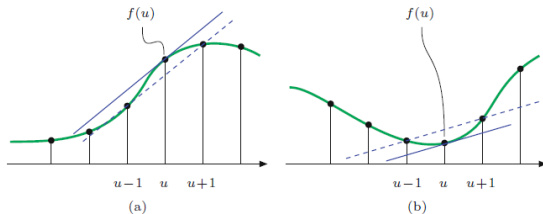


Figure: Approximation of the derivation for discrete imagefunctions

$$\frac{df}{dx}(u) \approx \frac{f(u+1) - f(u-1)}{(u+1) - (u-1)} = \frac{f(u+1) - f(u-1)}{2}$$

Two dimensional approach

If working with full images, we got two dimensions and therefore two partial derivations:

$$I_x = \frac{\partial I}{\partial x}(u, v), I_y = \frac{\partial I}{\partial y}(u, v)$$


the **gradient** at the point (u, v) is

$$\nabla I(u, v) = \begin{pmatrix} I_x(u, v) \\ I_y(u, v) \end{pmatrix}$$

And the **magnitude** is

$$|\nabla I| = \sqrt{I_x^2 + I_y^2}$$


Example



(a) I



(b) I_x



Implementation with filters

Edge
Detection

Leonhard
Applis

What
makes
an Edge

Problems
Definition

Basics of
gradient-
based
edge de-
tection

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edge de-
tection

Compass
Operators

Edge
Sharpen-

Expressing the gradient as a *linear filter* is simple:

$$I_x = \begin{bmatrix} -0.5 & 0 & 0.5 \end{bmatrix} I_y = \begin{bmatrix} -0.5 \\ 0 \\ 0.5 \end{bmatrix}$$

Table of Contents

Edge
Detection

**Leonhard
Applis**

What
makes
an Edge?

Problems
Definition

Basics of
gradient-
based
edge-
detection

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edge-
detection

Compass
Operators

Edge
Sharpening

1 What makes an Edge?

- Problems
- Definition

2 Basics of gradient-based edgedetection

- One dimensional approach
- Two Dimensional Approach
- Filters

3 Advanced gradient-based edgedetection

4 Compass Operators

5 Edge Sharpening

Table of Contents

Edge
Detection

Leonhard
Applis

What
makes
an Edge?

Problems
Definition

Basics of
gradient-
based
edges-
etection

One di-
mensional
approach

Two Di-
mensional
Approach

Filters

Advanced
gradient-
based
edges-
etection

Compass
Opera-
tors

Edge
Sharpen-

1 What makes an Edge?

- Problems
- Definition

2 Basics of gradient-based edgedetection

- One dimensional approach
- Two Dimensional Approach
- Filters

3 Advanced gradient-based edgedetection

4 Compass Operators

5 Edge Sharpening

Table of Contents

- 1 What makes an Edge?
 - Problems
 - Definition
- 2 Basics of gradient-based edgedetection
 - One dimensional approach
 - Two Dimensional Approach
 - Filters
- 3 Advanced gradient-based edgedetection
- 4 Compass Operators
- 5 Edge Sharpening