


# Pipeline Programming Model

There are two types of event listeners in an Aviator application: Handlers and Subscribers. Handlers “do work” inside the application, such as validating or applying transactions.

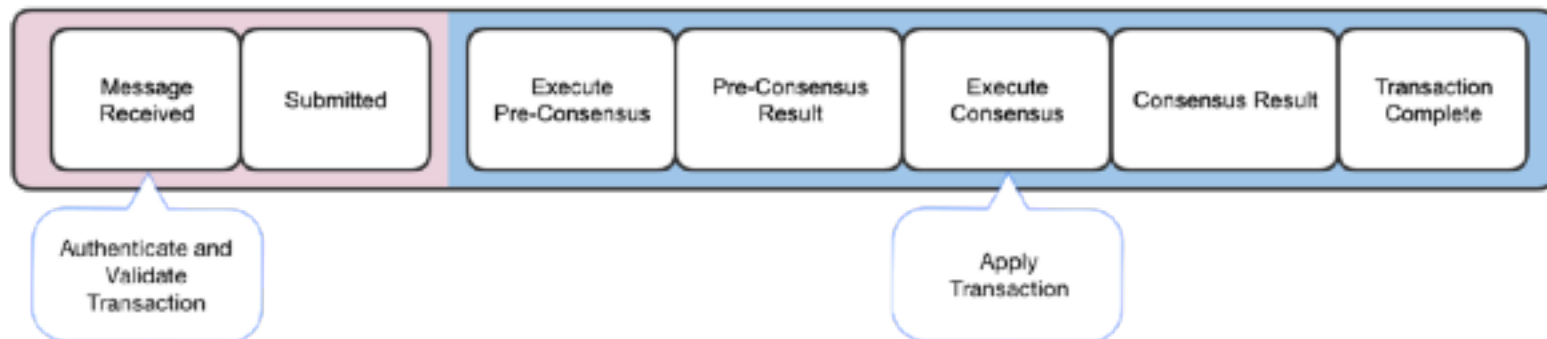

# Pipeline Programming Model

Subscribers report status or results back to a calling application. Applications integrated through REST can return only one status...

