


Pipeline Programming Model

Events are issued as transactions move from one stage to the next. Applications listen for these events in order to take action or report status for a given transaction.

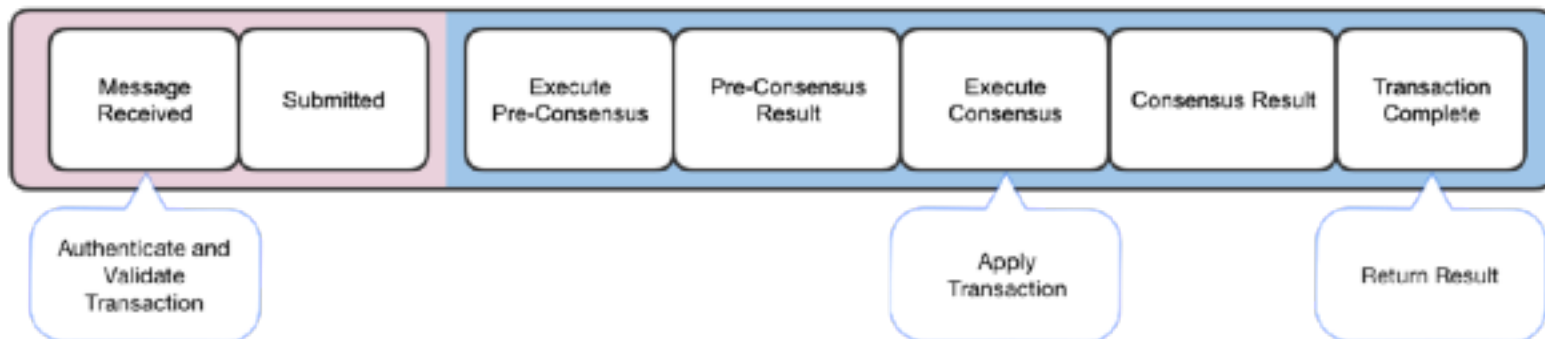

Pipeline Programming Model

There are two types of event listeners in an Aviator application: Handlers and Subscribers. Handlers “do work” inside the application, such as validating or applying transactions.

