EUROPEAN UNION AGENCY FOR RAILWAYS

Moving Europe towards a sustainable and safe railway system without frontiers.

XSD Data and message model

Telematics TSI - Technical document - TD105

Version 4.0

120 Rue Marc Lefrancq | BP 20392 | FR-59307 Valenciennes Cedex
Tel. +33 (0)327 09 65 00 | era.europa.eu

Contents

A. Document management 3
A.1 Document properties 3
A.2 Change management 3
A.3 Configuration management 3
A.4 Availability 3
A.5 Application and actors in the scope 3
A.6 Document history 3
B. Acronyms, definitions and external references 4
B.1 Acronyms 4
B.2 Definitions 5
B.3 External references 5
1 Schema taf_cat_complete.xsd 5
2 Schema taf_cat_codelists.xsd 12
3 Schema TAP_TSI_codelist.xsd 13

A. Document management

A.1 Document properties

- File name: ERA_TD_105
- Subject and document type: Telematics TSI - Technical document - TD105
- Author: European Union Agency for Railways
- Version: 4.0

A.2 Change management

Updates to this technical document shall be subject to Change Control Management procedure managed by the Agency pursuant:

- the applicable requirements in the reference TSI
- Art. 23(2) of the Agency Regulation

If necessary, working groups are created in line with Art. 5 of the Agency Regulation.

A.3 Configuration management

A new version of the document will be created if new changes are considered following the Change Control Management Process led by ERA.

More specifically:

- if there is a change in the requirements which influences the implementation
- if information is added to or deleted from the technical document
- adding test cases to the field checking in messages or databases.

Modifications will have to be highlighted, so they can be easily identified.

Disclaimer:

Specific legal references to technical documents and legal acts shall be revised after the enter into force of the Telematics TSI. In some sections this text can be highlighted.

A.4 Availability

The version in force of this document is available on Agency's Gitlab repository. Any printed copy is uncontrolled.

A.5 Application and actors in the scope

Date of entry into force of reference TSI.

This document applies to all the actors in the scope of the reference TSI.

A.6 Document history

Table 1 - Document history

Version	*Date*	*Modifications*
1.0	25.01.2011	Initial version
1.1	15.05.2012	New TAF TSI baseline 5.2
2.0	08.08.2013	All the chapters were revised due to the TAF TSI Revision Process and the TAF TSI CCM WP cycle 2012 – 2013. New TAF TSI baseline 5.3.
2.0	17.10.2013	Validated by the ERA TAF CCB on 11.09.2013
2.1	10.02.2015	All the chapters were revised due to the TAF TSI CCM WP cycle 2013 – 2014. Validated by the ERA TAF CCB on 10.02.2015. New TAF TSI baseline 2.1
2.2	18.03.2018	New TAF TSI baseline 2.2
2.2.2	16.06.2018	Validated by the ERA TAF CCB on 31.05.2018.
2.3.0	30.11.2018	Validated by the ERA TAF CCB on 28.11.2018.
2.3.1	16.04.2020	Hotfix 2.3.1
2.4.0	27.05.2020	Validated by the ERA TAF CCB on 27.05.2020
2.4.1	03.09.2020	Hotfix 2.4.1
2.5.0	15.12.2020	Validated by the ERA TAF CCB on 25.11.2020
3.0.0	15.06.2021	Validated by the ERA TAF CCB on 26.05.2021
3.1.0	15.12.2021	Validated by the ERA TAF CCB on 24.11.2021
3.2.0	15.06.2022	Validated by the ERA TAF CCB on 01.06.2022
3.3.0	15.12.2022	Validated by the ERA TAF CCB on 30.11.2022
3.4.0	15.06.2023	Validated by the ERA TAF CCB on 31.05.2023
3.4.1	15.12.2023	Validated by the ERA TAF CCB on 29.11.2023
3.5.0	15.06.2024	Validated by the ERA TAF CCB on 04.06.2024
3.5.1	15.12.2024	Validated by the ERA TAF CCB on 04.06.2024
4.0.0	06.02.2026	Version **initially released 10.6.2025 and officially published with** the TSI Telematics ***(Commission Implementing Regulation*** *(EU) 2026/253 of 6 February 2026****)***

B. Acronyms, definitions and external references

B.1 Acronyms

Table 2 – Acronyms

Intentionally empty

B.2 Definitions

Terms contained in this document are defined in the ERA Ontology.

B.3 External references

The referenced documents listed in Table 2 are indispensable for the application of this document:

- For dated references, only the edition cited applies;
- For undated references, if any, the latest edition of the referenced document (including any amendments) applies.

Table 2 Reference documents

Id	*Title*	*Doc ID, Edition*	*Date*	*Author/ Publisher*
1.	Directive 2012/34/EU of The European Parliament and of The Council establishing a single European railway area.	Directive 2012/34/EU	21/11/2012	EC
2.	DIRECTIVE (EU) 2016/797 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 11 May 2016 on the interoperability of the rail system within the European Union (Recast)	Directive (EU) 2016/797	11/06/2016	EC
3.	COMMISSION IMPLEMENTING REGULATION (EU) 2019/773 of 16 May 2019 on the technical specification for interoperability relating to the operation and traffic management subsystem of the rail system within the European Union and repealing Decision 2012/757/EU	COMMISSION IMPLEMENTING REGULATION (EU) 2019/773	16/05/2019	EC
4.	Commission Implementing Regulation (EU) 2026/253 of 6 February 2026 on a technical specification relating to the telematics subsystem of the rail system in the European Union for interoperability of data sharing in rail transport (TEL TSI) and repealing Regulations (EU) No 454/2011 (TAP TSI) and (EU) No 1305/2014 (TAF TSI)	COMMISSION REGULATION (EU) No 2026/253 of 06 February 2026	10/02/2026	EC

1 Schema taf_cat_complete.xsd

schema location: **taf_cat_complete.xsd**
attributeFormDefault: **unqualified**
elementFormDefault: **qualified**
targetNamespace: **http://www.era.europa.eu/schemes/TAFTSI/4.0**

Elements

ActualEndDateTime
ActualETA
ActualETI
AdditionalInstruction
Address
AdministrativeContactInformation
AffectedLocation
AffectedSection
AgainstBooked
AgainstReferenced
AgreedTimeOfDelivery
AirBrake
AirBrakedMass
AlertMessage
AllocationCompany
Altitude
ArrivalAtDestination
ArrivalInterchangeReport
ArrivalTimeAtDestination
ArrivalTimeAtLocation
ArrivalTimeAtLocationActual
ArrivalTrackAtLocation
AssociatedAttachedLocationIdent
AssociatedAttachedOTN
AssociatedAttachedTimingAtLocation
AssociatedAttachedTrainID
AssociatedAttachedTrainServiceNumber
BitmapDays
BogiePitch
BogieWagonsOnly
BookedLocationDateTime
BookedLocationTime
BrakeWeight
BrakingRatio
CarrierStatus
ChangeofTrackMessage
CityTown
ClosingTime
Coasting
Comments
CommitmentETA
Company
ConsignmentNumber
ConsignmentOrderMessage
ContainerHandlingFlag
ContractNumber
ContractNumberMovement
CoordinatingIM
Core
CountryCodeISO
CreateDateTime
Customer
CustomerNumber
Customers
DangerousGoodsIndication
DangerousGoodsIndicator

Complex types

CargoCodeType
CompositIdentifierOperationalType
CompositIdentifierPlannedType
ConsignmentIdent
CustomerCode
DanGoodsType
DimensionValue
IntermodalTransportDataType
LocationIdent
TrainActivityType
WagonTelematics

Simple types

CommunicationRefID
CompanyCode
CountryIdentISO
CurrencyCode_Type
DeltaTime
DerailmentDetectionDevice
EquipmentNumberType
EquipmentTypeType
ForwardingRestrictionType
FreeText
LoadUnitNumberType
Money_Type
Name
NHMCodeType
Numeric0-2
Numeric1-5
Numeric1-6
Numeric2-2
Numeric3-3
Numeric4-4
Percentage
Speed
String1-10
String1-14
String1-5
String1-7
String1-8
String4-4
String5-5
String5-8
Time
VolumeValue
VolumeValueLiter
WagonIdent
WeightValueKilo
WeightValueTonne

Attributes

CI_InstanceNumber

DangerousGoodsVolume
DangerousGoodsWeight
Date
DateLastOverhaul
DateNextOverhaul
DatePutIntoService
DeclarationText
DelayCause
DelayCauseTime
DelayCodingDateTime
DelayEventDateTime
DelayEventReport
DelayLocation
DelayMinutes
DeliveryAtDestination
DeliveryReference
DeliveryTimeAtDestination
DeliveryTimeAtInterchange
DepartureInterchangeReport
DepartureJourneyTrack
DepartureTimeAtLocation
DepartureTrackAtLocation
Destination
Dimensions
DwellTime
eMail
EmergencyBrakeOverride
EndDate
EndDateTime
EndLocation
ErrorMessage
EstimatedEndDateTime
EventType
ExceptionalGaugingCode
ExceptionalGaugingIdent
ExceptionalGaugingInd
ExceptionalGaugingProfile
ExceptionPoint
ExceptionReason
ExceptionTimeAtLocation
FaxNumber
FerryPermittedFlag
FreeTextField
FreightFlag
GeographicalCoordinates
GeographicCoordinates
GeoLocalisation
GeoLocalisationOnNetwork
GNSS_DynamicPosition
Goods
GoodsDescription
GoodsInWagon
GrossWeight
HandBrake
HandlingInstruction
HandoverPointFlag
Height
HighestPlannedSpeed

Identifiers
ILU
ILU_Details
ILU_Type
IM_Partner
ImpactedRU
IntermediateDestination
InternalReferenceIdentifier
InterruptionDateTime
InterruptionDescription
InterruptionInformation
InterruptionPoint
InterruptionReason
ITU
ITU_Details
ITU_Type
JourneySection
JourneySectionDestination
JourneySectionOrigin
KeeperShortNameVKM
LastModifiedDateTime
Latitude
LeadRU
Length
LengthOfSetOfCarriages
LengthOverBuffers
LoadArea
LoadingCapacity
LoadingFacility
LoadingStatus
LoadingTackles
Location
LocationActualTrack
LocationDateTime
LocationFileDatasetMessage
LocationModified
LocationPlannedTrack
LocationPrimaryCode
LocationPrimaryInformation
LocationPrimaryName
LocationSubsidiaryCode
LocationSubsidiaryIdentification
LocationSubsidiaryInformation
LocationSubsidiaryName
LocoNumber
LocoTypeNumber
Longitude
MaxAxleWeight
MaxDesignSpeed
MaxGrossWeight
MaxLengthOfLoad
MaxTemp
Measure
MessageDateTimeCreated
MessageHeader
MessageIdentifier
MessageReference
MessageRoutingID

MessageType
MessageTypeVersion
MinBrakedWeightPercent
MinCurveRadius
MinTemp
MinVerticalRadiusYardHump
ModificationReason
ModificationStatusIndicator
Name
NetworkProjectedLocation
NetworkSpecificParameter
NextIntermediateDestination
NextResponsibleRU
NHM_Code
Noise
NoiseByPassLimit
Notes
NumberOfAxles
NumberOfBogies
NumberOfVehicles
ObjectType
Offset
OffsetToReference
OnDemandPath
OperationalTrainCouplingStrength
OperationalTrainNumber
OperationalTrainNumberIdentifier
OriginCountry
OverhaulValidityPeriod
ParkingBrakeForce
PassengerFlag
PathCanceledMessage
PathConfirmedMessage
PathDetailsMessage
PathDetailsRefusedMessage
PathInformation
PathNotAvailableMessage
PathRequestMessage
PermittedTolerance
PhoneNumber
PickupTimeAtLocation
PlannedCalendar
PlannedDateNextOverhaul
PlannedJourneyLocation
PlannedSpeed
PlannedTrainData
PlannedTrainTechnicalData
PlannedTransportIdentifiers
PostalCode
PreArrangedPath
PreviousConsignmentNumber
PreviousResponsibleRU
PrimaryLocationName
ProductionStation
PushPullTrain
Quantity
ReceiptConfirmationMessage
Recipient

ReferencedLocationDateTime
ReferenceNumbers
ReferenceOTN
ReferenceTrainIDSubCalendar
RegenerativeBrake
RelatedIdentifier
RelatedPlannedTransportIdentifiers
RelatedReference
RelatedSenderReference
RelatedTransportOperationalIdentifiers
Remarks
RequestedCalendar
RequestedPeriod
RequestedTimeframe
ResponsibilityActualSection
ResponsibilityNextSection
ResponsibleApplicant
ResponsibleIM
ResponsibleRU
RestrictionsDueToLoadOrDamage
RevisedRequest
RID
RID_Checking
RollingRoadUnit
RollingStockDataset
RollingStockDatasetMessage
RollingStockDatasetQueryMessage
RouteCode
RouteInformation
Routing
RP_Code
RU_Partner
ScheduledDateTimeAtTransfer
ScheduledTimeAtHandover
ScheduledTimeAtLocation
Seals
Sender
SenderReference
Ship
SpecialTreatments
SRID
StartDate
StartDateTime
StartLocation
Station
StatusOfDocument
SummaryOFGoodsWithSameRID
TechnicalForwardingRestrictions
TiltingFunction
TimetableYear
TimingAtLocation
TotalLoadWeight
TotalWeight
TractionDetails
TractionPositionInTrain
TractionWeight
TrafficType
TrainActivity

TrainActivityType
TrainAtLocation
TrainCC_System
TrainCompositionJourneySection
TrainCompositionMessage
TrainContactDetails
TrainDelay
TrainDelayCauseMessage
TrainForecastAtReportingLocationMessage
TrainID
TrainInformation
TrainJourneyModification
TrainJourneyModificationIndicator
TrainJourneyModificationMessage
TrainJourneyModificationTime
TrainJourneyStartTime
TrainLength
TrainLocationReport
TrainLocationStatus
TrainMaxSpeed
TrainNotAtInterruptionPoint
TrainOperationalIdentification
TrainReadyMessage
TrainReadyStatus
TrainRunningData
TrainRunningForecastMessage
TrainRunningInformationMessage
TrainRunningInterruptionMessage
TrainRunningTechData
TrainStartTime
TrainWeight
TransfereeIM
TransferPoint
TransportInstruction
TransportOperationalIdentifiers
TypeOfIMHarmonization
TypeOfInformation
TypeOfRequest
TypeOfRUHarmonization
TypeofService
UltimateDestinationCountry
UN_Number
ValidityPeriod
Value
Variant
VesselIndication
VesselName
Volume
WagonAtDeparture
WagonData
WagonETI_ETA_Message
WagonEventInformation
WagonInformation
WagonLength
WagonLocationStatus
WagonMaxSpeed
WagonNumberFreight
WagonNumberOfAxles

WagonOperationalData
WagonPickupAtOrigin
Wagons
WagonStatusMessages
WagonTechData
WagonTrainPosition
WagonWeightEmpty
WeightOfSetOfCarriages
WheelDiameter
WheelsetGauge
Width
WIMO_Dataset
YardArrival
YardDeparture

2 Schema taf_cat_codelists.xsd

schema location: **taf_cat_codelists.xsd**
attributeFormDefault: **unqualified**
elementFormDefault: **qualified**
targetNamespace: **http://www.era.europa.eu/schemes/TAFTSI/4.0**

Elements

AirBrakeType
BrakeSpecialCharacteristics
BrakeType
BrakingPowerVariationDevice
CodeOfCause
CombinedTrafficLoadProfile
CommercialSpecificationCode
ConsignmentOrderType
ConsignorDeclarationCode
CouplingType
CustomerType
DangerLabel
EmptyPackingCode
HandBrakeType
ILU_TypeDetail
IncotermCode
InfoOnGoodsShapeTypeDanger
InteropCapability
JourneyLocationTypeCode
LivestockOrPeopleIndicator
LoadTableStars
MessageStatus
MRN_Type
NormalLoadingGauge
PackingGroup
PrepaidcodeCarrier
PrepaidCodeCustomer
ProcessType
ReasonOfReference
RefusalCode
RollingRoadUnitType
RouteClass
RU_DeclarationCode

Simple types

ConsignmentTypeCode
DelayCode
InfoIndex
MessageCode
RestrictionCodes
RunningStatus
TrainCC_SystemCode
TypeOfIMHarmonizationCode
TypeOfInformationCode
TypeOfLoadUnitType
TypeOfRequestCode
TypeOfRUHarmonizationCode
UnitType

Attributes

LocationSubsidiaryTypeCode
TimingQualifierCode

TractionMode
TractionType
TrainRadioSystem
TrainRunningInterruptionStatus
TrainType
TypeOfRemovableAccessories
TypeOfUsedHybridPowerunit
WheelSetTransformationMethod

3 Schema TAP_TSI_codelist.xsd

schema location: **TAP_TSI_codelist.xsd**
attributeFormDefault:
elementFormDefault: **unqualified**
targetNamespace: **http://www.era.europa.eu/schemes/TAPTSI/4.0**

Simple types
AnotherTrainAcceptableCodeList
AvailableServiceTypeCodeList
BorderPointTypeCodeList
CancellationReasonCodeList
CardMemoTypeCodeList
CertificatePresentationCodeList
ChangeOfStationCodeList
ChangeOfTrainOrDateCodeList
ClassTypeCodeList
CodeEntityTypeCodeList
CodeListStatusCodeList
CodeRangeTypeCodeList
CompanyCodeOfferCombinationCodeList
CompartmentCharacteristicsTypeCodeList
CompartmentPositionAllocationTypeCodeList
CompartmentPositionRequestTypeCodeList
CompartmentWithSpecialFeaturesAllocatedCodeList
CompartmentWithSpecialFeaturesCodeList
ConnectingReservationsTypeCodeList
CountryCodeUICType
CurrencyCodeTypeCodeList
CustomerServiceCodeTypeCodeList
DisabilityTypeCodeList
DistributionChannelTypeCodeList
ErrorCode_HomePrintingCodeList
FareCodeTypeCodeList
FareTableTypeCodeList
FieldFormattingTypeCodeList
FirstPersonAllPersonTypeCodeList
IndividualReservationTicketsRequestedCodeList
IRTTariffNameCodeList
JourneyCodeTypeCodeList
LoadingLowerDeckTypeCodeList
LocationBorderPointTypeCodeList
LocationCategoryCodeTypeCodeList
LocationOpeningStatusCodeList
LocationUtilizationTypeCodeList
MarkOfChangedPriceTypeCodeList
MeetingPointTypeCodeList
OTTFareTypeCodeList
PassengerIdentificationNumberID_TypeCodeList
PassengerWithVehicleCodeList
PersonOfferSwitchTypeCodeList
PictogramCodeTypeCodeList
PlaceCodeTypeBerthCodeList
PlaceCodeTypeCodeList
PlaceCodeTypeCouchetteCodeList
PriceCalculationCodeTypeCodeList

PRMAssistanceFacilitiesCodeList
PRMBookingTypeCodeList
PRMLocalFacilitiesCodeList
PRMOnBoardFacilitiesCodeList
PRMReplyCodeCodeList
PurchaseConditions1CodeList
PurchaseConditions2CodeList
PurchaseConditions3CodeList
ReasonForCancellationTypeCodeList
ReplyCodeTypeCodeList
RequestingOfficeTypeCodeList
ReservationFeeTypeCodeList
ReservationSystemTypeCodeList
RoundingFactorTypeCodeList
RoundingTypeCodeList
SeasonTicketTypeCodeList
ServiceCodeTypeCodeList
ServiceIdentifierCodeList
ServiceInformationCodeList
ServiceTypeCodeList
SingleOutwardJourneyTypeCodeList
SmokingNonSmokingTypeCodeList
SpecialOfferOrAllocationsTypeAllocatedCodeList
SpecialOfferOrAllocationsTypeCodeList
SpecialSeriesTypeCodeList
TariffCodeIRTTypeCodeList
TestTypeCodeList
TrailerCategoryTypeCodeList
type1131CodeList
type1153CodeList
type1225CodeList
type2005CodeList
type2029CodeList
type3035CodeList
type3039CodeList
type3055CodeList
type3131CodeList
type3153CodeList
type3225CodeList
type3227CodeList
type3455CodeList
type3475CodeList
type3477CodeList
type4025CodeList
type4049CodeList
type4405CodeList
type4451CodeList
type5261CodeList
type5263CodeList
type6411CodeList
type7009BrandNameCodeList
type7009ServiceModeCodeList
type7037CodeList
type7139CodeList
type7161CodeList
type8015CodeList
type9039CodeList
type9141CodeList
type9143CodeList
type9321CodeList
TypeOfCoachTypeAllocatedCodeList
TypeOfCoachTypeCodeList
TypeOfMessageCodeList
TypeOfPriceCodeList
TypeOfServiceCodeList
TypeOfSupplementTypeCodeList
TypeOfTextCodeList
UndertakingProvidingServiceTypeCodeList
VehicleCategoryTypeCodeList

element **ActualEndDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation Identifies the actual date and time of arrival of the Wagon or Unit on the final destination of the customer siding.

source	`<xs:element name="ActualEndDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the actual date and time of arrival of the Wagon or Unit on the final destination of the customer siding.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ActualETA**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **AlertMessage**
annotation	documentation Identifies the actual ETA date and time of arrival of the Wagon or Unit on the final destination of the customer siding.

source	`<xs:element name="ActualETA" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the actual ETA date and time of arrival of the Wagon or Unit on the final destination of the customer siding.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ActualETI**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation Identifies the actual valid estimated date and time of interchange of the Wagon or Unit at an interchange point

source	<xs:element name="ActualETI" type="xs:dateTime"> <xs:annotation> <xs:documentation>Identifies the actual valid estimated date and time of interchange of the Wagon or Unit at an interchange point</xs:documentation> </xs:annotation> </xs:element>

element **AdditionalInstruction**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Additional instructions regarding the wagon or shipment in free text
source	<xs:element name="AdditionalInstruction" type="FreeText"> <xs:annotation> <xs:documentation>Additional instructions regarding the wagon or shipment in free text</xs:documentation> </xs:annotation> </xs:element>

element **Address**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	element **AdministrativeContactInformation**
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Generic postal address in clear text
source	<xs:element name="Address" type="FreeText"> <xs:annotation> <xs:documentation>Generic postal address in clear text</xs:documentation> </xs:annotation> </xs:element>

element **AdministrativeContactInformation**

diagram	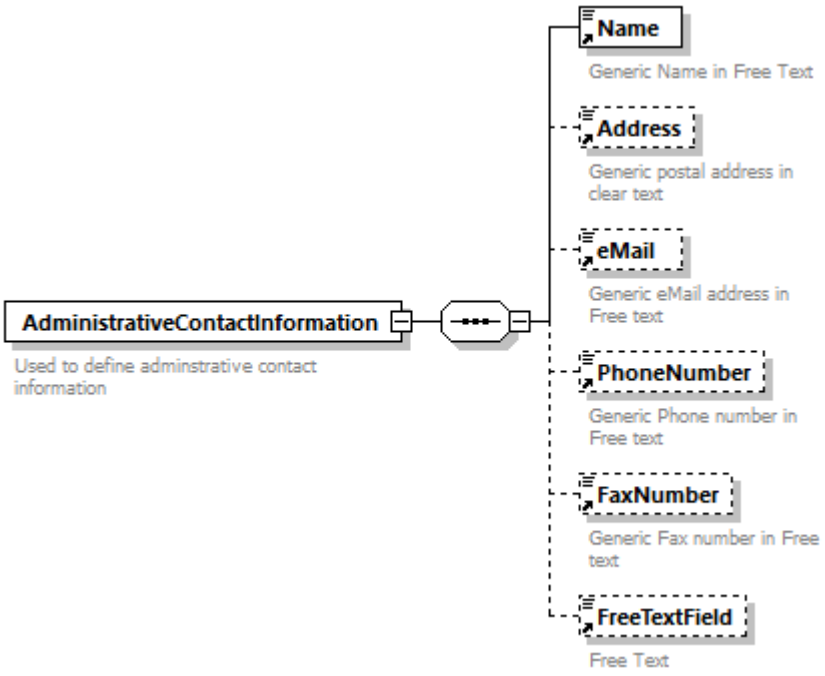
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	Name Address eMail PhoneNumber FaxNumber FreeTextField
used by	elements Customers ErrorMessage LoadingFacility PathCanceledMessage PathConfirmedMessage PathDetailsMessage PathDetailsRefusedMessage PathNotAvailableMessage PathRequestMessage
annotation	documentation Used to define adminstrative contact information

source	`<xs:element name="AdministrativeContactInformation">`
	`<xs:annotation>`
	`<xs:documentation>Used to define adminstrative contact information</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="Name"/>`
	`<xs:element ref="Address" minOccurs="0"/>`
	`<xs:element ref="eMail" minOccurs="0"/>`
	`<xs:element ref="PhoneNumber" minOccurs="0"/>`
	`<xs:element ref="FaxNumber" minOccurs="0"/>`
	`<xs:element ref="FreeTextField" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **AffectedLocation**

diagram	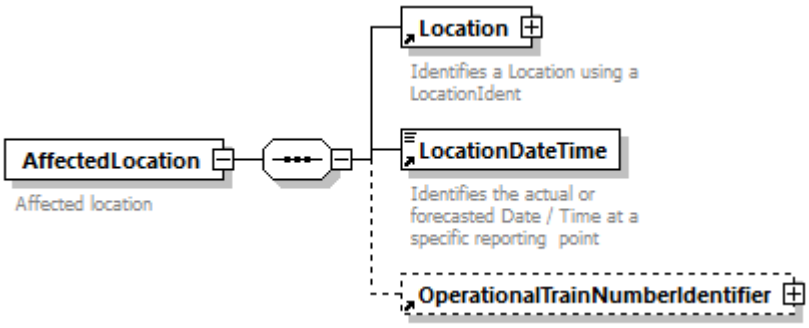
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	Location LocationDateTime OperationalTrainNumberIdentifier
used by	element ReceiptConfirmationMessage
annotation	documentation Affected location
source	<xs:element name="AffectedLocation"> <xs:annotation> <xs:documentation>Affected location </xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Location"/> <xs:element ref="LocationDateTime"/> <xs:element ref="OperationalTrainNumberIdentifier" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **AffectedSection**

diagram	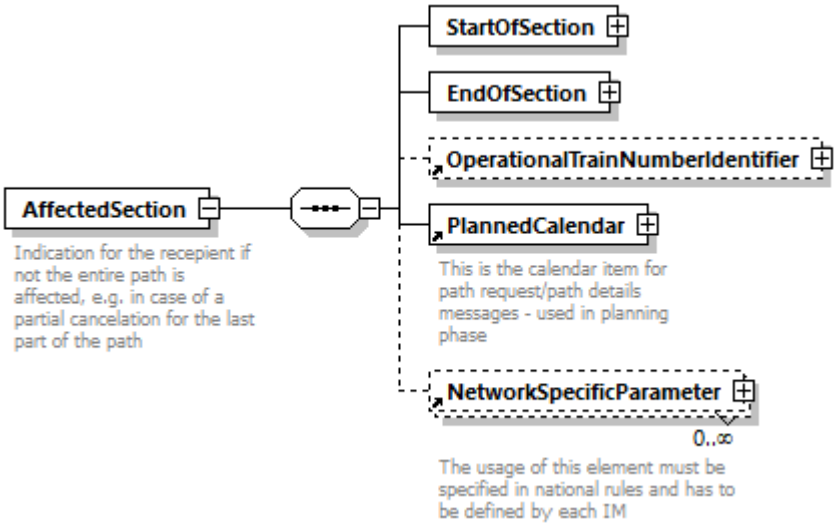
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	StartOfSection EndOfSection OperationalTrainNumberIdentifier PlannedCalendar NetworkSpecificParameter
used by	elements PathCanceledMessage PathConfirmedMessage PathDetailsRefusedMessage PathNotAvailableMessage

	ReceiptConfirmationMessage
annotation	documentation Indication for the recepient if not the entire path is affected, e.g. in case of a partial cancelation for the last part of the path
source	

```
<xs:element name="AffectedSection">
  <xs:annotation>
    <xs:documentation>Indication for the recepient if not the entire path is
affected, e.g. in case of a partial cancelation for the last part of the
path</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="StartOfSection">
        <xs:complexType>
          <xs:complexContent>
            <xs:extension base="LocationIdent">
              <xs:sequence minOccurs="0">
                <xs:element ref="BookedLocationDateTime" minOccurs="0"/>
                <xs:element ref="BookedLocationTime" minOccurs="0"/>
              </xs:sequence>
            </xs:extension>
          </xs:complexContent>
        </xs:complexType>
      </xs:element>
      <xs:element name="EndOfSection">
        <xs:complexType>
          <xs:complexContent>
            <xs:extension base="LocationIdent">
              <xs:sequence minOccurs="0">
                <xs:element ref="BookedLocationDateTime" minOccurs="0"/>
                <xs:element ref="BookedLocationTime" minOccurs="0"/>
              </xs:sequence>
            </xs:extension>
          </xs:complexContent>
        </xs:complexType>
      </xs:element>
      <xs:element ref="OperationalTrainNumberIdentifier" minOccurs="0"/>
      <xs:element ref="PlannedCalendar"/>
      <xs:element ref="NetworkSpecificParameter" minOccurs="0"
maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **AffectedSection/StartOfSection**

diagram	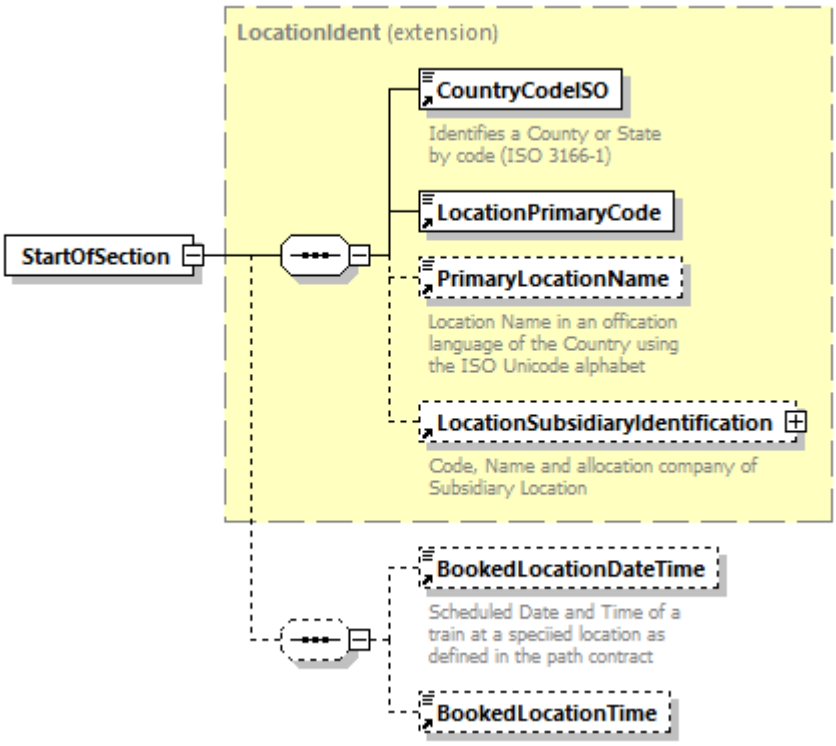
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification** **BookedLocationDateTime** **BookedLocationTime**

source	`<xs:element name="StartOfSection">`
	`<xs:complexType>`
	`<xs:complexContent>`
	`<xs:extension base="LocationIdent">`
	`<xs:sequence minOccurs="0">`
	`<xs:element ref="BookedLocationDateTime" minOccurs="0"/>`
	`<xs:element ref="BookedLocationTime" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:extension>`
	`</xs:complexContent>`
	`</xs:complexType>`
	`</xs:element>`

element **AffectedSection/EndOfSection**

diagram	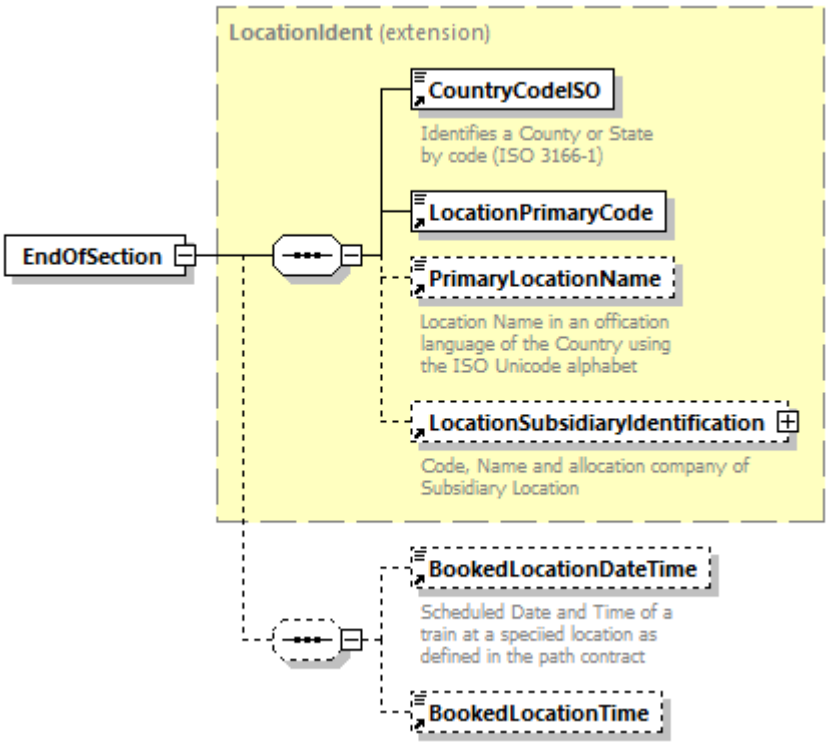
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification** **BookedLocationDateTime** **BookedLocationTime**

source	`<xs:element name="EndOfSection">`
	`<xs:complexType>`
	`<xs:complexContent>`
	`<xs:extension base="LocationIdent">`
	`<xs:sequence minOccurs="0">`
	`<xs:element ref="BookedLocationDateTime" minOccurs="0"/>`
	`<xs:element ref="BookedLocationTime" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:extension>`
	`</xs:complexContent>`
	`</xs:complexType>`
	`</xs:element>`

element **AgainstBooked**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**DeltaTime**
properties	content simple
used by	element **TrainDelay**

facets	Kind Value Annotation length 5
annotation	documentation Identifies the Delta delay time against the booked schedule in minutes
source	<xs:element name="AgainstBooked" type="DeltaTime"> <xs:annotation> <xs:documentation>Identifies the Delta delay time against the booked schedule in minutes</xs:documentation> </xs:annotation> </xs:element>

element **AgainstReferenced**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**DeltaTime**
properties	content simple
used by	element **TrainDelay**
facets	Kind Value Annotation length 5
annotation	documentation Delay compared to the referenced Date/Time
source	<xs:element name="AgainstReferenced" type="DeltaTime"> <xs:annotation> <xs:documentation>Delay compared to the referenced Date/Time</xs:documentation> </xs:annotation> </xs:element>

element **AgreedTimeOfDelivery**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements **ConsignmentOrderMessage/COMS/COM** **WIMO_Dataset/ConsignmentLevelData**
annotation	documentation The requested Date and Time for the delivery of a wagon/Shipment or Intermodal untis at customer sidings
source	<xs:element name="AgreedTimeOfDelivery" type="xs:dateTime"> <xs:annotation> <xs:documentation>The requested Date and Time for the delivery of a wagon/Shipment or Intermodal untis at customer sidings</xs:documentation> </xs:annotation> </xs:element>

element **AirBrake**

diagram	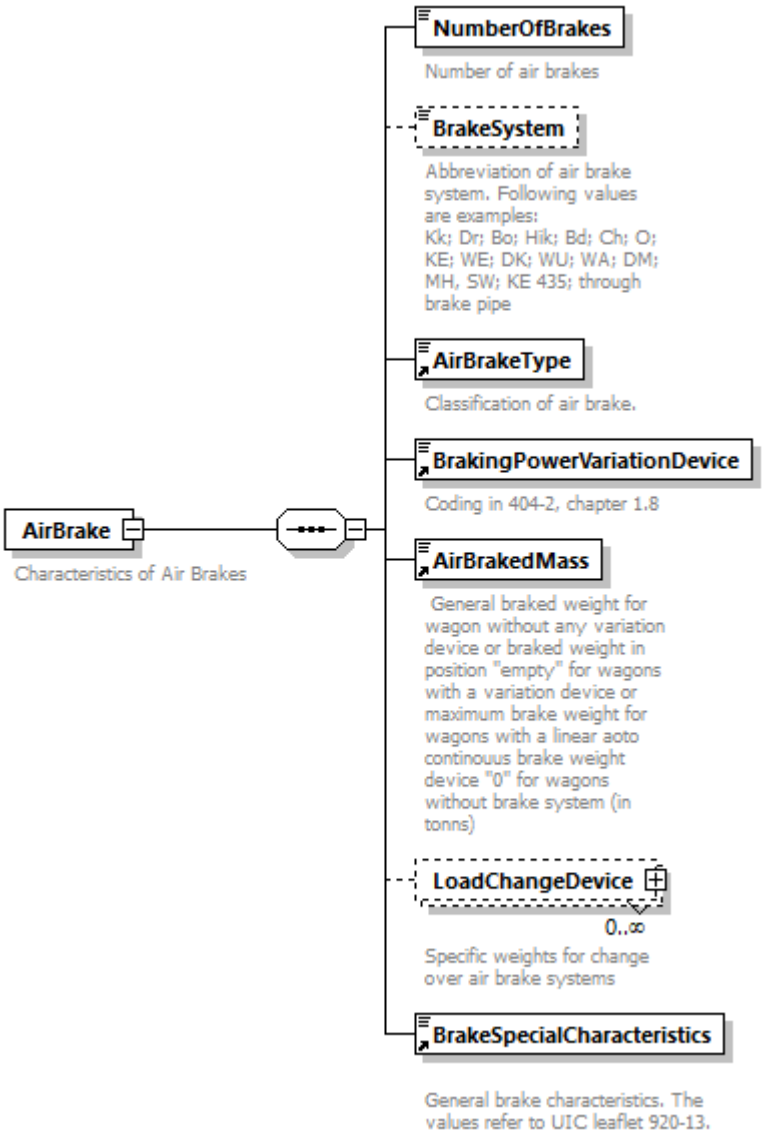
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	NumberOfBrakes BrakeSystem AirBrakeType BrakingPowerVariationDevice AirBrakedMass LoadChangeDevice BrakeSpecialCharacteristics
used by	element RollingStockDataset/DesignDataSet
annotation	documentation Characteristics of Air Brakes
source	<xs:element name="AirBrake"> <xs:annotation> <xs:documentation>Characteristics of Air Brakes</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="NumberOfBrakes" type="Numeric2-2"> <xs:annotation> <xs:documentation>Number of air brakes</xs:documentation> </xs:annotation> </xs:element>

```
      <xs:element name="BrakeSystem" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Abbreviation of air brake system. Following values are
examples:
Kk; Dr; Bo; Hik; Bd; Ch; O; KE; WE; DK; WU; WA; DM; MH, SW; KE 435; through brake
pipe</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="256"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="AirBrakeType"/>
      <xs:element ref="BrakingPowerVariationDevice"/>
      <xs:element ref="AirBrakedMass">
        <xs:annotation>
          <xs:documentation> General braked weight for wagon without any variation
device or braked weight in position "empty" for wagons with a variation device or
maximum brake weight for wagons with a linear aoto continouus brake weight device "0"
for wagons without brake system (in tonns)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="LoadChangeDevice" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>Specific weights for change over air brake
systems</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ChangeOverWeight" type="Numeric3-3">
              <xs:annotation>
                <xs:documentation>Change over weight of braked weight in tonns
variation device</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="AirBrakedMassLoaded" type="Numeric3-3">
              <xs:annotation>
                <xs:documentation>Braked weight in tonns loaded for change over
weight</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="BrakeSpecialCharacteristics"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **AirBrake/NumberOfBrakes**

diagram	NumberOfBrakes Number of air brakes
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric2-2**
properties	content simple
facets	Kind: minInclusive; Value: 01; Annotation:

	maxInclusive 99
annotation	documentation Number of air brakes

source	`<xs:element name="NumberOfBrakes" type="Numeric2-2">`
	`  <xs:annotation>`
	`  <xs:documentation>Number of air brakes</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **AirBrake/BrakeSystem**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation maxLength 256
annotation	documentation Abbreviation of air brake system. Following values are examples: Kk; Dr; Bo; Hik; Bd; Ch; O; KE; WE; DK; WU; WA; DM; MH, SW; KE 435; through brake pipe

source	`<xs:element name="BrakeSystem" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Abbreviation of air brake system. Following values are examples:`
	`Kk; Dr; Bo; Hik; Bd; Ch; O; KE; WE; DK; WU; WA; DM; MH, SW; KE 435; through brake pipe</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="256"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **AirBrake/LoadChangeDevice**

diagram	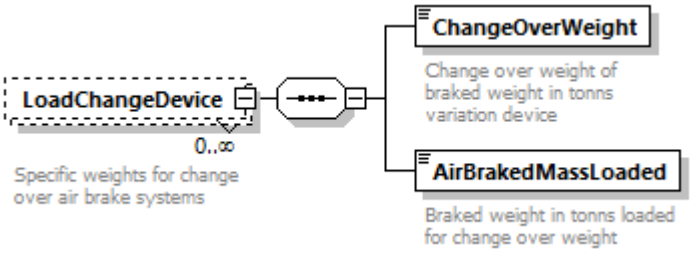
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc unbounded content complex

children	**ChangeOverWeight AirBrakedMassLoaded**
annotation	documentation Specific weights for change over air brake systems
source	<xs:element name="LoadChangeDevice" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Specific weights for change over air brake systems</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="ChangeOverWeight" type="Numeric3-3"> <xs:annotation> <xs:documentation>Change over weight of braked weight in tonns variation device</xs:documentation> </xs:annotation> </xs:element> <xs:element name="AirBrakedMassLoaded" type="Numeric3-3"> <xs:annotation> <xs:documentation>Braked weight in tonns loaded for change over weight</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **AirBrake/LoadChangeDevice/ChangeOverWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric3-3**
properties	content simple
facets	Kind Value Annotation minInclusive 001 maxInclusive 999
annotation	documentation Change over weight of braked weight in tonns variation device
source	<xs:element name="ChangeOverWeight" type="Numeric3-3"> <xs:annotation> <xs:documentation>Change over weight of braked weight in tonns variation device</xs:documentation> </xs:annotation> </xs:element>

element **AirBrake/LoadChangeDevice/AirBrakedMassLoaded**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric3-3**

properties	content simple
facets	Kind Value Annotation minInclusive 001 maxInclusive 999
annotation	documentation Braked weight in tonns loaded for change over weight

source	`<xs:element name="AirBrakedMassLoaded" type="Numeric3-3">`
	`  <xs:annotation>`
	`  <xs:documentation>Braked weight in tonns loaded for change over weight</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **AirBrakedMass**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **AirBrake**
facets	Kind Value Annotation minInclusive 0 maxInclusive 999
annotation	documentation General braked weight for wagon without a variation device; Braked weight empty for wagons with a variation device; maximum braked weight for wagons with linear auto continuous device; "0" for wagons without air brake (in tons).

source	`<xs:element name="AirBrakedMass">`
	`  <xs:annotation>`
	`  <xs:documentation>General braked weight for wagon without a variation device; Braked weight empty for wagons with a variation device; maximum braked weight for wagons with linear auto continuous device; "0" for wagons without air brake (in tons).</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="0"/>`
	`  <xs:maxInclusive value="999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **AlertMessage**

diagram	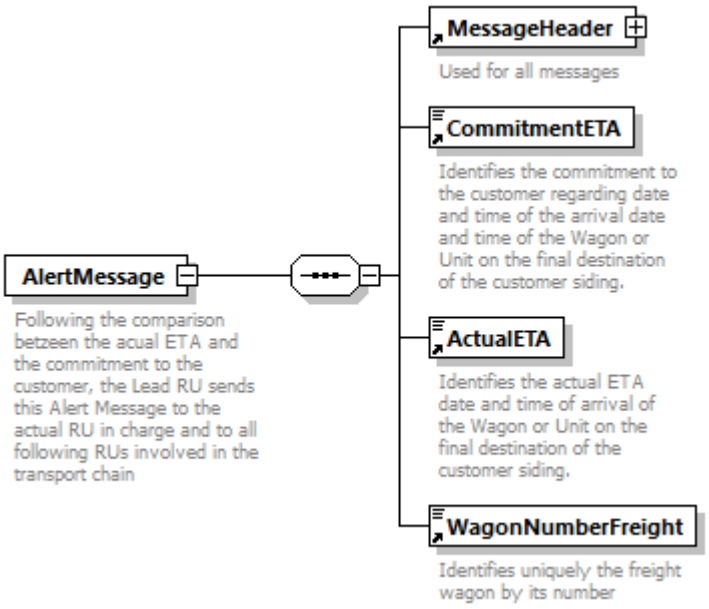
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MessageHeader** **CommitmentETA** **ActualETA** **WagonNumberFreight**
annotation	documentation Following the comparison betzeen the acual ETA and the commitment to the customer, the Lead RU sends this Alert Message to the actual RU in charge and to all following RUs involved in the transport chain

source	`<xs:element name="AlertMessage">`
	`<xs:annotation>`
	`<xs:documentation>Following the comparison betzeen the acual ETA and the commitment to the customer, the Lead RU sends this Alert Message to the actual RU in charge and to all following RUs involved in the transport chain</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="MessageHeader"/>`
	`<xs:element ref="CommitmentETA"/>`
	`<xs:element ref="ActualETA"/>`
	`<xs:element ref="WagonNumberFreight"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **AllocationCompany**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
used by	elements **LocationSubsidiaryIdentification** **LocationSubsidiaryInformation**
facets	Kind Value Annotation

	minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Name of company who is responsible for allocation and maintenance of codes

source	`<xs:element name="AllocationCompany" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Name of company who is responsible for allocation and maintenance of codes</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Altitude**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:integer**
properties	content simple
used by	element **GeographicCoordinates**
annotation	documentation Altitude (in m) at the beginning of the SP. Considering ETRS89 as reference. Starting at -1000m

source	`<xs:element name="Altitude" type="xs:integer">`
	`  <xs:annotation>`
	`  <xs:documentation>Altitude (in m) at the beginning of the SP. Considering ETRS89 as reference. Starting at -1000m</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ArrivalAtDestination**

diagram	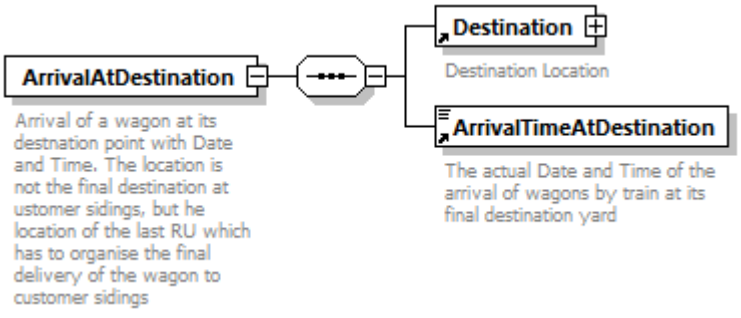
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Destination ArrivalTimeAtDestination**
annotation	documentation Arrival of a wagon at its destnation point with Date and Time. The location is not the final destination at ustomer sidings, but he location of the last RU which has to organise the final delivery of the wagon to customer sidings

source	`<xs:element name="ArrivalAtDestination">`
	`  <xs:annotation>`
	`  <xs:documentation>Arrival of a wagon at its destnation point with Date and Time.`

```
The location is  not the final destination at ustomer sidings, but he location of the
last RU which has to organise the final delivery of the wagon to customer
sidings</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="Destination"/>
      <xs:element ref="ArrivalTimeAtDestination"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ArrivalInterchangeReport**

diagram

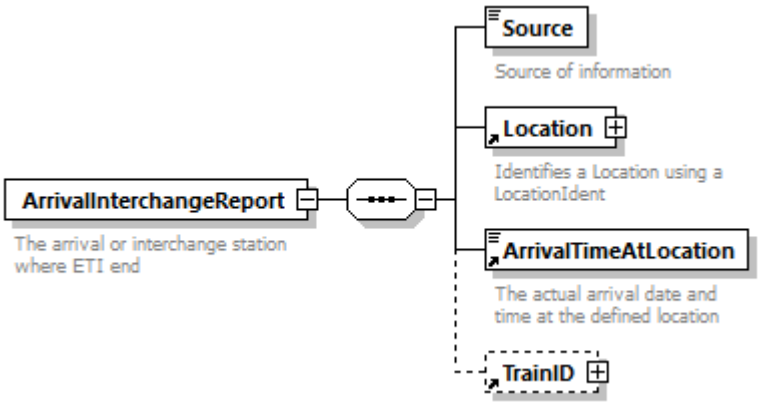

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties: content complex

children: **Source** **Location** **ArrivalTimeAtLocation** **TrainID**

used by: element **WagonETI_ETA_Message**

annotation: documentation
The arrival or interchange station where ETI end

source

```
<xs:element name="ArrivalInterchangeReport">
  <xs:annotation>
    <xs:documentation>The arrival or interchange station where ETI
end</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Source">
        <xs:annotation>
          <xs:documentation>Source of information</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:enumeration value="Experienced time of arrival"/>
            <xs:enumeration value="Real Time Train Situation"/>
            <xs:enumeration value="Estimated time of arrival"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="Location"/>
      <xs:element ref="ArrivalTimeAtLocation"/>
      <xs:element ref="TrainID" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ArrivalInterchangeReport/Source**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind / Value / Annotation enumeration Experienced time of arrival enumeration Real Time Train Situation enumeration Estimated time of arrival
annotation	documentation Source of information
source	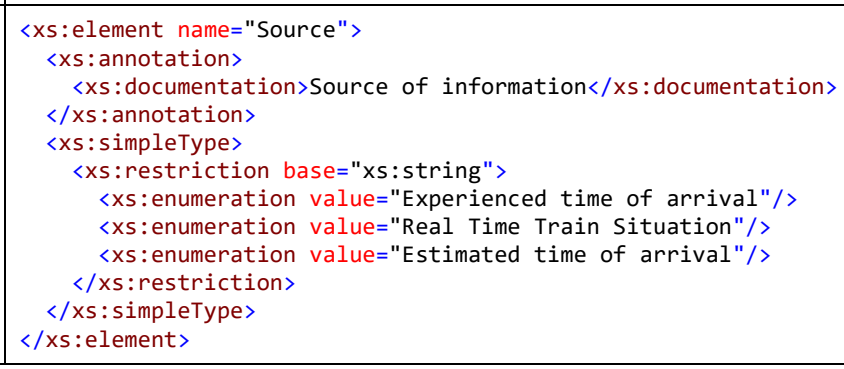

```
<xs:element name="Source">
  <xs:annotation>
    <xs:documentation>Source of information</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:enumeration value="Experienced time of arrival"/>
      <xs:enumeration value="Real Time Train Situation"/>
      <xs:enumeration value="Estimated time of arrival"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ArrivalTimeAtDestination**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **ArrivalAtDestination**
annotation	documentation The actual Date and Time of the arrival of wagons by train at its final destination yard
source	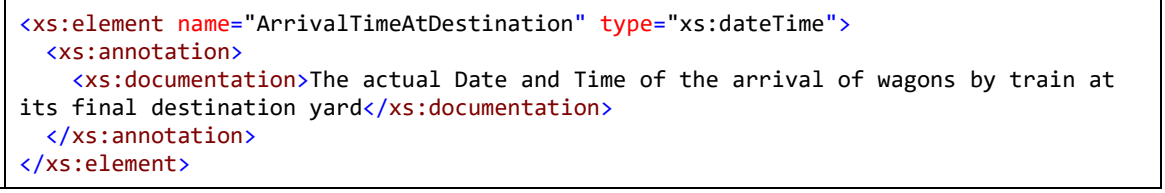

```
<xs:element name="ArrivalTimeAtDestination" type="xs:dateTime">
  <xs:annotation>
    <xs:documentation>The actual Date and Time of the arrival of wagons by train at
its final destination yard</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **ArrivalTimeAtLocation**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **ArrivalInterchangeReport**
annotation	documentation The actual arrival date and time at the defined location

source	`<xs:element name="ArrivalTimeAtLocation" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>The actual arrival date and time at the defined location</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ArrivalTimeAtLocationActual**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **YardArrival**
annotation	documentation The actual arrival date and time at the defined location

source	`<xs:element name="ArrivalTimeAtLocationActual" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>The actual arrival date and time at the defined location</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ArrivalTrackAtLocation**

diagram	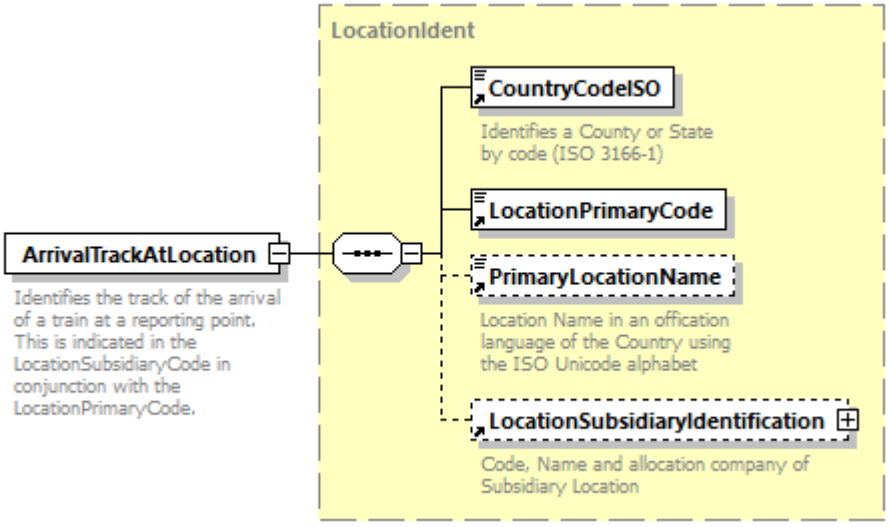
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
annotation	documentation Identifies the track of the arrival of a train at a reporting point. This is indicated in the LocationSubsidiaryCode in conjunction with the LocationPrimaryCode.

source	`<xs:element name="ArrivalTrackAtLocation" type="LocationIdent">`
	`<xs:annotation>`
	`<xs:documentation>Identifies the track of the arrival of a train at a reporting point. This is indicated in the LocationSubsidiaryCode in conjunction with the LocationPrimaryCode. </xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **AssociatedAttachedLocationIdent**

diagram	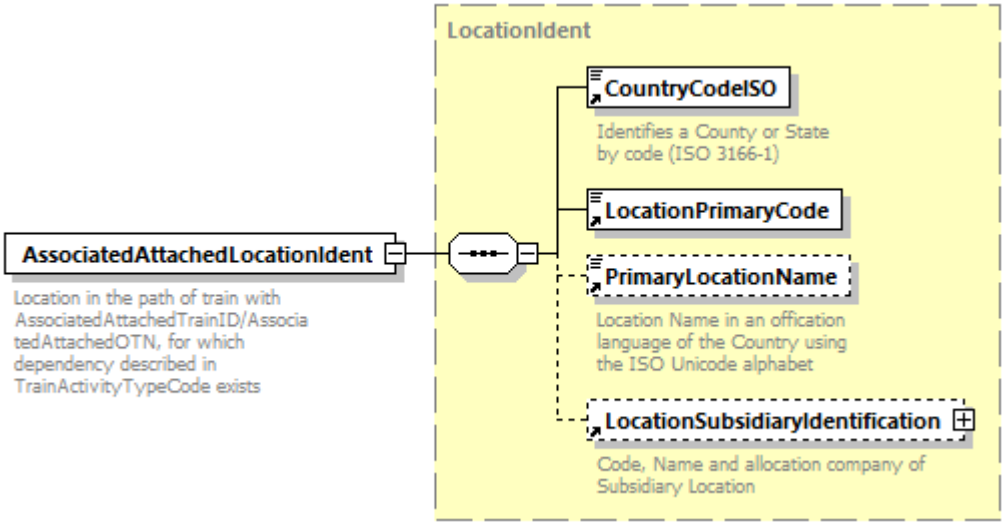
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
used by	complexType **TrainActivityType**
annotation	documentation Location in the path of train with AssociatedAttachedTrainID/AssociatedAttachedOTN, for which dependency described in TrainActivityTypeCode exists

source	`<xs:element name="AssociatedAttachedLocationIdent" type="LocationIdent">`
	`<xs:annotation>`
	`<xs:documentation>Location in the path of train with AssociatedAttachedTrainID/AssociatedAttachedOTN, for which dependency described in TrainActivityTypeCode exists </xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **AssociatedAttachedOTN**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**String1-8**
properties	content simple
used by	complexType **TrainActivityType**
facets	Kind Value Annotation minLength 1 maxLength 8
annotation	documentation Identifies the associated train for the activity for traffic management purposes by the Dispatcher, GSMR services, etc.

source	`<xs:element name="AssociatedAttachedOTN" type="String1-8">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the associated train for the activity for traffic management purposes by the Dispatcher, GSMR services, etc.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **AssociatedAttachedTimingAtLocation**

diagram	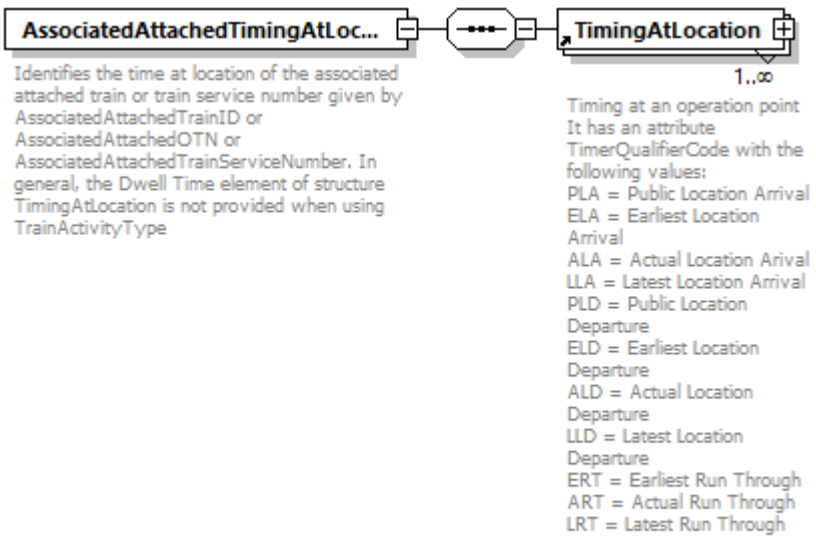
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**TimingAtLocation**
used by	complexType **TrainActivityType**
annotation	documentation Identifies the time at location of the associated attached train or train service number given by AssociatedAttachedTrainID or AssociatedAttachedOTN or AssociatedAttachedTrainServiceNumber. In general, the Dwell Time element of structure TimingAtLocation is not provided when using TrainActivityType
source	`<xs:element name="AssociatedAttachedTimingAtLocation">` `  <xs:annotation>`

```
    <xs:documentation>Identifies the time at location of the associated attached
train or train service number given by AssociatedAttachedTrainID or
AssociatedAttachedOTN or AssociatedAttachedTrainServiceNumber. In general, the Dwell
Time element of structure TimingAtLocation is not provided when using
TrainActivityType</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="TimingAtLocation" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **AssociatedAttachedTrainID**

diagram	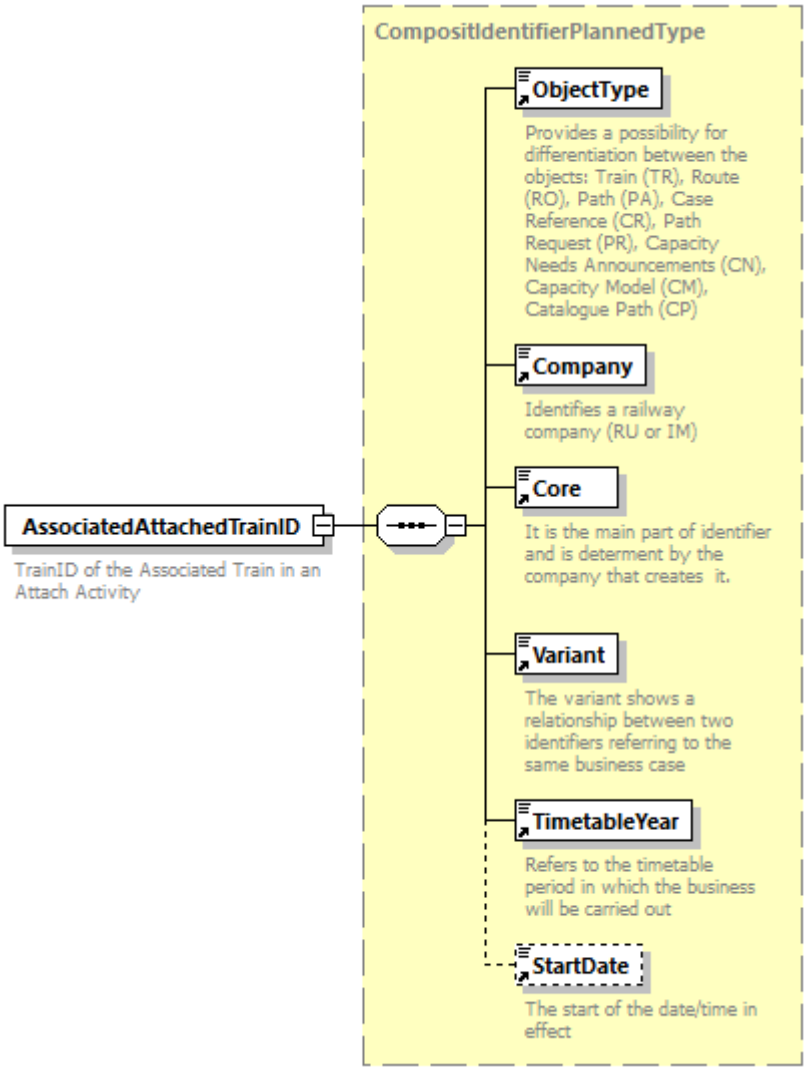
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompositIdentifierPlannedType**
properties	content complex
children	**ObjectType Company Core Variant TimetableYear StartDate**
used by	complexType **TrainActivityType**

annotation	documentation TrainID of the Associated Train in an Attach Activity
source	<xs:element name="AssociatedAttachedTrainID" type="CompositIdentifierPlannedType"> <xs:annotation> <xs:documentation>TrainID of the Associated Train in an Attach Activity</xs:documentation> </xs:annotation> </xs:element>

element **AssociatedAttachedTrainServiceNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**String1-8**
properties	content simple
used by	complexType **TrainActivityType**
facets	Kind Value Annotation minLength 1 maxLength 8
annotation	documentation Identifies the associated train service line number for the train activity connecting service
source	<xs:element name="AssociatedAttachedTrainServiceNumber" type="String1-8"> <xs:annotation> <xs:documentation>Identifies the associated train service line number for the train activity connecting service</xs:documentation> </xs:annotation> </xs:element>

element **BitmapDays**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	elements **PlannedCalendar** **ReferenceTrainIDSubCalendar** **RequestedCalendar**
facets	Kind Value Annotation minLength 1 maxLength 740 whiteSpace collapse pattern [0-1]{1,740}
annotation	documentation Structure BitmapDays must be provided if ValidityPeriod of associated calendar contains more than one day; it is optional otherwise.
source	<xs:element name="BitmapDays"> <xs:annotation> <xs:documentation>Structure BitmapDays must be provided if ValidityPeriod of associated calendar contains more than one day; it is optional

```
otherwise.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="740"/>
      <xs:whiteSpace value="collapse"/>
      <xs:pattern value="[0-1]{1,740}"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **BogiePitch**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation Bogie Wheelbase measured in mm
source	<xs:element name="BogiePitch"> <xs:annotation> <xs:documentation>Bogie Wheelbase measured in mm</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **BogieWagonsOnly**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple

used by	element **PlannedTrainTechnicalData**
annotation	documentation Indicates that the train consists of bogie wagons only or not. "Yes"/"true" means always all wagons of the train are bogie wagons. Then content of element is "no"/"false" or element isn't used means the train contains of different wagons (not homogeneous only with bogie wagons).
source	`<xs:element name="BogieWagonsOnly" type="xs:boolean">` `<xs:annotation>` `<xs:documentation>Indicates that the train consists of bogie wagons only or not. "Yes"/"true" means always all wagons of the train are bogie wagons. Then content of element is "no"/"false" or element isn't used means the train contains of different wagons (not homogeneous only with bogie wagons).</xs:documentation>` `</xs:annotation>` `</xs:element>`

element **BookedLocationDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements **ChangeofTrackMessage DelayEventReport AffectedSection/EndOfSection InterruptionPoint JourneySectionDestination JourneySectionOrigin LocationModified AffectedSection/StartOfSection TimingAtLocation/Timing TrainAtLocation TrainLocationReport**
annotation	documentation Scheduled Date and Time of a train at a speciied location as defined in the path contract

source	`<xs:element name="BookedLocationDateTime" type="xs:dateTime">`
	`<xs:annotation>`
	`<xs:documentation>Scheduled Date and Time of a train at a speciied location as defined in the path contract</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **BookedLocationTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:time**
properties	content simple
used by	elements **AffectedSection/EndOfSection AffectedSection/StartOfSection**
source	`<xs:element name="BookedLocationTime" type="xs:time"/>`

element **BrakeWeight**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
used by	elements **PlannedTrainTechnicalData TrainRunningTechData WagonOperationalData**
facets	Kind Value Annotation minInclusive 0 maxInclusive 99999
annotation	documentation Shows the Braked mass of the wagon according to the type of the braking system, in Tonnes

source	`<xs:element name="BrakeWeight">`
	`<xs:annotation>`
	`<xs:documentation>Shows the Braked mass of the wagon according to the type of the braking system, in Tonnes</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:int">`
	`<xs:minInclusive value="0"/>`
	`<xs:maxInclusive value="99999"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **BrakingRatio**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	elements **PlannedTrainTechnicalData TrainRunningTechData**
facets	Kind Value Annotation minInclusive 1 maxInclusive 999
annotation	documentation Minimum percentage of braking. Expressed as an integer value (no percent sign should be added).

source	`<xs:element name="BrakingRatio">`
	`<xs:annotation>`
	`<xs:documentation>Minimum percentage of braking. Expressed as an integer value (no percent sign should be added).</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:integer">`
	`<xs:maxInclusive value="999"/>`
	`<xs:minInclusive value="1"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **CarrierStatus**

diagram	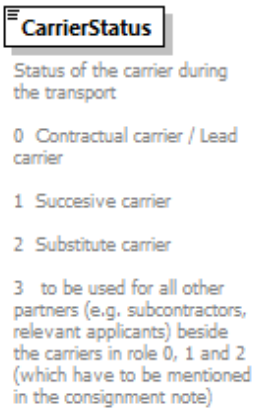
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	elements **WagonStatusMessages/WagonStatusMessage/CarriersInvolved/Carrier** **ConsignmentOrderMessage/COMS/COM/Carriers**
facets	Kind / Value / Annotation enumeration 0 — documentation: 0: Contractual carrier enumeration 1 — documentation: 1: Successive carrier enumeration 2 — documentation: 2: Substitute carrier enumeration 3 — documentation: 3: to be used for all other partners (e.g. subcontractors, relevant applicants) beside the carriers in role 0, 1 and 2 (which have to be mentioned in the consignment note)
annotation	documentation Status of the carrier during the transport 0 Contractual carrier / Lead carrier 1 Succesive carrier 2 Substitute carrier 3 to be used for all other partners (e.g. subcontractors, relevant applicants) beside the carriers in role 0, 1 and 2 (which have to be mentioned in the consignment note)

source

```
<xs:element name="CarrierStatus">
  <xs:annotation>
    <xs:documentation>Status of the carrier during the transport
                      0  Contractual carrier / Lead carrier
                      1  Succesive carrier
                      2  Substitute carrier
                      3   to be used for all other partners (e.g. subcontractors,
relevant applicants) beside the carriers in role 0, 1 and 2 (which have to be
mentioned in the consignment note)</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="0">
        <xs:annotation>
          <xs:documentation>0: Contractual carrier</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>1: Successive carrier</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
```

```
          <xs:documentation>2: Substitute carrier</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>3:  to be used for all other partners (e.g.
subcontractors, relevant applicants) beside the carriers in role 0, 1 and 2 (which
have to be mentioned in the consignment note)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ChangeofTrackMessage**

diagram	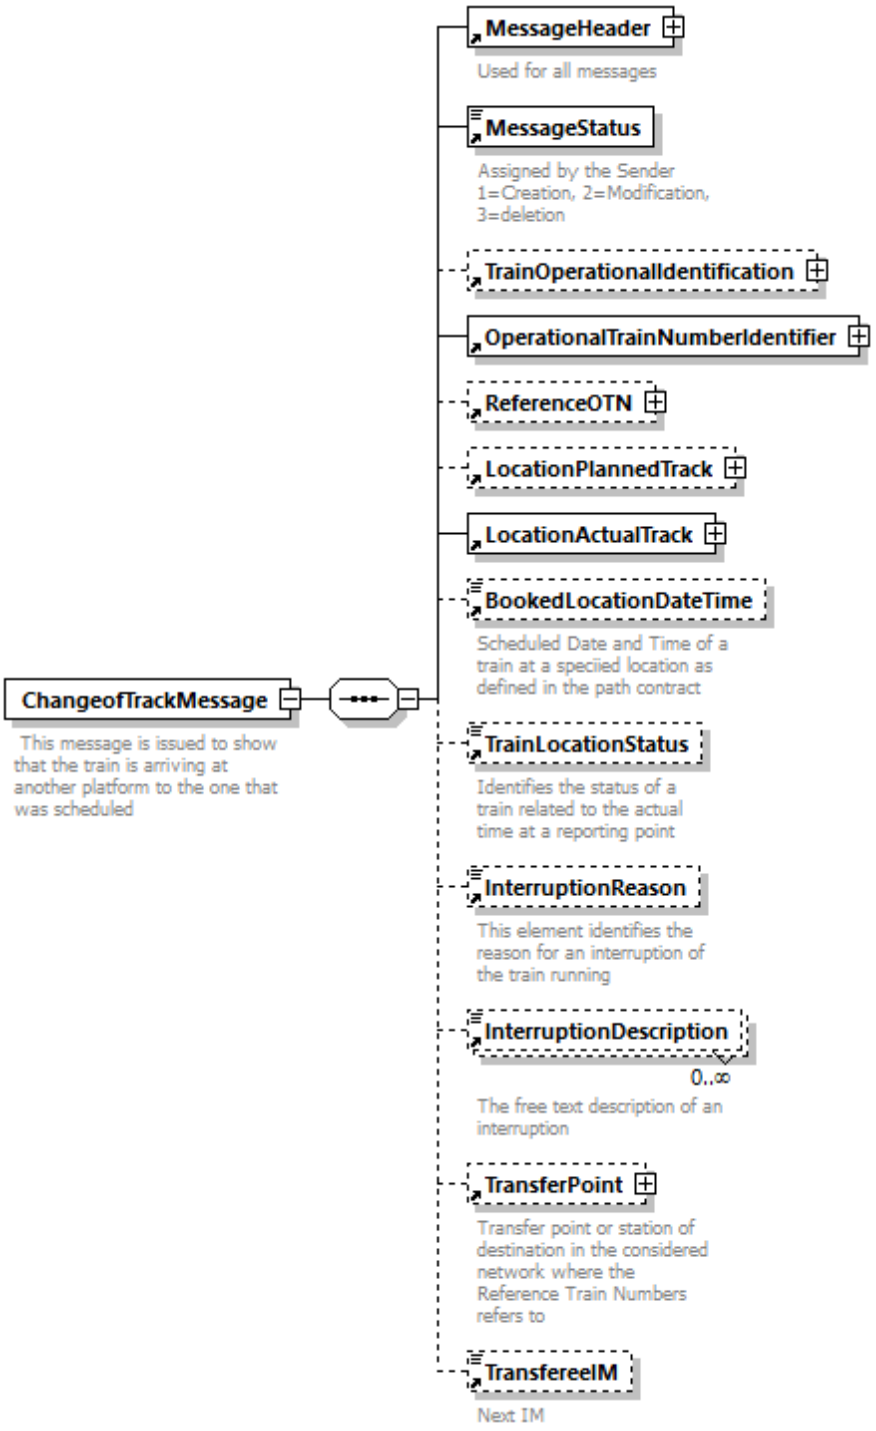
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	MessageHeader MessageStatus TrainOperationalIdentification OperationalTrainNumberIdentifier ReferenceOTN LocationPlannedTrack LocationActualTrack BookedLocationDateTime TrainLocationStatus InterruptionReason InterruptionDescription TransferPoint TransfereeIM
annotation	documentation This message is issued to show that the train is arriving at another platform to the one that was scheduled
source	`<xs:element name="ChangeofTrackMessage">` `<xs:annotation>`

```
    <xs:documentation> This message is issued to show that the train is arriving at
another platform to the one that was scheduled</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus">
        <xs:annotation>
          <xs:documentation>Assigned by the Sender 1=Creation, 2=Modification,
3=deletion </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="TrainOperationalIdentification" minOccurs="0"/>
      <xs:element ref="OperationalTrainNumberIdentifier"/>
      <xs:element ref="ReferenceOTN" minOccurs="0"/>
      <xs:element ref="LocationPlannedTrack" minOccurs="0"/>
      <xs:element ref="LocationActualTrack"/>
      <xs:element ref="BookedLocationDateTime" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Scheduled Date and Time of a train at a speciied location
as defined in the path contract</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="TrainLocationStatus" minOccurs="0"/>
      <xs:element ref="InterruptionReason" minOccurs="0"/>
      <xs:element ref="InterruptionDescription" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element ref="TransferPoint" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Transfer point or station of destination in the
considered network where the Reference Train Numbers refers to </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="TransfereeIM" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **CityTown**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Name of the City or Town in Clear Text

source	`<xs:element name="CityTown">`
	`  <xs:annotation>`
	`  <xs:documentation>Name of the City or Town in Clear Text</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="35"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`

```
  </xs:simpleType>
</xs:element>
```

element **ClosingTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **VesselIndication**
annotation	documentation The closing Date and Time of the port for the delivery of the shipment by rail to a vessel.

source	`<xs:element name="ClosingTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>The closing Date and Time of the port for the delivery of the shipment by rail to a vessel.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Coasting**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **PlannedTrainTechnicalData**
annotation	documentation IM indicates to the RU whether the driver can rely on coasting. This is of both economic and ecological interest, as in many parts of the journey the trains may have enough inertia to be able to match the calculated time of the next location relying on coasting only.
source	`<xs:element name="Coasting" type="xs:boolean">` `  <xs:annotation>` ` <xs:documentation>IM indicates to the RU whether the driver can rely on coasting. This is of both economic and ecological interest, as in many parts of the journey the trains may have enough inertia to be able to match the calculated time of the next location relying on coasting only.</xs:documentation>` ` </xs:annotation>` `</xs:element>`

element **Comments**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	elements **LocationPrimaryInformation** **LocationSubsidiaryInformation**
facets	Kind Value Annotation minLength 1 maxLength 255
source	`<xs:element name="Comments" type="FreeText"/>`

element **CommitmentETA**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **AlertMessage**
annotation	documentation Identifies the commitment to the customer regarding date and time of the arrival date and time of the Wagon or Unit on the final destination of the customer siding.

source	`<xs:element name="CommitmentETA" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the commitment to the customer regarding date and time of the arrival date and time of the Wagon or Unit on the final destination of the customer siding.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Company**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
used by	complexTypes **CompositIdentifierOperationalType** **CompositIdentifierPlannedType**
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}

annotation	documentation Identifies a railway company (RU or IM)
source	<xs:element name="Company" type="CompanyCode"> <xs:annotation> <xs:documentation>Identifies a railway company (RU or IM)</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**ConsignmentIdent**
properties	content complex
used by	element **WIMO_Dataset/ConsignmentLevelData**
annotation	documentation Reference number assigned to a consignment by a lead RU
source	<xs:element name="ConsignmentNumber" type="ConsignmentIdent"> <xs:annotation> <xs:documentation>Reference number assigned to a consignment by a lead RU</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage**

diagram	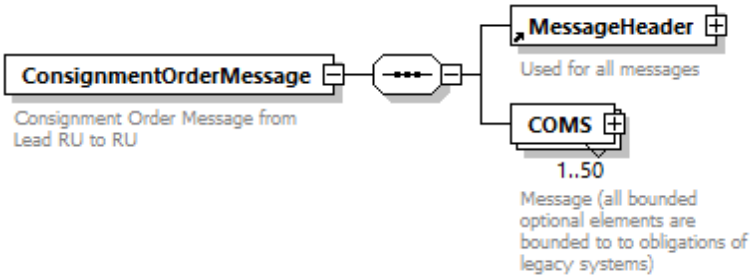
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MessageHeader COMS**
annotation	documentation Consignment Order Message from Lead RU to RU
source	<xs:element name="ConsignmentOrderMessage"> <xs:annotation> <xs:documentation>Consignment Order Message from Lead RU to RU</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="MessageHeader"/> <xs:element name="COMS" maxOccurs="50"> <xs:annotation> <xs:documentation>Message (all bounded optional elements are bounded to to obligations of legacy systems)</xs:documentation> </xs:annotation>

```
        <xs:complexType>
          <xs:sequence>
            <xs:element name="COM_Header">
              <xs:annotation>
                <xs:documentation>Additional Header containing consignment related
key data such as dossiernumber, version number and a change log for
modifications</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="SendingRU" type="CompanyCode">
                    <xs:annotation>
                      <xs:documentation>Use here the 4 digit code according to UIC
leaflet 920-1 of the railway, which created/amended the message (like
2185).</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="ReceivingRU" type="CompanyCode">
                    <xs:annotation>
                      <xs:documentation>Use here the 4 digit code according to UIC
leaflet 920-1 of the railway, which is the receipient of the message (like
2185).</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="MessageReferenceNumber" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Message Reference NumberThis identification
is being generated during creation of the message. This allows the tracing of the
message.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="18">
                          <xs:annotation>
                            <xs:documentation>Use here a counter, any
system.</xs:documentation>
                          </xs:annotation>
                        </xs:maxLength>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="ShipmentType">
                    <xs:annotation>
                      <xs:documentation>Classification of the wagon order as
'CUV','CIM' or "SMGS".</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:token">
                        <xs:enumeration value="CIM">
                          <xs:annotation>
                            <xs:documentation>Regular transport, according in basic
to the CIM consignment note.</xs:documentation>
                          </xs:annotation>
                        </xs:enumeration>
                        <xs:enumeration value="CUV">
                          <xs:annotation>
                            <xs:documentation>Transport of empty wagons. If loaded
and empty wagons are withing the same shipment, then the ShipmentType has to be set
to CIM. For the empty wagons the loading status has to be set in the
WagonDetails.</xs:documentation>
                          </xs:annotation>
                        </xs:enumeration>
                        <xs:enumeration value="SMGS"/>
```

```
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element ref="ConsignmentOrderType"/>
                <xs:element name="COM_PreparationDatetime">
                  <xs:annotation>
                    <xs:documentation>Date and Time of preparation of the
COM</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:dateTime"/>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="DossierNumber" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Internal identification number of  the Wo.
This information is important to be able to identify the COM even after
modifications. Format: RRRRYYYYMMDDNNNNNNN Where RRRR = railway code, YYYY = year, MM
= month, DD = day and NNNNNNN = running number.</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:length value="19"/>
                      <xs:pattern value="\d{4}20\d{2}[0-1][0-9][0-3]\d{8}"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="VersionNumber">
                  <xs:annotation>
                    <xs:documentation>Message version number. This number hast to
be incremented after each modification. On creation this value has to be set to
0.</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:int">
                      <xs:minInclusive value="0"/>
                      <xs:maxInclusive value="100"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="PrintForm" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Which form to use for printout. CIM-CN or
CIM-CN for combined traffic. This information assures, that the same paper document
will be used for the 'duplicate of the consignment note' and the final print out of
the ECN for the consignee.</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:token">
                      <xs:enumeration value="WLT">
                        <xs:annotation>
                          <xs:documentation>Wagon load transport form to be used
for print-out.</xs:documentation>
                        </xs:annotation>
                      </xs:enumeration>
                      <xs:enumeration value="CT">
                        <xs:annotation>
                          <xs:documentation>Combined traffic form to be used for
print-out.</xs:documentation>
                        </xs:annotation>
                      </xs:enumeration>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
```

```
                    <xs:element name="Intermodal" minOccurs="0">
                      <xs:simpleType>
                        <xs:restriction base="xs:byte">
                          <xs:pattern value="0|1"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="ChangeLog" minOccurs="0" maxOccurs="100">
                      <xs:annotation>
                        <xs:documentation>Log of changes made by the LeadRU /
contractual carrier during the transport.</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:sequence>
                          <xs:element name="DateTime">
                            <xs:annotation>
                              <xs:documentation>DateTime, when the changes were
applied.</xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:dateTime"/>
                            </xs:simpleType>
                          </xs:element>
                          <xs:element name="NumberOfModifiedVersion">
                            <xs:annotation>
                              <xs:documentation>Version number of the modified message
(as also written into COMHeader/COMVersionNumber).</xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:int"/>
                            </xs:simpleType>
                          </xs:element>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element name="COM">
                <xs:annotation>
                  <xs:documentation>Consignment order message</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="AcceptancePoint">
                      <xs:annotation>
                        <xs:documentation>Description of location and time for the take
over of the consignment</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:sequence>
                          <xs:element ref="Station"/>
                          <xs:element ref="RP_Code" minOccurs="0"/>
                          <xs:element ref="ProductionStation" minOccurs="0"/>
                          <xs:element name="AcceptanceDate" minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>Date and time (month, day and hour) at
which the goods were accepted. </xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:dateTime"/>
                            </xs:simpleType>
                          </xs:element>
                          <xs:element name="ConsignmentNumber">
```

```
                        <xs:annotation>
                          <xs:documentation>Running number and check digit of the
consignment between Lead RU and customer. Format: NNNNNC The number consists of NNNNN
= running number C = check digit, </xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:length value="6"/>
                            <xs:pattern value="\d*[1-9]\d*"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="ForwardingTrainNumber" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Train number at shipping
</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="6"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="CarrierCode" type="CompanyCode">
                        <xs:annotation>
                          <xs:documentation>Code of the shipping carrier mentioned
in the consignment number.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="DeliveryPoint">
                  <xs:annotation>
                    <xs:documentation>Description of location and time for the hand
over of the consignment</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element ref="Station"/>
                      <xs:element ref="RP_Code" minOccurs="0"/>
                      <xs:element ref="ProductionStation" minOccurs="0"/>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element ref="Customers" minOccurs="2" maxOccurs="4">
                  <xs:annotation>
                    <xs:documentation>Information about the consignor, consignee
and freight payers. At least information about consignor and consignee has to be
given</xs:documentation>
                  </xs:annotation>
                </xs:element>
                <xs:element name="ConsignorDeclarations" minOccurs="0"
maxOccurs="10">
                  <xs:annotation>
                    <xs:documentation>Consignors declarartions, this element
contains either declarations of the original consignor or declarations of the LeadRU
as consignor</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element ref="ConsignorDeclarationCode"/>
                      <xs:element ref="DeclarationText" minOccurs="0"/>
```

```
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="GeneralInformation" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Genearal information about the complete
consignment</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="ConsignorReference" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Consignor's reference concerning the
complete consignment</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="35"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="InformationConsignee" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Information from the consignor to the
consignee relating to the consignment. This information is not to commit the
carrier.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="350"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="WagonGroupInfo" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Consignor information regarding the
whole consignment. Comparable with the element WagonInfo, but for all
wagons.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:maxLength value="2000"/>
                            <xs:minLength value="1"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="AttachedDocuments" minOccurs="0" maxOccurs="10">
                  <xs:annotation>
                    <xs:documentation>Paper documents accompanying the
transport</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="DocumentType">
                        <xs:annotation>
                          <xs:documentation>Type code of attached document. The
UN/DIFACT 1001 list of codes is to be used to code accompanying
documents.</xs:documentation>
                        </xs:annotation>
```

```
                              <xs:simpleType>
                                <xs:restriction base="xs:int">
                                  <xs:minInclusive value="1"/>
                                  <xs:maxInclusive value="999"/>
                                </xs:restriction>
                              </xs:simpleType>
                            </xs:element>
                            <xs:element name="DocumentInformation" minOccurs="0">
                              <xs:annotation>
                                <xs:documentation>Additional information regarding the
attached document may be entered here.</xs:documentation>
                              </xs:annotation>
                              <xs:simpleType>
                                <xs:restriction base="xs:string">
                                  <xs:minLength value="1"/>
                                  <xs:maxLength value="35"/>
                                </xs:restriction>
                              </xs:simpleType>
                            </xs:element>
                            <xs:element ref="Quantity" minOccurs="0">
                              <xs:annotation>
                                <xs:documentation>Amount of the documents of the
specified type.</xs:documentation>
                              </xs:annotation>
                            </xs:element>
                            <xs:element name="DocumentTypeDescription" minOccurs="0">
                              <xs:annotation>
                                <xs:documentation>Description of document type, when it
is not in the UN/EDIFACT 1001 list included.</xs:documentation>
                              </xs:annotation>
                              <xs:simpleType>
                                <xs:restriction base="xs:string">
                                  <xs:minLength value="1"/>
                                  <xs:maxLength value="35"/>
                                </xs:restriction>
                              </xs:simpleType>
                            </xs:element>
                            <xs:element name="Filename" minOccurs="0">
                              <xs:annotation>
                                <xs:documentation>Filename of embedded pdf in legacy
system</xs:documentation>
                              </xs:annotation>
                              <xs:simpleType>
                                <xs:restriction base="xs:string">
                                  <xs:maxLength value="35"/>
                                  <xs:minLength value="1"/>
                                </xs:restriction>
                              </xs:simpleType>
                            </xs:element>
                            <xs:element ref="StatusOfDocument" minOccurs="0"/>
                          </xs:sequence>
                        </xs:complexType>
                      </xs:element>
                      <xs:element name="CommercialSpecifications" minOccurs="0"
maxOccurs="5">
                        <xs:annotation>
                          <xs:documentation>Commercial Specification</xs:documentation>
                        </xs:annotation>
                        <xs:complexType>
                          <xs:sequence>
                            <xs:element ref="CommercialSpecificationCode"/>
                            <xs:element name="SpecificationText" minOccurs="0">
                              <xs:annotation>
                                <xs:documentation>Additional Text for codes with free
```

```
text</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="1000"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="CarrierCode" type="CompanyCode"
minOccurs="0" maxOccurs="10">
                        <xs:annotation>
                          <xs:documentation>additional carrier code belonging to
the given contract number</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="ContractNumber" minOccurs="0"
maxOccurs="10">
                        <xs:annotation>
                          <xs:documentation>additional contract number according to
the given carrier code.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1">
                              <xs:annotation>
                                <xs:documentation>has to be sent as n6 (with
leading zeros if necessary)</xs:documentation>
                              </xs:annotation>
                            </xs:minLength>
                            <xs:maxLength value="6"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="PrepaymentInstructions">
                  <xs:annotation>
                    <xs:documentation>Prepayment</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="PrepaymentCustomer" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Prepaidcode (given by the
client)</xs:documentation>
                        </xs:annotation>
                        <xs:complexType>
                          <xs:choice>
                            <xs:element ref="PrepaidCodeCustomer"/>
                            <xs:element ref="IncotermCode"/>
                          </xs:choice>
                        </xs:complexType>
                      </xs:element>
                      <xs:element ref="PrepaidcodeCarrier"/>
                      <xs:element name="PaidUpTo" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Charges Paid Up To ... This information
is being sent by the consignor in agreement with the contractual carrier so only one
structure is needed for field 20 and 49. The carrier is only allowed to apply
changes, when ordered by the consignor.</xs:documentation>
                        </xs:annotation>
                        <xs:complexType>
```

```
                              <xs:complexContent>
                                <xs:extension base="LocationIdent"/>
                              </xs:complexContent>
                            </xs:complexType>
                          </xs:element>
                          <xs:element name="AdditionalCharges" minOccurs="0"
maxOccurs="5">
                            <xs:annotation>
                              <xs:documentation>Additional Charges</xs:documentation>
                            </xs:annotation>
                            <xs:complexType>
                              <xs:sequence>
                                <xs:element name="Code">
                                  <xs:annotation>
                                    <xs:documentation>Additional charges code according
CIT GLV-CIM appendix 3</xs:documentation>
                                  </xs:annotation>
                                  <xs:simpleType>
                                    <xs:restriction base="xs:string">
                                      <xs:length value="2"/>
                                      <xs:pattern value="\d*[1-9]\d*"/>
                                    </xs:restriction>
                                  </xs:simpleType>
                                </xs:element>
                                <xs:element name="Description" minOccurs="0">
                                  <xs:annotation>
                                    <xs:documentation>Additional charges
description</xs:documentation>
                                  </xs:annotation>
                                  <xs:simpleType>
                                    <xs:restriction base="xs:string">
                                      <xs:minLength value="1"/>
                                      <xs:maxLength value="35"/>
                                    </xs:restriction>
                                  </xs:simpleType>
                                </xs:element>
                              </xs:sequence>
                            </xs:complexType>
                          </xs:element>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                    <xs:element name="Tariff">
                      <xs:annotation>
                        <xs:documentation>Number of customer agreement or
tariff</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:choice>
                          <xs:element name="ContractNumber">
                            <xs:annotation>
                              <xs:documentation>Number of customer
agreement.</xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:string">
                                <xs:minLength value="1">
                                  <xs:annotation>
                                    <xs:documentation>has to be sent as n6 (with
leading zeros if necessary)</xs:documentation>
                                  </xs:annotation>
                                </xs:minLength>
                                <xs:maxLength value="6"/>
                              </xs:restriction>
```

```
                            </xs:simpleType>
                          </xs:element>
                          <xs:element name="TariffNumber">
                            <xs:annotation>
                              <xs:documentation>Number of the
tariff.</xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:string">
                                <xs:minLength value="1">
                                  <xs:annotation>
                                    <xs:documentation>has to be sent as n6 (with
leading zeros if necessary, but without check digit)</xs:documentation>
                                  </xs:annotation>
                                </xs:minLength>
                                <xs:maxLength value="6"/>
                                <xs:pattern value="\d*[1-9]\d*"/>
                              </xs:restriction>
                            </xs:simpleType>
                          </xs:element>
                        </xs:choice>
                      </xs:complexType>
                    </xs:element>
                    <xs:element name="SectionalInvoicing" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Sectional Invoicing</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:sequence>
                          <xs:element name="Section" maxOccurs="30">
                            <xs:annotation>
                              <xs:documentation>Sectional Invoicing</xs:documentation>
                            </xs:annotation>
                            <xs:complexType>
                              <xs:sequence>
                                <xs:element name="InvoicingCarrierCode"
type="CompanyCode">
                                  <xs:annotation>
                                    <xs:documentation>Sectional invoicing
by</xs:documentation>
                                  </xs:annotation>
                                </xs:element>
                                <xs:element name="InvoicedSection">
                                  <xs:annotation>
                                    <xs:documentation>Information about the section to
be invoiced.</xs:documentation>
                                  </xs:annotation>
                                  <xs:complexType>
                                    <xs:choice>
                                      <xs:element name="CountryCode"
type="CountryIdentISO">
                                        <xs:annotation>
                                          <xs:documentation>Invoiced section specified
by country</xs:documentation>
                                        </xs:annotation>
                                      </xs:element>
                                      <xs:element name="SectionCarrierCode"
type="CompanyCode">
                                        <xs:annotation>
                                          <xs:documentation>Invoiced section specified
by carrier</xs:documentation>
                                        </xs:annotation>
                                      </xs:element>
                                    </xs:choice>
```

```
                                </xs:complexType>
                              </xs:element>
                            </xs:sequence>
                          </xs:complexType>
                        </xs:element>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                  <xs:element name="DeclarationOfValue" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Details of the value of the goods and the
currency code when the value exceeds the limit given in CIM Article 30 section
2.</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="Amount" type="Money_Type">
                          <xs:annotation>
                            <xs:documentation>Amount</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element name="CurrencyCode" type="CurrencyCode_Type">
                          <xs:annotation>
                            <xs:documentation>Currency abbreviation (ISO-4217
alphanumeric)</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                  <xs:element name="InterestInDelivery" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Details of the amount and currency code of a
special interest in delivery.</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="Amount" type="Money_Type">
                          <xs:annotation>
                            <xs:documentation>Amount</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element name="CurrencyCode" type="CurrencyCode_Type">
                          <xs:annotation>
                            <xs:documentation>Currency abbreviation (ISO-4217
alphanumeric)</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                  <xs:element name="CashOnDelivery" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Details of the amount to be collected on
delivery and the currency code.</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="Amount" type="Money_Type">
                          <xs:annotation>
                            <xs:documentation>Amount</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element name="CurrencyCode" type="CurrencyCode_Type">
```

```
                        <xs:annotation>
                          <xs:documentation>Currency abbreviation (ISO-4217
alphanumeric)</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="RouteSection" minOccurs="0" maxOccurs="30">
                  <xs:annotation>
                    <xs:documentation>Route sequence Sequential information about
the complete routing of the consignment, the LeadRu  decides wether to provide this
information or not</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="SequenceID" type="xs:int">
                        <xs:annotation>
                          <xs:documentation>Position of the route section in
transport chain. Used to determine the exact way of the transport for customs
purposes.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:sequence>
                        <xs:element ref="RouteCode"/>
                        <xs:element name="RouteText" minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Description of the specific route
section</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:string">
                              <xs:minLength value="1"/>
                              <xs:maxLength value="80"/>
                            </xs:restriction>
                          </xs:simpleType>
                        </xs:element>
                      </xs:sequence>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element ref="SpecialTreatments" minOccurs="0" maxOccurs="30"/>
                <xs:element name="CustomsProcedures" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Customs procedures</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element ref="RU_Partner" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Code of the RU entrusted of customs
procedures. </xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element ref="Location"/>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="CustomsData" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Customs Data</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
```

```
                        <xs:element name="SimplifiedTransportProcedure"
minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Simplified transport procedure is used
(STP).</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:boolean"/>
                          </xs:simpleType>
                        </xs:element>
                        <xs:element name="PrincipalRU" type="CompanyCode"
minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Code for the principal
RU</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element name="CustomsSurveillance">
                          <xs:annotation>
                            <xs:documentation>Good under customs
surveillance</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:boolean"/>
                          </xs:simpleType>
                        </xs:element>
                        <xs:element name="CustomsEndorsements" minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Reserved for endorsements by customs or
a consignor/consignee authorised by customs. Data element in accordance with
Regulation (EC) 1875/2006).</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:string">
                              <xs:minLength value="1"/>
                              <xs:maxLength value="1000"/>
                            </xs:restriction>
                          </xs:simpleType>
                        </xs:element>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                  <xs:element name="RU_Declarations" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Carriers declaration</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="RU_Declaration" minOccurs="0"
maxOccurs="30">
                          <xs:annotation>
                            <xs:documentation>Details of the carriers
declaration.</xs:documentation>
                          </xs:annotation>
                          <xs:complexType>
                            <xs:sequence>
                              <xs:element name="DeclaringRU" type="CompanyCode">
                                <xs:annotation>
                                  <xs:documentation>Code of carrier, who added the
declaration.</xs:documentation>
                                </xs:annotation>
                              </xs:element>
                              <xs:element ref="RU_DeclarationCode"/>
                              <xs:element ref="DeclarationText" minOccurs="0"/>
```

```
                              </xs:sequence>
                            </xs:complexType>
                          </xs:element>
                          <xs:element name="DifferentAcceptance" minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>Details of the changes of the
acceptance point given by the consignor.</xs:documentation>
                            </xs:annotation>
                            <xs:complexType>
                              <xs:sequence>
                                <xs:element name="DifferentAcceptancePoint"
type="LocationIdent" minOccurs="0">
                                  <xs:annotation>
                                    <xs:documentation>Variance of acceptance point
given in structure AcceptancePoint.</xs:documentation>
                                  </xs:annotation>
                                </xs:element>
                                <xs:element name="DifferentAcceptanceDate"
minOccurs="0">
                                  <xs:annotation>
                                    <xs:documentation>Variance of acceptance date given
structure AcceptancePoint.</xs:documentation>
                                  </xs:annotation>
                                  <xs:simpleType>
                                    <xs:restriction base="xs:dateTime"/>
                                  </xs:simpleType>
                                </xs:element>
                              </xs:sequence>
                            </xs:complexType>
                          </xs:element>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                    <xs:element name="Carriers" maxOccurs="30">
                      <xs:complexType>
                        <xs:sequence>
                          <xs:element ref="CarrierStatus"/>
                          <xs:element name="CarrierCode" type="CompanyCode">
                            <xs:annotation>
                              <xs:documentation>Railway Undertaking (Railway
Code)</xs:documentation>
                            </xs:annotation>
                          </xs:element>
                          <xs:element name="ResponsibleCarrierCode" type="CompanyCode"
minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>Railway Undertaking (Railway Code) of
the carrier in charge.</xs:documentation>
                            </xs:annotation>
                          </xs:element>
                          <xs:element name="CarrierName" minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>Name of Carrier</xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:string">
                                <xs:minLength value="1"/>
                                <xs:maxLength value="35"/>
                              </xs:restriction>
                            </xs:simpleType>
                          </xs:element>
                          <xs:element name="StreetNumber" minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>Streetnumber of
```

```
carrier.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="5"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="Street" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Name of street of the
carrier</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="35"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="ZIPCode" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Postal Code</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="9"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="City" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>City/Town</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="35"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="CountryCode" type="CountryIdentISO"
minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Country Code (ISO
Code)</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="SectionFrom" type="LocationIdent">
                        <xs:annotation>
                          <xs:documentation>Start of section to be performed by the
carrier. This can be a station OR a border crossing point.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="SectionTo" type="LocationIdent">
                        <xs:annotation>
                          <xs:documentation>End of section to be performed by the
carrier. This can be a station OR a border crossing point.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="SubContractNumber_SplitContract"
minOccurs="0">
```

```
                        <xs:annotation>
                          <xs:documentation>Number of customer agreement between
the responsible and the operating carrier</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1">
                              <xs:annotation>
                                <xs:documentation>has to be sent as n6 (with
leading zeros if necessary)</xs:documentation>
                              </xs:annotation>
                            </xs:minLength>
                            <xs:maxLength value="6"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                    </xs:sequence>
                    <xs:attribute name="sequenceID" type="xs:int">
                      <xs:annotation>
                        <xs:documentation>Position of carrier during transport.
</xs:documentation>
                      </xs:annotation>
                    </xs:attribute>
                  </xs:complexType>
                </xs:element>
                <xs:element name="LeadCarrier">
                  <xs:annotation>
                    <xs:documentation>LeadCarrier/ Contractual
carrier</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="CarrierCode" type="CompanyCode">
                        <xs:annotation>
                          <xs:documentation>Contractual carrier, railway
undertaking (Railway Code).</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="CarrierName" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Name of contractual
carrier</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="35"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="StreetNumber" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Streetnumber of
carrier.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="5"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="Street" minOccurs="0">
                        <xs:annotation>
```

```
                        <xs:documentation>Name of street of the
carrier</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="35"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="ZIPCode" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Postal Code</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="9"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="City" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>City/Town</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="35"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="CountryCode" type="CountryIdentISO"
minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Country Code (ISO
Code)</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element name="Signature" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Signature of the contractual carrier.
When missing, the shipment number (CIM: 62) shall be used for signature
purposes.</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="35"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element name="MadeOut">
                <xs:annotation>
                  <xs:documentation>Made out</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="Place">
                      <xs:annotation>
                        <xs:documentation>Place on which the consignment note was
```

```
made out</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:maxLength value="35"/>
                            <xs:minLength value="1"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="Date" type="xs:date">
                        <xs:annotation>
                          <xs:documentation>Date at which the consignment note was
made out.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="ChargesNote" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Charges note</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="ChargesNoteAvailable" type="xs:boolean"/>
                      <xs:element name="DateOfReturn" type="xs:date" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Date, when the destination carrier sent
the charges note back to the contractual carrier.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="TransitPeriodExtensions" minOccurs="0"
maxOccurs="30">
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element ref="CodeOfCause"/>
                      <xs:element name="Description" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Description for CodeOfCause no.
9.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="180"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="Place">
                        <xs:annotation>
                          <xs:documentation>Place of the
extension.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="180"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="Beginning">
```

```
                        <xs:annotation>
                          <xs:documentation>Beginning of the
extension.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:dateTime"/>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="Ending">
                        <xs:annotation>
                          <xs:documentation>End of extension.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:dateTime"/>
                        </xs:simpleType>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="ChargingSections" maxOccurs="15">
                  <xs:annotation>
                    <xs:documentation>Charging section</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="Start" type="LocationIdent">
                        <xs:annotation>
                          <xs:documentation>Start of the charging
section</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="End" type="LocationIdent">
                        <xs:annotation>
                          <xs:documentation>End of the charging
section</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="CommercialRouteCode" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Route code (RIP) when the customer
agreement or the tariff applied provide for it. </xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:length value="3"/>
                            <xs:pattern value="\d*[1-9]\d*"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="CurrencyCode" type="CurrencyCode_Type">
                        <xs:annotation>
                          <xs:documentation>Code for the currency of the amounts
entered in the charging section.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="Tariff" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Freight Charges Section
Tariff</xs:documentation>
                        </xs:annotation>
                        <xs:complexType>
                          <xs:sequence>
                            <xs:element name="NHMCode" type="NHMCodeType">
                              <xs:annotation>
```

```
                                <xs:documentation>NHM code determining the charges
applicable.</xs:documentation>
                              </xs:annotation>
                            </xs:element>
                            <xs:element name="TariffNumber">
                              <xs:annotation>
                                <xs:documentation>Customer agreement or tariff
applied</xs:documentation>
                              </xs:annotation>
                              <xs:simpleType>
                                <xs:restriction base="xs:string">
                                  <xs:minLength value="1"/>
                                  <xs:maxLength value="6"/>
                                </xs:restriction>
                              </xs:simpleType>
                            </xs:element>
                            <xs:element name="ChargedMass" minOccurs="0">
                              <xs:annotation>
                                <xs:documentation>Charged mass [weight in kg]. As
appropriate, area in m² or the volume of the wagon or goods in m³ if used as the
basis for charging.</xs:documentation>
                              </xs:annotation>
                              <xs:complexType>
                                <xs:sequence>
                                  <xs:element name="value">
                                    <xs:simpleType>
                                      <xs:restriction base="xs:decimal">
                                        <xs:minInclusive value="1"/>
                                        <xs:totalDigits value="8"/>
                                        <xs:fractionDigits value="1"/>
                                      </xs:restriction>
                                    </xs:simpleType>
                                  </xs:element>
                                  <xs:element name="measure" minOccurs="0">
                                    <xs:simpleType>
                                      <xs:restriction base="xs:token">
                                        <xs:enumeration value="kg"/>
                                        <xs:enumeration value="m2"/>
                                        <xs:enumeration value="m3"/>
                                      </xs:restriction>
                                    </xs:simpleType>
                                  </xs:element>
                                </xs:sequence>
                              </xs:complexType>
                            </xs:element>
                            <xs:element name="ExchangeRate" minOccurs="0">
                              <xs:annotation>
                                <xs:documentation>Exchange rate for amounts to be
paid by the consignor or consignee which are not expressed in the invoicing
currency.</xs:documentation>
                              </xs:annotation>
                              <xs:simpleType>
                                <xs:restriction base="xs:decimal">
                                  <xs:totalDigits value="18"/>
                                  <xs:fractionDigits value="3"/>
                                </xs:restriction>
                              </xs:simpleType>
                            </xs:element>
                            <xs:element name="Distance" minOccurs="0">
                              <xs:annotation>
                                <xs:documentation>Tariff distance, expressed in km
or zones, between the stations or points corresponding to the beginning and end of
the charging section.</xs:documentation>
                              </xs:annotation>
```

```
                                <xs:complexType>
                                  <xs:choice>
                                    <xs:element name="KM">
                                      <xs:annotation>
                                        <xs:documentation>Tariff distance, expressed
in km, between the stations or points corresponding to the beginning and end of the
charging section.</xs:documentation>
                                      </xs:annotation>
                                      <xs:simpleType>
                                        <xs:restriction base="xs:int">
                                          <xs:minInclusive value="1"/>
                                          <xs:maxInclusive value="99999"/>
                                        </xs:restriction>
                                      </xs:simpleType>
                                    </xs:element>
                                    <xs:element name="Zones">
                                      <xs:annotation>
                                        <xs:documentation>Tariff distance, expressed
in zones, between the stations or points corresponding to the beginning and end of
the charging section.</xs:documentation>
                                      </xs:annotation>
                                      <xs:simpleType>
                                        <xs:restriction base="xs:int">
                                          <xs:minInclusive value="1"/>
                                          <xs:maxInclusive value="99"/>
                                        </xs:restriction>
                                      </xs:simpleType>
                                    </xs:element>
                                  </xs:choice>
                                </xs:complexType>
                              </xs:element>
                              <xs:element name="Fee" minOccurs="0">
                                <xs:annotation>
                                  <xs:documentation>Supplements, fees,
deductions</xs:documentation>
                                </xs:annotation>
                                <xs:simpleType>
                                  <xs:restriction base="xs:int">
                                    <xs:totalDigits value="4"/>
                                    <xs:minInclusive value="1"/>
                                  </xs:restriction>
                                </xs:simpleType>
                              </xs:element>
                              <xs:element name="FreightCharges" minOccurs="0">
                                <xs:annotation>
                                  <xs:documentation>Freight Charges (paid and
due)</xs:documentation>
                                </xs:annotation>
                                <xs:complexType>
                                  <xs:choice>
                                    <xs:element name="Prepaid" type="Money_Type">
                                      <xs:annotation>
                                        <xs:documentation>Carriage charges to be paid
by the consignor in the tariff currency.</xs:documentation>
                                      </xs:annotation>
                                    </xs:element>
                                    <xs:element name="Transferred" type="Money_Type">
                                      <xs:annotation>
                                        <xs:documentation>Carriage charges to be paid
by the consignee in the tariff currency.</xs:documentation>
                                      </xs:annotation>
                                    </xs:element>
                                  </xs:choice>
                                </xs:complexType>
```

```
                                </xs:element>
                              </xs:sequence>
                            </xs:complexType>
                          </xs:element>
                          <xs:element name="AdditionalCharges" minOccurs="0"
maxOccurs="10">
                            <xs:annotation>
                              <xs:documentation/>
                              <xs:documentation>Sum of Prepaid</xs:documentation>
                              <xs:documentation>Sum of Transferred</xs:documentation>
                            </xs:annotation>
                            <xs:complexType>
                              <xs:sequence>
                                <xs:element name="Code">
                                  <xs:annotation>
                                    <xs:documentation>Additional charges
code</xs:documentation>
                                  </xs:annotation>
                                  <xs:simpleType>
                                    <xs:restriction base="xs:string">
                                      <xs:minLength value="1"/>
                                      <xs:maxLength value="2"/>
                                    </xs:restriction>
                                  </xs:simpleType>
                                </xs:element>
                                <xs:choice>
                                  <xs:element name="Prepaid" type="Money_Type">
                                    <xs:annotation>
                                      <xs:documentation>Prepaid</xs:documentation>
                                    </xs:annotation>
                                  </xs:element>
                                  <xs:element name="Transferred" type="Money_Type">
                                    <xs:annotation>
                                      <xs:documentation>Transferred</xs:documentation>
                                    </xs:annotation>
                                  </xs:element>
                                </xs:choice>
                              </xs:sequence>
                            </xs:complexType>
                          </xs:element>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                    <xs:element ref="Wagons" minOccurs="0" maxOccurs="99">
                      <xs:annotation>
                        <xs:documentation>Contains list of transported Goods, Wagons
and ITU etc.</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element name="WagonPreviousNumberFreight" minOccurs="0"
maxOccurs="20">
                      <xs:annotation>
                        <xs:documentation>Identifies the previous freight wagon if a
shipment or Intermodal unit has changed the wagon during its
journey</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="WagonIdent">
                          <xs:length value="12"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element ref="AgreedTimeOfDelivery" minOccurs="0">
                      <xs:annotation>
```

```
                        <xs:documentation>The requested Date and Time for the delivery
of a wagon/Shipment or Intermodal units at customer sidings</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
```

element **ConsignmentOrderMessage/COMS**

diagram	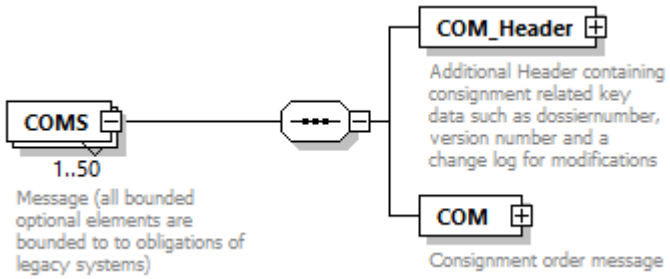
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 1 maxOcc 50 content complex
children	**COM_Header** **COM**
annotation	documentation Message (all bounded optional elements are bounded to to obligations of legacy systems)

source

```
<xs:element name="COMS" maxOccurs="50">
  <xs:annotation>
    <xs:documentation>Message (all bounded optional elements are bounded to to
obligations of legacy systems)</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="COM_Header">
        <xs:annotation>
          <xs:documentation>Additional Header containing consignment related key data
such as dossiernumber, version number and a change log for
modifications</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="SendingRU" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Use here the 4 digit code according to UIC leaflet
920-1 of the railway, which created/amended the message (like
2185).</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="ReceivingRU" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Use here the 4 digit code according to UIC leaflet
920-1 of the railway, which is the receipient of the message (like
2185).</xs:documentation>
              </xs:annotation>
```

```
            </xs:element>
            <xs:element name="MessageReferenceNumber" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Message Reference NumberThis identification is
being generated during creation of the message. This allows the tracing of the
message.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="18">
                    <xs:annotation>
                      <xs:documentation>Use here a counter, any
system.</xs:documentation>
                    </xs:annotation>
                  </xs:maxLength>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="ShipmentType">
              <xs:annotation>
                <xs:documentation>Classification of the wagon order as 'CUV','CIM' or
"SMGS".</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:token">
                  <xs:enumeration value="CIM">
                    <xs:annotation>
                      <xs:documentation>Regular transport, according in basic to the
CIM consignment note.</xs:documentation>
                    </xs:annotation>
                  </xs:enumeration>
                  <xs:enumeration value="CUV">
                    <xs:annotation>
                      <xs:documentation>Transport of empty wagons. If loaded and
empty wagons are withing the same shipment, then the ShipmentType has to be set to
CIM. For the empty wagons the loading status has to be set in the
WagonDetails.</xs:documentation>
                    </xs:annotation>
                  </xs:enumeration>
                  <xs:enumeration value="SMGS"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="ConsignmentOrderType"/>
            <xs:element name="COM_PreparationDatetime">
              <xs:annotation>
                <xs:documentation>Date and Time of preparation of the
COM</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:dateTime"/>
              </xs:simpleType>
            </xs:element>
            <xs:element name="DossierNumber" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Internal identification number of  the Wo. This
information is important to be able to identify the COM even after modifications.
Format: RRRRYYYYMMDDNNNNNNN Where RRRR = railway code, YYYY = year, MM = month, DD =
day and NNNNNNN = running number.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:length value="19"/>
```

```
                    <xs:pattern value="\d{4}20\d{2}[0-1][0-9][0-3]\d{8}"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="VersionNumber">
                <xs:annotation>
                  <xs:documentation>Message version number. This number hast to be
incremented after each modification. On creation this value has to be set to
0.</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:int">
                    <xs:minInclusive value="0"/>
                    <xs:maxInclusive value="100"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="PrintForm" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Which form to use for printout. CIM-CN or CIM-CN
for combined traffic. This information assures, that the same paper document will be
used for the 'duplicate of the consignment note' and the final print out of the ECN
for the consignee.</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:token">
                    <xs:enumeration value="WLT">
                      <xs:annotation>
                        <xs:documentation>Wagon load transport form to be used for
print-out.</xs:documentation>
                      </xs:annotation>
                    </xs:enumeration>
                    <xs:enumeration value="CT">
                      <xs:annotation>
                        <xs:documentation>Combined traffic form to be used for print-
out.</xs:documentation>
                      </xs:annotation>
                    </xs:enumeration>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="Intermodal" minOccurs="0">
                <xs:simpleType>
                  <xs:restriction base="xs:byte">
                    <xs:pattern value="0|1"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="ChangeLog" minOccurs="0" maxOccurs="100">
                <xs:annotation>
                  <xs:documentation>Log of changes made by the LeadRU / contractual
carrier during the transport.</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="DateTime">
                      <xs:annotation>
                        <xs:documentation>DateTime, when the changes were
applied.</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:dateTime"/>
                      </xs:simpleType>
                    </xs:element>
```

```
                    <xs:element name="NumberOfModifiedVersion">
                      <xs:annotation>
                        <xs:documentation>Version number of the modified message (as
also written into COMHeader/COMVersionNumber).</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:int"/>
                      </xs:simpleType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element name="COM">
          <xs:annotation>
            <xs:documentation>Consignment order message</xs:documentation>
          </xs:annotation>
          <xs:complexType>
            <xs:sequence>
              <xs:element name="AcceptancePoint">
                <xs:annotation>
                  <xs:documentation>Description of location and time for the take over
of the consignment</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element ref="Station"/>
                    <xs:element ref="RP_Code" minOccurs="0"/>
                    <xs:element ref="ProductionStation" minOccurs="0"/>
                    <xs:element name="AcceptanceDate" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Date and time (month, day and hour) at which
the goods were accepted. </xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:dateTime"/>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="ConsignmentNumber">
                      <xs:annotation>
                        <xs:documentation>Running number and check digit of the
consignment between Lead RU and customer. Format: NNNNNC The number consists of NNNNN
= running number C = check digit, </xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:length value="6"/>
                          <xs:pattern value="\d*[1-9]\d*"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="ForwardingTrainNumber" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Train number at shipping </xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="6"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
```

```
                    <xs:element name="CarrierCode" type="CompanyCode">
                      <xs:annotation>
                        <xs:documentation>Code of the shipping carrier mentioned in the
consignment number.</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element name="DeliveryPoint">
                <xs:annotation>
                  <xs:documentation>Description of location and time for the hand over
of the consignment</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element ref="Station"/>
                    <xs:element ref="RP_Code" minOccurs="0"/>
                    <xs:element ref="ProductionStation" minOccurs="0"/>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element ref="Customers" minOccurs="2" maxOccurs="4">
                <xs:annotation>
                  <xs:documentation>Information about the consignor, consignee and
freight payers. At least information about consignor and consignee has to be
given</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="ConsignorDeclarations" minOccurs="0" maxOccurs="10">
                <xs:annotation>
                  <xs:documentation>Consignors declarartions, this element contains
either declarations of the original consignor or declarations of the LeadRU as
consignor</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element ref="ConsignorDeclarationCode"/>
                    <xs:element ref="DeclarationText" minOccurs="0"/>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element name="GeneralInformation" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Genearal information about the complete
consignment</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="ConsignorReference" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Consignor's reference concerning the complete
consignment</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="35"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="InformationConsignee" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Information from the consignor to the
```

```
consignee relating to the consignment. This information is not to commit the
carrier.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="350"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="WagonGroupInfo" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Consignor information regarding the whole
consignment. Comparable with the element WagonInfo, but for all
wagons.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:maxLength value="2000"/>
                        <xs:minLength value="1"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="AttachedDocuments" minOccurs="0" maxOccurs="10">
              <xs:annotation>
                <xs:documentation>Paper documents accompanying the
transport</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="DocumentType">
                    <xs:annotation>
                      <xs:documentation>Type code of attached document. The UN/DIFACT
1001 list of codes is to be used to code accompanying documents.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:int">
                        <xs:minInclusive value="1"/>
                        <xs:maxInclusive value="999"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="DocumentInformation" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Additional information regarding the attached
document may be entered here.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="35"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element ref="Quantity" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Amount of the documents of the specified
type.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="DocumentTypeDescription" minOccurs="0">
```

```
                    <xs:annotation>
                      <xs:documentation>Description of document type, when it is not
in the UN/EDIFACT 1001 list included.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="35"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="Filename" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Filename of embedded pdf in legacy
system</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:maxLength value="35"/>
                        <xs:minLength value="1"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element ref="StatusOfDocument" minOccurs="0"/>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="CommercialSpecifications" minOccurs="0" maxOccurs="5">
              <xs:annotation>
                <xs:documentation>Commercial Specification</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element ref="CommercialSpecificationCode"/>
                  <xs:element name="SpecificationText" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Additional Text for codes with free
text</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="1000"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="CarrierCode" type="CompanyCode" minOccurs="0"
maxOccurs="10">
                    <xs:annotation>
                      <xs:documentation>additional carrier code belonging to the
given contract number</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="ContractNumber" minOccurs="0" maxOccurs="10">
                    <xs:annotation>
                      <xs:documentation>additional contract number according to the
given carrier code.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1">
                          <xs:annotation>
                            <xs:documentation>has to be sent as n6 (with leading
zeros if necessary)</xs:documentation>
```

```
                        </xs:annotation>
                      </xs:minLength>
                      <xs:maxLength value="6"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
              </xs:sequence>
            </xs:complexType>
          </xs:element>
          <xs:element name="PrepaymentInstructions">
            <xs:annotation>
              <xs:documentation>Prepayment</xs:documentation>
            </xs:annotation>
            <xs:complexType>
              <xs:sequence>
                <xs:element name="PrepaymentCustomer" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Prepaidcode (given by the
client)</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:choice>
                      <xs:element ref="PrepaidCodeCustomer"/>
                      <xs:element ref="IncotermCode"/>
                    </xs:choice>
                  </xs:complexType>
                </xs:element>
                <xs:element ref="PrepaidcodeCarrier"/>
                <xs:element name="PaidUpTo" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Charges Paid Up To ... This information is
being sent by the consignor in agreement with the contractual carrier so only one
structure is needed for field 20 and 49. The carrier is only allowed to apply
changes, when ordered by the consignor.</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:complexContent>
                      <xs:extension base="LocationIdent"/>
                    </xs:complexContent>
                  </xs:complexType>
                </xs:element>
                <xs:element name="AdditionalCharges" minOccurs="0" maxOccurs="5">
                  <xs:annotation>
                    <xs:documentation>Additional Charges</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="Code">
                        <xs:annotation>
                          <xs:documentation>Additional charges code according CIT
GLV-CIM appendix 3</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:length value="2"/>
                            <xs:pattern value="\d*[1-9]\d*"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="Description" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Additional charges
description</xs:documentation>
                        </xs:annotation>
```

```
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="35"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
              </xs:sequence>
            </xs:complexType>
          </xs:element>
          <xs:element name="Tariff">
            <xs:annotation>
              <xs:documentation>Number of customer agreement or
tariff</xs:documentation>
            </xs:annotation>
            <xs:complexType>
              <xs:choice>
                <xs:element name="ContractNumber">
                  <xs:annotation>
                    <xs:documentation>Number of customer
agreement.</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:minLength value="1">
                        <xs:annotation>
                          <xs:documentation>has to be sent as n6 (with leading
zeros if necessary)</xs:documentation>
                        </xs:annotation>
                      </xs:minLength>
                      <xs:maxLength value="6"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="TariffNumber">
                  <xs:annotation>
                    <xs:documentation>Number of the tariff.</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:minLength value="1">
                        <xs:annotation>
                          <xs:documentation>has to be sent as n6 (with leading
zeros if necessary, but without check digit)</xs:documentation>
                        </xs:annotation>
                      </xs:minLength>
                      <xs:maxLength value="6"/>
                      <xs:pattern value="\d*[1-9]\d*"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
              </xs:choice>
            </xs:complexType>
          </xs:element>
          <xs:element name="SectionalInvoicing" minOccurs="0">
            <xs:annotation>
              <xs:documentation>Sectional Invoicing</xs:documentation>
            </xs:annotation>
            <xs:complexType>
              <xs:sequence>
                <xs:element name="Section" maxOccurs="30">
```

```
                    <xs:annotation>
                      <xs:documentation>Sectional Invoicing</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="InvoicingCarrierCode" type="CompanyCode">
                          <xs:annotation>
                            <xs:documentation>Sectional invoicing
by</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element name="InvoicedSection">
                          <xs:annotation>
                            <xs:documentation>Information about the section to be
invoiced.</xs:documentation>
                          </xs:annotation>
                          <xs:complexType>
                            <xs:choice>
                              <xs:element name="CountryCode" type="CountryIdentISO">
                                <xs:annotation>
                                  <xs:documentation>Invoiced section specified by
country</xs:documentation>
                                </xs:annotation>
                              </xs:element>
                              <xs:element name="SectionCarrierCode"
type="CompanyCode">
                                <xs:annotation>
                                  <xs:documentation>Invoiced section specified by
carrier</xs:documentation>
                                </xs:annotation>
                              </xs:element>
                            </xs:choice>
                          </xs:complexType>
                        </xs:element>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="DeclarationOfValue" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Details of the value of the goods and the currency
code when the value exceeds the limit given in CIM Article 30 section
2.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="Amount" type="Money_Type">
                    <xs:annotation>
                      <xs:documentation>Amount</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="CurrencyCode" type="CurrencyCode_Type">
                    <xs:annotation>
                      <xs:documentation>Currency abbreviation (ISO-4217
alphanumeric)</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="InterestInDelivery" minOccurs="0">
              <xs:annotation>
```

```
                <xs:documentation>Details of the amount and currency code of a
special interest in delivery.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="Amount" type="Money_Type">
                    <xs:annotation>
                      <xs:documentation>Amount</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="CurrencyCode" type="CurrencyCode_Type">
                    <xs:annotation>
                      <xs:documentation>Currency abbreviation (ISO-4217
alphanumeric)</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="CashOnDelivery" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Details of the amount to be collected on delivery
and the currency code.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="Amount" type="Money_Type">
                    <xs:annotation>
                      <xs:documentation>Amount</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="CurrencyCode" type="CurrencyCode_Type">
                    <xs:annotation>
                      <xs:documentation>Currency abbreviation (ISO-4217
alphanumeric)</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="RouteSection" minOccurs="0" maxOccurs="30">
              <xs:annotation>
                <xs:documentation>Route sequence Sequential information about the
complete routing of the consignment, the LeadRu  decides wether to provide this
information or not</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="SequenceID" type="xs:int">
                    <xs:annotation>
                      <xs:documentation>Position of the route section in transport
chain. Used to determine the exact way of the transport for customs
purposes.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:sequence>
                    <xs:element ref="RouteCode"/>
                    <xs:element name="RouteText" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Description of the specific route
section</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
```

```
                        <xs:minLength value="1"/>
                        <xs:maxLength value="80"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:sequence>
            </xs:complexType>
          </xs:element>
          <xs:element ref="SpecialTreatments" minOccurs="0" maxOccurs="30"/>
          <xs:element name="CustomsProcedures" minOccurs="0">
            <xs:annotation>
              <xs:documentation>Customs procedures</xs:documentation>
            </xs:annotation>
            <xs:complexType>
              <xs:sequence>
                <xs:element ref="RU_Partner" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Code of the RU entrusted of customs
procedures. </xs:documentation>
                  </xs:annotation>
                </xs:element>
                <xs:element ref="Location"/>
              </xs:sequence>
            </xs:complexType>
          </xs:element>
          <xs:element name="CustomsData" minOccurs="0">
            <xs:annotation>
              <xs:documentation>Customs Data</xs:documentation>
            </xs:annotation>
            <xs:complexType>
              <xs:sequence>
                <xs:element name="SimplifiedTransportProcedure" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Simplified transport procedure is used
(STP).</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:boolean"/>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="PrincipalRU" type="CompanyCode" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Code for the principal RU</xs:documentation>
                  </xs:annotation>
                </xs:element>
                <xs:element name="CustomsSurveillance">
                  <xs:annotation>
                    <xs:documentation>Good under customs
surveillance</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:boolean"/>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="CustomsEndorsements" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Reserved for endorsements by customs or a
consignor/consignee authorised by customs. Data element in accordance with Regulation
(EC) 1875/2006).</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:minLength value="1"/>
```

```
                        <xs:maxLength value="1000"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="RU_Declarations" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Carriers declaration</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="RU_Declaration" minOccurs="0" maxOccurs="30">
                    <xs:annotation>
                      <xs:documentation>Details of the carriers
declaration.</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="DeclaringRU" type="CompanyCode">
                          <xs:annotation>
                            <xs:documentation>Code of carrier, who added the
declaration.</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element ref="RU_DeclarationCode"/>
                        <xs:element ref="DeclarationText" minOccurs="0"/>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                  <xs:element name="DifferentAcceptance" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Details of the changes of the acceptance
point given by the consignor.</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="DifferentAcceptancePoint"
type="LocationIdent" minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Variance of acceptance point given in
structure AcceptancePoint.</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element name="DifferentAcceptanceDate" minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Variance of acceptance date given
structure AcceptancePoint.</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:dateTime"/>
                          </xs:simpleType>
                        </xs:element>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="Carriers" maxOccurs="30">
              <xs:complexType>
                <xs:sequence>
                  <xs:element ref="CarrierStatus"/>
```

```
                    <xs:element name="CarrierCode" type="CompanyCode">
                      <xs:annotation>
                        <xs:documentation>Railway Undertaking (Railway
Code)</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element name="ResponsibleCarrierCode" type="CompanyCode"
minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Railway Undertaking (Railway Code) of the
carrier in charge.</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element name="CarrierName" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Name of Carrier</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="35"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="StreetNumber" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Streetnumber of carrier.</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="5"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="Street" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Name of street of the
carrier</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="35"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="ZIPCode" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Postal Code</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="9"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="City" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>City/Town</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
```

```
                        <xs:minLength value="1"/>
                        <xs:maxLength value="35"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="CountryCode" type="CountryIdentISO"
minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Country Code (ISO Code)</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="SectionFrom" type="LocationIdent">
                    <xs:annotation>
                      <xs:documentation>Start of section to be performed by the
carrier. This can be a station OR a border crossing point.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="SectionTo" type="LocationIdent">
                    <xs:annotation>
                      <xs:documentation>End of section to be performed by the
carrier. This can be a station OR a border crossing point.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="SubContractNumber_SplitContract" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Number of customer agreement between the
responsible and the operating carrier</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1">
                          <xs:annotation>
                            <xs:documentation>has to be sent as n6 (with leading
zeros if necessary)</xs:documentation>
                          </xs:annotation>
                        </xs:minLength>
                        <xs:maxLength value="6"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
                <xs:attribute name="sequenceID" type="xs:int">
                  <xs:annotation>
                    <xs:documentation>Position of carrier during transport.
</xs:documentation>
                  </xs:annotation>
                </xs:attribute>
              </xs:complexType>
            </xs:element>
            <xs:element name="LeadCarrier">
              <xs:annotation>
                <xs:documentation>LeadCarrier/ Contractual carrier</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="CarrierCode" type="CompanyCode">
                    <xs:annotation>
                      <xs:documentation>Contractual carrier, railway undertaking
(Railway Code).</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="CarrierName" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Name of contractual
```

```
carrier</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="35"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="StreetNumber" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Streetnumber of carrier.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="5"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="Street" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Name of street of the
carrier</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="35"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="ZIPCode" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Postal Code</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="9"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="City" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>City/Town</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="35"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="CountryCode" type="CountryIdentISO"
minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Country Code (ISO Code)</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="Signature" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Signature of the contractual carrier. When
missing, the shipment number (CIM: 62) shall be used for signature
```

```
purposes.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="35"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="MadeOut">
              <xs:annotation>
                <xs:documentation>Made out</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="Place">
                    <xs:annotation>
                      <xs:documentation>Place on which the consignment note was made
out</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:maxLength value="35"/>
                        <xs:minLength value="1"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="Date" type="xs:date">
                    <xs:annotation>
                      <xs:documentation>Date at which the consignment note was made
out.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="ChargesNote" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Charges note</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="ChargesNoteAvailable" type="xs:boolean"/>
                  <xs:element name="DateOfReturn" type="xs:date" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Date, when the destination carrier sent the
charges note back to the contractual carrier.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="TransitPeriodExtensions" minOccurs="0" maxOccurs="30">
              <xs:complexType>
                <xs:sequence>
                  <xs:element ref="CodeOfCause"/>
                  <xs:element name="Description" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Description for CodeOfCause no.
9.</xs:documentation>
                    </xs:annotation>
```

```
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="180"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="Place">
                    <xs:annotation>
                      <xs:documentation>Place of the extension.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="180"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="Beginning">
                    <xs:annotation>
                      <xs:documentation>Beginning of the
extension.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:dateTime"/>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="Ending">
                    <xs:annotation>
                      <xs:documentation>End of extension.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:dateTime"/>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="ChargingSections" maxOccurs="15">
              <xs:annotation>
                <xs:documentation>Charging section</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="Start" type="LocationIdent">
                    <xs:annotation>
                      <xs:documentation>Start of the charging
section</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="End" type="LocationIdent">
                    <xs:annotation>
                      <xs:documentation>End of the charging
section</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="CommercialRouteCode" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Route code (RIP) when the customer agreement
or the tariff applied provide for it. </xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:length value="3"/>
```

```
                        <xs:pattern value="\d*[1-9]\d*"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="CurrencyCode" type="CurrencyCode_Type">
                    <xs:annotation>
                      <xs:documentation>Code for the currency of the amounts entered
in the charging section.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="Tariff" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Freight Charges Section
Tariff</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="NHMCode" type="NHMCodeType">
                          <xs:annotation>
                            <xs:documentation>NHM code determining the charges
applicable.</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element name="TariffNumber">
                          <xs:annotation>
                            <xs:documentation>Customer agreement or tariff
applied</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:string">
                              <xs:minLength value="1"/>
                              <xs:maxLength value="6"/>
                            </xs:restriction>
                          </xs:simpleType>
                        </xs:element>
                        <xs:element name="ChargedMass" minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Charged mass [weight in kg]. As
appropriate, area in m² or the volume of the wagon or goods in m³ if used as the
basis for charging.</xs:documentation>
                          </xs:annotation>
                          <xs:complexType>
                            <xs:sequence>
                              <xs:element name="value">
                                <xs:simpleType>
                                  <xs:restriction base="xs:decimal">
                                    <xs:minInclusive value="1"/>
                                    <xs:totalDigits value="8"/>
                                    <xs:fractionDigits value="1"/>
                                  </xs:restriction>
                                </xs:simpleType>
                              </xs:element>
                              <xs:element name="measure" minOccurs="0">
                                <xs:simpleType>
                                  <xs:restriction base="xs:token">
                                    <xs:enumeration value="kg"/>
                                    <xs:enumeration value="m2"/>
                                    <xs:enumeration value="m3"/>
                                  </xs:restriction>
                                </xs:simpleType>
                              </xs:element>
                            </xs:sequence>
                          </xs:complexType>
                        </xs:element>
```

```
                        <xs:element name="ExchangeRate" minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Exchange rate for amounts to be paid by
the consignor or consignee which are not expressed in the invoicing
currency.</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:decimal">
                              <xs:totalDigits value="18"/>
                              <xs:fractionDigits value="3"/>
                            </xs:restriction>
                          </xs:simpleType>
                        </xs:element>
                        <xs:element name="Distance" minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Tariff distance, expressed in km or
zones, between the stations or points corresponding to the beginning and end of the
charging section.</xs:documentation>
                          </xs:annotation>
                          <xs:complexType>
                            <xs:choice>
                              <xs:element name="KM">
                                <xs:annotation>
                                  <xs:documentation>Tariff distance, expressed in km,
between the stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
                                </xs:annotation>
                                <xs:simpleType>
                                  <xs:restriction base="xs:int">
                                    <xs:minInclusive value="1"/>
                                    <xs:maxInclusive value="99999"/>
                                  </xs:restriction>
                                </xs:simpleType>
                              </xs:element>
                              <xs:element name="Zones">
                                <xs:annotation>
                                  <xs:documentation>Tariff distance, expressed in
zones, between the stations or points corresponding to the beginning and end of the
charging section.</xs:documentation>
                                </xs:annotation>
                                <xs:simpleType>
                                  <xs:restriction base="xs:int">
                                    <xs:minInclusive value="1"/>
                                    <xs:maxInclusive value="99"/>
                                  </xs:restriction>
                                </xs:simpleType>
                              </xs:element>
                            </xs:choice>
                          </xs:complexType>
                        </xs:element>
                        <xs:element name="Fee" minOccurs="0">
                          <xs:annotation>
                            <xs:documentation>Supplements, fees,
deductions</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:int">
                              <xs:totalDigits value="4"/>
                              <xs:minInclusive value="1"/>
                            </xs:restriction>
                          </xs:simpleType>
                        </xs:element>
                        <xs:element name="FreightCharges" minOccurs="0">
                          <xs:annotation>
```

```
                              <xs:documentation>Freight Charges (paid and
due)</xs:documentation>
                            </xs:annotation>
                            <xs:complexType>
                              <xs:choice>
                                <xs:element name="Prepaid" type="Money_Type">
                                  <xs:annotation>
                                    <xs:documentation>Carriage charges to be paid by
the consignor in the tariff currency.</xs:documentation>
                                  </xs:annotation>
                                </xs:element>
                                <xs:element name="Transferred" type="Money_Type">
                                  <xs:annotation>
                                    <xs:documentation>Carriage charges to be paid by
the consignee in the tariff currency.</xs:documentation>
                                  </xs:annotation>
                                </xs:element>
                              </xs:choice>
                            </xs:complexType>
                          </xs:element>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                    <xs:element name="AdditionalCharges" minOccurs="0" maxOccurs="10">
                      <xs:annotation>
                        <xs:documentation/>
                        <xs:documentation>Sum of Prepaid</xs:documentation>
                        <xs:documentation>Sum of Transferred</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:sequence>
                          <xs:element name="Code">
                            <xs:annotation>
                              <xs:documentation>Additional charges
code</xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:string">
                                <xs:minLength value="1"/>
                                <xs:maxLength value="2"/>
                              </xs:restriction>
                            </xs:simpleType>
                          </xs:element>
                          <xs:choice>
                            <xs:element name="Prepaid" type="Money_Type">
                              <xs:annotation>
                                <xs:documentation>Prepaid</xs:documentation>
                              </xs:annotation>
                            </xs:element>
                            <xs:element name="Transferred" type="Money_Type">
                              <xs:annotation>
                                <xs:documentation>Transferred</xs:documentation>
                              </xs:annotation>
                            </xs:element>
                          </xs:choice>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element ref="Wagons" minOccurs="0" maxOccurs="99">
                <xs:annotation>
                  <xs:documentation>Contains list of transported Goods, Wagons and ITU
```

```
etc.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="WagonPreviousNumberFreight" minOccurs="0"
maxOccurs="20">
              <xs:annotation>
                <xs:documentation>Identifies the previous freight wagon if a shipment
or Intermodal unit has changed the wagon during its journey</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="WagonIdent">
                  <xs:length value="12"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="AgreedTimeOfDelivery" minOccurs="0">
              <xs:annotation>
                <xs:documentation>The requested Date and Time for the delivery of a
wagon/Shipment or Intermodal units at customer sidings</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM_Header**

diagram

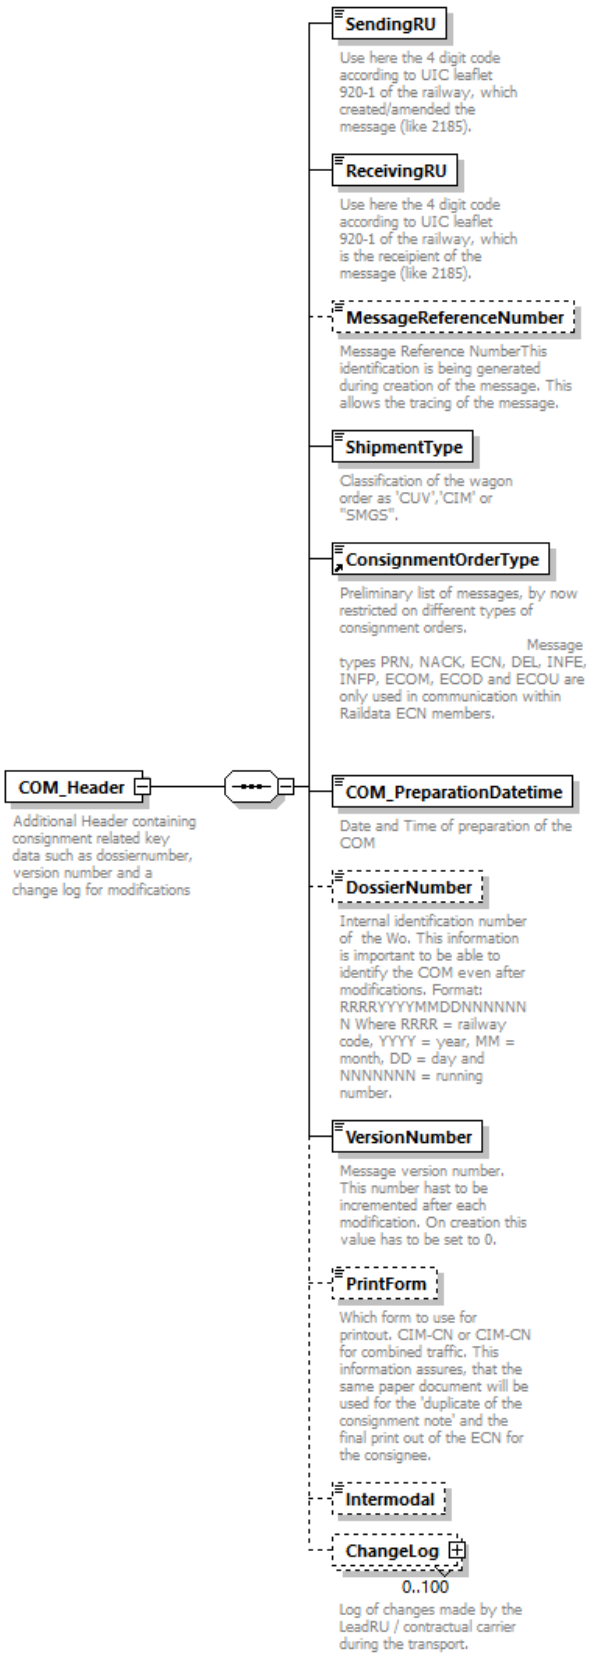

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	SendingRU ReceivingRU MessageReferenceNumber ShipmentType ConsignmentOrderType COM_PreparationDatetime DossierNumber VersionNumber PrintForm Intermodal ChangeLog
annotation	documentation Additional Header containing consignment related key data such as dossiernumber, version number and a change log for modifications

source

```
<xs:element name="COM_Header">
  <xs:annotation>
    <xs:documentation>Additional Header containing consignment related key data such as dossiernumber, version number and a change log for modifications</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="SendingRU" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>Use here the 4 digit code according to UIC leaflet 920-1 of the railway, which created/amended the message (like 2185).</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ReceivingRU" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>Use here the 4 digit code according to UIC leaflet 920-1 of the railway, which is the receipient of the message (like 2185).</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="MessageReferenceNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Message Reference NumberThis identification is being generated during creation of the message. This allows the tracing of the message.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="18">
              <xs:annotation>
                <xs:documentation>Use here a counter, any system.</xs:documentation>
              </xs:annotation>
            </xs:maxLength>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ShipmentType">
        <xs:annotation>
          <xs:documentation>Classification of the wagon order as 'CUV','CIM' or "SMGS".</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="CIM">
              <xs:annotation>
                <xs:documentation>Regular transport, according in basic to the CIM consignment note.</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="CUV">
              <xs:annotation>
                <xs:documentation>Transport of empty wagons. If loaded and empty wagons are withing the same shipment, then the ShipmentType has to be set to CIM. For the empty wagons the loading status has to be set in the WagonDetails.</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
```

```
            <xs:enumeration value="SMGS"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="ConsignmentOrderType"/>
      <xs:element name="COM_PreparationDatetime">
        <xs:annotation>
          <xs:documentation>Date and Time of preparation of the
COM</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:dateTime"/>
        </xs:simpleType>
      </xs:element>
      <xs:element name="DossierNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Internal identification number of  the Wo. This
information is important to be able to identify the COM even after modifications.
Format: RRRRYYYYMMDDNNNNNNN Where RRRR = railway code, YYYY = year, MM = month, DD =
day and NNNNNNN = running number.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:length value="19"/>
            <xs:pattern value="\d{4}20\d{2}[0-1][0-9][0-3]\d{8}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="VersionNumber">
        <xs:annotation>
          <xs:documentation>Message version number. This number hast to be
incremented after each modification. On creation this value has to be set to
0.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:int">
            <xs:minInclusive value="0"/>
            <xs:maxInclusive value="100"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="PrintForm" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Which form to use for printout. CIM-CN or CIM-CN for
combined traffic. This information assures, that the same paper document will be used
for the 'duplicate of the consignment note' and the final print out of the ECN for
the consignee.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="WLT">
              <xs:annotation>
                <xs:documentation>Wagon load transport form to be used for print-
out.</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="CT">
              <xs:annotation>
                <xs:documentation>Combined traffic form to be used for print-
out.</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
          </xs:restriction>
        </xs:simpleType>
```

```
      </xs:element>
      <xs:element name="Intermodal" minOccurs="0">
        <xs:simpleType>
          <xs:restriction base="xs:byte">
            <xs:pattern value="0|1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ChangeLog" minOccurs="0" maxOccurs="100">
        <xs:annotation>
          <xs:documentation>Log of changes made by the LeadRU / contractual carrier
during the transport.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="DateTime">
              <xs:annotation>
                <xs:documentation>DateTime, when the changes were
applied.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:dateTime"/>
              </xs:simpleType>
            </xs:element>
            <xs:element name="NumberOfModifiedVersion">
              <xs:annotation>
                <xs:documentation>Version number of the modified message (as also
written into COMHeader/COMVersionNumber).</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:int"/>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM_Header/SendingRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind / Value / Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Use here the 4 digit code according to UIC leaflet 920-1 of the railway, which created/amended the message (like 2185).

source	`<xs:element name="SendingRU" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Use here the 4 digit code according to UIC leaflet 920-1 of the`

```
railway, which created/amended the message (like 2185).</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM_Header/ReceivingRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Use here the 4 digit code according to UIC leaflet 920-1 of the railway, which is the receipient of the message (like 2185).

source	`<xs:element name="ReceivingRU" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Use here the 4 digit code according to UIC leaflet 920-1 of the railway, which is the receipient of the message (like 2185).</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM_Header/MessageReferenceNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 18 documentation Use here a counter, any system.
annotation	documentation Message Reference NumberThis identification is being generated during creation of the message. This allows the tracing of the message.

source	`<xs:element name="MessageReferenceNumber" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Message Reference NumberThis identification is being generated during creation of the message. This allows the tracing of the message.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="18">`

```
        <xs:annotation>
          <xs:documentation>Use here a counter, any system.</xs:documentation>
        </xs:annotation>
      </xs:maxLength>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM_Header/ShipmentType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
facets	Kind / Value / Annotation enumeration CIM — documentation: Regular transport, according in basic to the CIM consignment note. enumeration CUV — documentation: Transport of empty wagons. If loaded and empty wagons are withing the same shipment, then the ShipmentType has to be set to CIM. For the empty wagons the loading status has to be set in the WagonDetails. enumeration SMGS
annotation	documentation Classification of the wagon order as 'CUV','CIM' or "SMGS".

source

```
<xs:element name="ShipmentType">
  <xs:annotation>
    <xs:documentation>Classification of the wagon order as 'CUV','CIM' or
"SMGS".</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="CIM">
        <xs:annotation>
          <xs:documentation>Regular transport, according in basic to the CIM
consignment note.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="CUV">
        <xs:annotation>
          <xs:documentation>Transport of empty wagons. If loaded and empty wagons are
withing the same shipment, then the ShipmentType has to be set to CIM. For the empty
wagons the loading status has to be set in the WagonDetails.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="SMGS"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM_Header/COM_PreparationDatetime**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:dateTime**
properties	content simple
annotation	documentation Date and Time of preparation of the COM
source	<xs:element name="COM_PreparationDatetime"> <xs:annotation> <xs:documentation>Date and Time of preparation of the COM</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:dateTime"/> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM_Header/DossierNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation length 19 pattern \d{4}20\d{2}[0-1][0-9][0-3]\d{8}
annotation	documentation Internal identification number of the Wo. This information is important to be able to identify the COM even after modifications. Format: RRRRYYYYMMDDNNNNNNN Where RRRR = railway code, YYYY = year, MM = month, DD = day and NNNNNNN = running number.
source	<xs:element name="DossierNumber" minOccurs="0"> <xs:annotation> <xs:documentation>Internal identification number of the Wo. This information is important to be able to identify the COM even after modifications. Format: RRRRYYYYMMDDNNNNNNN Where RRRR = railway code, YYYY = year, MM = month, DD = day and NNNNNNN = running number.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:length value="19"/> <xs:pattern value="\d{4}20\d{2}[0-1][0-9][0-3]\d{8}"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM_Header/VersionNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
facets	Kind Value Annotation minInclusive 0 maxInclusive 100
annotation	documentation Message version number. This number hast to be incremented after each modification. On creation this value has to be set to 0.

source	`<xs:element name="VersionNumber">`
	`<xs:annotation>`
	`<xs:documentation>Message version number. This number hast to be incremented after each modification. On creation this value has to be set to 0.</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:int">`
	`<xs:minInclusive value="0"/>`
	`<xs:maxInclusive value="100"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM_Header/PrintForm**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration WLT documentation Wagon load transport form to be used for print-out. enumeration CT documentation Combined traffic form to be used for print-out.
annotation	documentation Which form to use for printout. CIM-CN or CIM-CN for combined traffic. This information assures, that the same paper document will be used for the 'duplicate of the consignment note' and the final print out of the ECN for the consignee.

source	`<xs:element name="PrintForm" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Which form to use for printout. CIM-CN or CIM-CN for combined traffic. This information assures, that the same paper document will be used for the 'duplicate of the consignment note' and the final print out of the ECN for the`

```
consignee.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="WLT">
        <xs:annotation>
          <xs:documentation>Wagon load transport form to be used for print-
out.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="CT">
        <xs:annotation>
          <xs:documentation>Combined traffic form to be used for print-
out.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM_Header/Intermodal**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:byte**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern 0|1

source	`<xs:element name="Intermodal" minOccurs="0">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:byte">`
	`  <xs:pattern value="0|1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM_Header/ChangeLog**

diagram	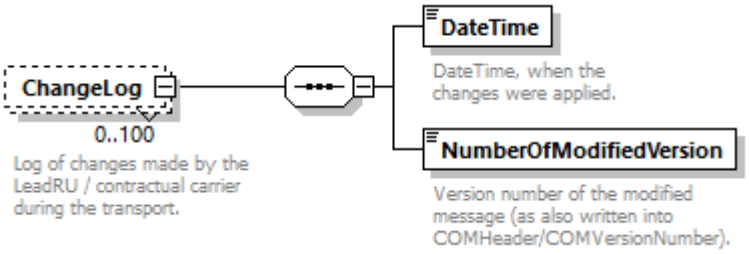
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 100 content complex
children	**DateTime NumberOfModifiedVersion**
annotation	documentation Log of changes made by the LeadRU / contractual carrier during the transport.
source	`<xs:element name="ChangeLog" minOccurs="0" maxOccurs="100">`

```
  <xs:annotation>
    <xs:documentation>Log of changes made by the LeadRU / contractual carrier during
the transport.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="DateTime">
        <xs:annotation>
          <xs:documentation>DateTime, when the changes were
applied.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:dateTime"/>
        </xs:simpleType>
      </xs:element>
      <xs:element name="NumberOfModifiedVersion">
        <xs:annotation>
          <xs:documentation>Version number of the modified message (as also written
into COMHeader/COMVersionNumber).</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:int"/>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM_Header/ChangeLog/DateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:dateTime**
properties	content simple
annotation	documentation DateTime, when the changes were applied.

source	`<xs:element name="DateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>DateTime, when the changes were applied.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:dateTime"/>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM_Header/ChangeLog/NumberOfModifiedVersion**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**

properties	content simple
annotation	documentation Version number of the modified message (as also written into COMHeader/COMVersionNumber).
source	<xs:element name="NumberOfModifiedVersion"> <xs:annotation> <xs:documentation>Version number of the modified message (as also written into COMHeader/COMVersionNumber).</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"/> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM**

diagram	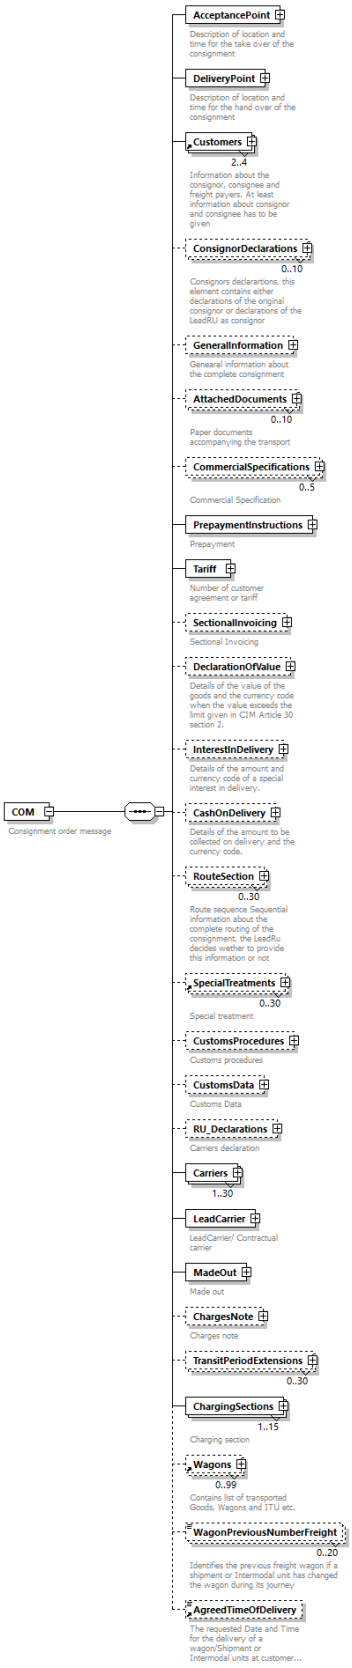
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	AcceptancePoint DeliveryPoint Customers ConsignorDeclarations GeneralInformation AttachedDocuments CommercialSpecifications PrepaymentInstructions Tariff SectionalInvoicing DeclarationOfValue InterestInDelivery CashOnDelivery RouteSection SpecialTreatments CustomsProcedures CustomsData RU_Declarations Carriers LeadCarrier MadeOut ChargesNote TransitPeriodExtensions ChargingSections Wagons WagonPreviousNumberFreight AgreedTimeOfDelivery
annotation	documentation Consignment order message

source

```
<xs:element name="COM">
  <xs:annotation>
    <xs:documentation>Consignment order message</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="AcceptancePoint">
        <xs:annotation>
          <xs:documentation>Description of location and time for the take over of the
consignment</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="Station"/>
            <xs:element ref="RP_Code" minOccurs="0"/>
            <xs:element ref="ProductionStation" minOccurs="0"/>
            <xs:element name="AcceptanceDate" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Date and time (month, day and hour) at which the
goods were accepted. </xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:dateTime"/>
              </xs:simpleType>
            </xs:element>
            <xs:element name="ConsignmentNumber">
              <xs:annotation>
                <xs:documentation>Running number and check digit of the consignment
between Lead RU and customer. Format: NNNNNC The number consists of NNNNN = running
number C = check digit, </xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:length value="6"/>
                  <xs:pattern value="\d*[1-9]\d*"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="ForwardingTrainNumber" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Train number at shipping </xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="6"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="CarrierCode" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Code of the shipping carrier mentioned in the
consignment number.</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
```

```
      </xs:element>
      <xs:element name="DeliveryPoint">
        <xs:annotation>
          <xs:documentation>Description of location and time for the hand over of the
consignment</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="Station"/>
            <xs:element ref="RP_Code" minOccurs="0"/>
            <xs:element ref="ProductionStation" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="Customers" minOccurs="2" maxOccurs="4">
        <xs:annotation>
          <xs:documentation>Information about the consignor, consignee and freight
payers. At least information about consignor and consignee has to be
given</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ConsignorDeclarations" minOccurs="0" maxOccurs="10">
        <xs:annotation>
          <xs:documentation>Consignors declarartions, this element contains either
declarations of the original consignor or declarations of the LeadRU as
consignor</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="ConsignorDeclarationCode"/>
            <xs:element ref="DeclarationText" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="GeneralInformation" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Genearal information about the complete
consignment</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ConsignorReference" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Consignor's reference concerning the complete
consignment</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="35"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="InformationConsignee" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Information from the consignor to the consignee
relating to the consignment. This information is not to commit the
carrier.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="350"/>
                </xs:restriction>
```

```
              </xs:simpleType>
            </xs:element>
            <xs:element name="WagonGroupInfo" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Consignor information regarding the whole
consignment. Comparable with the element WagonInfo, but for all
wagons.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="2000"/>
                  <xs:minLength value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="AttachedDocuments" minOccurs="0" maxOccurs="10">
        <xs:annotation>
          <xs:documentation>Paper documents accompanying the
transport</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="DocumentType">
              <xs:annotation>
                <xs:documentation>Type code of attached document. The UN/DIFACT 1001
list of codes is to be used to code accompanying documents.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:int">
                  <xs:minInclusive value="1"/>
                  <xs:maxInclusive value="999"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="DocumentInformation" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Additional information regarding the attached
document may be entered here.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="35"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="Quantity" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Amount of the documents of the specified
type.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="DocumentTypeDescription" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Description of document type, when it is not in the
UN/EDIFACT 1001 list included.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="35"/>
```

```
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Filename" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Filename of embedded pdf in legacy
system</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="35"/>
                  <xs:minLength value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="StatusOfDocument" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="CommercialSpecifications" minOccurs="0" maxOccurs="5">
        <xs:annotation>
          <xs:documentation>Commercial Specification</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="CommercialSpecificationCode"/>
            <xs:element name="SpecificationText" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Additional Text for codes with free
text</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="1000"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="CarrierCode" type="CompanyCode" minOccurs="0"
maxOccurs="10">
              <xs:annotation>
                <xs:documentation>additional carrier code belonging to the given
contract number</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="ContractNumber" minOccurs="0" maxOccurs="10">
              <xs:annotation>
                <xs:documentation>additional contract number according to the given
carrier code.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1">
                    <xs:annotation>
                      <xs:documentation>has to be sent as n6 (with leading zeros if
necessary)</xs:documentation>
                    </xs:annotation>
                  </xs:minLength>
                  <xs:maxLength value="6"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
```

```
      </xs:element>
      <xs:element name="PrepaymentInstructions">
        <xs:annotation>
          <xs:documentation>Prepayment</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="PrepaymentCustomer" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Prepaidcode (given by the
client)</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:choice>
                  <xs:element ref="PrepaidCodeCustomer"/>
                  <xs:element ref="IncotermCode"/>
                </xs:choice>
              </xs:complexType>
            </xs:element>
            <xs:element ref="PrepaidcodeCarrier"/>
            <xs:element name="PaidUpTo" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Charges Paid Up To ... This information is being
sent by the consignor in agreement with the contractual carrier so only one structure
is needed for field 20 and 49. The carrier is only allowed to apply changes, when
ordered by the consignor.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:complexContent>
                  <xs:extension base="LocationIdent"/>
                </xs:complexContent>
              </xs:complexType>
            </xs:element>
            <xs:element name="AdditionalCharges" minOccurs="0" maxOccurs="5">
              <xs:annotation>
                <xs:documentation>Additional Charges</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="Code">
                    <xs:annotation>
                      <xs:documentation>Additional charges code according CIT GLV-CIM
appendix 3</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:length value="2"/>
                        <xs:pattern value="\d*[1-9]\d*"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="Description" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Additional charges
description</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="35"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
```

```
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="Tariff">
        <xs:annotation>
          <xs:documentation>Number of customer agreement or tariff</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:choice>
            <xs:element name="ContractNumber">
              <xs:annotation>
                <xs:documentation>Number of customer agreement.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1">
                    <xs:annotation>
                      <xs:documentation>has to be sent as n6 (with leading zeros if
necessary)</xs:documentation>
                    </xs:annotation>
                  </xs:minLength>
                  <xs:maxLength value="6"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="TariffNumber">
              <xs:annotation>
                <xs:documentation>Number of the tariff.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1">
                    <xs:annotation>
                      <xs:documentation>has to be sent as n6 (with leading zeros if
necessary, but without check digit)</xs:documentation>
                    </xs:annotation>
                  </xs:minLength>
                  <xs:maxLength value="6"/>
                  <xs:pattern value="\d*[1-9]\d*"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:choice>
        </xs:complexType>
      </xs:element>
      <xs:element name="SectionalInvoicing" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Sectional Invoicing</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Section" maxOccurs="30">
              <xs:annotation>
                <xs:documentation>Sectional Invoicing</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="InvoicingCarrierCode" type="CompanyCode">
                    <xs:annotation>
                      <xs:documentation>Sectional invoicing by</xs:documentation>
                    </xs:annotation>
                  </xs:element>
```

```
                    <xs:element name="InvoicedSection">
                      <xs:annotation>
                        <xs:documentation>Information about the section to be
invoiced.</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:choice>
                          <xs:element name="CountryCode" type="CountryIdentISO">
                            <xs:annotation>
                              <xs:documentation>Invoiced section specified by
country</xs:documentation>
                            </xs:annotation>
                          </xs:element>
                          <xs:element name="SectionCarrierCode" type="CompanyCode">
                            <xs:annotation>
                              <xs:documentation>Invoiced section specified by
carrier</xs:documentation>
                            </xs:annotation>
                          </xs:element>
                        </xs:choice>
                      </xs:complexType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element name="DeclarationOfValue" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Details of the value of the goods and the currency code
when the value exceeds the limit given in CIM Article 30 section
2.</xs:documentation>
          </xs:annotation>
          <xs:complexType>
            <xs:sequence>
              <xs:element name="Amount" type="Money_Type">
                <xs:annotation>
                  <xs:documentation>Amount</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="CurrencyCode" type="CurrencyCode_Type">
                <xs:annotation>
                  <xs:documentation>Currency abbreviation (ISO-4217
alphanumeric)</xs:documentation>
                </xs:annotation>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element name="InterestInDelivery" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Details of the amount and currency code of a special
interest in delivery.</xs:documentation>
          </xs:annotation>
          <xs:complexType>
            <xs:sequence>
              <xs:element name="Amount" type="Money_Type">
                <xs:annotation>
                  <xs:documentation>Amount</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="CurrencyCode" type="CurrencyCode_Type">
                <xs:annotation>
```

```
                <xs:documentation>Currency abbreviation (ISO-4217
alphanumeric)</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="CashOnDelivery" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Details of the amount to be collected on delivery and the
currency code.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Amount" type="Money_Type">
              <xs:annotation>
                <xs:documentation>Amount</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="CurrencyCode" type="CurrencyCode_Type">
              <xs:annotation>
                <xs:documentation>Currency abbreviation (ISO-4217
alphanumeric)</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="RouteSection" minOccurs="0" maxOccurs="30">
        <xs:annotation>
          <xs:documentation>Route sequence Sequential information about the complete
routing of the consignment, the LeadRu  decides wether to provide this information or
not</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="SequenceID" type="xs:int">
              <xs:annotation>
                <xs:documentation>Position of the route section in transport chain.
Used to determine the exact way of the transport for customs
purposes.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:sequence>
              <xs:element ref="RouteCode"/>
              <xs:element name="RouteText" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Description of the specific route
section</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:minLength value="1"/>
                    <xs:maxLength value="80"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
            </xs:sequence>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="SpecialTreatments" minOccurs="0" maxOccurs="30"/>
      <xs:element name="CustomsProcedures" minOccurs="0">
        <xs:annotation>
```

```
          <xs:documentation>Customs procedures</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="RU_Partner" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Code of the RU entrusted of customs procedures.
</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="Location"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="CustomsData" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Customs Data</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="SimplifiedTransportProcedure" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Simplified transport procedure is used
(STP).</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:boolean"/>
              </xs:simpleType>
            </xs:element>
            <xs:element name="PrincipalRU" type="CompanyCode" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Code for the principal RU</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="CustomsSurveillance">
              <xs:annotation>
                <xs:documentation>Good under customs surveillance</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:boolean"/>
              </xs:simpleType>
            </xs:element>
            <xs:element name="CustomsEndorsements" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Reserved for endorsements by customs or a
consignor/consignee authorised by customs. Data element in accordance with Regulation
(EC) 1875/2006).</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="1000"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="RU_Declarations" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Carriers declaration</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
```

```
            <xs:element name="RU_Declaration" minOccurs="0" maxOccurs="30">
              <xs:annotation>
                <xs:documentation>Details of the carriers
declaration.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="DeclaringRU" type="CompanyCode">
                    <xs:annotation>
                      <xs:documentation>Code of carrier, who added the
declaration.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element ref="RU_DeclarationCode"/>
                  <xs:element ref="DeclarationText" minOccurs="0"/>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="DifferentAcceptance" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Details of the changes of the acceptance point
given by the consignor.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="DifferentAcceptancePoint" type="LocationIdent"
minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Variance of acceptance point given in
structure AcceptancePoint.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="DifferentAcceptanceDate" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Variance of acceptance date given structure
AcceptancePoint.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:dateTime"/>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="Carriers" maxOccurs="30">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="CarrierStatus"/>
            <xs:element name="CarrierCode" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Railway Undertaking (Railway
Code)</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="ResponsibleCarrierCode" type="CompanyCode"
minOccurs="0">
              <xs:annotation>
                <xs:documentation>Railway Undertaking (Railway Code) of the carrier
in charge.</xs:documentation>
              </xs:annotation>
            </xs:element>
```

```
                <xs:element name="CarrierName" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Name of Carrier</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:minLength value="1"/>
                      <xs:maxLength value="35"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="StreetNumber" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Streetnumber of carrier.</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:minLength value="1"/>
                      <xs:maxLength value="5"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="Street" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Name of street of the carrier</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:minLength value="1"/>
                      <xs:maxLength value="35"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="ZIPCode" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Postal Code</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:minLength value="1"/>
                      <xs:maxLength value="9"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="City" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>City/Town</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:minLength value="1"/>
                      <xs:maxLength value="35"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="CountryCode" type="CountryIdentISO" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Country Code (ISO Code)</xs:documentation>
                  </xs:annotation>
                </xs:element>
                <xs:element name="SectionFrom" type="LocationIdent">
                  <xs:annotation>
                    <xs:documentation>Start of section to be performed by the carrier.
This can be a station OR a border crossing point.</xs:documentation>
```

```
              </xs:annotation>
            </xs:element>
            <xs:element name="SectionTo" type="LocationIdent">
              <xs:annotation>
                <xs:documentation>End of section to be performed by the carrier. This
can be a station OR a border crossing point.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="SubContractNumber_SplitContract" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Number of customer agreement between the
responsible and the operating carrier</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1">
                    <xs:annotation>
                      <xs:documentation>has to be sent as n6 (with leading zeros if
necessary)</xs:documentation>
                    </xs:annotation>
                  </xs:minLength>
                  <xs:maxLength value="6"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
          <xs:attribute name="sequenceID" type="xs:int">
            <xs:annotation>
              <xs:documentation>Position of carrier during transport.
</xs:documentation>
            </xs:annotation>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
      <xs:element name="LeadCarrier">
        <xs:annotation>
          <xs:documentation>LeadCarrier/ Contractual carrier</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="CarrierCode" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Contractual carrier, railway undertaking (Railway
Code).</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="CarrierName" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Name of contractual carrier</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="35"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="StreetNumber" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Streetnumber of carrier.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
```

```
                    <xs:maxLength value="5"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="Street" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Name of street of the carrier</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:minLength value="1"/>
                    <xs:maxLength value="35"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="ZIPCode" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Postal Code</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:minLength value="1"/>
                    <xs:maxLength value="9"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="City" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>City/Town</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:minLength value="1"/>
                    <xs:maxLength value="35"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="CountryCode" type="CountryIdentISO" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Country Code (ISO Code)</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="Signature" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Signature of the contractual carrier. When missing,
the shipment number (CIM: 62) shall be used for signature
purposes.</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:minLength value="1"/>
                    <xs:maxLength value="35"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element name="MadeOut">
          <xs:annotation>
            <xs:documentation>Made out</xs:documentation>
          </xs:annotation>
          <xs:complexType>
            <xs:sequence>
```

```
            <xs:element name="Place">
              <xs:annotation>
                <xs:documentation>Place on which the consignment note was made
out</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="35"/>
                  <xs:minLength value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Date" type="xs:date">
              <xs:annotation>
                <xs:documentation>Date at which the consignment note was made
out.</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="ChargesNote" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Charges note</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ChargesNoteAvailable" type="xs:boolean"/>
            <xs:element name="DateOfReturn" type="xs:date" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Date, when the destination carrier sent the charges
note back to the contractual carrier.</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="TransitPeriodExtensions" minOccurs="0" maxOccurs="30">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="CodeOfCause"/>
            <xs:element name="Description" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Description for CodeOfCause no.
9.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="180"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Place">
              <xs:annotation>
                <xs:documentation>Place of the extension.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="180"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
```

```
            <xs:element name="Beginning">
              <xs:annotation>
                <xs:documentation>Beginning of the extension.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:dateTime"/>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Ending">
              <xs:annotation>
                <xs:documentation>End of extension.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:dateTime"/>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="ChargingSections" maxOccurs="15">
        <xs:annotation>
          <xs:documentation>Charging section</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Start" type="LocationIdent">
              <xs:annotation>
                <xs:documentation>Start of the charging section</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="End" type="LocationIdent">
              <xs:annotation>
                <xs:documentation>End of the charging section</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="CommercialRouteCode" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Route code (RIP) when the customer agreement or the
tariff applied provide for it. </xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:length value="3"/>
                  <xs:pattern value="\d*[1-9]\d*"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="CurrencyCode" type="CurrencyCode_Type">
              <xs:annotation>
                <xs:documentation>Code for the currency of the amounts entered in the
charging section.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="Tariff" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Freight Charges Section Tariff</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="NHMCode" type="NHMCodeType">
                    <xs:annotation>
                      <xs:documentation>NHM code determining the charges
applicable.</xs:documentation>
                    </xs:annotation>
```

```
                    </xs:element>
                    <xs:element name="TariffNumber">
                      <xs:annotation>
                        <xs:documentation>Customer agreement or tariff
applied</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:minLength value="1"/>
                          <xs:maxLength value="6"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="ChargedMass" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Charged mass [weight in kg]. As appropriate,
area in m² or the volume of the wagon or goods in m³ if used as the basis for
charging.</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:sequence>
                          <xs:element name="value">
                            <xs:simpleType>
                              <xs:restriction base="xs:decimal">
                                <xs:minInclusive value="1"/>
                                <xs:totalDigits value="8"/>
                                <xs:fractionDigits value="1"/>
                              </xs:restriction>
                            </xs:simpleType>
                          </xs:element>
                          <xs:element name="measure" minOccurs="0">
                            <xs:simpleType>
                              <xs:restriction base="xs:token">
                                <xs:enumeration value="kg"/>
                                <xs:enumeration value="m2"/>
                                <xs:enumeration value="m3"/>
                              </xs:restriction>
                            </xs:simpleType>
                          </xs:element>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                    <xs:element name="ExchangeRate" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Exchange rate for amounts to be paid by the
consignor or consignee which are not expressed in the invoicing
currency.</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:decimal">
                          <xs:totalDigits value="18"/>
                          <xs:fractionDigits value="3"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="Distance" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Tariff distance, expressed in km or zones,
between the stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:choice>
                          <xs:element name="KM">
```

```
                        <xs:annotation>
                          <xs:documentation>Tariff distance, expressed in km,
between the stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:int">
                            <xs:minInclusive value="1"/>
                            <xs:maxInclusive value="99999"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="Zones">
                        <xs:annotation>
                          <xs:documentation>Tariff distance, expressed in zones,
between the stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:int">
                            <xs:minInclusive value="1"/>
                            <xs:maxInclusive value="99"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                    </xs:choice>
                  </xs:complexType>
                </xs:element>
                <xs:element name="Fee" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Supplements, fees,
deductions</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:int">
                      <xs:totalDigits value="4"/>
                      <xs:minInclusive value="1"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element name="FreightCharges" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Freight Charges (paid and
due)</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:choice>
                      <xs:element name="Prepaid" type="Money_Type">
                        <xs:annotation>
                          <xs:documentation>Carriage charges to be paid by the
consignor in the tariff currency.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="Transferred" type="Money_Type">
                        <xs:annotation>
                          <xs:documentation>Carriage charges to be paid by the
consignee in the tariff currency.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                    </xs:choice>
                  </xs:complexType>
                </xs:element>
              </xs:sequence>
            </xs:complexType>
```

```
            </xs:element>
            <xs:element name="AdditionalCharges" minOccurs="0" maxOccurs="10">
              <xs:annotation>
                <xs:documentation/>
                <xs:documentation>Sum of Prepaid</xs:documentation>
                <xs:documentation>Sum of Transferred</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="Code">
                    <xs:annotation>
                      <xs:documentation>Additional charges code</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="2"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:choice>
                    <xs:element name="Prepaid" type="Money_Type">
                      <xs:annotation>
                        <xs:documentation>Prepaid</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element name="Transferred" type="Money_Type">
                      <xs:annotation>
                        <xs:documentation>Transferred</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                  </xs:choice>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="Wagons" minOccurs="0" maxOccurs="99">
        <xs:annotation>
          <xs:documentation>Contains list of transported Goods, Wagons and ITU
etc.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="WagonPreviousNumberFreight" minOccurs="0" maxOccurs="20">
        <xs:annotation>
          <xs:documentation>Identifies the previous freight wagon if a shipment or
Intermodal unit has changed the wagon during its journey</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="WagonIdent">
            <xs:length value="12"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="AgreedTimeOfDelivery" minOccurs="0">
        <xs:annotation>
          <xs:documentation>The requested Date and Time for the delivery of a
wagon/Shipment or Intermodal units at customer sidings</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/AcceptancePoint**

diagram	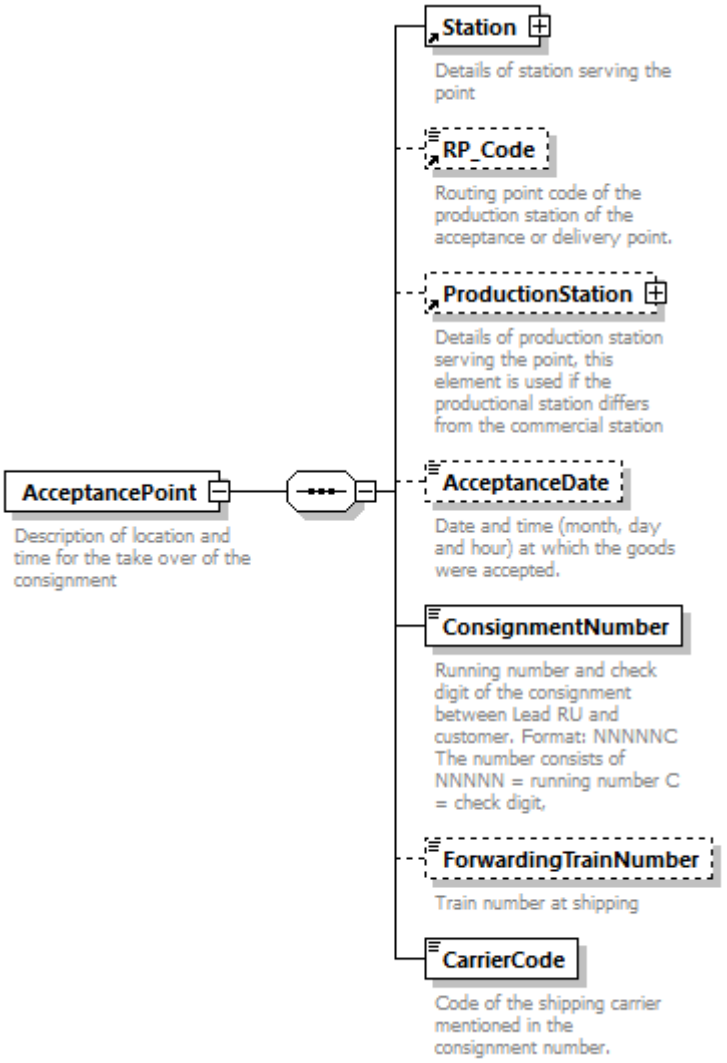
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Station RP_Code ProductionStation AcceptanceDate ConsignmentNumber ForwardingTrainNumber CarrierCode**
annotation	documentation Description of location and time for the take over of the consignment
source	<xs:element name="AcceptancePoint"> <xs:annotation> <xs:documentation>Description of location and time for the take over of the consignment</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Station"/> <xs:element ref="RP_Code" minOccurs="0"/> <xs:element ref="ProductionStation" minOccurs="0"/> <xs:element name="AcceptanceDate" minOccurs="0"> <xs:annotation> <xs:documentation>Date and time (month, day and hour) at which the goods were accepted. </xs:documentation> </xs:annotation>

```
        <xs:simpleType>
          <xs:restriction base="xs:dateTime"/>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ConsignmentNumber">
        <xs:annotation>
          <xs:documentation>Running number and check digit of the consignment between
Lead RU and customer. Format: NNNNNC The number consists of NNNNN = running number C
= check digit, </xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:length value="6"/>
            <xs:pattern value="\d*[1-9]\d*"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ForwardingTrainNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Train number at shipping </xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="6"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CarrierCode" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>Code of the shipping carrier mentioned in the consignment
number.</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/AcceptancePoint/AcceptanceDate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:dateTime**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Date and time (month, day and hour) at which the goods were accepted.

source	`<xs:element name="AcceptanceDate" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Date and time (month, day and hour) at which the goods were accepted. </xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:dateTime"/>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/AcceptancePoint/ConsignmentNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	element **WIMO_Dataset/ConsignmentLevelData**
facets	Kind Value Annotation length 6 pattern \d*[1-9]\d*
annotation	documentation Running number and check digit of the consignment between Lead RU and customer. Format: NNNNNC The number consists of NNNNN = running number C = check digit,

source	`<xs:element name="ConsignmentNumber">`
	`<xs:annotation>`
	`<xs:documentation>Running number and check digit of the consignment between Lead RU and customer. Format: NNNNNC The number consists of NNNNN = running number C = check digit, </xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:length value="6"/>`
	`<xs:pattern value="\d*[1-9]\d*"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/AcceptancePoint/ForwardingTrainNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 6
annotation	documentation Train number at shipping

source	`<xs:element name="ForwardingTrainNumber" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Train number at shipping </xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:minLength value="1"/>`

```
      <xs:maxLength value="6"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/AcceptancePoint/CarrierCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Code of the shipping carrier mentioned in the consignment number.

source	`<xs:element name="CarrierCode" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Code of the shipping carrier mentioned in the consignment number.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/DeliveryPoint**

diagram	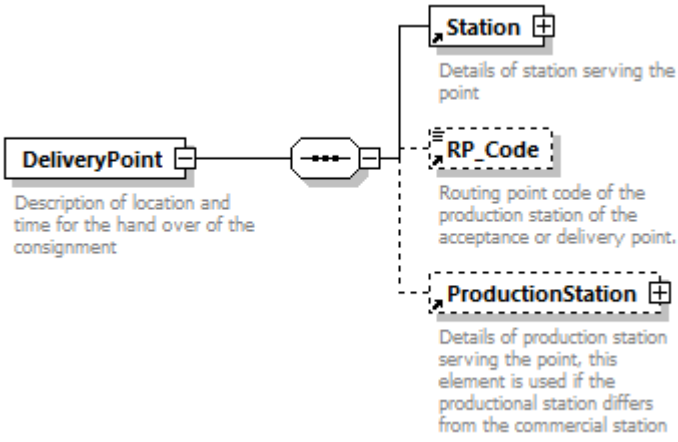
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Station RP_Code ProductionStation**
annotation	documentation Description of location and time for the hand over of the consignment

source	`<xs:element name="DeliveryPoint">`
	`  <xs:annotation>`
	`  <xs:documentation>Description of location and time for the hand over of the consignment</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`

```
    <xs:sequence>
      <xs:element ref="Station"/>
      <xs:element ref="RP_Code" minOccurs="0"/>
      <xs:element ref="ProductionStation" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ConsignorDeclarations**

diagram	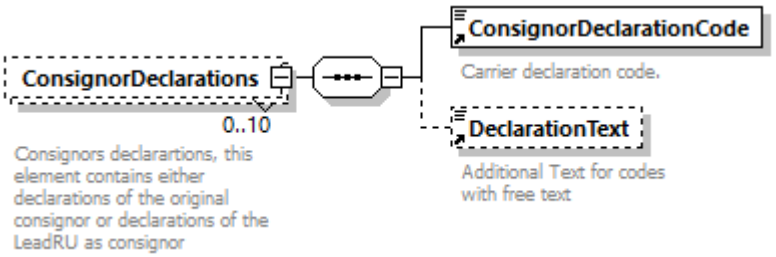
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 10 content complex
children	**ConsignorDeclarationCode DeclarationText**
annotation	documentation Consignors declarartions, this element contains either declarations of the original consignor or declarations of the LeadRU as consignor
source	<xs:element name="ConsignorDeclarations" minOccurs="0" maxOccurs="10"> <xs:annotation> <xs:documentation>Consignors declarartions, this element contains either declarations of the original consignor or declarations of the LeadRU as consignor</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="ConsignorDeclarationCode"/> <xs:element ref="DeclarationText" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/GeneralInformation**

diagram	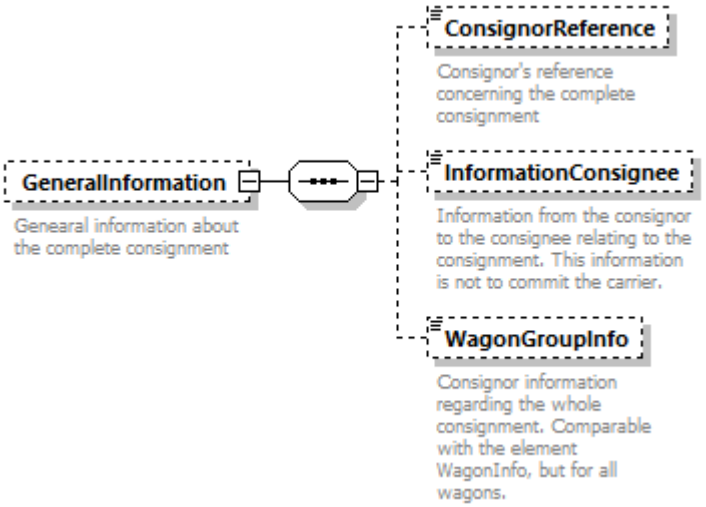
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	ConsignorReference InformationConsignee WagonGroupInfo
annotation	documentation Genearal information about the complete consignment

source

```
<xs:element name="GeneralInformation" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Genearal information about the complete
consignment</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ConsignorReference" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Consignor's reference concerning the complete
consignment</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="InformationConsignee" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Information from the consignor to the consignee relating
to the consignment. This information is not to commit the carrier.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="350"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="WagonGroupInfo" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Consignor information regarding the whole consignment.
Comparable with the element WagonInfo, but for all wagons.</xs:documentation>
        </xs:annotation>
```

```
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="2000"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/GeneralInformation/ConsignorReference**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Consignor's reference concerning the complete consignment

source	`<xs:element name="ConsignorReference" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Consignor's reference concerning the complete consignment</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/GeneralInformation/InformationConsignee**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 350
annotation	documentation Information from the consignor to the consignee relating to the consignment. This information is not to commit the carrier.

source

```
<xs:element name="InformationConsignee" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Information from the consignor to the consignee relating to the
consignment. This information is not to commit the carrier.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="350"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/GeneralInformation/WagonGroupInfo**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:string**

properties

minOcc	0
maxOcc	1
content	simple

facets

Kind	Value	Annotation
minLength	1	
maxLength	2000	

annotation

documentation
Consignor information regarding the whole consignment. Comparable with the element WagonInfo, but for all wagons.

source

```
<xs:element name="WagonGroupInfo" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Consignor information regarding the whole consignment.
Comparable with the element WagonInfo, but for all wagons.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:maxLength value="2000"/>
      <xs:minLength value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/AttachedDocuments**

diagram	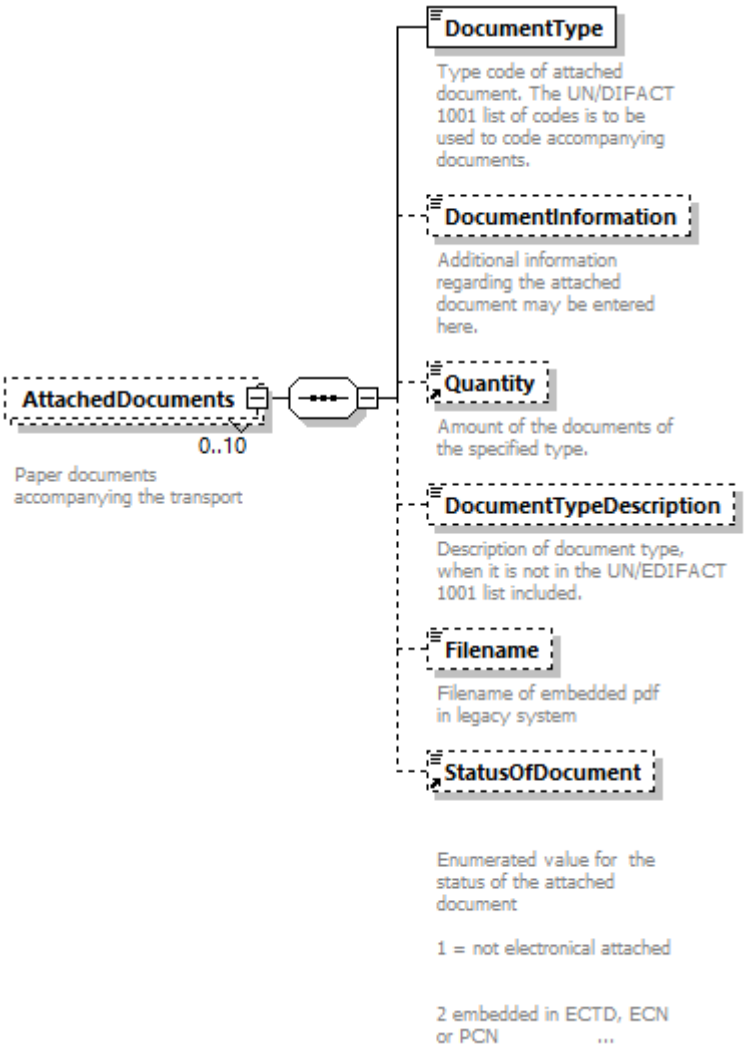
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 10 content complex
children	DocumentType DocumentInformation Quantity DocumentTypeDescription Filename StatusOfDocument
annotation	documentation Paper documents accompanying the transport
source	<xs:element name="AttachedDocuments" minOccurs="0" maxOccurs="10"> <xs:annotation> <xs:documentation>Paper documents accompanying the transport</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="DocumentType"> <xs:annotation> <xs:documentation>Type code of attached document. The UN/DIFACT 1001 list of codes is to be used to code accompanying documents.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> <xs:maxInclusive value="999"/> </xs:restriction> </xs:simpleType>

```
      </xs:element>
      <xs:element name="DocumentInformation" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Additional information regarding the attached document
may be entered here.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="Quantity" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Amount of the documents of the specified
type.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="DocumentTypeDescription" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Description of document type, when it is not in the
UN/EDIFACT 1001 list included.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Filename" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Filename of embedded pdf in legacy
system</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="35"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="StatusOfDocument" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/AttachedDocuments/DocumentType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
facets	Kind Value Annotation

	minInclusive 1 maxInclusive 999
annotation	documentation Type code of attached document. The UN/DIFACT 1001 list of codes is to be used to code accompanying documents.
source	<xs:element name="DocumentType"> <xs:annotation> <xs:documentation>Type code of attached document. The UN/DIFACT 1001 list of codes is to be used to code accompanying documents.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> <xs:maxInclusive value="999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/AttachedDocuments/DocumentInformation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Additional information regarding the attached document may be entered here.
source	<xs:element name="DocumentInformation" minOccurs="0"> <xs:annotation> <xs:documentation>Additional information regarding the attached document may be entered here.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/AttachedDocuments/DocumentTypeDescription**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1

	content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Description of document type, when it is not in the UN/EDIFACT 1001 list included.
source	<xs:element name="DocumentTypeDescription" minOccurs="0"> <xs:annotation> <xs:documentation>Description of document type, when it is not in the UN/EDIFACT 1001 list included.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/AttachedDocuments/Filename**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Filename of embedded pdf in legacy system
source	<xs:element name="Filename" minOccurs="0"> <xs:annotation> <xs:documentation>Filename of embedded pdf in legacy system</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="35"/> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/CommercialSpecifications**

diagram	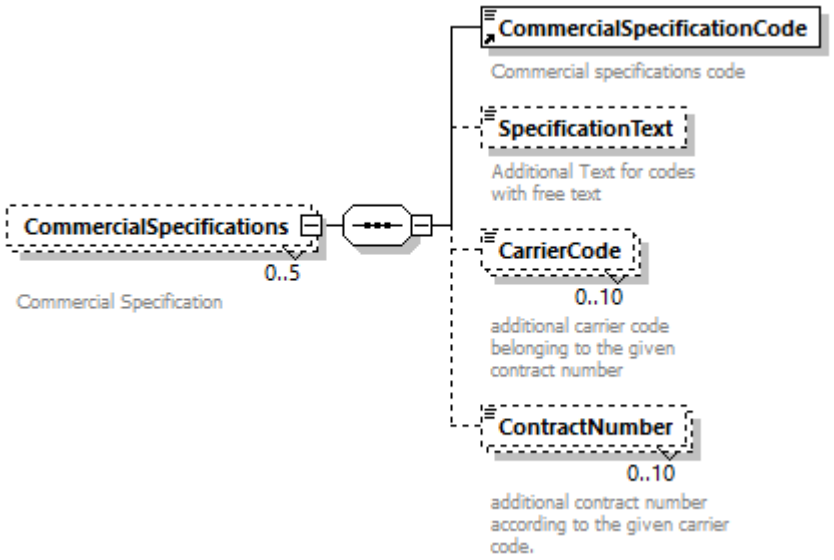
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 5 content complex
children	**CommercialSpecificationCode SpecificationText CarrierCode ContractNumber**
annotation	documentation Commercial Specification

source

```
<xs:element name="CommercialSpecifications" minOccurs="0" maxOccurs="5">
  <xs:annotation>
    <xs:documentation>Commercial Specification</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="CommercialSpecificationCode"/>
      <xs:element name="SpecificationText" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Additional Text for codes with free
text</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="1000"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CarrierCode" type="CompanyCode" minOccurs="0" maxOccurs="10">
        <xs:annotation>
          <xs:documentation>additional carrier code belonging to the given contract
number</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ContractNumber" minOccurs="0" maxOccurs="10">
        <xs:annotation>
          <xs:documentation>additional contract number according to the given carrier
code.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1">
              <xs:annotation>
```

```
                <xs:documentation>has to be sent as n6 (with leading zeros if
necessary)</xs:documentation>
              </xs:annotation>
            </xs:minLength>
            <xs:maxLength value="6"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/CommercialSpecifications/SpecificationText**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 1000
annotation	documentation Additional Text for codes with free text

source	`<xs:element name="SpecificationText" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Additional Text for codes with free text</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="1000"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/CommercialSpecifications/CarrierCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	minOcc 0 maxOcc 10 content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation additional carrier code belonging to the given contract number

source	<xs:element name="CarrierCode" type="CompanyCode" minOccurs="0" maxOccurs="10"> <xs:annotation> <xs:documentation>additional carrier code belonging to the given contract number</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/CommercialSpecifications/ContractNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 10 content simple
used by	element **WIMO_Dataset/ConsignmentLevelData**
facets	Kind Value Annotation minLength 1 documentation has to be sent as n6 (with leading zeros if necessary) maxLength 6
annotation	documentation additional contract number according to the given carrier code.
source	<xs:element name="ContractNumber" minOccurs="0" maxOccurs="10"> <xs:annotation> <xs:documentation>additional contract number according to the given carrier code.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"> <xs:annotation> <xs:documentation>has to be sent as n6 (with leading zeros if necessary)</xs:documentation> </xs:annotation> </xs:minLength> <xs:maxLength value="6"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions**

diagram	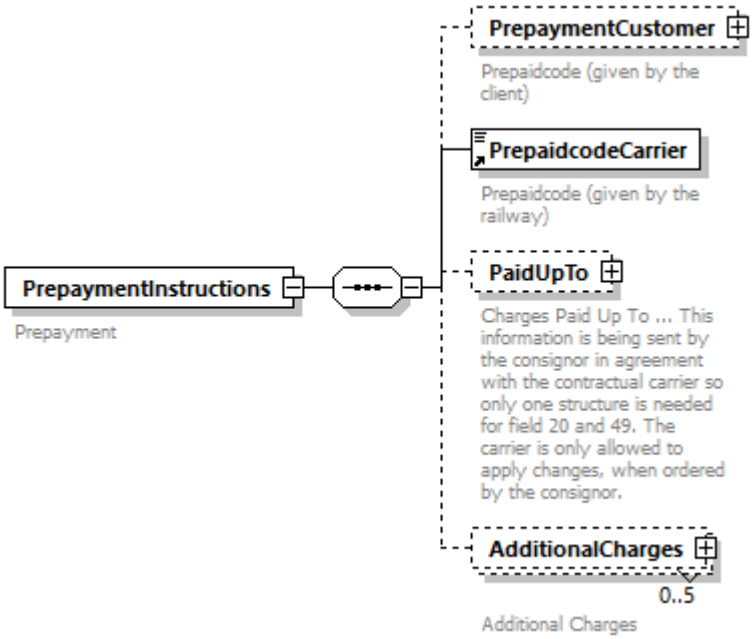
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	PrepaymentCustomer PrepaidcodeCarrier PaidUpTo AdditionalCharges
annotation	documentation Prepayment

source

```
<xs:element name="PrepaymentInstructions">
  <xs:annotation>
    <xs:documentation>Prepayment</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="PrepaymentCustomer" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Prepaidcode (given by the client)</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:choice>
            <xs:element ref="PrepaidCodeCustomer"/>
            <xs:element ref="IncotermCode"/>
          </xs:choice>
        </xs:complexType>
      </xs:element>
      <xs:element ref="PrepaidcodeCarrier"/>
      <xs:element name="PaidUpTo" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Charges Paid Up To ... This information is being sent by
the consignor in agreement with the contractual carrier so only one structure is
needed for field 20 and 49. The carrier is only allowed to apply changes, when
ordered by the consignor.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:complexContent>
            <xs:extension base="LocationIdent"/>
          </xs:complexContent>
        </xs:complexType>
      </xs:element>
      <xs:element name="AdditionalCharges" minOccurs="0" maxOccurs="5">
```

```
        <xs:annotation>
          <xs:documentation>Additional Charges</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Code">
              <xs:annotation>
                <xs:documentation>Additional charges code according CIT GLV-CIM
appendix 3</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:length value="2"/>
                  <xs:pattern value="\d*[1-9]\d*"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Description" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Additional charges description</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="35"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions/PrepaymentCustomer**

diagram	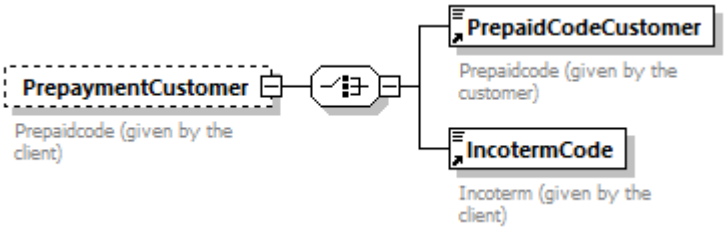
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**PrepaidCodeCustomer IncotermCode**
annotation	documentation Prepaidcode (given by the client)

source	`<xs:element name="PrepaymentCustomer" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Prepaidcode (given by the client)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:choice>`
	`  <xs:element ref="PrepaidCodeCustomer"/>`
	`  <xs:element ref="IncotermCode"/>`
	`  </xs:choice>`

```
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions/PaidUpTo**

diagram

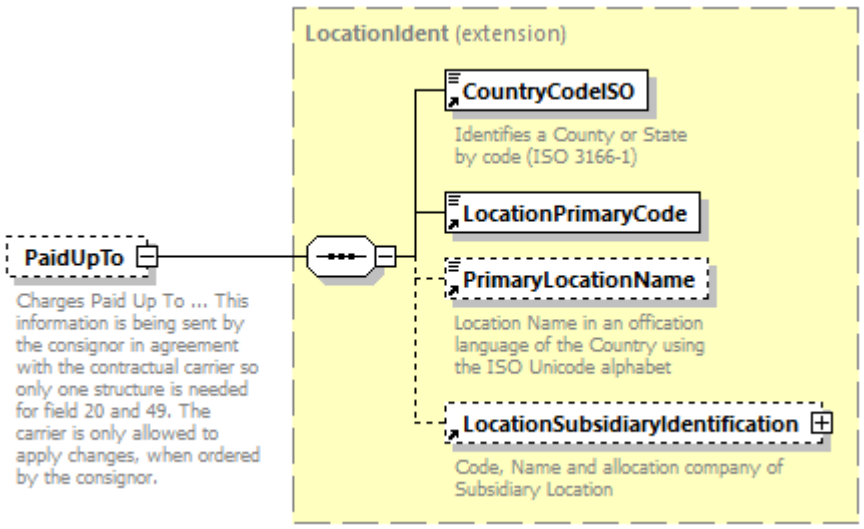

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: extension of **LocationIdent**

properties:
- minOcc 0
- maxOcc 1
- content complex

children: **CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**

annotation:
documentation
Charges Paid Up To ... This information is being sent by the consignor in agreement with the contractual carrier so only one structure is needed for field 20 and 49. The carrier is only allowed to apply changes, when ordered by the consignor.

source

```
<xs:element name="PaidUpTo" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Charges Paid Up To ... This information is being sent by the
consignor in agreement with the contractual carrier so only one structure is needed
for field 20 and 49. The carrier is only allowed to apply changes, when ordered by
the consignor.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:complexContent>
      <xs:extension base="LocationIdent"/>
    </xs:complexContent>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions/AdditionalCharges**

diagram

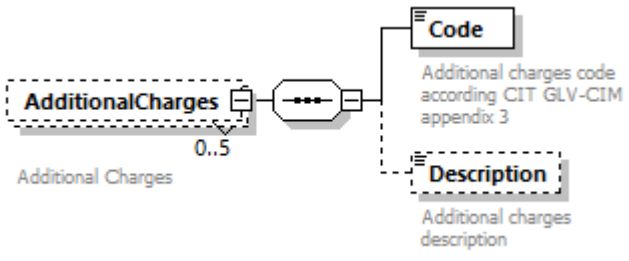

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 5 content complex
children	**Code** **Description**
annotation	documentation Additional Charges
source	<xs:element name="AdditionalCharges" minOccurs="0" maxOccurs="5"> <xs:annotation> <xs:documentation>Additional Charges</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="Code"> <xs:annotation> <xs:documentation>Additional charges code according CIT GLV-CIM appendix 3</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:length value="2"/> <xs:pattern value="\d*[1-9]\d*"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="Description" minOccurs="0"> <xs:annotation> <xs:documentation>Additional charges description</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions/AdditionalCharges/Code**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation length 2 pattern \d*[1-9]\d*
annotation	documentation Additional charges code according CIT GLV-CIM appendix 3
source	<xs:element name="Code"> <xs:annotation> <xs:documentation>Additional charges code according CIT GLV-CIM appendix 3</xs:documentation>

```
    </xs:annotation>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:length value="2"/>
        <xs:pattern value="\d*[1-9]\d*"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions/AdditionalCharges/Description**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Additional charges description

source	`<xs:element name="Description" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Additional charges description</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/Tariff**

diagram	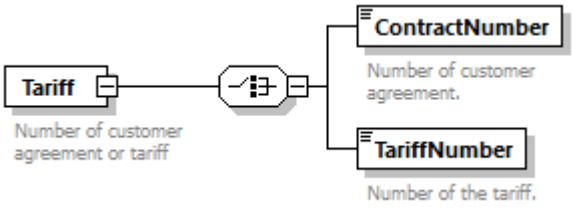
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**ContractNumber TariffNumber**
annotation	documentation Number of customer agreement or tariff

source	`<xs:element name="Tariff">`
	`  <xs:annotation>`
	`  <xs:documentation>Number of customer agreement or tariff</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:choice>`

```
      <xs:element name="ContractNumber">
        <xs:annotation>
          <xs:documentation>Number of customer agreement.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1">
              <xs:annotation>
                <xs:documentation>has to be sent as n6 (with leading zeros if
necessary)</xs:documentation>
              </xs:annotation>
            </xs:minLength>
            <xs:maxLength value="6"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="TariffNumber">
        <xs:annotation>
          <xs:documentation>Number of the tariff.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1">
              <xs:annotation>
                <xs:documentation>has to be sent as n6 (with leading zeros if
necessary, but without check digit)</xs:documentation>
              </xs:annotation>
            </xs:minLength>
            <xs:maxLength value="6"/>
            <xs:pattern value="\d*[1-9]\d*"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:choice>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/Tariff/ContractNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	element **WIMO_Dataset/ConsignmentLevelData**
facets	Kind / Value / Annotation minLength 1 documentation: has to be sent as n6 (with leading zeros if necessary) maxLength 6
annotation	documentation Number of customer agreement.

source	`<xs:element name="ContractNumber">`
	`  <xs:annotation>`
	`  <xs:documentation>Number of customer agreement.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1">`

```
        <xs:annotation>
          <xs:documentation>has to be sent as n6 (with leading zeros if
necessary)</xs:documentation>
        </xs:annotation>
      </xs:minLength>
      <xs:maxLength value="6"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/Tariff/TariffNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind / Value / Annotation minLength 1 — documentation: has to be sent as n6 (with leading zeros if necessary, but without check digit) maxLength 6 pattern \d*[1-9]\d*
annotation	documentation Number of the tariff.

source	`<xs:element name="TariffNumber">`
	`  <xs:annotation>`
	`  <xs:documentation>Number of the tariff.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1">`
	`  <xs:annotation>`
	`  <xs:documentation>has to be sent as n6 (with leading zeros if necessary, but without check digit)</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:minLength>`
	`  <xs:maxLength value="6"/>`
	`  <xs:pattern value="\d*[1-9]\d*"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/SectionalInvoicing**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**Section**
annotation	documentation Sectional Invoicing
source	`<xs:element name="SectionalInvoicing" minOccurs="0">`

```
  <xs:annotation>
    <xs:documentation>Sectional Invoicing</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Section" maxOccurs="30">
        <xs:annotation>
          <xs:documentation>Sectional Invoicing</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="InvoicingCarrierCode" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Sectional invoicing by</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="InvoicedSection">
              <xs:annotation>
                <xs:documentation>Information about the section to be
invoiced.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:choice>
                  <xs:element name="CountryCode" type="CountryIdentISO">
                    <xs:annotation>
                      <xs:documentation>Invoiced section specified by
country</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="SectionCarrierCode" type="CompanyCode">
                    <xs:annotation>
                      <xs:documentation>Invoiced section specified by
carrier</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:choice>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/SectionalInvoicing/Section**

diagram	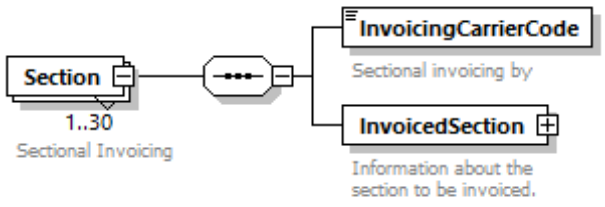
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 1 maxOcc 30 content complex
children	**InvoicingCarrierCode** **InvoicedSection**
annotation	documentation Sectional Invoicing

source

```
<xs:element name="Section" maxOccurs="30">
  <xs:annotation>
    <xs:documentation>Sectional Invoicing</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="InvoicingCarrierCode" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>Sectional invoicing by</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="InvoicedSection">
        <xs:annotation>
          <xs:documentation>Information about the section to be
invoiced.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:choice>
            <xs:element name="CountryCode" type="CountryIdentISO">
              <xs:annotation>
                <xs:documentation>Invoiced section specified by
country</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="SectionCarrierCode" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Invoiced section specified by
carrier</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:choice>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/SectionalInvoicing/Section/InvoicingCarrierCode**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: **CompanyCode**

properties: content simple

facets

Kind	Value	Annotation
minLength	4	
maxLength	4	
pattern	[0-9A-Z]{4}	

annotation: documentation
Sectional invoicing by

source

```
<xs:element name="InvoicingCarrierCode" type="CompanyCode">
  <xs:annotation>
    <xs:documentation>Sectional invoicing by</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/SectionalInvoicing/Section/InvoicedSection**

diagram	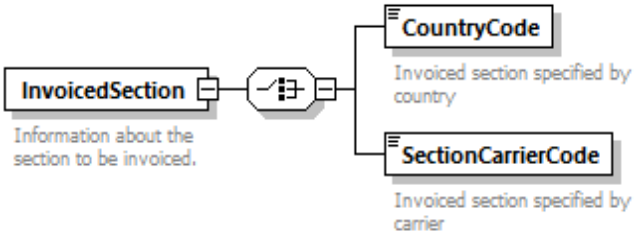
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**CountryCode** **SectionCarrierCode**
annotation	documentation Information about the section to be invoiced.

source	`<xs:element name="InvoicedSection">`
	`<xs:annotation>`
	`<xs:documentation>Information about the section to be invoiced.</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:choice>`
	`<xs:element name="CountryCode" type="CountryIdentISO">`
	`<xs:annotation>`
	`<xs:documentation>Invoiced section specified by country</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element name="SectionCarrierCode" type="CompanyCode">`
	`<xs:annotation>`
	`<xs:documentation>Invoiced section specified by carrier</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`</xs:choice>`
	`</xs:complexType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/SectionalInvoicing/Section/InvoicedSection/CountryCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	content simple
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation Invoiced section specified by country

source	`<xs:element name="CountryCode" type="CountryIdentISO">`
	`<xs:annotation>`
	`<xs:documentation>Invoiced section specified by country</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/SectionalInvoicing/Section/InvoicedSection/SectionCarrierCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Invoiced section specified by carrier

source	`<xs:element name="SectionCarrierCode" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Invoiced section specified by carrier</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/DeclarationOfValue**

diagram	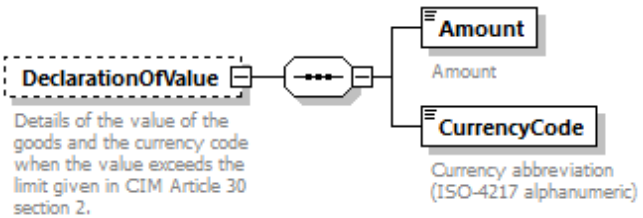
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**Amount CurrencyCode**
annotation	documentation Details of the value of the goods and the currency code when the value exceeds the limit given in CIM Article 30 section 2.

source	`<xs:element name="DeclarationOfValue" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Details of the value of the goods and the currency code when the value exceeds the limit given in CIM Article 30 section 2.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="Amount" type="Money_Type">`
	`  <xs:annotation>`
	`  <xs:documentation>Amount</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  <xs:element name="CurrencyCode" type="CurrencyCode_Type">`
	`  <xs:annotation>`
	`  <xs:documentation>Currency abbreviation (ISO-4217 alphanumeric)</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/DeclarationOfValue/Amount**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Money_Type**
properties	content simple
facets	Kind Value Annotation totalDigits 18 fractionDigits 2
annotation	documentation Amount

source	`<xs:element name="Amount" type="Money_Type">`
	`  <xs:annotation>`
	`  <xs:documentation>Amount</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/DeclarationOfValue/CurrencyCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CurrencyCode_Type**
properties	content simple
facets	Kind Value Annotation pattern [A-Z][A-Z][A-Z]
annotation	documentation Currency abbreviation (ISO-4217 alphanumeric)

source	`<xs:element name="CurrencyCode" type="CurrencyCode_Type">`
	`  <xs:annotation>`
	`  <xs:documentation>Currency abbreviation (ISO-4217 alphanumeric)</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/InterestInDelivery**

diagram	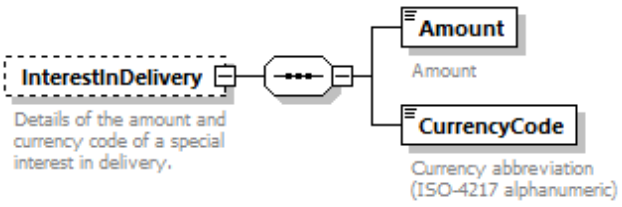
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**Amount** **CurrencyCode**

annotation	documentation Details of the amount and currency code of a special interest in delivery.
source	<xs:element name="InterestInDelivery" minOccurs="0"> <xs:annotation> <xs:documentation>Details of the amount and currency code of a special interest in delivery.</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="Amount" type="Money_Type"> <xs:annotation> <xs:documentation>Amount</xs:documentation> </xs:annotation> </xs:element> <xs:element name="CurrencyCode" type="CurrencyCode_Type"> <xs:annotation> <xs:documentation>Currency abbreviation (ISO-4217 alphanumeric)</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/InterestInDelivery/Amount**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Money_Type**
properties	content simple
facets	Kind Value Annotation totalDigits 18 fractionDigits 2
annotation	documentation Amount
source	<xs:element name="Amount" type="Money_Type"> <xs:annotation> <xs:documentation>Amount</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/InterestInDelivery/CurrencyCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CurrencyCode_Type**
properties	content simple
facets	Kind Value Annotation pattern [A-Z][A-Z][A-Z]
annotation	documentation Currency abbreviation (ISO-4217 alphanumeric)

source	<xs:element name="CurrencyCode" type="CurrencyCode_Type"> <xs:annotation> <xs:documentation>Currency abbreviation (ISO-4217 alphanumeric)</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/CashOnDelivery**

diagram	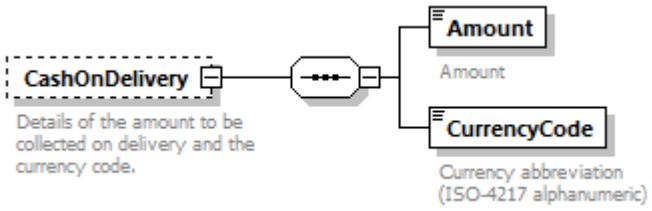
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**Amount CurrencyCode**
annotation	documentation Details of the amount to be collected on delivery and the currency code.
source	<xs:element name="CashOnDelivery" minOccurs="0"> <xs:annotation> <xs:documentation>Details of the amount to be collected on delivery and the currency code.</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="Amount" type="Money_Type"> <xs:annotation> <xs:documentation>Amount</xs:documentation> </xs:annotation> </xs:element> <xs:element name="CurrencyCode" type="CurrencyCode_Type"> <xs:annotation> <xs:documentation>Currency abbreviation (ISO-4217 alphanumeric)</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/CashOnDelivery/Amount**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Money_Type**
properties	content simple
facets	Kind Value Annotation totalDigits 18 fractionDigits 2

annotation	documentation Amount
source	<xs:element name="Amount" type="Money_Type"> <xs:annotation> <xs:documentation>Amount</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/CashOnDelivery/CurrencyCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	CurrencyCode_Type
properties	content simple
facets	Kind Value Annotation pattern [A-Z][A-Z][A-Z]
annotation	documentation Currency abbreviation (ISO-4217 alphanumeric)
source	<xs:element name="CurrencyCode" type="CurrencyCode_Type"> <xs:annotation> <xs:documentation>Currency abbreviation (ISO-4217 alphanumeric)</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/RouteSection**

diagram	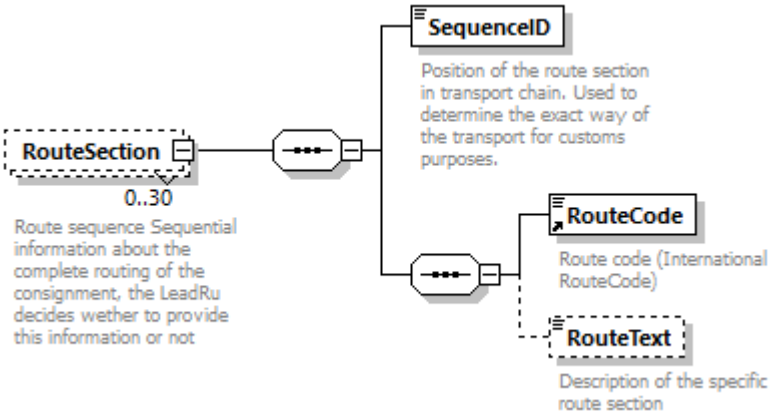
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 30 content complex
children	SequenceID RouteCode RouteText
annotation	documentation Route sequence Sequential information about the complete routing of the consignment, the LeadRu decides wether to provide this information or not
source	<xs:element name="RouteSection" minOccurs="0" maxOccurs="30"> <xs:annotation> <xs:documentation>Route sequence Sequential information about the complete routing of the consignment, the LeadRu decides wether to provide this information or

```
not</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="SequenceID" type="xs:int">
        <xs:annotation>
          <xs:documentation>Position of the route section in transport chain. Used to
determine the exact way of the transport for customs purposes.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:sequence>
        <xs:element ref="RouteCode"/>
        <xs:element name="RouteText" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Description of the specific route
section</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:minLength value="1"/>
              <xs:maxLength value="80"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
      </xs:sequence>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/RouteSection/SequenceID**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:int**
properties	content simple
annotation	documentation Position of the route section in transport chain. Used to determine the exact way of the transport for customs purposes.

source	`<xs:element name="SequenceID" type="xs:int">`
	`  <xs:annotation>`
	`  <xs:documentation>Position of the route section in transport chain. Used to determine the exact way of the transport for customs purposes.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/RouteSection/RouteText**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 80
annotation	documentation Description of the specific route section
source	<xs:element name="RouteText" minOccurs="0"> <xs:annotation> <xs:documentation>Description of the specific route section</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="80"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/CustomsProcedures**

diagram	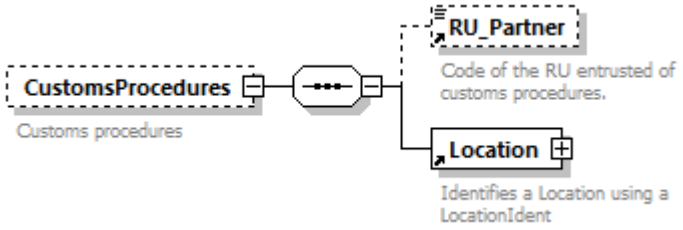
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	RU_Partner Location
annotation	documentation Customs procedures
source	<xs:element name="CustomsProcedures" minOccurs="0"> <xs:annotation> <xs:documentation>Customs procedures</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="RU_Partner" minOccurs="0"> <xs:annotation> <xs:documentation>Code of the RU entrusted of customs procedures. </xs:documentation> </xs:annotation> </xs:element> <xs:element ref="Location"/> </xs:sequence> </xs:complexType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/CustomsData**

diagram	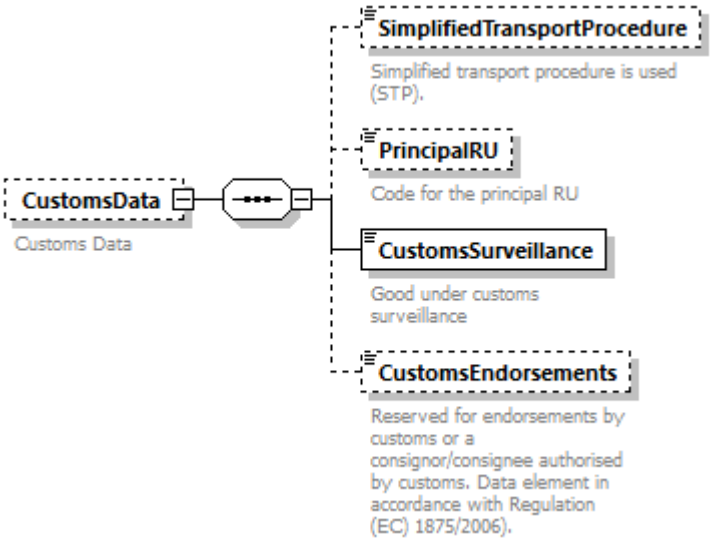
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	SimplifiedTransportProcedure PrincipalRU CustomsSurveillance CustomsEndorsements
annotation	documentation Customs Data

source

```
<xs:element name="CustomsData" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Customs Data</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="SimplifiedTransportProcedure" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Simplified transport procedure is used
(STP).</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:boolean"/>
        </xs:simpleType>
      </xs:element>
      <xs:element name="PrincipalRU" type="CompanyCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Code for the principal RU</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="CustomsSurveillance">
        <xs:annotation>
          <xs:documentation>Good under customs surveillance</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:boolean"/>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CustomsEndorsements" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Reserved for endorsements by customs or a
consignor/consignee authorised by customs. Data element in accordance with Regulation
(EC) 1875/2006).</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
```

```
            <xs:restriction base="xs:string">
              <xs:minLength value="1"/>
              <xs:maxLength value="1000"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/CustomsData/SimplifiedTransportProcedure**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Simplified transport procedure is used (STP).

source	`<xs:element name="SimplifiedTransportProcedure" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Simplified transport procedure is used (STP).</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:boolean"/>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/CustomsData/PrincipalRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Code for the principal RU

source	`<xs:element name="PrincipalRU" type="CompanyCode" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Code for the principal RU</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/CustomsData/CustomsSurveillance**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:boolean**
properties	content simple
annotation	documentation Good under customs surveillance

source	`<xs:element name="CustomsSurveillance">`
	`  <xs:annotation>`
	`  <xs:documentation>Good under customs surveillance</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:boolean"/>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/CustomsData/CustomsEndorsements**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 1000
annotation	documentation Reserved for endorsements by customs or a consignor/consignee authorised by customs. Data element in accordance with Regulation (EC) 1875/2006).

source	`<xs:element name="CustomsEndorsements" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Reserved for endorsements by customs or a consignor/consignee authorised by customs. Data element in accordance with Regulation (EC) 1875/2006).</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="1000"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/RU_Declarations**

diagram	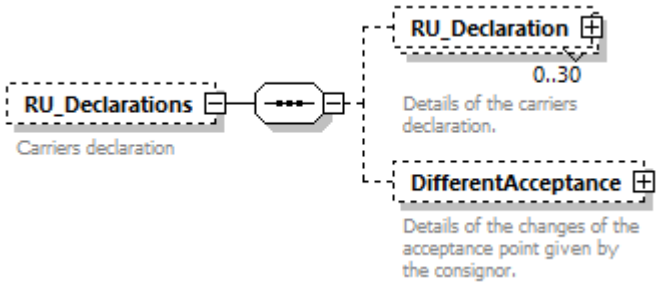
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**RU_Declaration DifferentAcceptance**
annotation	documentation Carriers declaration

source

```
<xs:element name="RU_Declarations" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Carriers declaration</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="RU_Declaration" minOccurs="0" maxOccurs="30">
        <xs:annotation>
          <xs:documentation>Details of the carriers declaration.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="DeclaringRU" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Code of carrier, who added the
declaration.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="RU_DeclarationCode"/>
            <xs:element ref="DeclarationText" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="DifferentAcceptance" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Details of the changes of the acceptance point given by
the consignor.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="DifferentAcceptancePoint" type="LocationIdent"
minOccurs="0">
              <xs:annotation>
                <xs:documentation>Variance of acceptance point given in structure
AcceptancePoint.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="DifferentAcceptanceDate" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Variance of acceptance date given structure
AcceptancePoint.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:dateTime"/>
```

```
            </xs:simpleType>
          </xs:element>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
 </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/RU_Declarations/RU_Declaration**

diagram

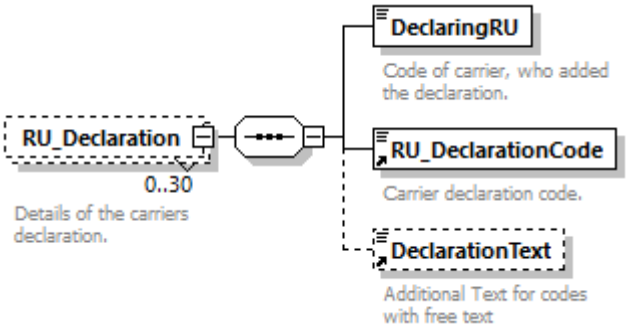

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties:
- minOcc 0
- maxOcc 30
- content complex

children: **DeclaringRU** **RU_DeclarationCode** **DeclarationText**

annotation:
documentation
Details of the carriers declaration.

source

```
<xs:element name="RU_Declaration" minOccurs="0" maxOccurs="30">
  <xs:annotation>
    <xs:documentation>Details of the carriers declaration.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="DeclaringRU" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>Code of carrier, who added the
declaration.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="RU_DeclarationCode"/>
      <xs:element ref="DeclarationText" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/RU_Declarations/RU_Declaration/DeclaringRU**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: **CompanyCode**

properties:
- content simple

facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Code of carrier, who added the declaration.
source	<xs:element name="DeclaringRU" type="CompanyCode"> <xs:annotation> <xs:documentation>Code of carrier, who added the declaration.</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/RU_Declarations/DifferentAcceptance**

diagram	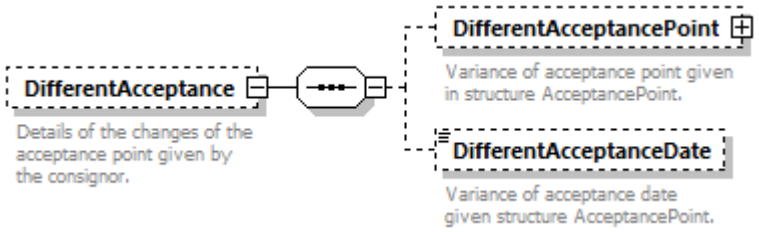
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	DifferentAcceptancePoint DifferentAcceptanceDate
annotation	documentation Details of the changes of the acceptance point given by the consignor.
source	<xs:element name="DifferentAcceptance" minOccurs="0"> <xs:annotation> <xs:documentation>Details of the changes of the acceptance point given by the consignor.</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="DifferentAcceptancePoint" type="LocationIdent" minOccurs="0"> <xs:annotation> <xs:documentation>Variance of acceptance point given in structure AcceptancePoint.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="DifferentAcceptanceDate" minOccurs="0"> <xs:annotation> <xs:documentation>Variance of acceptance date given structure AcceptancePoint.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:dateTime"/> </xs:simpleType> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element

ConsignmentOrderMessage/COMS/COM/RU_Declarations/DifferentAcceptance/DifferentAcceptancePoint

diagram	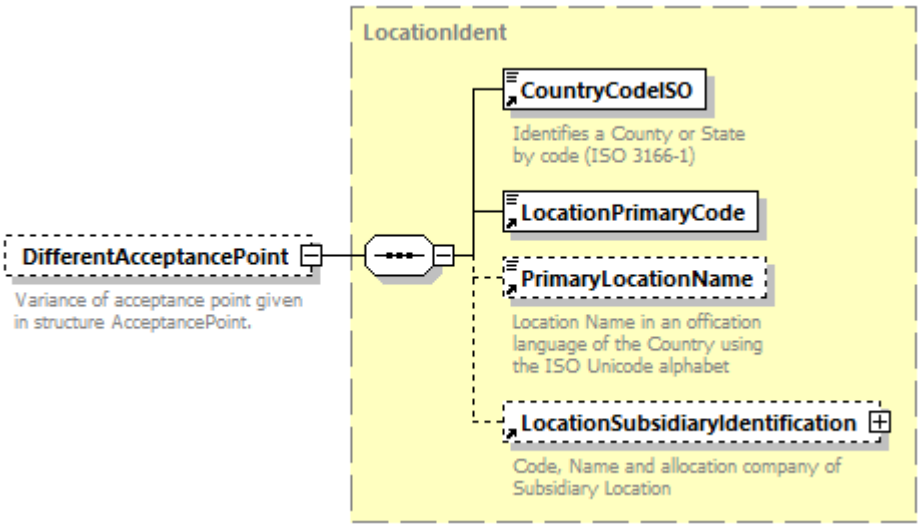
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	minOcc 0 maxOcc 1 content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
annotation	documentation Variance of acceptance point given in structure AcceptancePoint.

source	`<xs:element name="DifferentAcceptancePoint" type="LocationIdent" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Variance of acceptance point given in structure AcceptancePoint.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/RU_Declarations/DifferentAcceptance/DifferentAcceptanceDate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:dateTime**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Variance of acceptance date given structure AcceptancePoint.

source	`<xs:element name="DifferentAcceptanceDate" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Variance of acceptance date given structure AcceptancePoint.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:dateTime"/>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/Carriers**

diagram

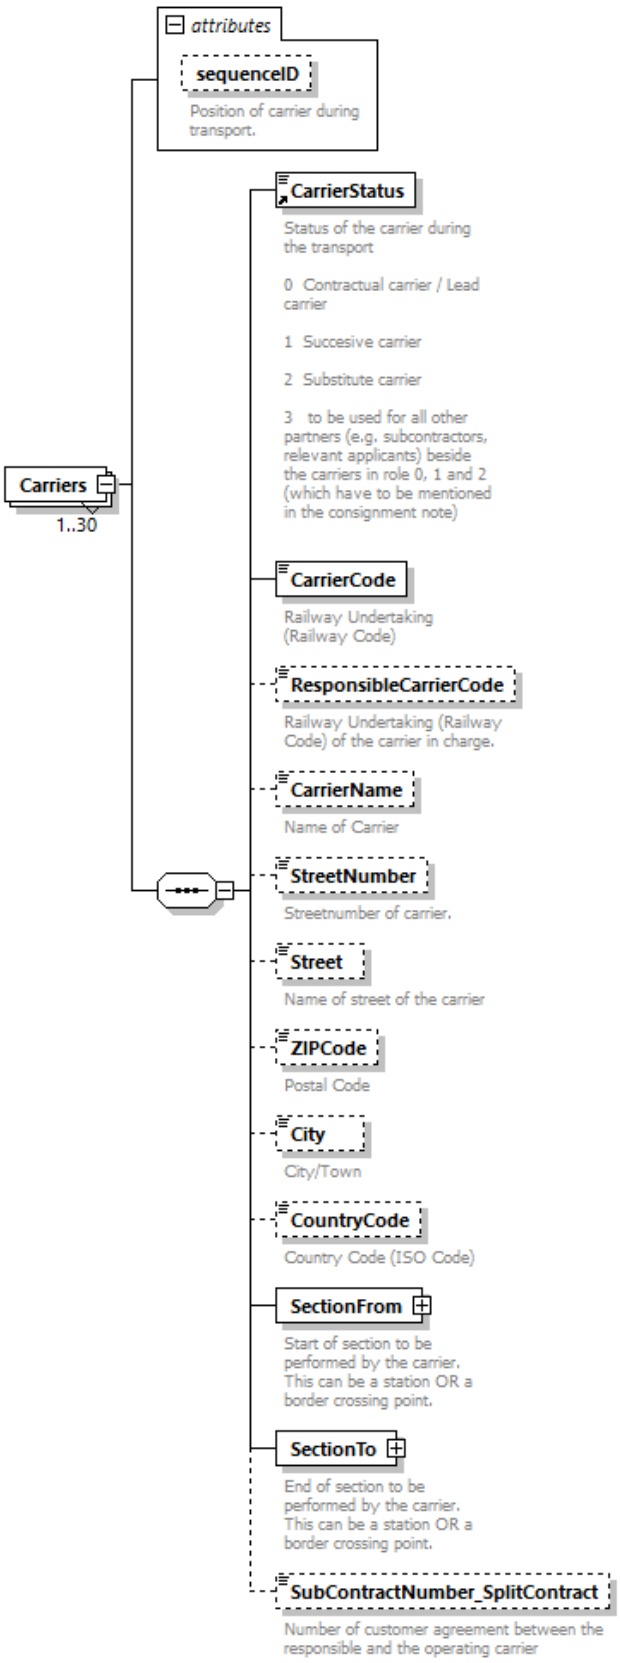

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

properties	minOcc 1 maxOcc 30 content complex
children	CarrierStatus CarrierCode ResponsibleCarrierCode CarrierName StreetNumber Street ZIPCode City CountryCode SectionFrom SectionTo SubContractNumber SplitContract

attributes

Name	Type	Use	Default	Fixed	Annotation
sequenceID	**xs:int**				documentation Position of carrier during transport.

source

```
<xs:element name="Carriers" maxOccurs="30">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="CarrierStatus"/>
      <xs:element name="CarrierCode" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>Railway Undertaking (Railway Code)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ResponsibleCarrierCode" type="CompanyCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Railway Undertaking (Railway Code) of the carrier in
charge.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="CarrierName" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Name of Carrier</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="StreetNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Streetnumber of carrier.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="5"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Street" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Name of street of the carrier</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ZIPCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Postal Code</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
```

```
            <xs:minLength value="1"/>
            <xs:maxLength value="9"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="City" minOccurs="0">
        <xs:annotation>
          <xs:documentation>City/Town</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CountryCode" type="CountryIdentISO" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Country Code (ISO Code)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="SectionFrom" type="LocationIdent">
        <xs:annotation>
          <xs:documentation>Start of section to be performed by the carrier. This can
be a station OR a border crossing point.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="SectionTo" type="LocationIdent">
        <xs:annotation>
          <xs:documentation>End of section to be performed by the carrier. This can
be a station OR a border crossing point.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="SubContractNumber_SplitContract" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Number of customer agreement between the responsible and
the operating carrier</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1">
              <xs:annotation>
                <xs:documentation>has to be sent as n6 (with leading zeros if
necessary)</xs:documentation>
              </xs:annotation>
            </xs:minLength>
            <xs:maxLength value="6"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
    <xs:attribute name="sequenceID" type="xs:int">
      <xs:annotation>
        <xs:documentation>Position of carrier during transport. </xs:documentation>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

attribute **ConsignmentOrderMessage/COMS/COM/Carriers/@sequenceID**

type	**xs:int**

annotation	documentation Position of carrier during transport.

source	`<xs:attribute name="sequenceID" type="xs:int">`
	`  <xs:annotation>`
	`  <xs:documentation>Position of carrier during transport. </xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

element **ConsignmentOrderMessage/COMS/COM/Carriers/CarrierCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Railway Undertaking (Railway Code)

source	`<xs:element name="CarrierCode" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Railway Undertaking (Railway Code)</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/Carriers/ResponsibleCarrierCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Railway Undertaking (Railway Code) of the carrier in charge.

source	`<xs:element name="ResponsibleCarrierCode" type="CompanyCode" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Railway Undertaking (Railway Code) of the carrier in charge.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/Carriers/CarrierName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Name of Carrier

source	`<xs:element name="CarrierName" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Name of Carrier</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/Carriers/StreetNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 5
annotation	documentation Streetnumber of carrier.

source	`<xs:element name="StreetNumber" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Streetnumber of carrier.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="5"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/Carriers/Street**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Name of street of the carrier
source	<xs:element name="Street" minOccurs="0"> <xs:annotation> <xs:documentation>Name of street of the carrier</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/Carriers/ZIPCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 9
annotation	documentation Postal Code
source	<xs:element name="ZIPCode" minOccurs="0"> <xs:annotation> <xs:documentation>Postal Code</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="9"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/Carriers/City**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation City/Town

source	`<xs:element name="City" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>City/Town</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/Carriers/CountryCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation Country Code (ISO Code)

source	`<xs:element name="CountryCode" type="CountryIdentISO" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Country Code (ISO Code)</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/Carriers/SectionFrom**

diagram	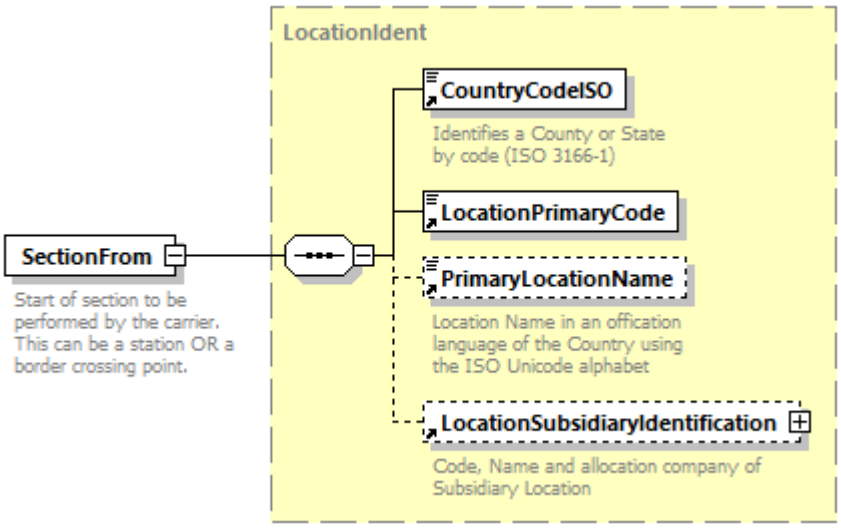
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
annotation	documentation Start of section to be performed by the carrier. This can be a station OR a border crossing point.

source	`<xs:element name="SectionFrom" type="LocationIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>Start of section to be performed by the carrier. This can be a station OR a border crossing point.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/Carriers/SectionTo**

diagram	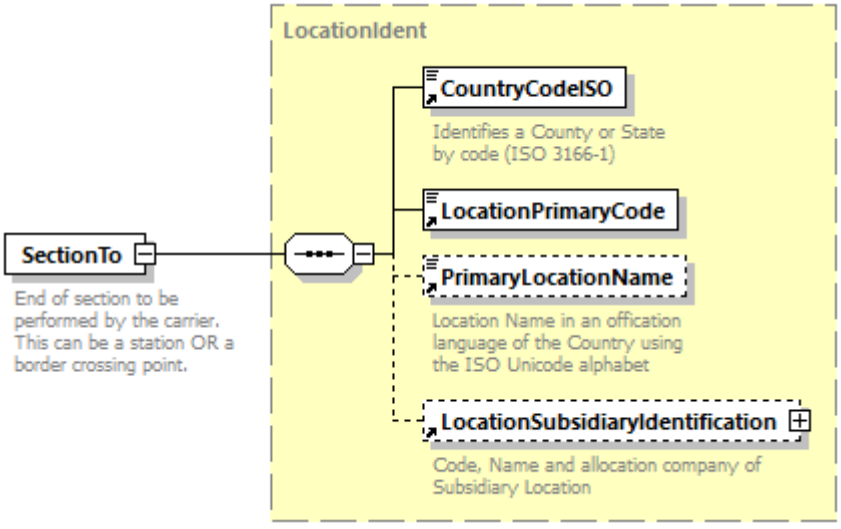
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex

children	CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification
annotation	documentation End of section to be performed by the carrier. This can be a station OR a border crossing point.
source	<xs:element name="SectionTo" type="LocationIdent"> <xs:annotation> <xs:documentation>End of section to be performed by the carrier. This can be a station OR a border crossing point.</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/Carriers/SubContractNumber_SplitContract**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 documentation has to be sent as n6 (with leading zeros if necessary) maxLength 6
annotation	documentation Number of customer agreement between the responsible and the operating carrier
source	<xs:element name="SubContractNumber_SplitContract" minOccurs="0"> <xs:annotation> <xs:documentation>Number of customer agreement between the responsible and the operating carrier</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"> <xs:annotation> <xs:documentation>has to be sent as n6 (with leading zeros if necessary)</xs:documentation> </xs:annotation> </xs:minLength> <xs:maxLength value="6"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/LeadCarrier**

diagram	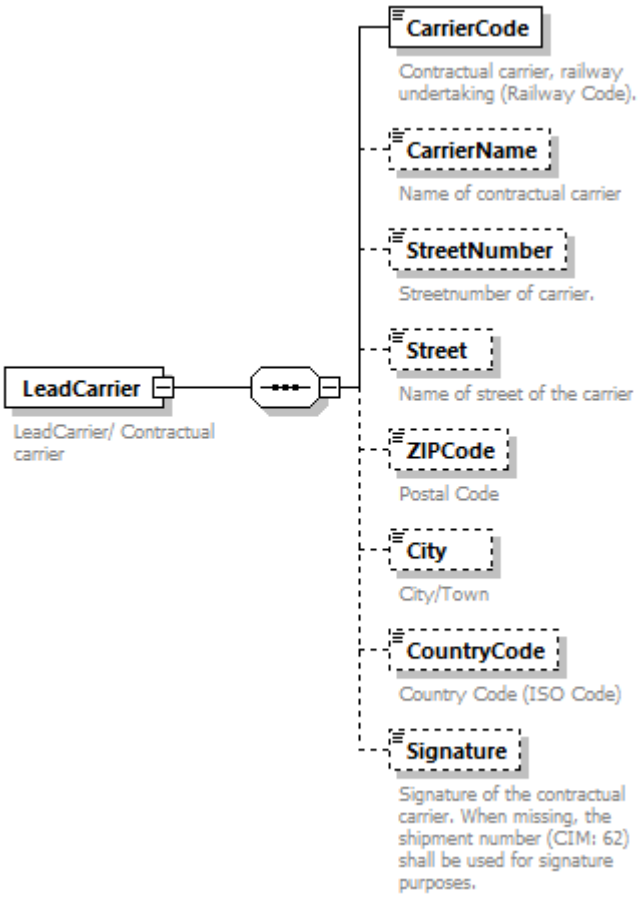
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**CarrierCode CarrierName StreetNumber Street ZIPCode City CountryCode Signature**
annotation	documentation LeadCarrier/ Contractual carrier

source	`<xs:element name="LeadCarrier">`
	`<xs:annotation>`
	`<xs:documentation>LeadCarrier/ Contractual carrier</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element name="CarrierCode" type="CompanyCode">`
	`<xs:annotation>`
	`<xs:documentation>Contractual carrier, railway undertaking (Railway Code).</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element name="CarrierName" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Name of contractual carrier</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:minLength value="1"/>`
	`<xs:maxLength value="35"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

```
      <xs:element name="StreetNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Streetnumber of carrier.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="5"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Street" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Name of street of the carrier</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ZIPCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Postal Code</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="9"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="City" minOccurs="0">
        <xs:annotation>
          <xs:documentation>City/Town</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CountryCode" type="CountryIdentISO" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Country Code (ISO Code)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="Signature" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Signature of the contractual carrier. When missing, the
shipment number (CIM: 62) shall be used for signature purposes.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/LeadCarrier/CarrierCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Contractual carrier, railway undertaking (Railway Code).

source	`<xs:element name="CarrierCode" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Contractual carrier, railway undertaking (Railway Code).</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/LeadCarrier/CarrierName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Name of contractual carrier

source	`<xs:element name="CarrierName" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Name of contractual carrier</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/LeadCarrier/StreetNumber**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 5
annotation	documentation Streetnumber of carrier.
source	<xs:element name="StreetNumber" minOccurs="0"> <xs:annotation> <xs:documentation>Streetnumber of carrier.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="5"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/LeadCarrier/Street**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Name of street of the carrier
source	<xs:element name="Street" minOccurs="0"> <xs:annotation> <xs:documentation>Name of street of the carrier</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/LeadCarrier/ZIPCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 9
annotation	documentation Postal Code
source	<xs:element name="ZIPCode" minOccurs="0"> <xs:annotation> <xs:documentation>Postal Code</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="9"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/LeadCarrier/City**

diagram	City City/Town
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation City/Town
source	<xs:element name="City" minOccurs="0"> <xs:annotation> <xs:documentation>City/Town</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/LeadCarrier/CountryCode**

diagram	CountryCode Country Code (ISO Code)
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	minOcc 0 maxOcc 1 content simple

facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation Country Code (ISO Code)
source	<xs:element name="CountryCode" type="CountryIdentISO" minOccurs="0"> <xs:annotation> <xs:documentation>Country Code (ISO Code)</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/LeadCarrier/Signature**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Signature of the contractual carrier. When missing, the shipment number (CIM: 62) shall be used for signature purposes.
source	<xs:element name="Signature" minOccurs="0"> <xs:annotation> <xs:documentation>Signature of the contractual carrier. When missing, the shipment number (CIM: 62) shall be used for signature purposes.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/MadeOut**

diagram	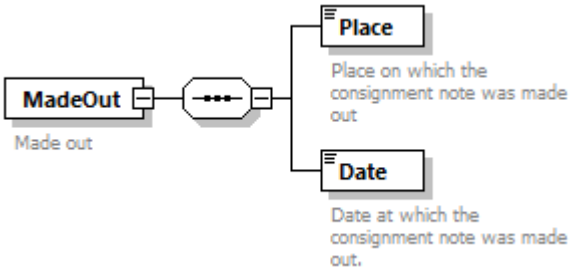
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Place Date**

annotation	documentation Made out
source	<xs:element name="MadeOut"> <xs:annotation> <xs:documentation>Made out</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="Place"> <xs:annotation> <xs:documentation>Place on which the consignment note was made out</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="35"/> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="Date" type="xs:date"> <xs:annotation> <xs:documentation>Date at which the consignment note was made out.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/MadeOut/Place**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Place on which the consignment note was made out
source	<xs:element name="Place"> <xs:annotation> <xs:documentation>Place on which the consignment note was made out</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="35"/> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/MadeOut/Date**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
annotation	documentation Date at which the consignment note was made out.

source	`<xs:element name="Date" type="xs:date">`
	`  <xs:annotation>`
	`  <xs:documentation>Date at which the consignment note was made out.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargesNote**

diagram	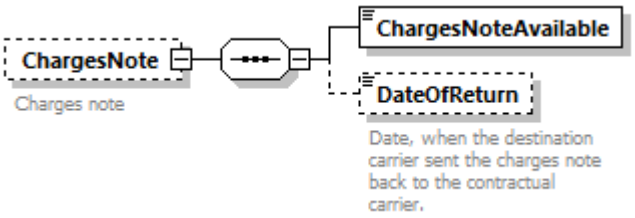
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**ChargesNoteAvailable** **DateOfReturn**
annotation	documentation Charges note

source	`<xs:element name="ChargesNote" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Charges note</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="ChargesNoteAvailable" type="xs:boolean"/>`
	`  <xs:element name="DateOfReturn" type="xs:date" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Date, when the destination carrier sent the charges note back to the contractual carrier.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargesNote/ChargesNoteAvailable**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
source	`<xs:element name="ChargesNoteAvailable" type="xs:boolean"/>`

element **ConsignmentOrderMessage/COMS/COM/ChargesNote/DateOfReturn**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Date, when the destination carrier sent the charges note back to the contractual carrier.

source	`<xs:element name="DateOfReturn" type="xs:date" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Date, when the destination carrier sent the charges note back to the contractual carrier.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/TransitPeriodExtensions**

diagram	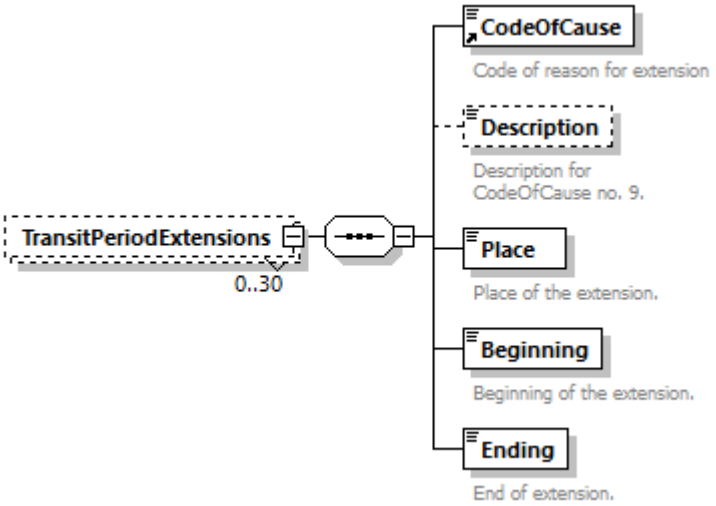
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 30 content complex
children	**CodeOfCause Description Place Beginning Ending**

source	`<xs:element name="TransitPeriodExtensions" minOccurs="0" maxOccurs="30">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="CodeOfCause"/>`

```
      <xs:element name="Description" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Description for CodeOfCause no. 9.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="180"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Place">
        <xs:annotation>
          <xs:documentation>Place of the extension.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="180"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Beginning">
        <xs:annotation>
          <xs:documentation>Beginning of the extension.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:dateTime"/>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Ending">
        <xs:annotation>
          <xs:documentation>End of extension.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:dateTime"/>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/TransitPeriodExtensions/Description**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 180
annotation	documentation Description for CodeOfCause no. 9.

source	`<xs:element name="Description" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Description for CodeOfCause no. 9.</xs:documentation>`

```
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="180"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/TransitPeriodExtensions/Place**

diagram	Place of the extension.
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 180
annotation	documentation Place of the extension.

source	`<xs:element name="Place">`
	`  <xs:annotation>`
	`  <xs:documentation>Place of the extension.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="180"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/TransitPeriodExtensions/Beginning**

diagram	 Beginning of the extension.
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:dateTime**
properties	content simple
annotation	documentation Beginning of the extension.

source	`<xs:element name="Beginning">`
	`  <xs:annotation>`
	`  <xs:documentation>Beginning of the extension.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:dateTime"/>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/TransitPeriodExtensions/Ending**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:dateTime**
properties	content simple
annotation	documentation End of extension.

source	`<xs:element name="Ending">`
	`  <xs:annotation>`
	`  <xs:documentation>End of extension.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:dateTime"/>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections**

diagram	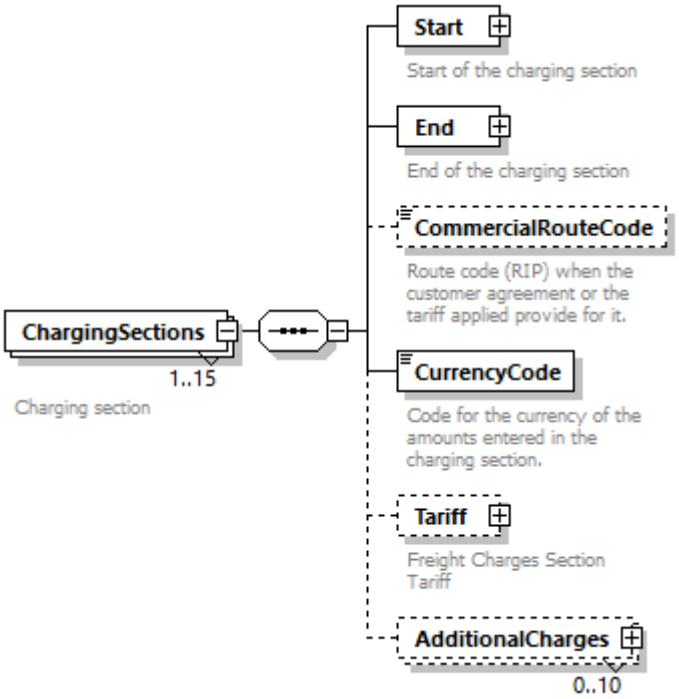
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 1 maxOcc 15 content complex
children	**Start End CommercialRouteCode CurrencyCode Tariff AdditionalCharges**
annotation	documentation Charging section

source	`<xs:element name="ChargingSections" maxOccurs="15">`
	`  <xs:annotation>`
	`  <xs:documentation>Charging section</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`

```
      <xs:element name="Start" type="LocationIdent">
        <xs:annotation>
          <xs:documentation>Start of the charging section</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="End" type="LocationIdent">
        <xs:annotation>
          <xs:documentation>End of the charging section</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="CommercialRouteCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Route code (RIP) when the customer agreement or the
tariff applied provide for it. </xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:length value="3"/>
            <xs:pattern value="\d*[1-9]\d*"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CurrencyCode" type="CurrencyCode_Type">
        <xs:annotation>
          <xs:documentation>Code for the currency of the amounts entered in the
charging section.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="Tariff" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Freight Charges Section Tariff</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="NHMCode" type="NHMCodeType">
              <xs:annotation>
                <xs:documentation>NHM code determining the charges
applicable.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="TariffNumber">
              <xs:annotation>
                <xs:documentation>Customer agreement or tariff
applied</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="6"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="ChargedMass" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Charged mass [weight in kg]. As appropriate, area
in m² or the volume of the wagon or goods in m³ if used as the basis for
charging.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="value">
                    <xs:simpleType>
                      <xs:restriction base="xs:decimal">
                        <xs:minInclusive value="1"/>
```

```
                        <xs:totalDigits value="8"/>
                        <xs:fractionDigits value="1"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="measure" minOccurs="0">
                    <xs:simpleType>
                      <xs:restriction base="xs:token">
                        <xs:enumeration value="kg"/>
                        <xs:enumeration value="m2"/>
                        <xs:enumeration value="m3"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="ExchangeRate" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Exchange rate for amounts to be paid by the
consignor or consignee which are not expressed in the invoicing
currency.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:decimal">
                  <xs:totalDigits value="18"/>
                  <xs:fractionDigits value="3"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Distance" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Tariff distance, expressed in km or zones, between
the stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:choice>
                  <xs:element name="KM">
                    <xs:annotation>
                      <xs:documentation>Tariff distance, expressed in km, between the
stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:int">
                        <xs:minInclusive value="1"/>
                        <xs:maxInclusive value="99999"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="Zones">
                    <xs:annotation>
                      <xs:documentation>Tariff distance, expressed in zones, between
the stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:int">
                        <xs:minInclusive value="1"/>
                        <xs:maxInclusive value="99"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
```

```
                </xs:choice>
              </xs:complexType>
            </xs:element>
            <xs:element name="Fee" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Supplements, fees, deductions</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:int">
                  <xs:totalDigits value="4"/>
                  <xs:minInclusive value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="FreightCharges" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Freight Charges (paid and due)</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:choice>
                  <xs:element name="Prepaid" type="Money_Type">
                    <xs:annotation>
                      <xs:documentation>Carriage charges to be paid by the consignor
in the tariff currency.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="Transferred" type="Money_Type">
                    <xs:annotation>
                      <xs:documentation>Carriage charges to be paid by the consignee
in the tariff currency.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:choice>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="AdditionalCharges" minOccurs="0" maxOccurs="10">
        <xs:annotation>
          <xs:documentation/>
          <xs:documentation>Sum of Prepaid</xs:documentation>
          <xs:documentation>Sum of Transferred</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Code">
              <xs:annotation>
                <xs:documentation>Additional charges code</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="2"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:choice>
              <xs:element name="Prepaid" type="Money_Type">
                <xs:annotation>
                  <xs:documentation>Prepaid</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="Transferred" type="Money_Type">
```

```
                <xs:annotation>
                  <xs:documentation>Transferred</xs:documentation>
                </xs:annotation>
              </xs:element>
            </xs:choice>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Start**

diagram	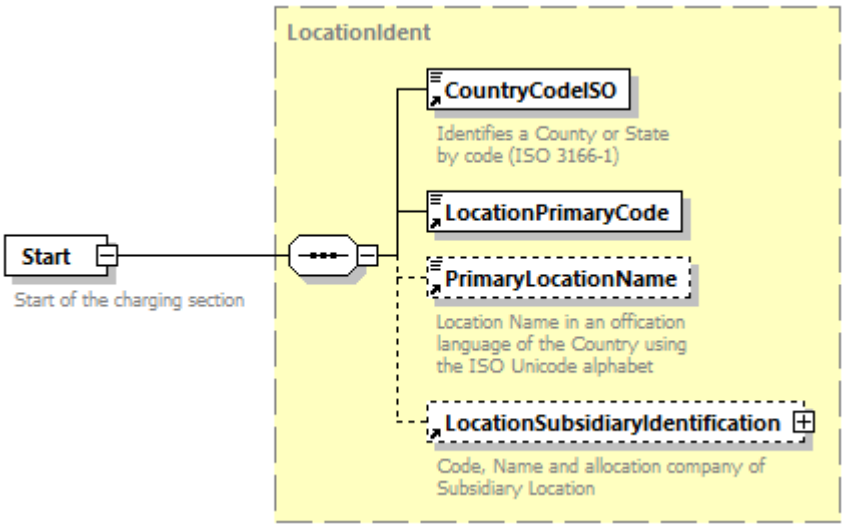
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification**
annotation	documentation Start of the charging section

source	`<xs:element name="Start" type="LocationIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>Start of the charging section</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/End**

diagram	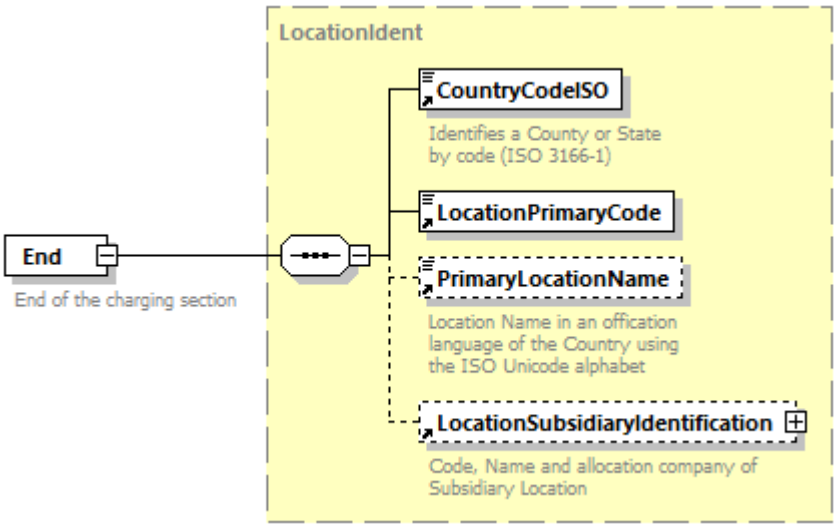
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification**
annotation	documentation End of the charging section

source	`<xs:element name="End" type="LocationIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>End of the charging section</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/CommercialRouteCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation length 3 pattern \d*[1-9]\d*
annotation	documentation Route code (RIP) when the customer agreement or the tariff applied provide for it.

source	`<xs:element name="CommercialRouteCode" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Route code (RIP) when the customer agreement or the tariff applied provide for it. </xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:length value="3"/>`
	`  <xs:pattern value="\d*[1-9]\d*"/>`

```
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/CurrencyCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CurrencyCode_Type**
properties	content simple
facets	Kind Value Annotation pattern [A-Z][A-Z][A-Z]
annotation	documentation Code for the currency of the amounts entered in the charging section.

source	`<xs:element name="CurrencyCode" type="CurrencyCode_Type">`
	`  <xs:annotation>`
	`  <xs:documentation>Code for the currency of the amounts entered in the charging section.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff**

diagram	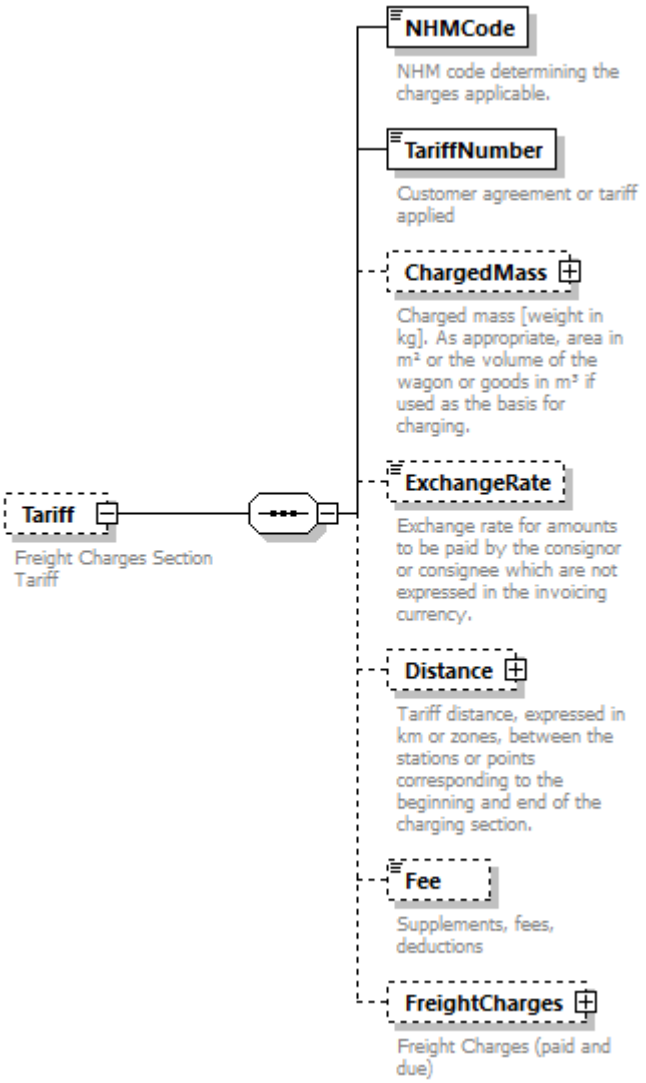
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	NHMCode TariffNumber ChargedMass ExchangeRate Distance Fee FreightCharges
annotation	documentation Freight Charges Section Tariff

source

```
<xs:element name="Tariff" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Freight Charges Section Tariff</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="NHMCode" type="NHMCodeType">
        <xs:annotation>
          <xs:documentation>NHM code determining the charges
applicable.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="TariffNumber">
        <xs:annotation>
          <xs:documentation>Customer agreement or tariff applied</xs:documentation>
```

```
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="6"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ChargedMass" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Charged mass [weight in kg]. As appropriate, area in m²
or the volume of the wagon or goods in m³ if used as the basis for
charging.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="value">
              <xs:simpleType>
                <xs:restriction base="xs:decimal">
                  <xs:minInclusive value="1"/>
                  <xs:totalDigits value="8"/>
                  <xs:fractionDigits value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="measure" minOccurs="0">
              <xs:simpleType>
                <xs:restriction base="xs:token">
                  <xs:enumeration value="kg"/>
                  <xs:enumeration value="m2"/>
                  <xs:enumeration value="m3"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="ExchangeRate" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Exchange rate for amounts to be paid by the consignor or
consignee which are not expressed in the invoicing currency.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:decimal">
            <xs:totalDigits value="18"/>
            <xs:fractionDigits value="3"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Distance" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Tariff distance, expressed in km or zones, between the
stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:choice>
            <xs:element name="KM">
              <xs:annotation>
                <xs:documentation>Tariff distance, expressed in km, between the
stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
```

```
                <xs:restriction base="xs:int">
                  <xs:minInclusive value="1"/>
                  <xs:maxInclusive value="99999"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Zones">
              <xs:annotation>
                <xs:documentation>Tariff distance, expressed in zones, between the
stations or points corresponding to the beginning and end of the charging
section.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:int">
                  <xs:minInclusive value="1"/>
                  <xs:maxInclusive value="99"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:choice>
        </xs:complexType>
      </xs:element>
      <xs:element name="Fee" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Supplements, fees, deductions</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:int">
            <xs:totalDigits value="4"/>
            <xs:minInclusive value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="FreightCharges" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Freight Charges (paid and due)</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:choice>
            <xs:element name="Prepaid" type="Money_Type">
              <xs:annotation>
                <xs:documentation>Carriage charges to be paid by the consignor in the
tariff currency.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="Transferred" type="Money_Type">
              <xs:annotation>
                <xs:documentation>Carriage charges to be paid by the consignee in the
tariff currency.</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:choice>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/NHMCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**NHMCodeType**
properties	content simple
facets	Kind Value Annotation length 6 pattern \d*[1-9]\d*
annotation	documentation NHM code determining the charges applicable.

source	`<xs:element name="NHMCode" type="NHMCodeType">`
	`  <xs:annotation>`
	`  <xs:documentation>NHM code determining the charges applicable.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/TariffNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 6
annotation	documentation Customer agreement or tariff applied

source	`<xs:element name="TariffNumber">`
	`  <xs:annotation>`
	`  <xs:documentation>Customer agreement or tariff applied</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="6"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/ChargedMass**

diagram	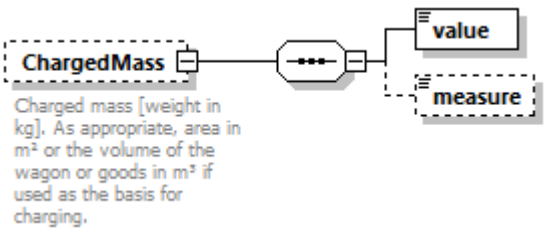

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**value measure**
annotation	documentation Charged mass [weight in kg]. As appropriate, area in m² or the volume of the wagon or goods in m³ if used as the basis for charging.
source	

```
<xs:element name="ChargedMass" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Charged mass [weight in kg]. As appropriate, area in m² or the
volume of the wagon or goods in m³ if used as the basis for
charging.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="value">
        <xs:simpleType>
          <xs:restriction base="xs:decimal">
            <xs:minInclusive value="1"/>
            <xs:totalDigits value="8"/>
            <xs:fractionDigits value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="measure" minOccurs="0">
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="kg"/>
            <xs:enumeration value="m2"/>
            <xs:enumeration value="m3"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/ChargedMass/value**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	content simple
facets	Kind / Value / Annotation minInclusive 1 totalDigits 8 fractionDigits 1
source	

```
<xs:element name="value">
  <xs:simpleType>
    <xs:restriction base="xs:decimal">
      <xs:minInclusive value="1"/>
      <xs:totalDigits value="8"/>
      <xs:fractionDigits value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/ChargedMass/measure**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation enumeration kg enumeration m2 enumeration m3

source	`<xs:element name="measure" minOccurs="0">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:token">`
	`  <xs:enumeration value="kg"/>`
	`  <xs:enumeration value="m2"/>`
	`  <xs:enumeration value="m3"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/ExchangeRate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation totalDigits 18 fractionDigits 3
annotation	documentation Exchange rate for amounts to be paid by the consignor or consignee which are not expressed in the invoicing currency.

source	`<xs:element name="ExchangeRate" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Exchange rate for amounts to be paid by the consignor or consignee which are not expressed in the invoicing currency.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:totalDigits value="18"/>`
	`  <xs:fractionDigits value="3"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/Distance**

diagram	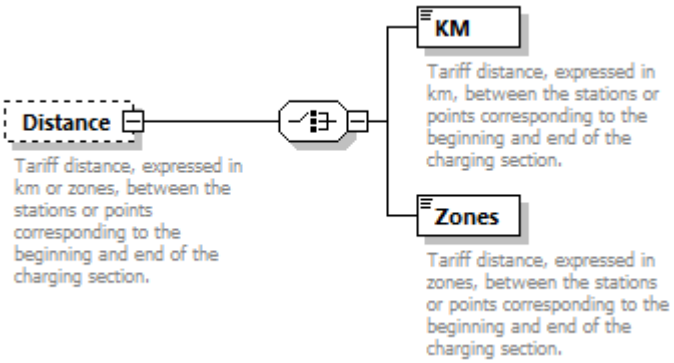
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**KM Zones**
annotation	documentation Tariff distance, expressed in km or zones, between the stations or points corresponding to the beginning and end of the charging section.

source

```
<xs:element name="Distance" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Tariff distance, expressed in km or zones, between the stations
or points corresponding to the beginning and end of the charging
section.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:choice>
      <xs:element name="KM">
        <xs:annotation>
          <xs:documentation>Tariff distance, expressed in km, between the stations or
points corresponding to the beginning and end of the charging
section.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:int">
            <xs:minInclusive value="1"/>
            <xs:maxInclusive value="99999"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Zones">
        <xs:annotation>
          <xs:documentation>Tariff distance, expressed in zones, between the stations
or points corresponding to the beginning and end of the charging
section.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:int">
            <xs:minInclusive value="1"/>
            <xs:maxInclusive value="99"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:choice>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/Distance/KM**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation Tariff distance, expressed in km, between the stations or points corresponding to the beginning and end of the charging section.

source	`<xs:element name="KM">`
	`  <xs:annotation>`
	`  <xs:documentation>Tariff distance, expressed in km, between the stations or points corresponding to the beginning and end of the charging section.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:int">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="99999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/Distance/Zones**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99
annotation	documentation Tariff distance, expressed in zones, between the stations or points corresponding to the beginning and end of the charging section.

source	`<xs:element name="Zones">`
	`  <xs:annotation>`
	`  <xs:documentation>Tariff distance, expressed in zones, between the stations or points corresponding to the beginning and end of the charging section.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:int">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="99"/>`
	`  </xs:restriction>`

```
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/Fee**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 1 totalDigits 4
annotation	documentation Supplements, fees, deductions
source	<xs:element name="Fee" minOccurs="0"> <xs:annotation> <xs:documentation>Supplements, fees, deductions</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:totalDigits value="4"/> <xs:minInclusive value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/FreightCharges**

diagram	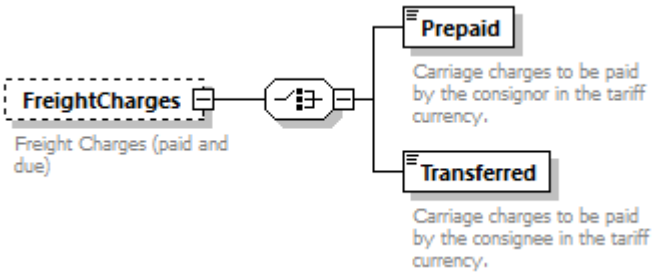
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**Prepaid** **Transferred**
annotation	documentation Freight Charges (paid and due)
source	<xs:element name="FreightCharges" minOccurs="0"> <xs:annotation> <xs:documentation>Freight Charges (paid and due)</xs:documentation> </xs:annotation> <xs:complexType> <xs:choice> <xs:element name="Prepaid" type="Money_Type"> <xs:annotation>

```
          <xs:documentation>Carriage charges to be paid by the consignor in the
tariff currency.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="Transferred" type="Money_Type">
        <xs:annotation>
          <xs:documentation>Carriage charges to be paid by the consignee in the
tariff currency.</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:choice>
  </xs:complexType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/FreightCharges/Prepaid**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Money_Type**
properties	content simple
facets	Kind Value Annotation totalDigits 18 fractionDigits 2
annotation	documentation Carriage charges to be paid by the consignor in the tariff currency.

source	`<xs:element name="Prepaid" type="Money_Type">`
	`  <xs:annotation>`
	`  <xs:documentation>Carriage charges to be paid by the consignor in the tariff currency.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/FreightCharges/Transferred**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Money_Type**
properties	content simple
facets	Kind Value Annotation totalDigits 18 fractionDigits 2
annotation	documentation Carriage charges to be paid by the consignee in the tariff currency.

source	`<xs:element name="Transferred" type="Money_Type">`
	`  <xs:annotation>`
	`  <xs:documentation>Carriage charges to be paid by the consignee in the tariff currency.</xs:documentation>`
	`  </xs:annotation>`

	</xs:element>

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/AdditionalCharges**

diagram	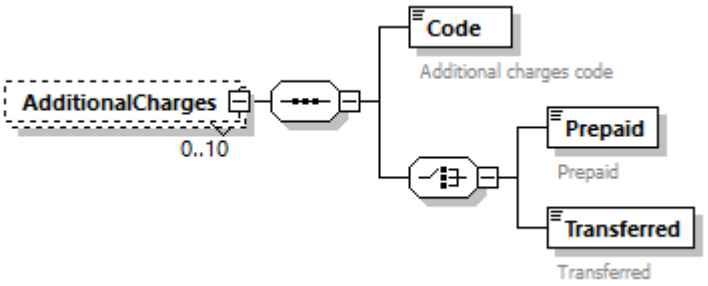
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 10 content complex
children	**Code Prepaid Transferred**
annotation	documentation Sum of Prepaid documentation Sum of Transferred
source	<xs:element name="AdditionalCharges" minOccurs="0" maxOccurs="10"> <xs:annotation> <xs:documentation/> <xs:documentation>Sum of Prepaid</xs:documentation> <xs:documentation>Sum of Transferred</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="Code"> <xs:annotation> <xs:documentation>Additional charges code</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="2"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:choice> <xs:element name="Prepaid" type="Money_Type"> <xs:annotation> <xs:documentation>Prepaid</xs:documentation> </xs:annotation> </xs:element> <xs:element name="Transferred" type="Money_Type"> <xs:annotation> <xs:documentation>Transferred</xs:documentation> </xs:annotation> </xs:element> </xs:choice> </xs:sequence> </xs:complexType> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/AdditionalCharges/Code**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 2
annotation	documentation Additional charges code
source	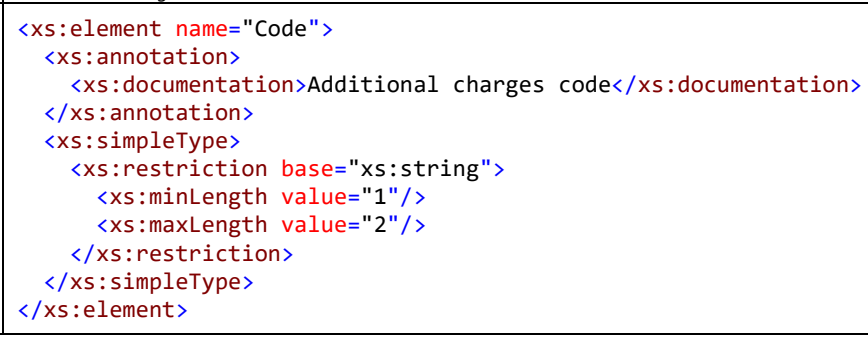

```
<xs:element name="Code">
  <xs:annotation>
    <xs:documentation>Additional charges code</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="2"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/AdditionalCharges/Prepaid**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Money_Type**
properties	content simple
facets	Kind Value Annotation totalDigits 18 fractionDigits 2
annotation	documentation Prepaid
source	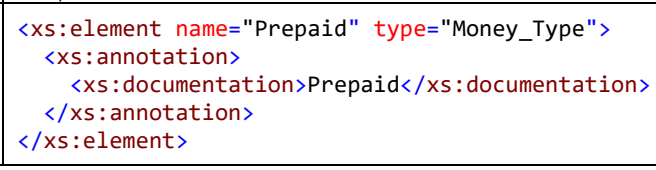

```
<xs:element name="Prepaid" type="Money_Type">
  <xs:annotation>
    <xs:documentation>Prepaid</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **ConsignmentOrderMessage/COMS/COM/ChargingSections/AdditionalCharges/Transferred**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Money_Type**
properties	content simple
facets	Kind Value Annotation totalDigits 18

	fractionDigits 2
annotation	documentation Transferred
source	<xs:element name="Transferred" type="Money_Type"> <xs:annotation> <xs:documentation>Transferred</xs:documentation> </xs:annotation> </xs:element>

element **ConsignmentOrderMessage/COMS/COM/WagonPreviousNumberFreight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **WagonIdent**
properties	minOcc 0 maxOcc 20 content simple
facets	Kind Value Annotation length 12 maxLength 12 pattern [0-9]{12}
annotation	documentation Identifies the previous freight wagon if a shipment or Intermodal unit has changed the wagon during its journey
source	<xs:element name="WagonPreviousNumberFreight" minOccurs="0" maxOccurs="20"> <xs:annotation> <xs:documentation>Identifies the previous freight wagon if a shipment or Intermodal unit has changed the wagon during its journey</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="WagonIdent"> <xs:length value="12"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ContainerHandlingFlag**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **LocationPrimaryInformation**
annotation	documentation This establishment is able to handle container traffic
source	<xs:element name="ContainerHandlingFlag" type="xs:boolean"> <xs:annotation> <xs:documentation>This establishment is able to handle container traffic</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

element **ContractNumber**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:string**

properties: content simple

used by: element **WIMO_Dataset/ConsignmentLevelData**

facets

Kind	Value	Annotation
minLength	1	documentation: has to be sent as n6 (with leading zeros if necessary)
maxLength	6	

annotation: documentation
Number of agreement between LeadRU and Responsible RU

source

```
<xs:element name="ContractNumber">
  <xs:annotation>
    <xs:documentation>Number of agreement between LeadRU and Responsible
RU</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1">
        <xs:annotation>
          <xs:documentation>has to be sent as n6 (with leading zeros if
necessary)</xs:documentation>
        </xs:annotation>
      </xs:minLength>
      <xs:maxLength value="6"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ContractNumberMovement**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: **FreeText**

properties: content simple

facets

Kind	Value	Annotation
minLength	1	
maxLength	255	

annotation: documentation
Identifies the contract between LeadRU and RU involved in the transport

source

```
<xs:element name="ContractNumberMovement" type="FreeText">
  <xs:annotation>
    <xs:documentation>Identifies the contract between LeadRU and RU involved in the
```

```
transport</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **CoordinatingIM**

diagram	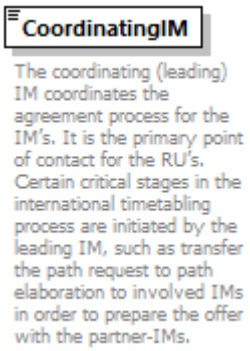
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
used by	elements **PathCanceledMessage** **PathConfirmedMessage** **PathDetailsMessage** **PathDetailsRefusedMessage** **PathNotAvailableMessage** **PathRequestMessage**
facets	Kind / Value / Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation The coordinating (leading) IM coordinates the agreement process for the IM's. It is the primary point of contact for the RU's. Certain critical stages in the international timetabling process are initiated by the leading IM, such as transfer the path request to path elaboration to involved IMs in order to prepare the offer with the partner-IMs.
source	`<xs:element name="CoordinatingIM" type="CompanyCode">` `<xs:annotation>` `<xs:documentation>The coordinating (leading) IM coordinates the agreement process for the IM's. It is the primary point of contact for the RU's. Certain critical stages in the international timetabling process are initiated by the leading IM, such as transfer the path request to path elaboration to involved IMs in order to prepare the offer with the partner-IMs. </xs:documentation>` `</xs:annotation>` `</xs:element>`

element **Core**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	complexTypes **CompositIdentifierOperationalType** **CompositIdentifierPlannedType**
facets	Kind / Value / Annotation minLength 12 maxLength 12

	whiteSpace replace pattern [\-*0-9A-Z]{12}
annotation	documentation It is the main part of identifier and is determent by the company that creates it.
source	<xs:element name="Core"> <xs:annotation> <xs:documentation>It is the main part of identifier and is determent by the company that creates it.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="12"/> <xs:whiteSpace value="replace"/> <xs:maxLength value="12"/> <xs:pattern value="[\-*0-9A-Z]{12}"/> </xs:restriction> </xs:simpleType> </xs:element>

element **CountryCodeISO**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **CountryIdentISO**
properties	content complex
used by	elements **RollingStockDataset/AdministrativeDataSet/ECMCertificate/EINNumber** **RollingRoadUnit/RollingRoadUnitDetails/Haulier** **LocationFileDatasetMessage** **RollingRoadUnit/RollingRoadUnitDetails/Vehicles** complexTypes **CustomerCode** **LocationIdent**
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation Identifies a County or State by code (ISO 3166-1)
source	<xs:element name="CountryCodeISO"> <xs:annotation> <xs:documentation>Identifies a County or State by code (ISO 3166-1)</xs:documentation> </xs:annotation> <xs:complexType> <xs:simpleContent> <xs:extension base="CountryIdentISO"/> </xs:simpleContent> </xs:complexType> </xs:element>

element **CreateDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**

properties	content simple
annotation	documentation Date and Time of creation of data
source	<xs:element name="CreateDateTime" type="xs:dateTime"> <xs:annotation> <xs:documentation>Date and Time of creation of data </xs:documentation> </xs:annotation> </xs:element>

element **Customer**

diagram	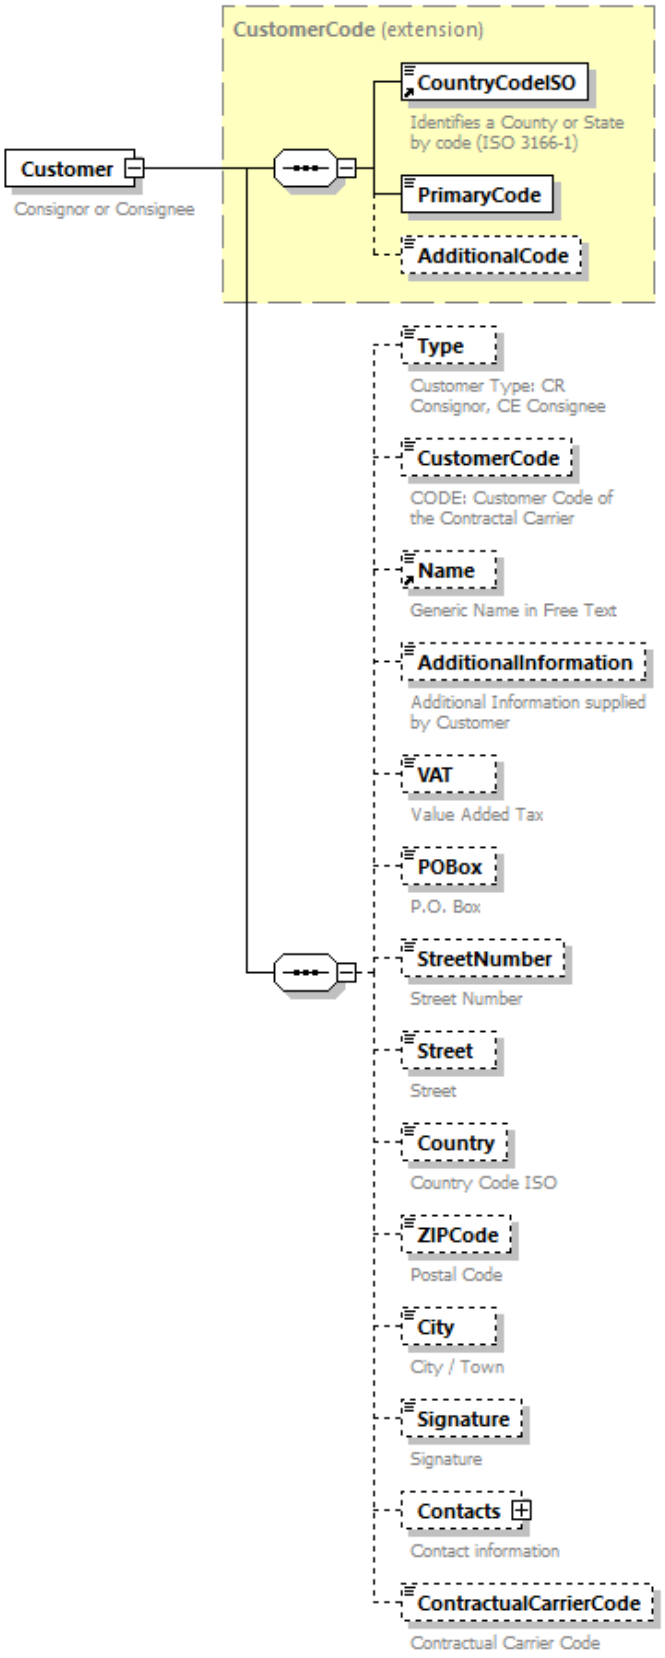
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **CustomerCode**

properties	content complex
children	CountryCodeISO PrimaryCode AdditionalCode Type CustomerCode Name AdditionalInformation VAT POBox StreetNumber Street Country ZIPCode City Signature Contacts ContractualCarrierCode
used by	element WIMO_Dataset/ConsignmentLevelData
annotation	documentation Consignor or Consignee

source

```
<xs:element name="Customer">
  <xs:annotation>
    <xs:documentation>Consignor or Consignee</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:complexContent>
      <xs:extension base="CustomerCode">
        <xs:sequence>
          <xs:element name="Type" minOccurs="0">
            <xs:annotation>
              <xs:documentation>Customer Type: CR Consignor, CE
Consignee</xs:documentation>
            </xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:token">
                <xs:enumeration value="CR"/>
                <xs:enumeration value="CE"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:element>
          <xs:element name="CustomerCode" minOccurs="0">
            <xs:annotation>
              <xs:documentation>CODE: Customer Code of the Contractal
Carrier</xs:documentation>
            </xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="16"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:element>
          <xs:element ref="Name" minOccurs="0"/>
          <xs:element name="AdditionalInformation" minOccurs="0">
            <xs:annotation>
              <xs:documentation>Additional Information supplied by
Customer</xs:documentation>
            </xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="45"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:element>
          <xs:element name="VAT" minOccurs="0">
            <xs:annotation>
              <xs:documentation>Value Added Tax</xs:documentation>
            </xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="25"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:element>
```

```
            <xs:element name="POBox" minOccurs="0">
              <xs:annotation>
                <xs:documentation>P.O. Box</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="35"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="StreetNumber" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Street Number</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="5"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Street" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Street</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="35"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Country" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Country Code ISO</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:length value="2"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="ZIPCode" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Postal Code</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="9"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="City" minOccurs="0">
              <xs:annotation>
                <xs:documentation>City / Town</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="35"/>
                </xs:restriction>
              </xs:simpleType>
```

```
            </xs:element>
            <xs:element name="Signature" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Signature</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="35"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Contacts" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Contact information</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="PhonNumber" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Telephone Number</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="30"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element ref="FaxNumber" minOccurs="0"/>
                  <xs:element ref="eMail" minOccurs="0"/>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="ContractualCarrierCode" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Contractual Carrier Code</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:length value="4"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
  </xs:element>
```

element **Customer/Type**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	minOcc 0 maxOcc 1 content simple

facets	Kind Value Annotation enumeration CR enumeration CE
annotation	documentation Customer Type: CR Consignor, CE Consignee
source	<xs:element name="Type" minOccurs="0"> <xs:annotation> <xs:documentation>Customer Type: CR Consignor, CE Consignee</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:token"> <xs:enumeration value="CR"/> <xs:enumeration value="CE"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Customer/CustomerCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 16
annotation	documentation CODE: Customer Code of the Contractal Carrier
source	<xs:element name="CustomerCode" minOccurs="0"> <xs:annotation> <xs:documentation>CODE: Customer Code of the Contractal Carrier</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="16"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Customer/AdditionalInformation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation

	minLength 1 maxLength 45
annotation	documentation Additional Information supplied by Customer
source	<xs:element name="AdditionalInformation" minOccurs="0"> <xs:annotation> <xs:documentation>Additional Information supplied by Customer</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="45"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Customer/VAT**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 25
annotation	documentation Value Added Tax
source	<xs:element name="VAT" minOccurs="0"> <xs:annotation> <xs:documentation>Value Added Tax</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="25"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Customer/POBox**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation P.O. Box

source

```
<xs:element name="POBox" minOccurs="0">
  <xs:annotation>
    <xs:documentation>P.O. Box</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="35"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **Customer/StreetNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 5
annotation	documentation Street Number
source	<xs:element name="StreetNumber" minOccurs="0"> <xs:annotation> <xs:documentation>Street Number</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="5"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Customer/Street**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Street
source	<xs:element name="Street" minOccurs="0"> <xs:annotation> <xs:documentation>Street</xs:documentation>

```
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="35"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **Customer/Country**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation length 2
annotation	documentation Country Code ISO

source	`<xs:element name="Country" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Country Code ISO</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:length value="2"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Customer/ZIPCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 9
annotation	documentation Postal Code

source	`<xs:element name="ZIPCode" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Postal Code</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="9"/>`
	`  </xs:restriction>`

```
  </xs:simpleType>
</xs:element>
```

element **Customer/City**

diagram	 City / Town
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation City / Town

source	`<xs:element name="City" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>City / Town</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Customer/Signature**

diagram	Signature
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Signature

source	`<xs:element name="Signature" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Signature</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Customer/Contacts**

diagram	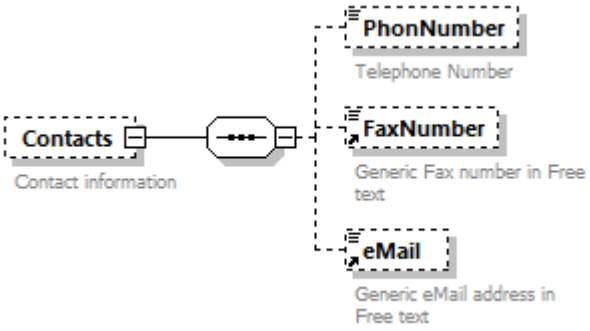
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**PhonNumber FaxNumber eMail**
annotation	documentation Contact information

source	`<xs:element name="Contacts" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Contact information</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element name="PhonNumber" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Telephone Number</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:minLength value="1"/>`
	`<xs:maxLength value="30"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`
	`<xs:element ref="FaxNumber" minOccurs="0"/>`
	`<xs:element ref="eMail" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **Customer/Contacts/PhonNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 30
annotation	documentation Telephone Number

source	<xs:element name="PhonNumber" minOccurs="0"> <xs:annotation> <xs:documentation>Telephone Number</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="30"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Customer/ContractualCarrierCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation length 4
annotation	documentation Contractual Carrier Code
source	<xs:element name="ContractualCarrierCode" minOccurs="0"> <xs:annotation> <xs:documentation>Contractual Carrier Code</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:length value="4"/> </xs:restriction> </xs:simpleType> </xs:element>

element **CustomerNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	elements **Customers LoadingFacility**
facets	Kind Value Annotation minLength 1 maxLength 16
annotation	documentation The customer number of the COM differs from the customer code used in TAF/TSI, its format may not accord to the TAf element
source	<xs:element name="CustomerNumber"> <xs:annotation>

```
    <xs:documentation>The customer number of the COM differs from the customer code
used in TAF/TSI, its format may not accord to the TAf element</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="16"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **Customers**

diagram

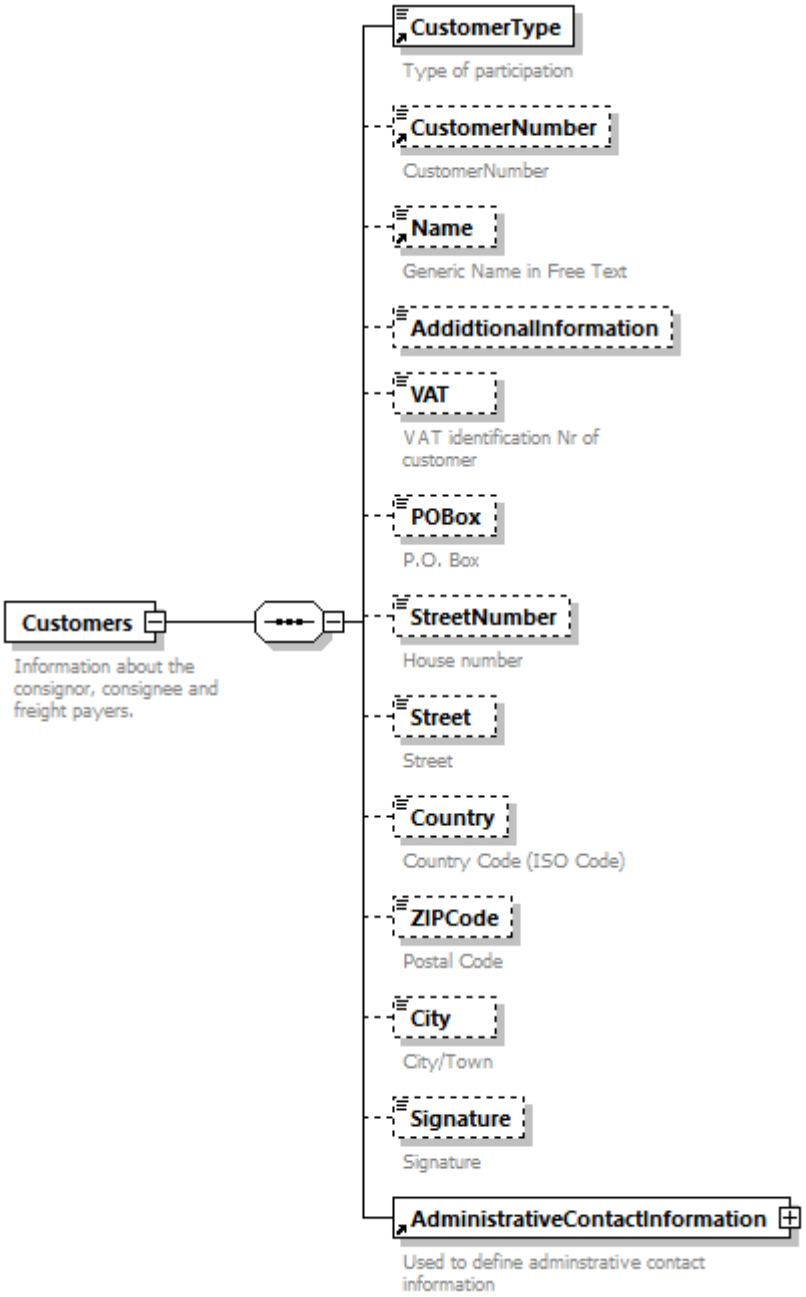

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	**CustomerType CustomerNumber Name AddidtionalInformation VAT POBox StreetNumber Street Country ZIPCode City Signature AdministrativeContactInformation**
used by	element **ConsignmentOrderMessage/COMS/COM**
annotation	documentation Information about the consignor, consignee and freight payers.

source

```
<xs:element name="Customers">
  <xs:annotation>
    <xs:documentation>Information about the consignor, consignee and freight
payers.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="CustomerType"/>
      <xs:element ref="CustomerNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>CustomerNumber</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="Name" minOccurs="0"/>
      <xs:element name="AddidtionalInformation" minOccurs="0"/>
      <xs:element name="VAT" minOccurs="0">
        <xs:annotation>
          <xs:documentation>VAT identification Nr of customer</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="25"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="POBox" minOccurs="0">
        <xs:annotation>
          <xs:documentation>P.O. Box</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="StreetNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>House number</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="5"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Street" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Street</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
```

```
      </xs:element>
      <xs:element name="Country" type="CountryIdentISO" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Country Code (ISO Code)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ZIPCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Postal Code</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="9"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="City" minOccurs="0">
        <xs:annotation>
          <xs:documentation>City/Town</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Signature" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Signature</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="AdministrativeContactInformation"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Customers/AddidtionalInformation**

diagram	AddidtionalInformation
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1
source	`<xs:element name="AddidtionalInformation" minOccurs="0"/>`

element **Customers/VAT**

diagram	VAT VAT identification Nr of customer

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 25
annotation	documentation VAT identification Nr of customer

source	`<xs:element name="VAT" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>VAT identification Nr of customer</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:minLength value="1"/>`
	`<xs:maxLength value="25"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **Customers/POBox**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation P.O. Box

source	`<xs:element name="POBox" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>P.O. Box</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:minLength value="1"/>`
	`<xs:maxLength value="35"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **Customers/StreetNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 5
annotation	documentation House number
source	<xs:element name="StreetNumber" minOccurs="0"> <xs:annotation> <xs:documentation>House number</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="5"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Customers/Street**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Street
source	<xs:element name="Street" minOccurs="0"> <xs:annotation> <xs:documentation>Street</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Customers/Country**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	minOcc 0 maxOcc 1 content simple

facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation Country Code (ISO Code)

source	`<xs:element name="Country" type="CountryIdentISO" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Country Code (ISO Code)</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Customers/ZIPCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 9
annotation	documentation Postal Code

source	`<xs:element name="ZIPCode" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Postal Code</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="9"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Customers/City**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation City/Town

source	`<xs:element name="City" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>City/Town</xs:documentation>`
	`  </xs:annotation>`

```
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="35"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **Customers/Signature**

diagram	Signature
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Signature
source	<xs:element name="Signature" minOccurs="0"> <xs:annotation> <xs:documentation>Signature</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType> </xs:element>

element **DangerousGoodsIndication**

diagram	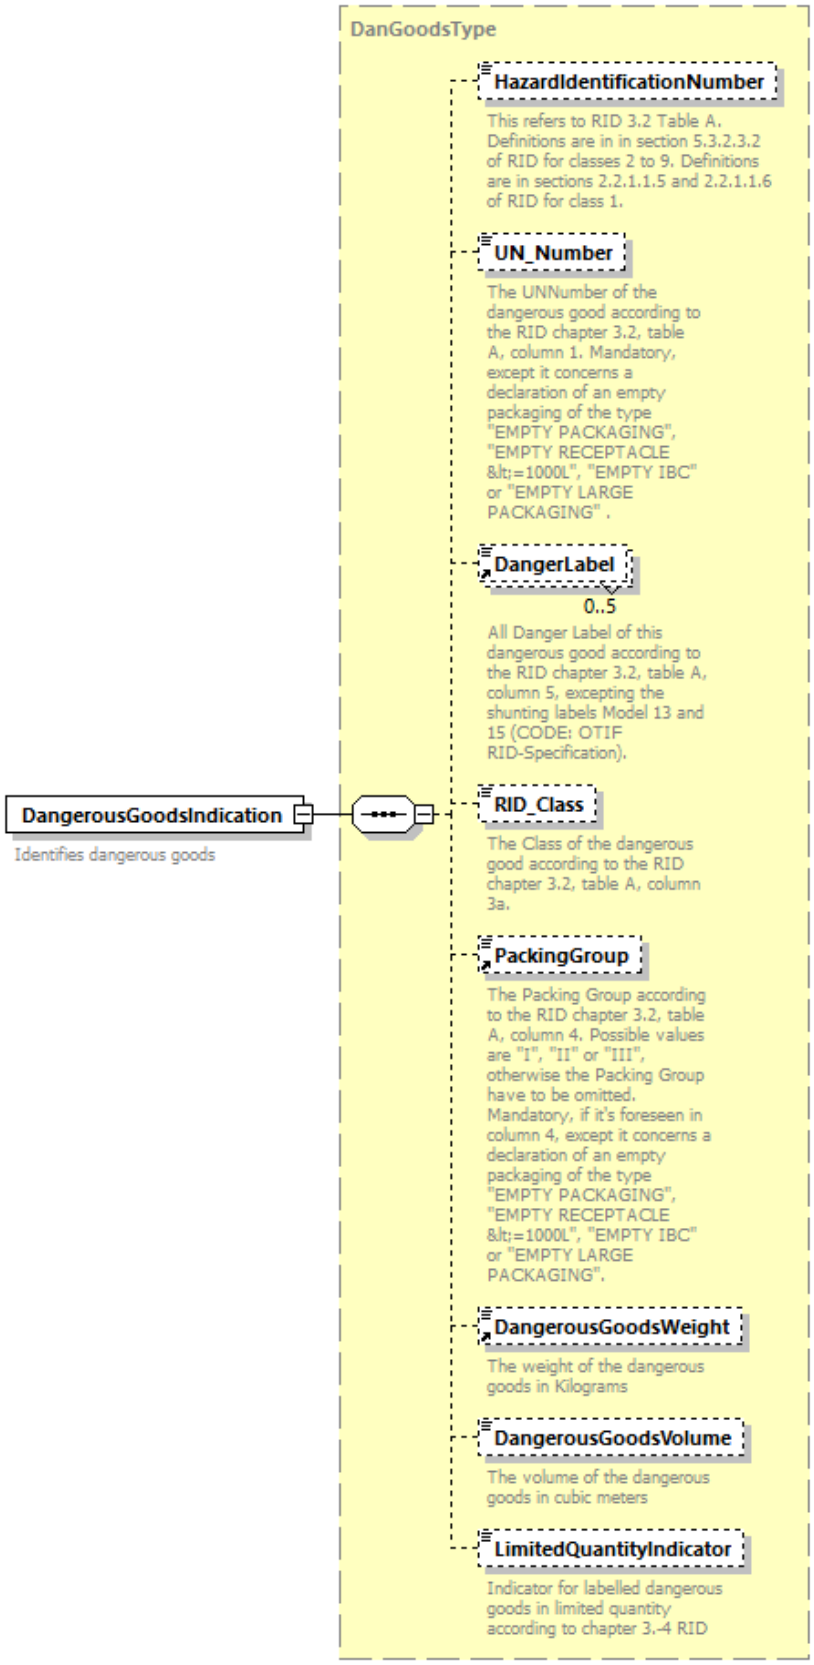
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**DanGoodsType**

properties	content complex
children	HazardIdentificationNumber UN_Number DangerLabel RID_Class PackingGroup DangerousGoodsWeight DangerousGoodsVolume LimitedQuantityIndicator
used by	elements WIMO_Dataset/ConsignmentLevelData PlannedTrainData WagonOperationalData complexType IntermodalTransportDataType
annotation	documentation Identifies dangerous goods
source	<xs:element name="DangerousGoodsIndication" type="DanGoodsType"> <xs:annotation> <xs:documentation>Identifies dangerous goods</xs:documentation> </xs:annotation> </xs:element>

element **DangerousGoodsIndicator**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element TrainRunningData
annotation	documentation Indicates whether Dangerous Goods are allowed (Yes/No Indicator) If "0", then no dangerous goods are allowed. If "1", then the restricted goods are described in DangerousGoodsIndication
source	<xs:element name="DangerousGoodsIndicator" type="xs:boolean"> <xs:annotation> <xs:documentation>Indicates whether Dangerous Goods are allowed (Yes/No Indicator) If "0", then no dangerous goods are allowed. If "1", then the restricted goods are described in DangerousGoodsIndication</xs:documentation> </xs:annotation> </xs:element>

element **DangerousGoodsVolume**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	VolumeValue
properties	content simple
used by	element SummaryOFGoodsWithSameRID
annotation	documentation The volume of the dangerous goods in cubic meters
source	<xs:element name="DangerousGoodsVolume" type="VolumeValue"> <xs:annotation> <xs:documentation>The volume of the dangerous goods in cubic meters</xs:documentation> </xs:annotation>

	</xs:element>

element **DangerousGoodsWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	content simple
used by	elements **RID SummaryOFGoodsWithSameRID** complexType **DanGoodsType**
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation The weight of dangerous goods in kilograms
source	<xs:element name="DangerousGoodsWeight" type="WeightValueKilo"> <xs:annotation> <xs:documentation>The weight of dangerous goods in kilograms</xs:documentation> </xs:annotation> </xs:element>

element **Date**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
annotation	documentation Date
source	<xs:element name="Date" type="xs:date"> <xs:annotation> <xs:documentation>Date</xs:documentation> </xs:annotation> </xs:element>

element **DateLastOverhaul**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple

used by	element **RollingStockDataset/DesignDataSet**
annotation	documentation Date of the last overhaul. For wagons newly placed on the market, the date put into service must be used.
source	<xs:element name="DateLastOverhaul" type="xs:date"> <xs:annotation> <xs:documentation> Date of the last overhaul. For wagons newly placed on the market, the date put into service must be used. </xs:documentation> </xs:annotation> </xs:element>

element **DateNextOverhaul**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
source	<xs:element name="DateNextOverhaul" type="xs:date"/>

element **DatePutIntoService**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
used by	element **RollingStockDataset/AdministrativeDataSet**
annotation	documentation Original Date of first operation
source	<xs:element name="DatePutIntoService" type="xs:date"> <xs:annotation> <xs:documentation>Original Date of first operation</xs:documentation> </xs:annotation> </xs:element>

element **DeclarationText**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	elements **ConsignmentOrderMessage/COMS/COM/ConsignorDeclarations** **ConsignmentOrderMessage/COMS/COM/RU_Declarations/RU_Declaration**
facets	Kind Value Annotation minLength 1 maxLength 1000

annotation	documentation Additional Text for codes with free text
source	<xs:element name="DeclarationText"> <xs:annotation> <xs:documentation>Additional Text for codes with free text</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="1000"/> </xs:restriction> </xs:simpleType> </xs:element>

element **DelayCause**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**DelayCode**
properties	content simple
used by	elements **DelayCauseTime** **TrainReadyMessage/TrainReadyStatus** **TrainReadyStatus**

facets

Kind	Value	Annotation
enumeration	11	documentation Formation of trains if managed by infrastructure manager
enumeration	10	documentation Timetable compilation
enumeration	12	documentation Mistakes in operational procedures
enumeration	13	documentation Wrong application of priority rules
enumeration	14	
enumeration	18	documentation Staff
enumeration	19	documentation Other causes related to the operational planning and management
enumeration	20	documentation Signalling installations
enumeration	21	documentation Signalling installations at level crossings
enumeration	22	documentation Telecommunication installations
enumeration	23	documentation Power supply equipment
enumeration	24	documentation Track
enumeration	25	documentation Structures
enumeration	28	documentation Staff
enumeration	29	documentation Other causes related to infrastructure installations
enumeration	31	documentation Irregularities in execution of construction work
enumeration	30	documentation Planned construction work
enumeration	32	documentation Speed restrictions due to defective track
enumeration	39	documentation Other causes related to Civil engineering
enumeration	40	documentation

			Delay caused by next IM
	enumeration	41	documentation
			Delay caused by previous IM
	enumeration	50	documentation
			exceeding the stop time
	enumeration	51	documentation
			Request of the RU
	enumeration	52	documentation
			Loading operations
	enumeration	53	documentation
			Loading irregularities
	enumeration	54	documentation
			Commercial preparation of the train
	enumeration	58	documentation
			Staff
	enumeration	59	documentation
			Other causes related to commercial causes
	enumeration	60	documentation
			Roster planning/re-rostering
	enumeration	61	documentation
			Formation of trains by the RU
	enumeration	62	documentation
			Problems affecting coaches
	enumeration	63	documentation
			Problems affecting wagons
	enumeration	64	documentation
			Problems affecting traction units
	enumeration	68	documentation
			Staff
	enumeration	69	documentation
			Other causes related to Rolling Stock
	enumeration	70	documentation
			Delay caused by next RU
	enumeration	71	documentation
			Delay caused by previous RU
	enumeration	80	documentation
			Strike
	enumeration	81	documentation
			Administrative formalites
	enumeration	82	documentation
			Outside influence
	enumeration	83	documentation
			Effects of weather and natural causes
	enumeration	84	documentation
			Delay caused by external reasons on the next network
	enumeration	89	documentation
			Other external causes
	enumeration	90	documentation
			Dangerous incidents, accidents and hazards
	enumeration	91	documentation
			Track occupation caused by the lateness of the same train
	enumeration	92	documentation
			Track occupation caused by the lateness of another train
	enumeration	93	documentation
			Turn round
	enumeration	94	documentation
			Connection
	enumeration	95	documentation
			Further investigation needed
annotation	documentation This element identifies the reason for a delay (modified DelayReason)		
source	<xs:element name="DelayCause" type="DelayCode"> <xs:annotation> <xs:documentation>This element identifies the reason for a delay (modified DelayReason)</xs:documentation> </xs:annotation> </xs:element>		

element **DelayCauseTime**

diagram	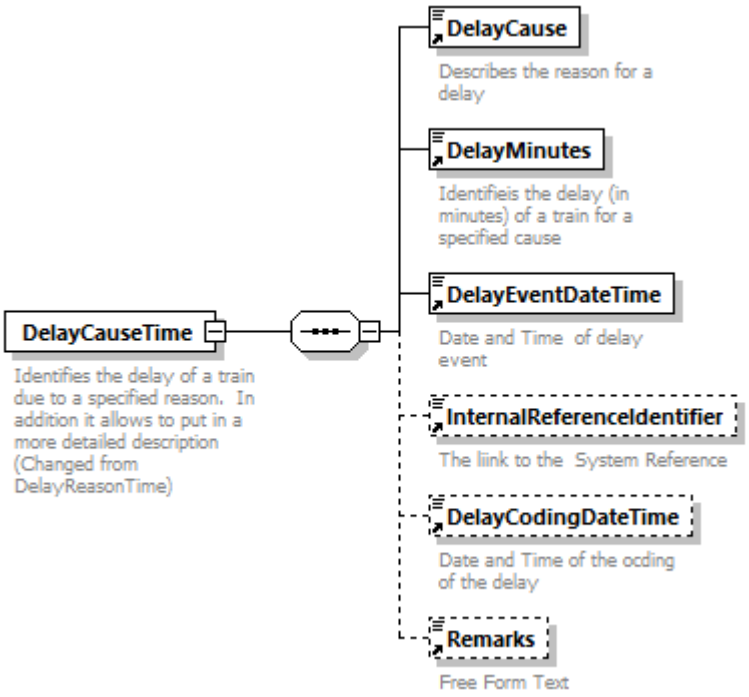
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	DelayCause DelayMinutes DelayEventDateTime InternalReferenceIdentifier DelayCodingDateTime Remarks
used by	element DelayEventReport
annotation	documentation Identifies the delay of a train due to a specified reason. In addition it allows to put in a more detailed description (Changed from DelayReasonTime)
source	<xs:element name="DelayCauseTime"> <xs:annotation> <xs:documentation>Identifies the delay of a train due to a specified reason. In addition it allows to put in a more detailed description (Changed from DelayReasonTime)</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="DelayCause"> <xs:annotation> <xs:documentation>Describes the reason for a delay</xs:documentation> </xs:annotation> </xs:element> <xs:element ref="DelayMinutes"/> <xs:element ref="DelayEventDateTime"/> <xs:element ref="InternalReferenceIdentifier" minOccurs="0"> <xs:annotation> <xs:documentation>The liink to the System Reference</xs:documentation> </xs:annotation> </xs:element> <xs:element ref="DelayCodingDateTime" minOccurs="0"> <xs:annotation> <xs:documentation>Date and Time of the ocding of the delay</xs:documentation> </xs:annotation> </xs:element> <xs:element ref="Remarks" minOccurs="0"/> </xs:sequence>

```
  </xs:complexType>
</xs:element>
```

element **DelayCodingDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **DelayCauseTime**
annotation	documentation Date and Time of the coding of the delay

source	`<xs:element name="DelayCodingDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Date and Time of the coding of the delay</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **DelayEventDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **DelayCauseTime**
annotation	documentation Date and Time of delay event

source	`<xs:element name="DelayEventDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Date and Time of delay event </xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **DelayEventReport**

diagram	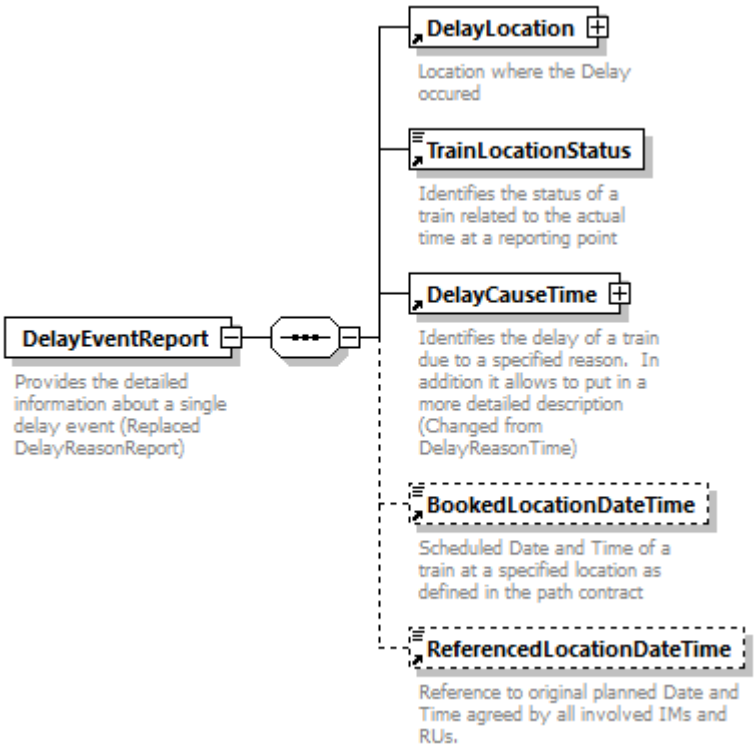
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	DelayLocation TrainLocationStatus DelayCauseTime BookedLocationDateTime ReferencedLocationDateTime
used by	element TrainDelayCauseMessage
annotation	documentation Provides the detailed information about a single delay event (Replaced DelayReasonReport)

source	`<xs:element name="DelayEventReport">`
	`<xs:annotation>`
	`<xs:documentation>Provides the detailed information about a single delay event (Replaced DelayReasonReport)</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="DelayLocation"/>`
	`<xs:element ref="TrainLocationStatus"/>`
	`<xs:element ref="DelayCauseTime"/>`
	`<xs:element ref="BookedLocationDateTime" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Scheduled Date and Time of a train at a specified location as defined in the path contract</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element ref="ReferencedLocationDateTime" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **DelayLocation**

diagram	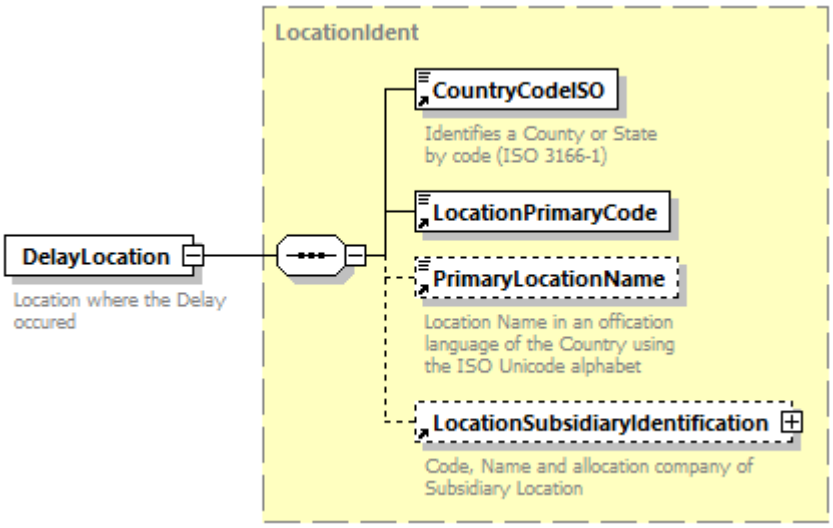
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
used by	element **DelayEventReport**
annotation	documentation Location where the Delay occured

source	`<xs:element name="DelayLocation" type="LocationIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>Location where the Delay occured</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **DelayMinutes**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**String1-5**
properties	content simple
used by	element **DelayCauseTime**
facets	Kind Value Annotation minLength 1 maxLength 5
annotation	documentation Identifieis the delay (in minutes) of a train for a specified cause

source	`<xs:element name="DelayMinutes" type="String1-5">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifieis the delay (in minutes) of a train for a specified cause</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **DeliveryAtDestination**

diagram	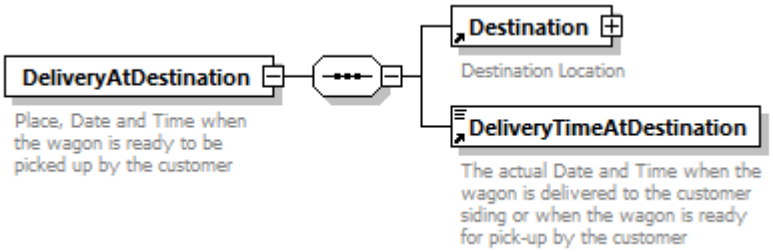
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Destination** **DeliveryTimeAtDestination**
annotation	documentation Place, Date and Time when the wagon is ready to be picked up by the customer

source	`<xs:element name="DeliveryAtDestination">`
	`<xs:annotation>`
	`<xs:documentation>Place, Date and Time when the wagon is ready to be picked up by the customer</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="Destination"/>`
	`<xs:element ref="DeliveryTimeAtDestination"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **DeliveryReference**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	elements **ILU_Details** **ITU_Details** **Wagons/WagonDetails**
facets	Kind Value Annotation minLength 1 maxLength 30

source	`<xs:element name="DeliveryReference">`
	`<xs:annotation/>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:maxLength value="30"/>`
	`<xs:minLength value="1"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **DeliveryTimeAtDestination**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **DeliveryAtDestination**
annotation	documentation The actual Date and Time when the wagon is delivered to the customer siding or when the wagon is ready for pick-up by the customer

source	`<xs:element name="DeliveryTimeAtDestination" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>The actual Date and Time when the wagon is delivered to the customer siding or when the wagon is ready for pick-up by the customer</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **DeliveryTimeAtInterchange**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **NextIntermediateDestination**
annotation	documentation The scheduled departure date and time or the scheduled handover date and time of wagons at an interchange point, where the responsibility of the wagons will change to another RU

source	`<xs:element name="DeliveryTimeAtInterchange" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>The scheduled departure date and time or the scheduled handover date and time of wagons at an interchange point, where the responsibility of the wagons will change to another RU</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **DepartureInterchangeReport**

diagram	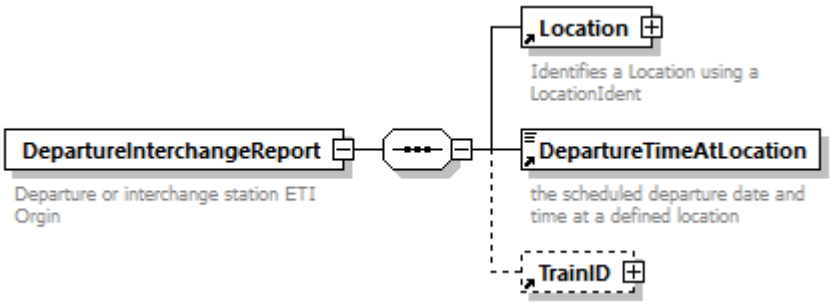
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Location** **DepartureTimeAtLocation** **TrainID**
used by	element **WagonETI_ETA_Message**
annotation	documentation Departure or interchange station ETI Orgin
source	<xs:element name="DepartureInterchangeReport"> <xs:annotation> <xs:documentation>Departure or interchange station ETI Orgin</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Location"/> <xs:element ref="DepartureTimeAtLocation"/> <xs:element ref="TrainID" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **DepartureJourneyTrack**

diagram	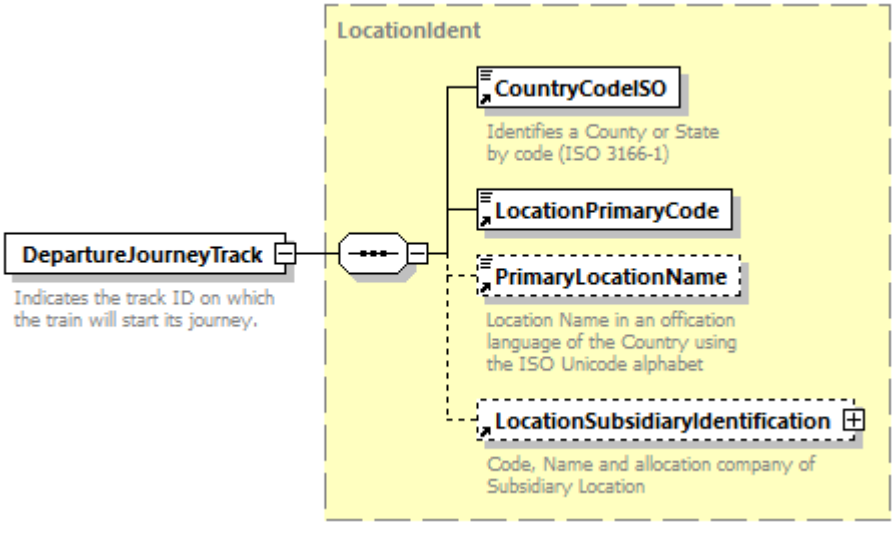
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**

annotation	documentation Indicates the track ID on which the train will start its journey.
source	<xs:element name="DepartureJourneyTrack" type="LocationIdent"> <xs:annotation> <xs:documentation>Indicates the track ID on which the train will start its journey.</xs:documentation> </xs:annotation> </xs:element>

element **DepartureTimeAtLocation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements DepartureInterchangeReport WagonAtDeparture WagonPickupAtOrigin YardDeparture
annotation	documentation the scheduled departure date and time at a defined location
source	<xs:element name="DepartureTimeAtLocation" type="xs:dateTime"> <xs:annotation> <xs:documentation>the scheduled departure date and time at a defined location</xs:documentation> </xs:annotation> </xs:element>

element **DepartureTrackAtLocation**

diagram	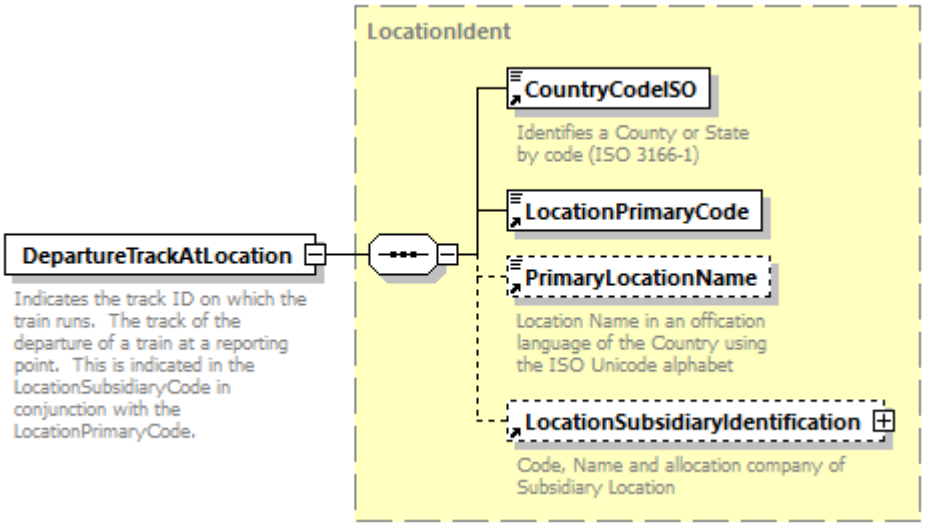
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	LocationIdent
properties	content complex
children	CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification
annotation	documentation Indicates the track ID on which the train runs. The track of the departure of a train at a reporting point. This is indicated in the LocationSubsidiaryCode in conjunction with the LocationPrimaryCode.

source	<xs:element name="DepartureTrackAtLocation" type="LocationIdent"> <xs:annotation> <xs:documentation>Indicates the track ID on which the train runs. The track of the departure of a train at a reporting point. This is indicated in the LocationSubsidiaryCode in conjunction with the LocationPrimaryCode.</xs:documentation> </xs:annotation> </xs:element>

element **Destination**

diagram	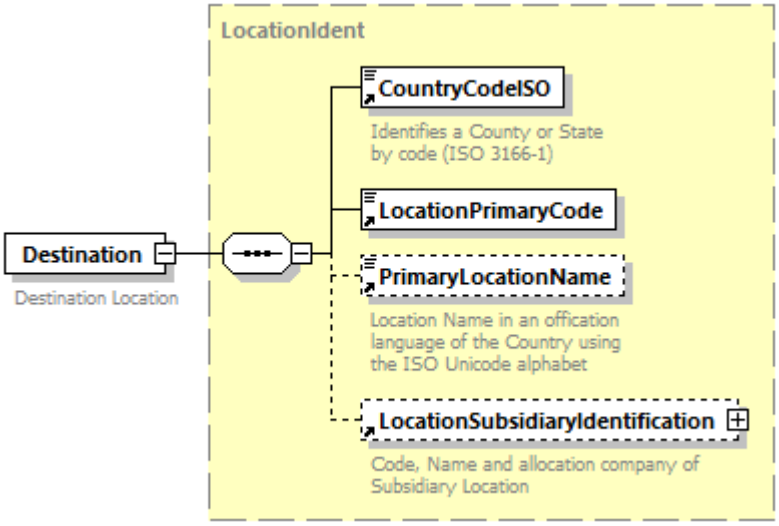
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification**
used by	elements **ArrivalAtDestination WIMO_Dataset/ConsignmentLevelData DeliveryAtDestination**
annotation	documentation Destination Location
source	<xs:element name="Destination" type="LocationIdent"> <xs:annotation> <xs:documentation>Destination Location</xs:documentation> </xs:annotation> </xs:element>

element **Dimensions**

diagram	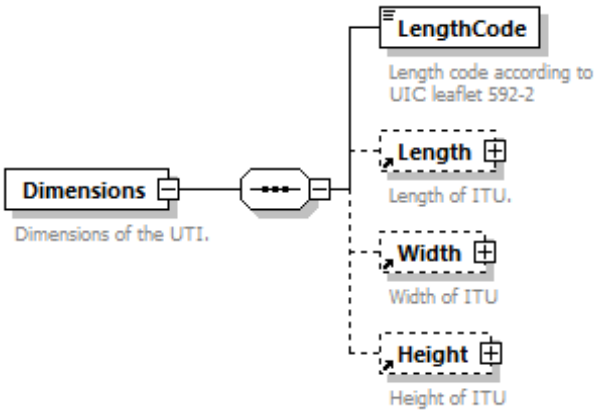
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**LengthCode Length Width Height**
used by	elements **ILU_Details ITU_Details**
annotation	documentation Dimensions of the UTI.

source	`<xs:element name="Dimensions">`
	`<xs:annotation>`
	`<xs:documentation>Dimensions of the UTI.</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element name="LengthCode">`
	`<xs:annotation>`
	`<xs:documentation>Length code according to UIC leaflet 592-2</xs:documentation>`
	`<xs:documentation>CODE: UIC leaflet 592-2</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:int">`
	`<xs:totalDigits value="2"/>`
	`<xs:minInclusive value="10"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`
	`<xs:element ref="Length" minOccurs="0"/>`
	`<xs:element ref="Width" minOccurs="0"/>`
	`<xs:element ref="Height" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **Dimensions/LengthCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple

facets	Kind Value Annotation minInclusive 10 totalDigits 2
annotation	documentation Length code according to UIC leaflet 592-2 documentation CODE: UIC leaflet 592-2
source	<xs:element name="LengthCode"> <xs:annotation> <xs:documentation>Length code according to UIC leaflet 592-2</xs:documentation> <xs:documentation>CODE: UIC leaflet 592-2</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:totalDigits value="2"/> <xs:minInclusive value="10"/> </xs:restriction> </xs:simpleType> </xs:element>

element **DwellTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	content simple
used by	element **TimingAtLocation**
facets	Kind Value Annotation fractionDigits 1
annotation	documentation The minimum duration of dwell time expressed in minutes
source	<xs:element name="DwellTime"> <xs:annotation> <xs:documentation>The minimum duration of dwell time expressed in minutes </xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:decimal"> <xs:fractionDigits value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **eMail**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CommunicationRefID**
properties	content simple

used by	elements **AdministrativeContactInformation** **Customer/Contacts**
facets	Kind Value Annotation minLength 1 maxLength 70
annotation	documentation Generic eMail address in Free text

source	`<xs:element name="eMail" type="CommunicationRefID">`
	`  <xs:annotation>`
	`  <xs:documentation>Generic eMail address in Free text</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **EmergencyBrakeOverride**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **PlannedTrainTechnicalData**
annotation	documentation Ability of the whole train (all wagons and traction units) to override the emergency brake signal

source	`<xs:element name="EmergencyBrakeOverride" type="xs:boolean">`
	`  <xs:annotation>`
	`  <xs:documentation>Ability of the whole train (all wagons and traction units) to override the emergency brake signal</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **EndDate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
annotation	documentation The end date/time in effect

source	`<xs:element name="EndDate" type="xs:date">`
	`  <xs:annotation>`
	`  <xs:documentation>The end date/time in effect</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **EndDateTime**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements **RequestedPeriod RequestedTimeframe ValidityPeriod**
annotation	documentation The end date/time in effect

source	`<xs:element name="EndDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>The end date/time in effect</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **EndLocation**

diagram	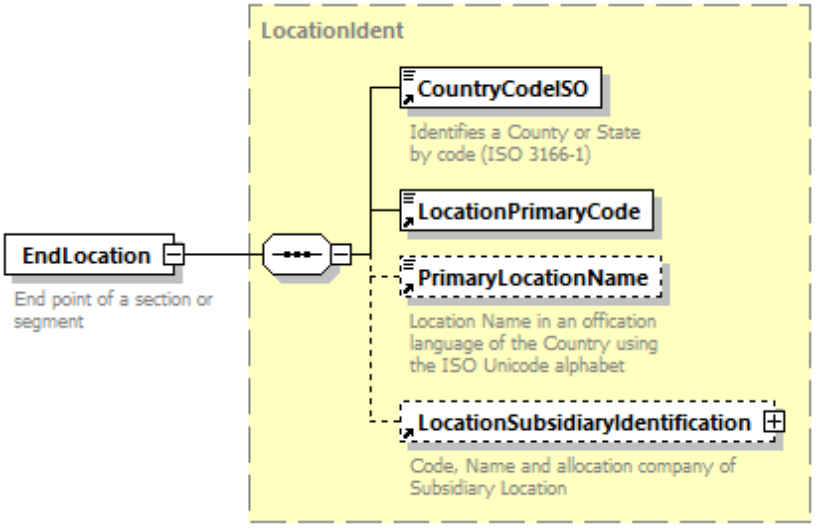
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification**
annotation	documentation End point of a section or segment

source	`<xs:element name="EndLocation" type="LocationIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>End point of a section or segment</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ErrorMessage**

diagram

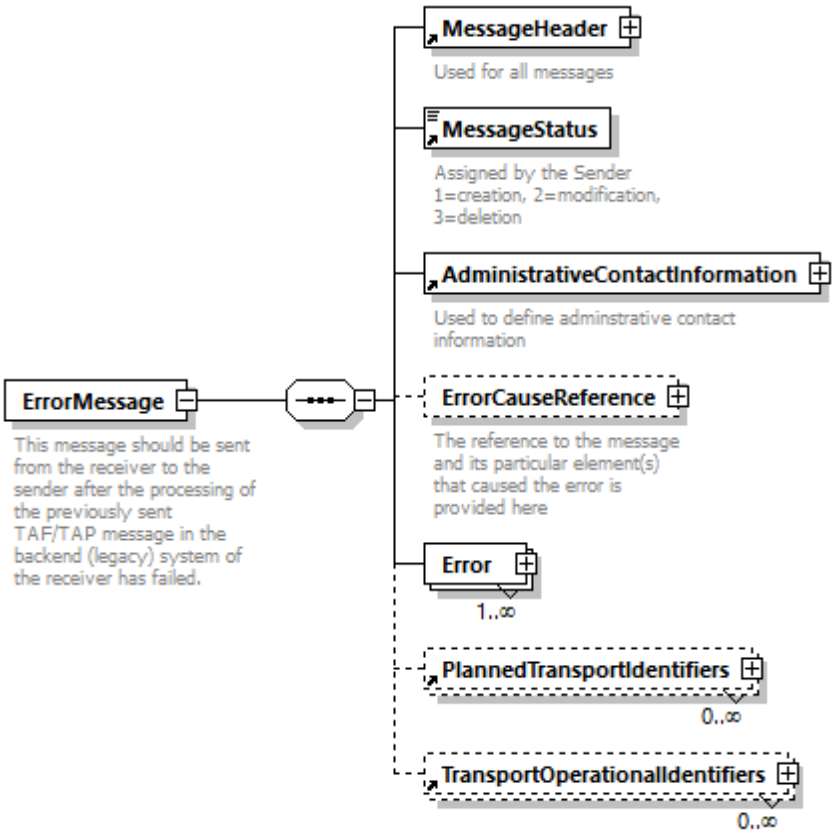

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MessageHeader MessageStatus AdministrativeContactInformation ErrorCauseReference Error PlannedTransportIdentifiers TransportOperationalIdentifiers**
annotation	documentation This message should be sent from the receiver to the sender after the processing of the previously sent TAF/TAP message in the backend (legacy) system of the receiver has failed.

source

```
<xs:element name="ErrorMessage">
  <xs:annotation>
    <xs:documentation>This message should be sent from the receiver to the sender
after the processing of the previously sent TAF/TAP message in the backend (legacy)
system of the receiver has failed.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus"/>
      <xs:element ref="AdministrativeContactInformation"/>
      <xs:element name="ErrorCauseReference" minOccurs="0">
        <xs:annotation>
          <xs:documentation>The reference to the message and its particular
element(s) that caused the error is provided here</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="MessageReference"/>
            <xs:element name="MessageSenderReference" type="FreeText" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
```

```
      <xs:element name="Error" maxOccurs="unbounded">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="TagReference" type="xs:string" minOccurs="0">
              <xs:annotation>
                <xs:documentation>This is a placeholder for XPath expression
indicating the element of the orginal message which caused the
error.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="TypeOfError">
              <xs:annotation>
                <xs:documentation>It is an enumerated type to indicate if the error
was caused due to a bussines rule violation (1 = FUNCTIONAL) or due to a system
failure (2 = TECHNICAL) or both (0 = BOTH)</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:integer">
                  <xs:enumeration value="0"/>
                  <xs:enumeration value="1"/>
                  <xs:enumeration value="2"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Severity">
              <xs:annotation>
                <xs:documentation>1 = WARNING: Message content, sequence or other
parameters are off standard but (partial) processing has been possible.2 = ERROR:
Message cannot be processed.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:integer">
                  <xs:enumeration value="1"/>
                  <xs:enumeration value="2"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="ErrorCode">
              <xs:annotation>
                <xs:documentation>To be defined: code list from 1 to 9999. Proposal
from PathDossierErrorCode: "Standard values are between 5000 and 6000 (central
maintained list). The values greater than 6000 can be used on national level.
"</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:integer">
                  <xs:minInclusive value="1"/>
                  <xs:maxInclusive value="9999"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="FreeTextField"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="PlannedTransportIdentifiers" minOccurs="0"
maxOccurs="unbounded"/>
      <xs:element ref="TransportOperationalIdentifiers" minOccurs="0"
maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ErrorMessage/ErrorCauseReference**

diagram	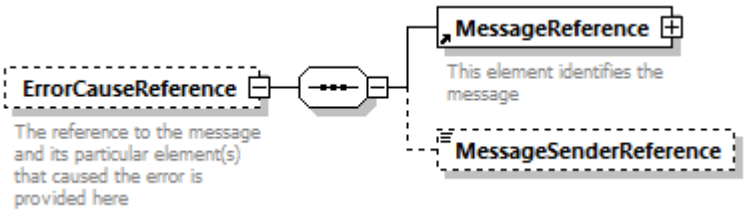
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**MessageReference** **MessageSenderReference**
annotation	documentation The reference to the message and its particular element(s) that caused the error is provided here

source	`<xs:element name="ErrorCauseReference" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>The reference to the message and its particular element(s) that caused the error is provided here</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="MessageReference"/>`
	`  <xs:element name="MessageSenderReference" type="FreeText" minOccurs="0"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **ErrorMessage/ErrorCauseReference/MessageSenderReference**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 255
source	`<xs:element name="MessageSenderReference" type="FreeText" minOccurs="0"/>`

element **ErrorMessage/Error**

diagram

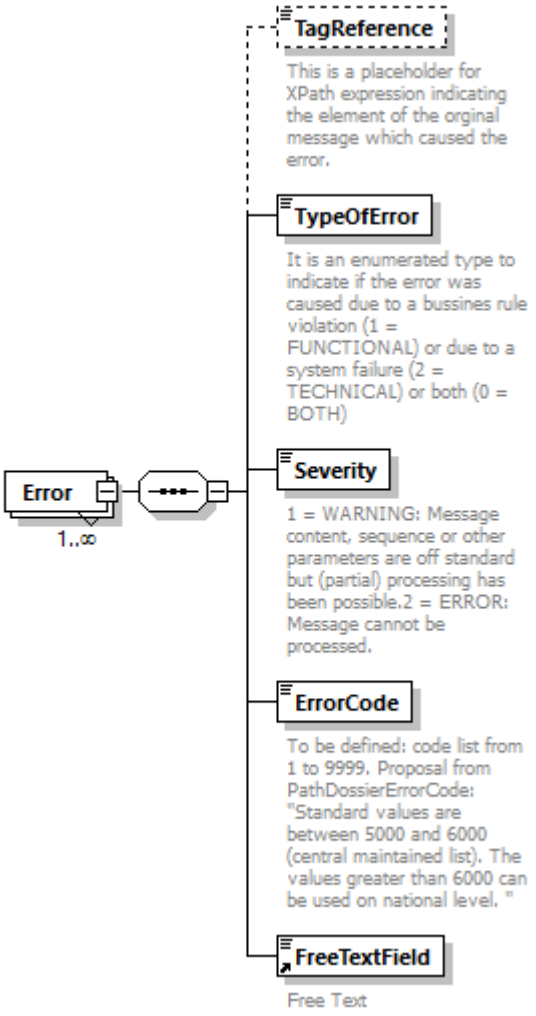

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 1 maxOcc unbounded content complex
children	TagReference TypeOfError Severity ErrorCode FreeTextField

source

```
<xs:element name="Error" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="TagReference" type="xs:string" minOccurs="0">
        <xs:annotation>
          <xs:documentation>This is a placeholder for XPath expression indicating the
element of the orginal message which caused the error.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="TypeOfError">
        <xs:annotation>
          <xs:documentation>It is an enumerated type to indicate if the error was
caused due to a bussines rule violation (1 = FUNCTIONAL) or due to a system failure
(2 = TECHNICAL) or both (0 = BOTH)</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:enumeration value="0"/>
            <xs:enumeration value="1"/>
            <xs:enumeration value="2"/>
```

```
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Severity">
        <xs:annotation>
          <xs:documentation>1 = WARNING: Message content, sequence or other
parameters are off standard but (partial) processing has been possible.2 = ERROR:
Message cannot be processed.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:enumeration value="1"/>
            <xs:enumeration value="2"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ErrorCode">
        <xs:annotation>
          <xs:documentation>To be defined: code list from 1 to 9999. Proposal from
PathDossierErrorCode: "Standard values are between 5000 and 6000 (central maintained
list). The values greater than 6000 can be used on national level.
"</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:minInclusive value="1"/>
            <xs:maxInclusive value="9999"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="FreeTextField"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ErrorMessage/Error/TagReference**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:string**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation This is a placeholder for XPath expression indicating the element of the orginal message which caused the error.

source	`<xs:element name="TagReference" type="xs:string" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>This is a placeholder for XPath expression indicating the element of the orginal message which caused the error.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ErrorMessage/Error/TypeOfError**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
facets	Kind Value Annotation enumeration 0 enumeration 1 enumeration 2
annotation	documentation It is an enumerated type to indicate if the error was caused due to a bussines rule violation (1 = FUNCTIONAL) or due to a system failure (2 = TECHNICAL) or both (0 = BOTH)
source	<xs:element name="TypeOfError"> <xs:annotation> <xs:documentation>It is an enumerated type to indicate if the error was caused due to a bussines rule violation (1 = FUNCTIONAL) or due to a system failure (2 = TECHNICAL) or both (0 = BOTH)</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:enumeration value="0"/> <xs:enumeration value="1"/> <xs:enumeration value="2"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ErrorMessage/Error/Severity**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
facets	Kind Value Annotation enumeration 1 enumeration 2
annotation	documentation 1 = WARNING: Message content, sequence or other parameters are off standard but (partial) processing has been possible.2 = ERROR: Message cannot be processed.
source	<xs:element name="Severity"> <xs:annotation> <xs:documentation>1 = WARNING: Message content, sequence or other parameters are

```
off standard but (partial) processing has been possible.2 = ERROR: Message cannot be
processed.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:integer">
      <xs:enumeration value="1"/>
      <xs:enumeration value="2"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ErrorMessage/Error/ErrorCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 9999
annotation	documentation To be defined: code list from 1 to 9999. Proposal from PathDossierErrorCode: "Standard values are between 5000 and 6000 (central maintained list). The values greater than 6000 can be used on national level. "
source	<xs:element name="ErrorCode"> <xs:annotation> <xs:documentation>To be defined: code list from 1 to 9999. Proposal from PathDossierErrorCode: "Standard values are between 5000 and 6000 (central maintained list). The values greater than 6000 can be used on national level. "</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="9999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **EstimatedEndDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
source	<xs:element name="EstimatedEndDateTime" type="xs:dateTime"/>

element **EventType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **WagonStatusMessages/WagonStatusMessage/Event**

facets

Kind	Value	Annotation
enumeration	10	documentation Wagon Ready To Pull (Based on information from customer or wagon keeper, the LRU not being the origin RU will inform the origin RU that the wagon (loaded or empty) can (or will be ready to) be pulled from the un/loading place or customer's siding.)
enumeration	20	documentation Wagon Pulled (Origin RU informs other involved RU(s) that the wagon has been pulled from un/loading place or from customer's siding.)
enumeration	01	documentation Wagon Left Origin (Origin RU informs other involved RU(s) that the wagon left with a train production departure station.)
enumeration	04	documentation Wagon Arrival (RU informs other involved RU(s) that the wagon has arrived to station with a train.)
enumeration	03	documentation Wagon Departure (RU informs other involved RU(s) that the wagon has departed from station with a train.)
enumeration	13	documentation Passed through (Wagon, being part of a running train, has passed through a location.)
enumeration	14	documentation Wagon Handed Over (RU informs other involved RU(s) that the wagon has been physically handed over to the next RU) (
enumeration	24	documentation Wagon Taken Over (RU informs other involved RU(s) that the wagon has been physically taken over from the previous RU.)
enumeration	06	documentation Wagon Journey Irregularity (RU informs other involved RU(s) that something irregular happened with the wagon or its load which requires action and may interrupt its transportation. Details about nature of the irregularity and its consequences are to be included too.)
enumeration	16	documentation Wagon Journey Recovered (RU informs other involved RU(s) that the wagon journey irregularity was recovered (e.g. wagon is repaired or load is fixed)
enumeration	05	documentation Wagon Reached Destination (Destination RU informs other involved RU(s) that the wagon arrived to destination station with a train.)
enumeration	15	documentation Wagon Delivered (Destination RU informs other involved RU(s) that the wagon has been delivered to un/loading place or to customer's siding.)
enumeration	60	documentation GPS Location (Information about the position of the wagon)

annotation

documentation
Type of event

source

```
<xs:element name="EventType">
  <xs:annotation>
    <xs:documentation>Type of event</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="10">
        <xs:annotation>
          <xs:documentation>Wagon Ready To Pull (Based on information from customer
or wagon keeper, the LRU not being the origin RU will inform the origin RU that the
wagon (loaded or empty) can (or will be ready to) be pulled from the un/loading place
or customer's siding.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="20">
        <xs:annotation>
```

```
          <xs:documentation> Wagon Pulled (Origin RU informs other involved RU(s)
that the wagon has been pulled from un/loading place or from customer's
siding.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="01">
        <xs:annotation>
          <xs:documentation>Wagon Left Origin (Origin RU informs other involved RU(s)
that the wagon left with a train production departure station.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="04">
        <xs:annotation>
          <xs:documentation>Wagon Arrival (RU informs other involved RU(s) that the
wagon has arrived to station with a train.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="03">
        <xs:annotation>
          <xs:documentation>Wagon Departure (RU informs other involved RU(s) that the
wagon has departed from station with a train.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="13">
        <xs:annotation>
          <xs:documentation>Passed through (Wagon, being part of a running train, has
passed through a location.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="14">
        <xs:annotation>
          <xs:documentation>Wagon Handed Over (RU informs other involved RU(s) that
the wagon has been physically handed over to the next RU) (</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="24">
        <xs:annotation>
          <xs:documentation>Wagon Taken Over (RU informs other involved RU(s) that
the wagon has been physically taken over from the previous RU.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="06">
        <xs:annotation>
          <xs:documentation>Wagon Journey Irregularity (RU informs other involved
RU(s) that something irregular happened with the wagon or its load which requires
action and may interrupt its transportation. Details about nature of the irregularity
and its consequences are to be included too.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="16">
        <xs:annotation>
          <xs:documentation>Wagon Journey Recovered (RU informs other involved RU(s)
that the wagon journey irregularity was recovered (e.g. wagon is repaired or load is
fixed)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="05">
        <xs:annotation>
          <xs:documentation>Wagon Reached Destination (Destination RU informs other
involved RU(s) that the wagon arrived to destination station with a
train.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="15">
```

```
        <xs:annotation>
          <xs:documentation>Wagon Delivered (Destination RU informs other involved
RU(s) that the wagon has been delivered to un/loading place or to customer's
siding.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="60">
        <xs:annotation>
          <xs:documentation>GPS Location ( Information about the position of the
wagon)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ExceptionalGaugingCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	element **ExceptionalGaugingIdent**
facets	Kind Value Annotation minLength 1 maxLength 24
annotation	documentation Acceptance agreement number, based on guidelines of IM_Partner

source	`<xs:element name="ExceptionalGaugingCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Acceptance agreement number, based on guidelines of IM_Partner</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="24"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ExceptionalGaugingIdent**

diagram	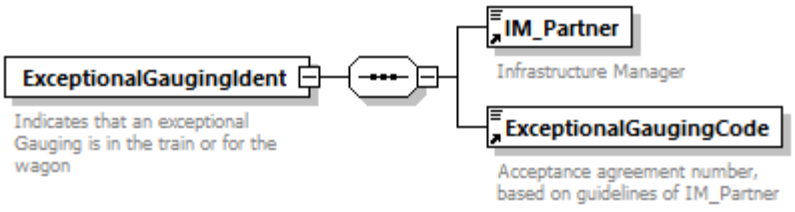
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	IM_Partner ExceptionalGaugingCode
used by	elements PlannedTrainData WagonOperationalData
annotation	documentation Indicates that an exceptional Gauging is in the train or for the wagon
source	<xs:element name="ExceptionalGaugingIdent"> <xs:annotation> <xs:documentation>Indicates that an exceptional Gauging is in the train or for the wagon </xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="IM_Partner"/> <xs:element ref="ExceptionalGaugingCode"/> </xs:sequence> </xs:complexType> </xs:element>

element **ExceptionalGaugingInd**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element TrainRunningData
annotation	documentation Indicates that an exceptional gauging is in the train or for the wagon - (true/false)
source	<xs:element name="ExceptionalGaugingInd" type="xs:boolean"> <xs:annotation> <xs:documentation>Indicates that an exceptional gauging is in the train or for the wagon - (true/false)</xs:documentation> </xs:annotation> </xs:element>

element **ExceptionalGaugingProfile**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	element WagonOperationalData
facets	Kind Value Annotation minLength 7 maxLength 7
annotation	documentation

	Identification of special load. Coding found in 404-2 chapter 4.9.1 (4AN + 3N)
source	<xs:element name="ExceptionalGaugingProfile"> <xs:annotation> <xs:documentation>Identification of special load. Coding found in 404-2 chapter 4.9.1 (4AN + 3N)</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="7"/> <xs:maxLength value="7"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ExceptionPoint**

diagram	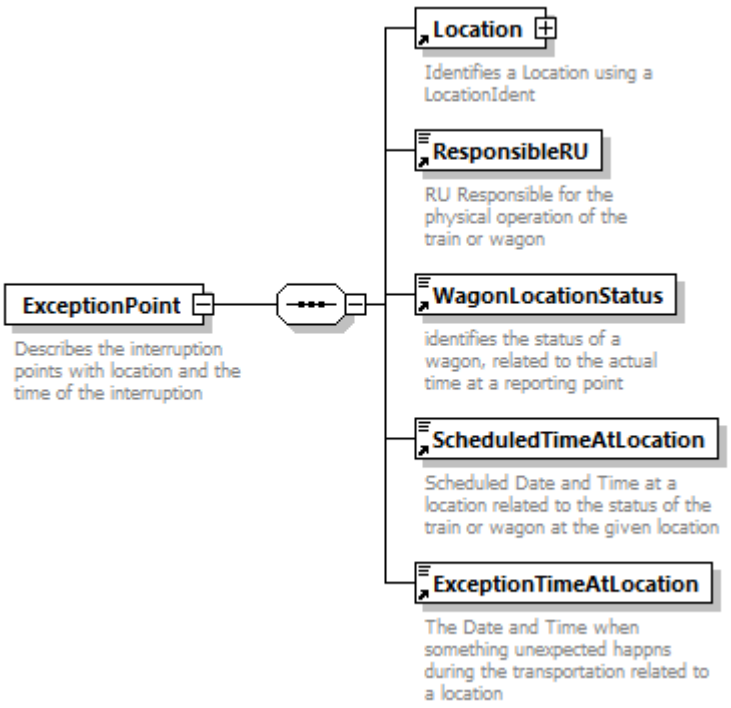
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	Location ResponsibleRU WagonLocationStatus ScheduledTimeAtLocation ExceptionTimeAtLocation
annotation	documentation Describes the interruption points with location and the time of the interruption
source	<xs:element name="ExceptionPoint"> <xs:annotation> <xs:documentation>Describes the interruption points with location and the time of the interruption</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Location"/> <xs:element ref="ResponsibleRU"/> <xs:element ref="WagonLocationStatus"/> <xs:element ref="ScheduledTimeAtLocation"/> <xs:element ref="ExceptionTimeAtLocation"/> </xs:sequence> </xs:complexType>

	</xs:element>

element **ExceptionReason**

diagram	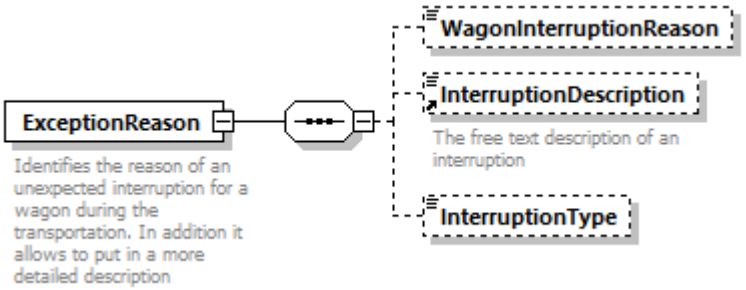
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	WagonInterruptionReason InterruptionDescription InterruptionType
annotation	documentation Identifies the reason of an unexpected interruption for a wagon during the transportation. In addition it allows to put in a more detailed description

source

```
<xs:element name="ExceptionReason">
  <xs:annotation>
    <xs:documentation>Identifies the reason of an unexpected interruption for a wagon
during the transportation. In addition it allows to put in a more detailed
description</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="WagonInterruptionReason" minOccurs="0">
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="wagon damaged"/>
            <xs:enumeration value="change of route"/>
            <xs:enumeration value="other"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="InterruptionDescription" minOccurs="0"/>
      <xs:element name="InterruptionType" minOccurs="0">
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:length value="1"/>
            <xs:enumeration value="0">
              <xs:annotation>
                <xs:documentation>Damage does not cause an interruption of transport
run</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="1">
              <xs:annotation>
                <xs:documentation>Damage causes an interruption of transport
run</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="2">
              <xs:annotation>
                <xs:documentation>other (no damage)</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
          </xs:restriction>
```

```
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ExceptionReason/WagonInterruptionReason**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation enumeration: wagon damaged enumeration: change of route enumeration: other

source	`<xs:element name="WagonInterruptionReason" minOccurs="0">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:token">`
	`  <xs:enumeration value="wagon damaged"/>`
	`  <xs:enumeration value="change of route"/>`
	`  <xs:enumeration value="other"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ExceptionReason/InterruptionType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation length: 1 enumeration: 0 — documentation: Damage does not cause an interruption of transport run enumeration: 1 — documentation: Damage causes an interruption of transport run enumeration: 2 — documentation: other (no damage)

source	`<xs:element name="InterruptionType" minOccurs="0">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:token">`
	`  <xs:length value="1"/>`
	`  <xs:enumeration value="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Damage does not cause an interruption of transport run</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:enumeration>`
	`  <xs:enumeration value="1">`
	`  <xs:annotation>`

```
          <xs:documentation>Damage causes an interruption of transport
run</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>other (no damage)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ExceptionTimeAtLocation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **ExceptionPoint**
annotation	documentation The Date and Time when something unexpected happns during the transportation related to a location

source	`<xs:element name="ExceptionTimeAtLocation" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>The Date and Time when something unexpected happns during the transportation related to a location</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **FaxNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CommunicationRefID**
properties	content simple
used by	elements **AdministrativeContactInformation** **Customer/Contacts**
facets	Kind Value Annotation minLength 1 maxLength 70
annotation	documentation Generic Fax number in Free text

source	`<xs:element name="FaxNumber" type="CommunicationRefID">`
	`  <xs:annotation>`
	`  <xs:documentation>Generic Fax number in Free text</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **FerryPermittedFlag**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
source	`<xs:element name="FerryPermittedFlag" type="xs:boolean"/>`

element **FreeTextField**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	elements **AdministrativeContactInformation** **ErrorMessage/Error** **PathCanceledMessage** **PathDetailsMessage** **PathDetailsRefusedMessage** **PathNotAvailableMessage** **PathRequestMessage** **PlannedJourneyLocation** complexType **TrainActivityType**
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Free Text

source	`<xs:element name="FreeTextField" type="FreeText">`
	`  <xs:annotation>`
	`  <xs:documentation>Free Text</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **FreightFlag**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **LocationPrimaryInformation**
annotation	documentation Identifies that the Entity or Location is for Freight Activity

source	`<xs:element name="FreightFlag" type="xs:boolean">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies that the Entity or Location is for Freight Activity</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **GeographicalCoordinates**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:string**
properties	content simple
annotation	documentation Longitude and latitude as defined in UIC Leafle 920-2

source	`<xs:element name="GeographicalCoordinates" type="xs:string">`
	`  <xs:annotation>`
	`  <xs:documentation>Longitude and latitude as defined in UIC Leafle 920-2</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **GeographicCoordinates**

diagram	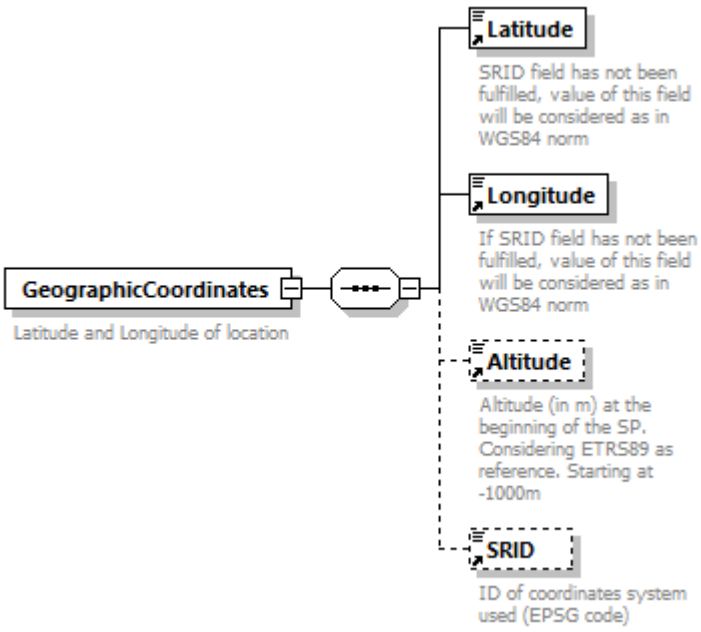
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Latitude Longitude Altitude SRID**
used by	elements **GNSS_DynamicPosition LocationPrimaryInformation LocationSubsidiaryInformation**
annotation	documentation Latitude and Longitude of location

source	`<xs:element name="GeographicCoordinates">`
	`  <xs:annotation>`
	`  <xs:documentation>Latitude and Longitude of location</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="Latitude">`

```
        <xs:annotation>
          <xs:documentation>SRID field has not been fulfilled, value of this field
will be considered as in WGS84 norm</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="Longitude">
        <xs:annotation>
          <xs:documentation>If SRID field has not been fulfilled, value of this field
will be considered as in WGS84 norm</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="Altitude" minOccurs="0"/>
      <xs:element ref="SRID" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **GeoLocalisation**

diagram	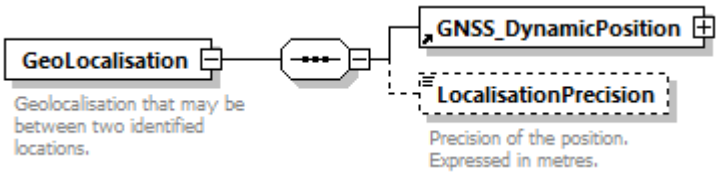
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	GNSS_DynamicPosition LocalisationPrecision
used by	element GeoLocalisationOnNetwork
annotation	documentation Geolocalisation that may be between two identified locations.

source

```
<xs:element name="GeoLocalisation">
  <xs:annotation>
    <xs:documentation>Geolocalisation that may be between two identified locations.
</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="GNSS_DynamicPosition"/>
      <xs:element name="LocalisationPrecision" type="xs:float" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Precision of the position. Expressed in
metres.</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **GeoLocalisation/LocalisationPrecision**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	**xs:float**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Precision of the position. Expressed in metres.

source	`<xs:element name="LocalisationPrecision" type="xs:float" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Precision of the position. Expressed in metres.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **GeoLocalisationOnNetwork**

diagram	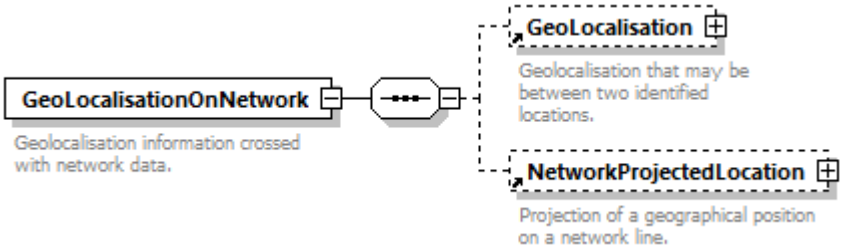
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**GeoLocalisation** **NetworkProjectedLocation**
used by	elements **InterruptionPoint** **TrainLocationReport**
annotation	documentation Geolocalisation information crossed with network data.

source	`<xs:element name="GeoLocalisationOnNetwork">`
	`  <xs:annotation>`
	`  <xs:documentation>Geolocalisation information crossed with network data.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="GeoLocalisation" minOccurs="0"/>`
	`  <xs:element ref="NetworkProjectedLocation" minOccurs="0"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **GNSS_DynamicPosition**

diagram

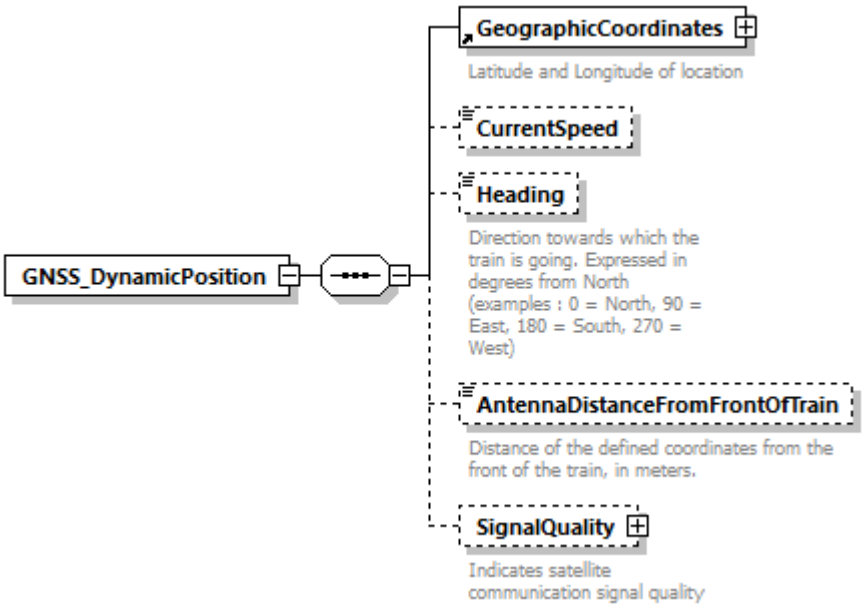

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	GeographicCoordinates CurrentSpeed Heading AntennaDistanceFromFrontOfTrain SignalQuality
used by	element GeoLocalisation

source

```
<xs:element name="GNSS_DynamicPosition">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="GeographicCoordinates"/>
      <xs:element name="CurrentSpeed" type="Speed" minOccurs="0"/>
      <xs:element name="Heading" type="xs:integer" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Direction towards which the train is going. Expressed in
degrees from North (examples : 0 = North, 90 = East, 180 = South, 270 =
West)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="AntennaDistanceFromFrontOfTrain" type="xs:float"
minOccurs="0">
        <xs:annotation>
          <xs:documentation>Distance of the defined coordinates from the front of the
train, in meters.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="SignalQuality" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Indicates satellite communication signal
quality</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="SatelliteHDOP" type="xs:decimal">
              <xs:annotation>
                <xs:documentation>HDOP = Horizontal Dilution Of Precision. Parameter
used to describe the strength of the current satellite configuration, or geometry,
and it’s impact on the accuracy of the data collected by a GNSS receiver at the time
of use. HDOP provides a measure of accuracy in 2-D position (e.g. Latitude and
Longitude). Smaller value indicates better precision. Values less than 1 are the
best. Values from 2 - 5 are good. Values greater 10 indicate bad quality
```

```
</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="NumberOfVisibleSatellites" type="xs:integer">
              <xs:annotation>
                <xs:documentation>Indicates the number of satellites being used in
the position solution. Greater value indicates better quality.</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **GNSS_DynamicPosition/CurrentSpeed**

diagram	CurrentSpeed
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Speed**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 001 maxInclusive 999
source	`<xs:element name="CurrentSpeed" type="Speed" minOccurs="0"/>`

element **GNSS_DynamicPosition/Heading**

diagram	Heading Direction towards which the train is going. Expressed in degrees from North (examples : 0 = North, 90 = East, 180 = South, 270 = West)
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:integer**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Direction towards which the train is going. Expressed in degrees from North (examples : 0 = North, 90 = East, 180 = South, 270 = West)

source	`<xs:element name="Heading" type="xs:integer" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Direction towards which the train is going. Expressed in degrees from North (examples : 0 = North, 90 = East, 180 = South, 270 = West)</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **GNSS_DynamicPosition/AntennaDistanceFromFrontOfTrain**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:float**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Distance of the defined coordinates from the front of the train, in meters.

source	`<xs:element name="AntennaDistanceFromFrontOfTrain" type="xs:float" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Distance of the defined coordinates from the front of the train, in meters.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **GNSS_DynamicPosition/SignalQuality**

diagram	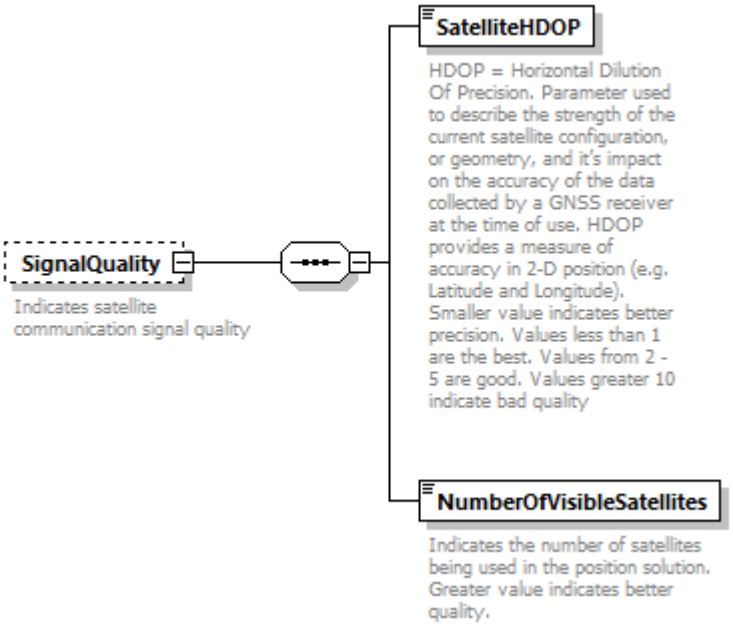
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	SatelliteHDOP NumberOfVisibleSatellites
annotation	documentation Indicates satellite communication signal quality

source	`<xs:element name="SignalQuality" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Indicates satellite communication signal quality</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="SatelliteHDOP" type="xs:decimal">`
	`  <xs:annotation>`

```
          <xs:documentation>HDOP = Horizontal Dilution Of Precision. Parameter used
to describe the strength of the current satellite configuration, or geometry, and
it's impact on the accuracy of the data collected by a GNSS receiver at the time of
use. HDOP provides a measure of accuracy in 2-D position (e.g. Latitude and
Longitude). Smaller value indicates better precision. Values less than 1 are the
best. Values from 2 - 5 are good. Values greater 10 indicate bad quality
</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="NumberOfVisibleSatellites" type="xs:integer">
        <xs:annotation>
          <xs:documentation>Indicates the number of satellites being used in the
position solution. Greater value indicates better quality.</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **GNSS_DynamicPosition/SignalQuality/SatelliteHDOP**

diagram	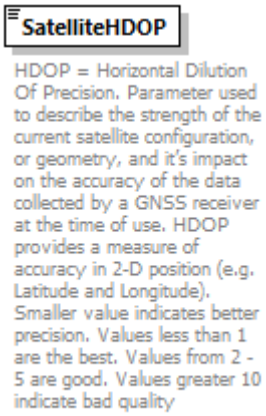
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:decimal**
properties	content simple
annotation	documentation HDOP = Horizontal Dilution Of Precision. Parameter used to describe the strength of the current satellite configuration, or geometry, and it's impact on the accuracy of the data collected by a GNSS receiver at the time of use. HDOP provides a measure of accuracy in 2-D position (e.g. Latitude and Longitude). Smaller value indicates better precision. Values less than 1 are the best. Values from 2 - 5 are good. Values greater 10 indicate bad quality
source	<xs:element name="SatelliteHDOP" type="xs:decimal"> <xs:annotation> <xs:documentation>HDOP = Horizontal Dilution Of Precision. Parameter used to describe the strength of the current satellite configuration, or geometry, and it's impact on the accuracy of the data collected by a GNSS receiver at the time of use. HDOP provides a measure of accuracy in 2-D position (e.g. Latitude and Longitude). Smaller value indicates better precision. Values less than 1 are the best. Values from 2 - 5 are good. Values greater 10 indicate bad quality </xs:documentation> </xs:annotation> </xs:element>

element **GNSS_DynamicPosition/SignalQuality/NumberOfVisibleSatellites**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:integer**
properties	content simple
annotation	documentation Indicates the number of satellites being used in the position solution. Greater value indicates better quality.

source	`<xs:element name="NumberOfVisibleSatellites" type="xs:integer">`
	`  <xs:annotation>`
	`  <xs:documentation>Indicates the number of satellites being used in the position solution. Greater value indicates better quality.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Goods**

diagram

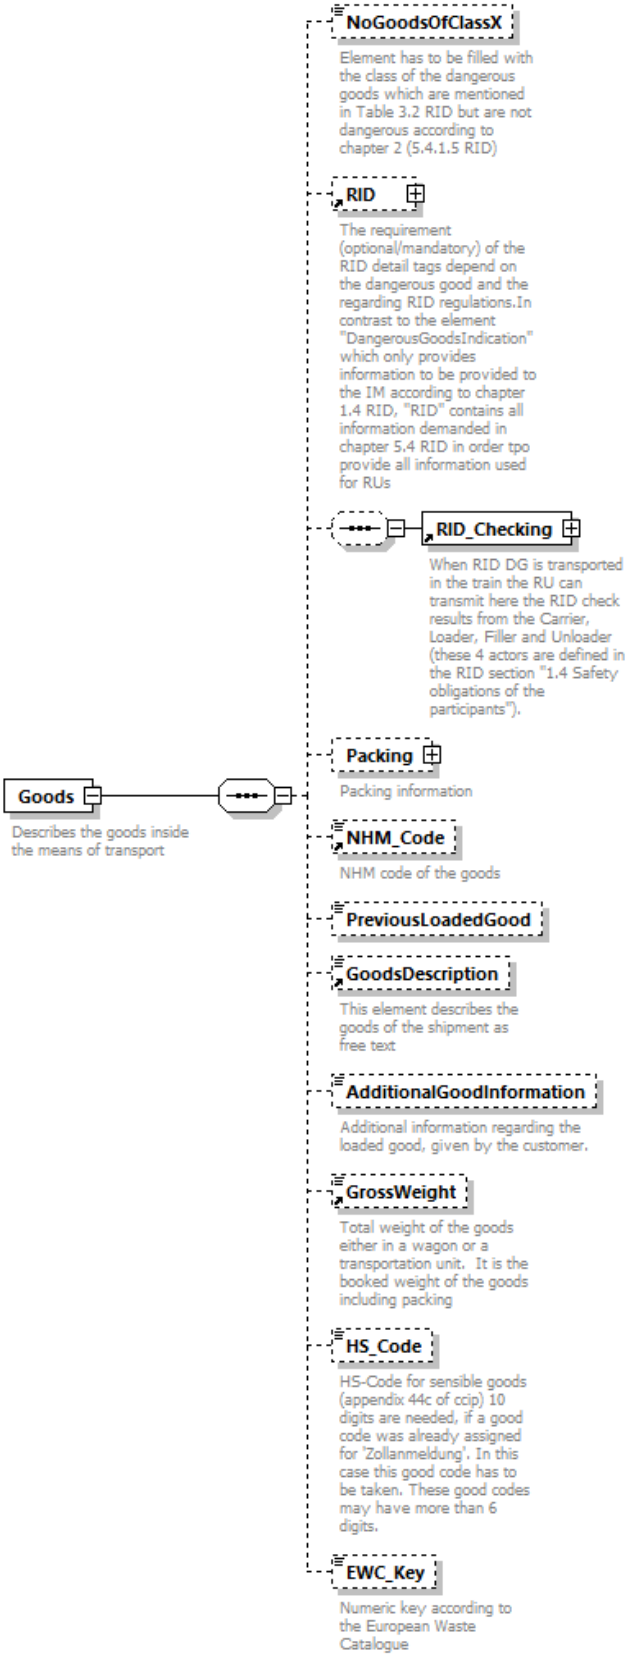

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	NoGoodsOfClassX RID RID_Checking Packing NHM_Code PreviousLoadedGood GoodsDescription AdditionalGoodInformation GrossWeight HS_Code EWC_Key
used by	elements WIMO_Dataset/ConsignmentLevelData ILU ITU RollingRoadUnit
annotation	documentation Describes the goods inside the means of transport

source

```
<xs:element name="Goods">
  <xs:annotation>
    <xs:documentation>Describes the goods inside the means of
transport</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="NoGoodsOfClassX" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Element has to be filled with the class of the dangerous
goods which are mentioned in Table 3.2 RID but are not dangerous according to chapter
2 (5.4.1.5 RID)</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="4"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="RID" minOccurs="0"/>
      <xs:sequence minOccurs="0">
        <xs:element ref="RID_Checking">
          <xs:annotation>
            <xs:documentation>When RID DG is transported in the train the RU can
transmit here the RID check results from the Carrier, Loader, Filler and Unloader
(these 4 actors are defined in the RID section "1.4 Safety obligations of the
participants").</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
      <xs:element name="Packing" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Packing information</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="NatureOfPacking" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Nature of packing according to the UN/ECE
Recommandation No 21</xs:documentation>
                <xs:documentation>CODE: UN/ECE-Recommendation No.
21</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="2"/>
                  <xs:minLength value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="NumberOfPackages" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Number of packages.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:int">
                  <xs:minInclusive value="1"/>
```

```
                  <xs:maxInclusive value="99999"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="PackageIdentification" minOccurs="0" maxOccurs="99">
              <xs:annotation>
                <xs:documentation>Particular marks and numbers to identify less than
wagon load assignments.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="35"/>
                  <xs:minLength value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="ReferenceNumbers" minOccurs="0" maxOccurs="99"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="NHM_Code" minOccurs="0"/>
      <xs:element name="PreviousLoadedGood" type="NHMCodeType" minOccurs="0"/>
      <xs:element ref="GoodsDescription" minOccurs="0"/>
      <xs:element name="AdditionalGoodInformation" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Additional information regarding the loaded good, given
by the customer.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="1000"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="GrossWeight" minOccurs="0"/>
      <xs:element name="HS_Code" minOccurs="0">
        <xs:annotation>
          <xs:documentation>HS-Code for sensible goods (appendix 44c of ccip) 10
digits are needed, if a good code was already assigned for 'Zollanmeldung'. In this
case this good code has to be taken. These good codes may have more than 6
digits.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="6"/>
            <xs:maxLength value="10"/>
            <xs:pattern value="\d*[1-9]\d*"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="EWC_Key" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Numeric key according to the European Waste
Catalogue</xs:documentation>
          <xs:documentation>CODE: European waste catalogue (EWC)
2000/532/EC</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="2"/>
            <xs:maxLength value="6"/>
            <xs:pattern value="\d*"/>
          </xs:restriction>
```

```
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Goods/NoGoodsOfClassX**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 4
annotation	documentation Element has to be filled with the class of the dangerous goods which are mentioned in Table 3.2 RID but are not dangerous according to chapter 2 (5.4.1.5 RID)
source	<xs:element name="NoGoodsOfClassX" minOccurs="0"> <xs:annotation> <xs:documentation>Element has to be filled with the class of the dangerous goods which are mentioned in Table 3.2 RID but are not dangerous according to chapter 2 (5.4.1.5 RID)</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Goods/Packing**

diagram

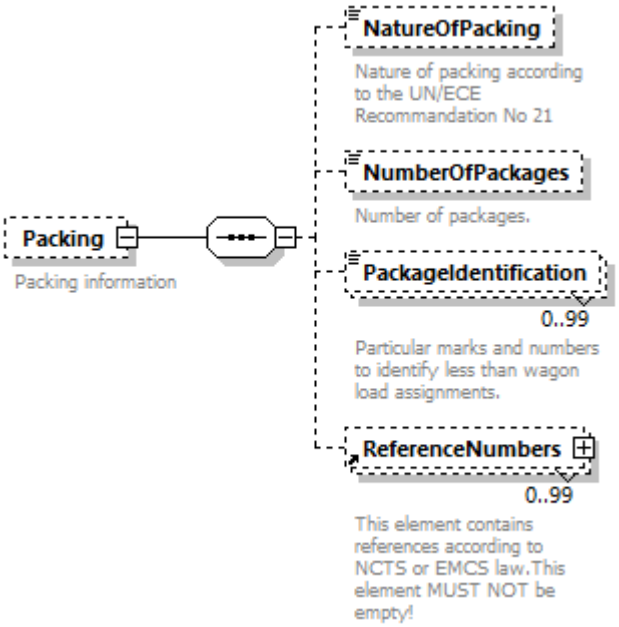

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	NatureOfPacking NumberOfPackages PackageIdentification ReferenceNumbers
annotation	documentation Packing information

source

```
<xs:element name="Packing" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Packing information</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="NatureOfPacking" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Nature of packing according to the UN/ECE Recommandation
No 21</xs:documentation>
          <xs:documentation>CODE: UN/ECE-Recommendation No. 21</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="2"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="NumberOfPackages" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Number of packages.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:int">
            <xs:minInclusive value="1"/>
            <xs:maxInclusive value="99999"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="PackageIdentification" minOccurs="0" maxOccurs="99">
        <xs:annotation>
```

```
          <xs:documentation>Particular marks and numbers to identify less than wagon
load assignments.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="35"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="ReferenceNumbers" minOccurs="0" maxOccurs="99"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Goods/Packing/NatureOfPacking**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 2
annotation	documentation Nature of packing according to the UN/ECE Recommandation No 21 documentation CODE: UN/ECE-Recommendation No. 21

source	`<xs:element name="NatureOfPacking" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Nature of packing according to the UN/ECE Recommandation No 21</xs:documentation>`
	`  <xs:documentation>CODE: UN/ECE-Recommendation No. 21</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="2"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Goods/Packing/NumberOfPackages**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	minOcc 0 maxOcc 1 content simple

facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation Number of packages.
source	<xs:element name="NumberOfPackages" minOccurs="0"> <xs:annotation> <xs:documentation>Number of packages.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Goods/Packing/PackageIdentification**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 99 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Particular marks and numbers to identify less than wagon load assignments.
source	<xs:element name="PackageIdentification" minOccurs="0" maxOccurs="99"> <xs:annotation> <xs:documentation>Particular marks and numbers to identify less than wagon load assignments.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="35"/> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Goods/PreviousLoadedGood**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**NHMCodeType**
properties	minOcc 0 maxOcc 1 content simple

facets	Kind Value Annotation length 6 pattern \d*[1-9]\d*
source	`<xs:element name="PreviousLoadedGood" type="NHMCodeType" minOccurs="0"/>`

element **Goods/AdditionalGoodInformation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 1000
annotation	documentation Additional information regarding the loaded good, given by the customer.

source	`<xs:element name="AdditionalGoodInformation" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Additional information regarding the loaded good, given by the customer.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="1000"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Goods/HS_Code**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 6 maxLength 10 pattern \d*[1-9]\d*
annotation	documentation HS-Code for sensible goods (appendix 44c of ccip) 10 digits are needed, if a good code was already assigned for 'Zollanmeldung'. In this case this good code has to be taken. These good codes may have more than 6 digits.

source

```
<xs:element name="HS_Code" minOccurs="0">
  <xs:annotation>
    <xs:documentation>HS-Code for sensible goods (appendix 44c of ccip) 10 digits are
needed, if a good code was already assigned for 'Zollanmeldung'. In this case this
good code has to be taken. These good codes may have more than 6
digits.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="6"/>
      <xs:maxLength value="10"/>
      <xs:pattern value="\d*[1-9]\d*"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **Goods/EWC_Key**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:string**

properties

minOcc	0
maxOcc	1
content	simple

facets

Kind	Value	Annotation
minLength	2	
maxLength	6	
pattern	\d*	

annotation

documentation
Numeric key according to the European Waste Catalogue
documentation
CODE: European waste catalogue (EWC) 2000/532/EC

source

```
<xs:element name="EWC_Key" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Numeric key according to the European Waste
Catalogue</xs:documentation>
    <xs:documentation>CODE: European waste catalogue (EWC)
2000/532/EC</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="2"/>
      <xs:maxLength value="6"/>
      <xs:pattern value="\d*"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **GoodsDescription**

diagram

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	elements **Goods Wagons/GoodsInWagon**
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation This element describes the goods of the shipment as free text

source	`<xs:element name="GoodsDescription" type="FreeText">`
	`  <xs:annotation>`
	`  <xs:documentation>This element describes the goods of the shipment as free text</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **GoodsInWagon**

diagram	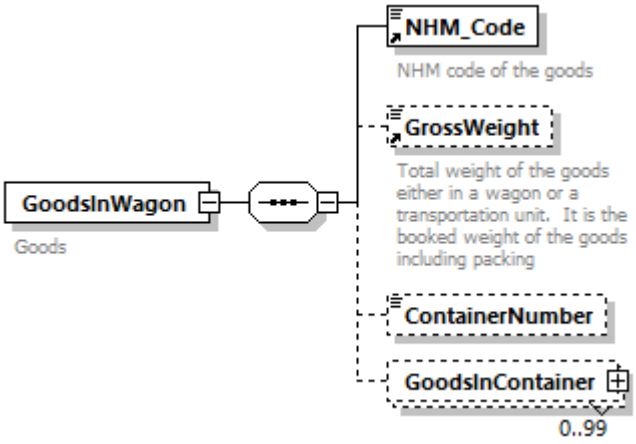
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**NHM_Code GrossWeight ContainerNumber GoodsInContainer**
used by	element **WagonInformation**
annotation	documentation Goods

source	`<xs:element name="GoodsInWagon">`
	`  <xs:annotation>`
	`  <xs:documentation>Goods</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="NHM_Code"/>`
	`  <xs:element ref="GrossWeight" minOccurs="0"/>`
	`  <xs:element name="ContainerNumber" type="EquipmentNumberType" minOccurs="0"/>`
	`  <xs:element name="GoodsInContainer" minOccurs="0" maxOccurs="99">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="NHM_Code" minOccurs="0"/>`
	`  <xs:element ref="GrossWeight" minOccurs="0"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`  </xs:element>`

```
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **GoodsInWagon/ContainerNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**EquipmentNumberType**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 13
source	`<xs:element name="ContainerNumber" type="EquipmentNumberType" minOccurs="0"/>`

element **GoodsInWagon/GoodsInContainer**

diagram	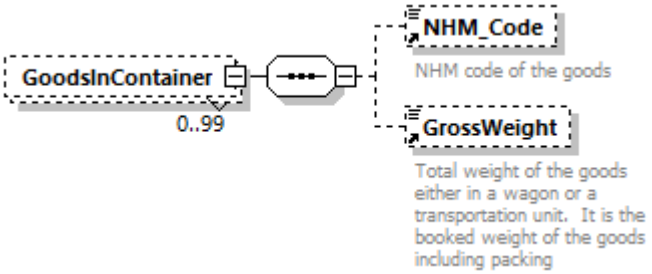
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 99 content complex
children	**NHM_Code GrossWeight**

source	`<xs:element name="GoodsInContainer" minOccurs="0" maxOccurs="99">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="NHM_Code" minOccurs="0"/>`
	`  <xs:element ref="GrossWeight" minOccurs="0"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **GrossWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**

properties	content simple
used by	elements **Goods** **GoodsInWagon/GoodsInContainer** **GoodsInWagon** **Wagons/GoodsInWagon**
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation Total weight of the goods either in a wagon or a transportation unit. It is the booked weight of the goods including packing

source	`<xs:element name="GrossWeight" type="WeightValueKilo">`
	`<xs:annotation>`
	`<xs:documentation>Total weight of the goods either in a wagon or a transportation unit. It is the booked weight of the goods including packing </xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **HandBrake**

diagram	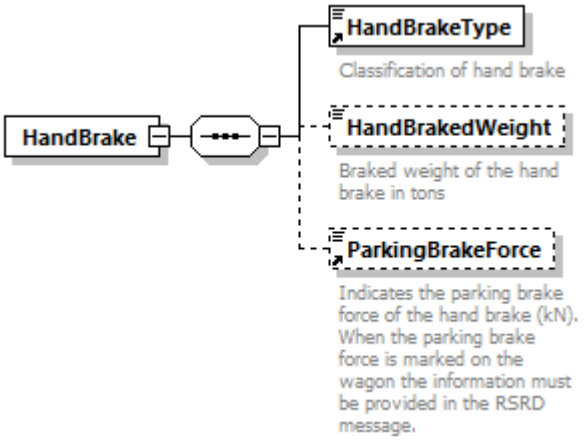
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**HandBrakeType** **HandBrakedWeight** **ParkingBrakeForce**
used by	element **RollingStockDataset/DesignDataSet**

source	`<xs:element name="HandBrake">`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="HandBrakeType"/>`
	`<xs:element name="HandBrakedWeight" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Braked weight of the hand brake in tons</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:decimal">`
	`<xs:totalDigits value="4"/>`
	`<xs:fractionDigits value="1"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`
	`<xs:element ref="ParkingBrakeForce" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **HandBrake/HandBrakedWeight**

diagram	 Braked weight of the hand brake in tons
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation totalDigits 4 fractionDigits 1
annotation	documentation Braked weight of the hand brake in tons

source	`<xs:element name="HandBrakedWeight" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Braked weight of the hand brake in tons</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:decimal">`
	`<xs:totalDigits value="4"/>`
	`<xs:fractionDigits value="1"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **HandlingInstruction**

diagram	 Special instructions regarding the handling of the wagon or shipment in free text
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 255
annotation	documentation Special instructions regarding the handling of the wagon or shipment in free text

source	`<xs:element name="HandlingInstruction" type="FreeText">`
	`<xs:annotation>`
	`<xs:documentation>Special instructions regarding the handling of the wagon or shipment in free text</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **HandoverPointFlag**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
used by	element **LocationPrimaryInformation**
annotation	documentation Identifies if the location is a Handover Point from IM to IM

source	`<xs:element name="HandoverPointFlag">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies if the location is a Handover Point from IM to IM</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Height**

diagram	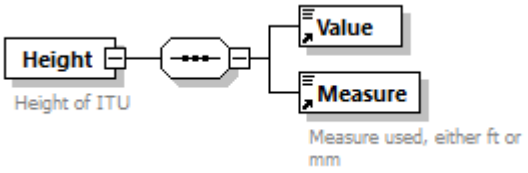
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Value** **Measure**
used by	element **Dimensions** complexType **DimensionValue**
annotation	documentation Height of ITU

source	`<xs:element name="Height">`
	`  <xs:annotation>`
	`  <xs:documentation>Height of ITU</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="Value"/>`
	`  <xs:element ref="Measure"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **HighestPlannedSpeed**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Speed**
properties	content simple

used by	element **PlannedTrainTechnicalData**
facets	Kind / Value / Annotation minInclusive 001 maxInclusive 999
annotation	documentation IM may inform the RA (Responsible applicant) on the speed which was the basis for path construction

source	`<xs:element name="HighestPlannedSpeed" type="Speed">`
	`  <xs:annotation>`
	`  <xs:documentation>IM may inform the RA (Responsible applicant) on the speed which was the basis for path construction</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Identifiers**

diagram	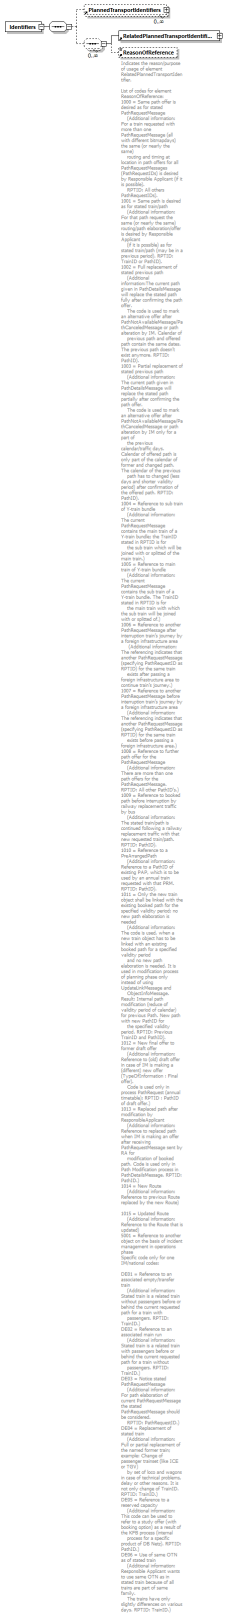
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	PlannedTransportIdentifiers RelatedPlannedTransportIdentifiers ReasonOfReference
used by	elements PathCanceledMessage PathConfirmedMessage PathDetailsMessage PathDetailsRefusedMessage PathNotAvailableMessage PathRequestMessage ReceiptConfirmationMessage
source	<xs:element name="Identifiers"> <xs:complexType> <xs:sequence> <xs:element ref="PlannedTransportIdentifiers" minOccurs="0" maxOccurs="unbounded"/> <xs:sequence minOccurs="0" maxOccurs="unbounded"> <xs:element ref="RelatedPlannedTransportIdentifiers"/> <xs:element ref="ReasonOfReference" minOccurs="0"/> </xs:sequence> </xs:sequence> </xs:complexType> </xs:element>

element **ILU**

diagram	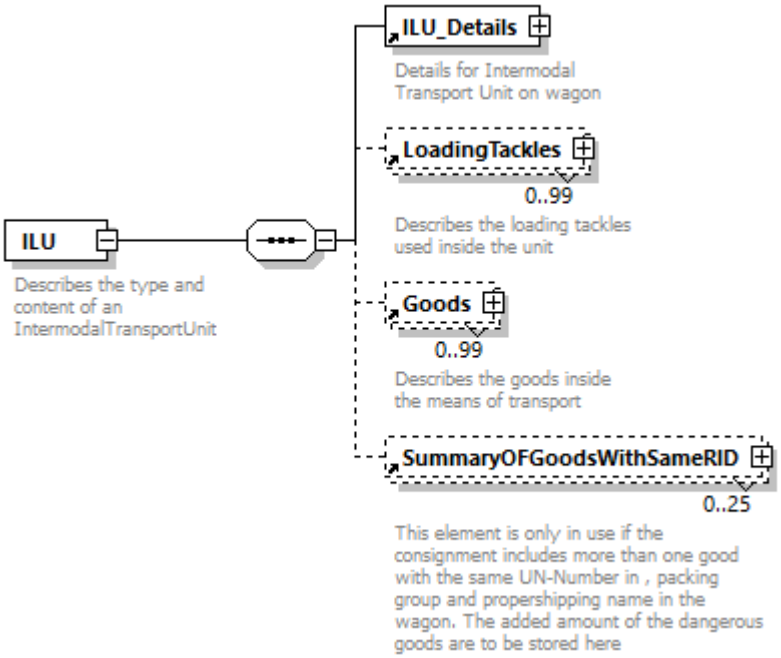
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	ILU_Details LoadingTackles Goods SummaryOFGoodsWithSameRID
used by	element Wagons/GoodsInWagon
annotation	documentation Describes the type and content of an IntermodalTransportUnit
source	<xs:element name="ILU"> <xs:annotation> <xs:documentation>Describes the type and content of an IntermodalTransportUnit</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="ILU_Details"> <xs:annotation> <xs:documentation>Details for Intermodal Transport Unit on wagon</xs:documentation>

```
        </xs:annotation>
      </xs:element>
      <xs:element ref="LoadingTackles" minOccurs="0" maxOccurs="99">
        <xs:annotation>
          <xs:documentation>Describes the loading tackles used inside the
unit</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="Goods" minOccurs="0" maxOccurs="99"/>
      <xs:element ref="SummaryOFGoodsWithSameRID" minOccurs="0" maxOccurs="25"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ILU_Details**

diagram

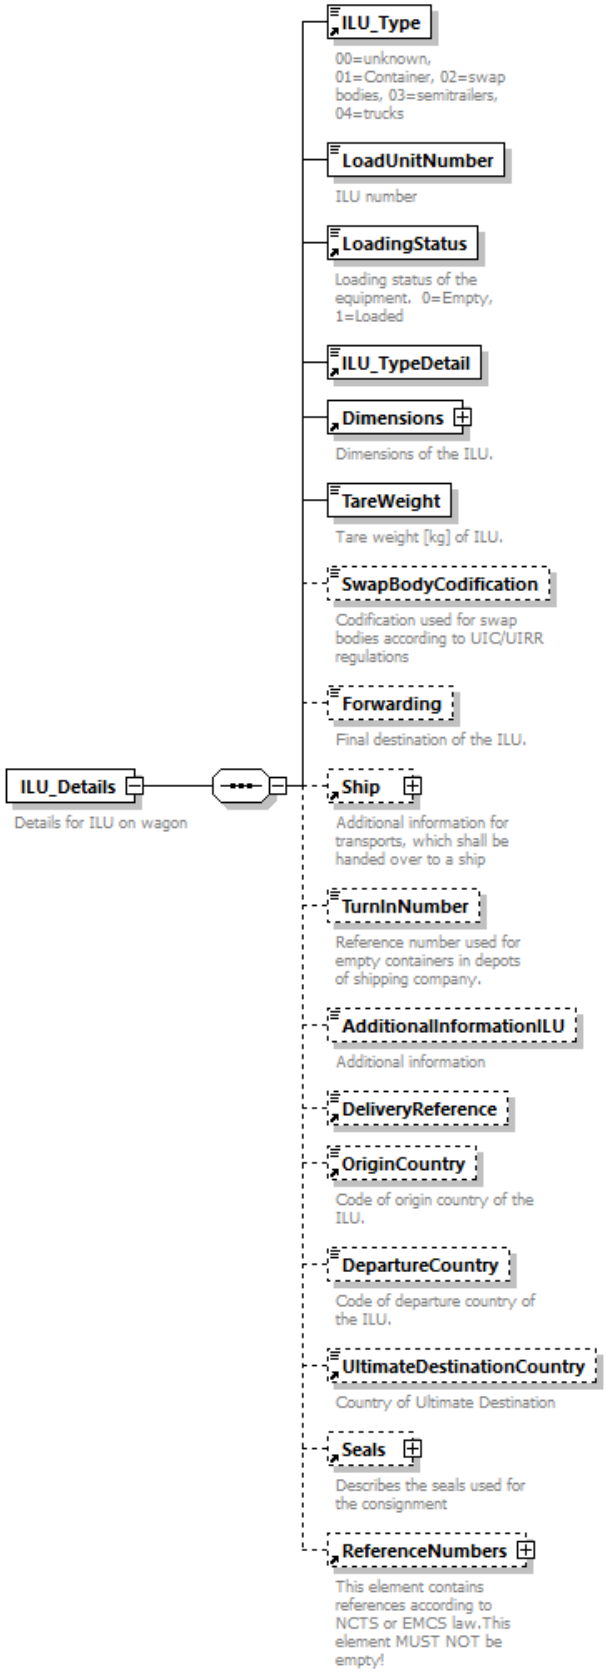

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

properties	content complex
children	**ILU_Type LoadUnitNumber LoadingStatus ILU_TypeDetail Dimensions TareWeight SwapBodyCodification Forwarding Ship TurnInNumber AdditionalInformationILU DeliveryReference OriginCountry DepartureCountry UltimateDestinationCountry Seals ReferenceNumbers**
used by	element **ILU**
annotation	documentation Details for ILU on wagon

source

```
<xs:element name="ILU_Details">
  <xs:annotation>
    <xs:documentation>Details for ILU on wagon</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="ILU_Type">
        <xs:annotation>
          <xs:documentation>00=unknown, 01=Container, 02=swap bodies,
03=semitrailers, 04=trucks</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="LoadUnitNumber" type="LoadUnitNumberType">
        <xs:annotation>
          <xs:documentation>ILU number</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="LoadingStatus"/>
      <xs:element ref="ILU_TypeDetail"/>
      <xs:element ref="Dimensions">
        <xs:annotation>
          <xs:documentation>Dimensions of the ILU.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="TareWeight" type="WeightValueKilo">
        <xs:annotation>
          <xs:documentation>Tare weight [kg] of ILU.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="SwapBodyCodification" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Codification used for swap bodies according to UIC/UIRR
regulations </xs:documentation>
          <xs:documentation>CODE:</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="3"/>
            <xs:maxLength value="4"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Forwarding" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Final destination of the ILU.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="80"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="Ship" minOccurs="0">
        <xs:annotation/>
```

```
      </xs:element>
      <xs:element name="TurnInNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Reference number used for empty containers in depots of
shipping company.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="30"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="AdditionalInformationILU" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Additional information </xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="350"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="DeliveryReference" minOccurs="0"/>
      <xs:element ref="OriginCountry" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Code of origin country of the ILU.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="DepartureCountry" type="CountryIdentISO" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Code of departure country of the ILU.</xs:documentation>
          <xs:documentation>CODE: ISO-3166-2</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="UltimateDestinationCountry" minOccurs="0"/>
      <xs:element ref="Seals" minOccurs="0"/>
      <xs:element ref="ReferenceNumbers" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ILU_Details/LoadUnitNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LoadUnitNumberType**
properties	content simple
facets	Kind Value Annotation whiteSpace replace pattern [A-Za-z0-9]{11}
annotation	documentation ILU number

source	`<xs:element name="LoadUnitNumber" type="LoadUnitNumberType">`
	`  <xs:annotation>`
	`  <xs:documentation>ILU number</xs:documentation>`
	`  </xs:annotation>`

	</xs:element>

element **ILU_Details/TareWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	content simple
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation Tare weight [kg] of ILU.
source	<xs:element name="TareWeight" type="WeightValueKilo"> <xs:annotation> <xs:documentation>Tare weight [kg] of ILU.</xs:documentation> </xs:annotation> </xs:element>

element **ILU_Details/SwapBodyCodification**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 3 maxLength 4
annotation	documentation Codification used for swap bodies according to UIC/UIRR regulations documentation CODE:
source	<xs:element name="SwapBodyCodification" minOccurs="0"> <xs:annotation> <xs:documentation>Codification used for swap bodies according to UIC/UIRR regulations </xs:documentation> <xs:documentation>CODE:</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="3"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ILU_Details/Forwarding**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 80
annotation	documentation Final destination of the ILU.

source	`<xs:element name="Forwarding" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Final destination of the ILU.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="80"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ILU_Details/TurnInNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 30
annotation	documentation Reference number used for empty containers in depots of shipping company.

source	`<xs:element name="TurnInNumber" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Reference number used for empty containers in depots of shipping company.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="30"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ILU_Details/AdditionalInformationILU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 350
annotation	documentation Additional information

source	`<xs:element name="AdditionalInformationILU" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Additional information </xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:minLength value="1"/>`
	`<xs:maxLength value="350"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **ILU_Details/DepartureCountry**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation Code of departure country of the ILU. documentation CODE: ISO-3166-2

source	`<xs:element name="DepartureCountry" type="CountryIdentISO" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Code of departure country of the ILU.</xs:documentation>`
	`<xs:documentation>CODE: ISO-3166-2</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **ILU_Type**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**TypeOfLoadUnitType**
properties	content simple
used by	element **ILU_Details**
facets	Kind Value Annotation enumeration 00 documentation unknown enumeration 01 documentation Container enumeration 02 documentation swap bodies enumeration 03 documentation semitrailers enumeration 04 documentation truck
annotation	documentation Type of ILU. Further information is given for each enumeration element.

source	`<xs:element name="ILU_Type" type="TypeOfLoadUnitType">`
	`  <xs:annotation>`
	`  <xs:documentation>Type of ILU. Further information is given for each enumeration element.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **IM_Partner**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
used by	elements **Wagons/WagonDetails/ExceptionalConsignment** **ExceptionalGaugingIdent**
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Infrastructure Manager

source	`<xs:element name="IM_Partner" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Infrastructure Manager</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ImpactedRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation The RU impacted by a restriction

source	`<xs:element name="ImpactedRU" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>The RU impacted by a restriction</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **IntermediateDestination**

diagram	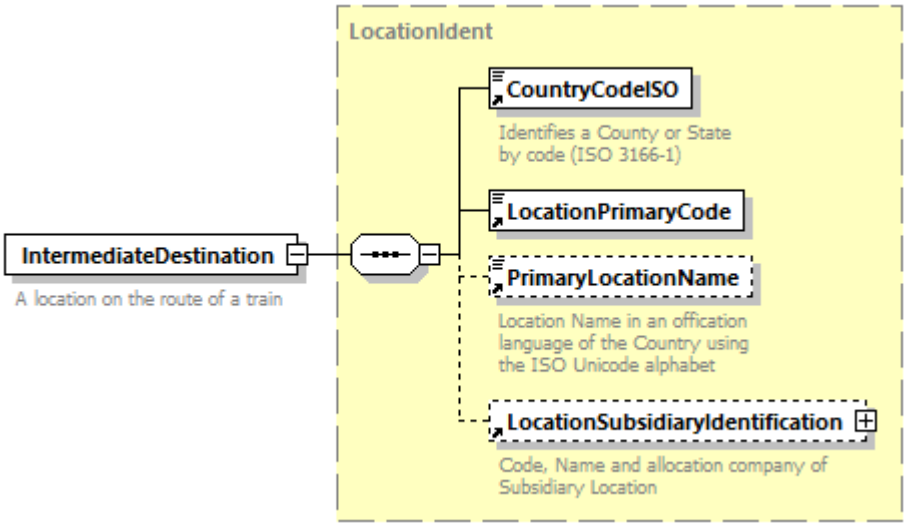
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
used by	element **NextIntermediateDestination**
annotation	documentation A location on the route of a train

source	`<xs:element name="IntermediateDestination" type="LocationIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>A location on the route of a train</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **InternalReferenceIdentifier**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	elements **DelayCauseTime** **InterruptionPoint/Interruption** **InterruptionInformation** **ReceiptConfirmationMessage** **TrainJourneyModificationMessage**
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation The link to the IM System Reference

source	`<xs:element name="InternalReferenceIdentifier" type="FreeText">`
	`<xs:annotation>`
	`<xs:documentation>The link to the IM System Reference</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **InterruptionDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements **InterruptionPoint/Interruption** **InterruptionInformation**
annotation	documentation Date and Time when the Train was interrupted

source	`<xs:element name="InterruptionDateTime" type="xs:dateTime">`
	`<xs:annotation>`
	`<xs:documentation>Date and Time when the Train was interrupted</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **InterruptionDescription**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	elements **ChangeofTrackMessage** **ExceptionReason** **InterruptionPoint/Interruption** **InterruptionInformation**
facets	Kind Value Annotation minLength 1 maxLength 255

annotation	documentation The free text description of an interruption
source	<xs:element name="InterruptionDescription" type="FreeText"> <xs:annotation> <xs:documentation>The free text description of an interruption</xs:documentation> </xs:annotation> </xs:element>

element **InterruptionInformation**

diagram	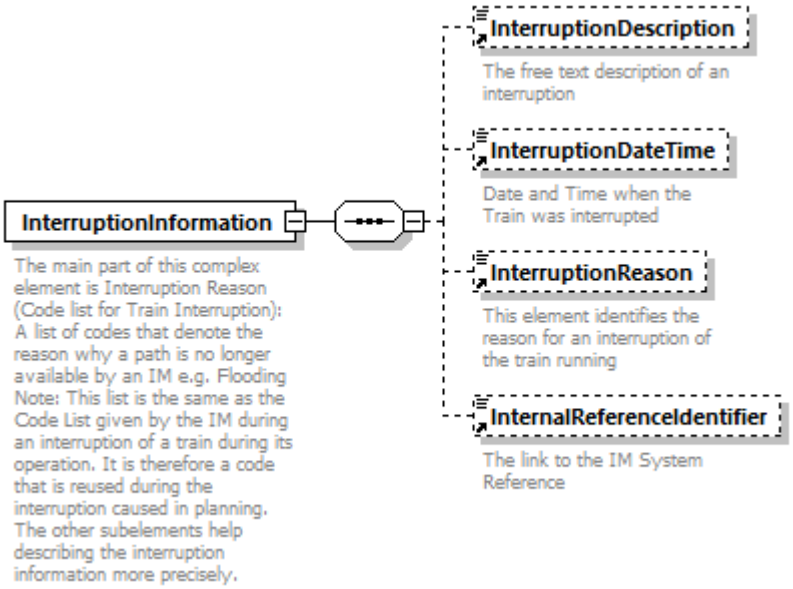
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**InterruptionDescription** **InterruptionDateTime** **InterruptionReason** **InternalReferenceIdentifier**
used by	element **PathNotAvailableMessage**
annotation	documentation The main part of this complex element is Interruption Reason (Code list for Train Interruption): A list of codes that denote the reason why a path is no longer available by an IM e.g. Flooding Note: This list is the same as the Code List given by the IM during an interruption of a train during its operation. It is therefore a code that is reused during the interruption caused in planning. The other subelements help describing the interruption information more precisely.
source	<xs:element name="InterruptionInformation"> <xs:annotation> <xs:documentation>The main part of this complex element is Interruption Reason (Code list for Train Interruption): A list of codes that denote the reason why a path is no longer available by an IM e.g. Flooding Note: This list is the same as the Code List given by the IM during an interruption of a train during its operation. It is therefore a code that is reused during the interruption caused in planning. The other subelements help describing the interruption information more precisely.</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="InterruptionDescription" minOccurs="0"/> <xs:element ref="InterruptionDateTime" minOccurs="0"/> <xs:element ref="InterruptionReason" minOccurs="0"/> <xs:element ref="InternalReferenceIdentifier" minOccurs="0"/> </xs:sequence>

```
  </xs:complexType>
</xs:element>
```

element **InterruptionPoint**

diagram

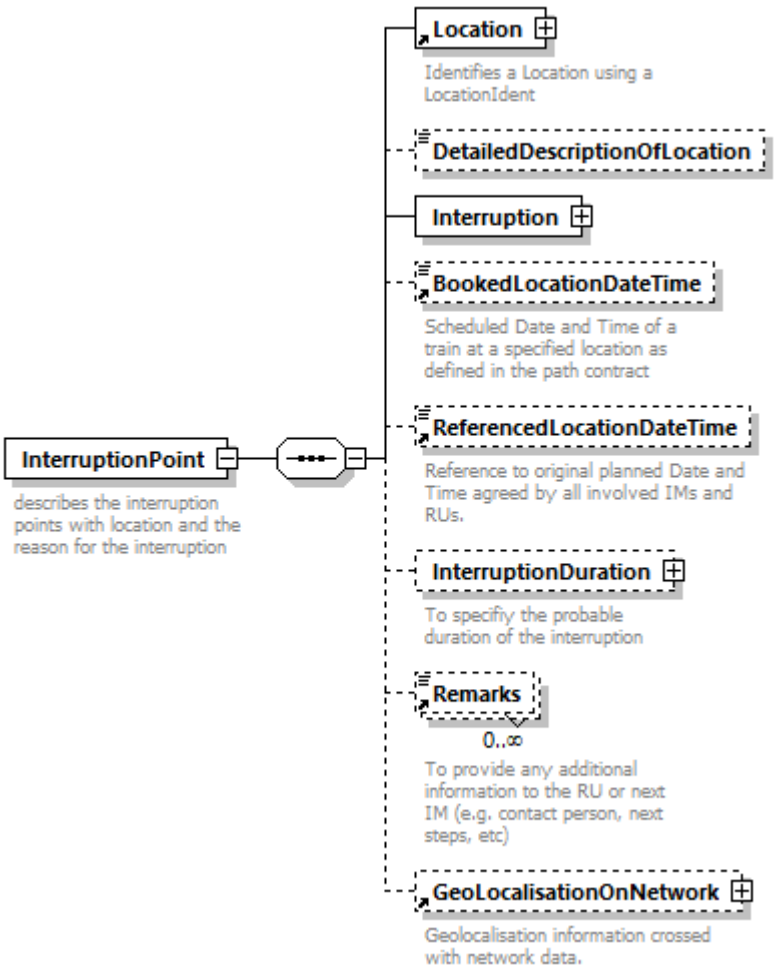

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Location DetailedDescriptionOfLocation Interruption BookedLocationDateTime ReferencedLocationDateTime InterruptionDuration Remarks GeoLocalisationOnNetwork**
used by	element **TrainRunningInterruptionMessage**
annotation	documentation describes the interruption points with location and the reason for the interruption

source

```
<xs:element name="InterruptionPoint">
  <xs:annotation>
    <xs:documentation>describes the interruption points with location and the reason
for the interruption</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="Location"/>
      <xs:element name="DetailedDescriptionOfLocation" type="FreeText"
minOccurs="0"/>
      <xs:element name="Interruption">
        <xs:complexType>
          <xs:sequence>
```

```
            <xs:element ref="InterruptionReason" minOccurs="0"/>
            <xs:element ref="InterruptionDateTime"/>
            <xs:element ref="InterruptionDescription" minOccurs="0"
maxOccurs="unbounded"/>
            <xs:element ref="InternalReferenceIdentifier" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="BookedLocationDateTime" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Scheduled Date and Time of a train at a specified
location as defined in the path contract</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="ReferencedLocationDateTime" minOccurs="0"/>
      <xs:element name="InterruptionDuration" minOccurs="0">
        <xs:annotation>
          <xs:documentation>To specifiy the probable duration of the
interruption</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="EarliestEndDateTime" type="xs:dateTime" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Forecasted earliest time for end of
interruption</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="LatestEndDateTime" type="xs:dateTime" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Forecasted latest time for end of
interruption</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="Remarks" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>To provide any additional information to the RU or next
IM (e.g. contact person, next steps, etc)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="GeoLocalisationOnNetwork" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **InterruptionPoint/DetailedDescriptionOfLocation**

diagram	DetailedDescriptionOfLocation
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 255

source	`<xs:element name="DetailedDescriptionOfLocation" type="FreeText" minOccurs="0"/>`

element **InterruptionPoint/Interruption**

diagram	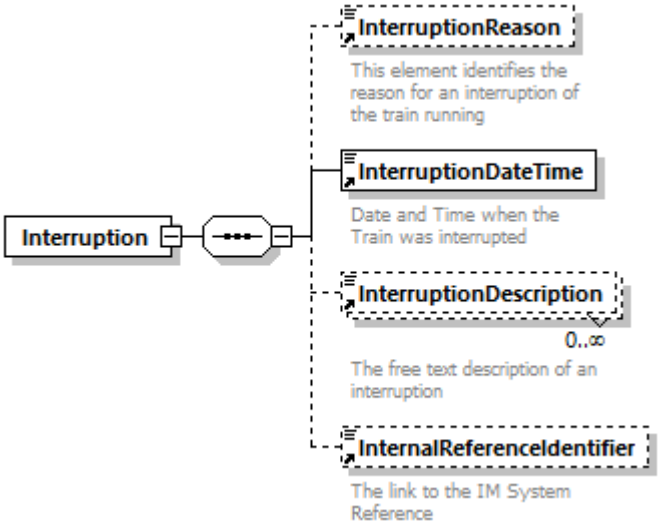
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**InterruptionReason InterruptionDateTime InterruptionDescription InternalReferenceIdentifier**

source	`<xs:element name="Interruption">`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="InterruptionReason" minOccurs="0"/>`
	`<xs:element ref="InterruptionDateTime"/>`
	`<xs:element ref="InterruptionDescription" minOccurs="0" maxOccurs="unbounded"/>`
	`<xs:element ref="InternalReferenceIdentifier" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **InterruptionPoint/InterruptionDuration**

diagram	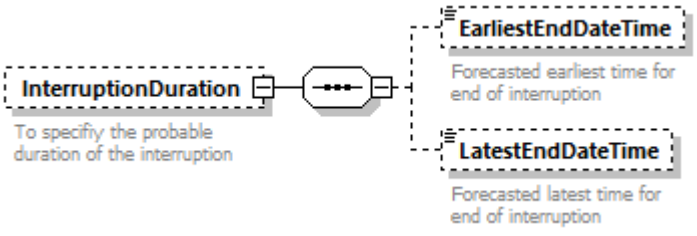
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**EarliestEndDateTime LatestEndDateTime**
annotation	documentation To specifiy the probable duration of the interruption

source	`<xs:element name="InterruptionDuration" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>To specifiy the probable duration of the`

```
interruption</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="EarliestEndDateTime" type="xs:dateTime" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Forecasted earliest time for end of
interruption</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="LatestEndDateTime" type="xs:dateTime" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Forecasted latest time for end of
interruption</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **InterruptionPoint/InterruptionDuration/EarliestEndDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Forecasted earliest time for end of interruption

source	`<xs:element name="EarliestEndDateTime" type="xs:dateTime" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Forecasted earliest time for end of interruption</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **InterruptionPoint/InterruptionDuration/LatestEndDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Forecasted latest time for end of interruption

source	`<xs:element name="LatestEndDateTime" type="xs:dateTime" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Forecasted latest time for end of interruption</xs:documentation>`
	`  </xs:annotation>`

	</xs:element>

element **InterruptionReason**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**DelayCode**
properties	content simple
used by	elements **ChangeofTrackMessage** **InterruptionPoint/Interruption** **InterruptionInformation**

facets

Kind	Value	Annotation
enumeration	11	documentation Formation of trains if managed by infrastructure manager
enumeration	10	documentation Timetable compilation
enumeration	12	documentation Mistakes in operational procedures
enumeration	13	documentation Wrong application of priority rules
enumeration	14	
enumeration	18	documentation Staff
enumeration	19	documentation Other causes related to the operational planning and management
enumeration	20	documentation Signalling installations
enumeration	21	documentation Signalling installations at level crossings
enumeration	22	documentation Telecommunication installations
enumeration	23	documentation Power supply equipment
enumeration	24	documentation Track
enumeration	25	documentation Structures
enumeration	28	documentation Staff
enumeration	29	documentation Other causes related to infrastructure installations
enumeration	31	documentation Irregularities in execution of construction work
enumeration	30	documentation Planned construction work
enumeration	32	documentation Speed restrictions due to defective track
enumeration	39	documentation Other causes related to Civil engineering
enumeration	40	documentation Delay caused by next IM
enumeration	41	documentation Delay caused by previous IM
enumeration	50	documentation exceeding the stop time
enumeration	51	documentation Request of the RU
enumeration	52	documentation Loading operations
enumeration	53	documentation Loading irregularities
enumeration	54	documentation Commercial preparation of the train
enumeration	58	documentation

			Staff
	enumeration	59	documentation
			Other causes related to commercial causes
	enumeration	60	documentation
			Roster planning/re-rostering
	enumeration	61	documentation
			Formation of trains by the RU
	enumeration	62	documentation
			Problems affecting coaches
	enumeration	63	documentation
			Problems affecting wagons
	enumeration	64	documentation
			Problems affecting traction units
	enumeration	68	documentation
			Staff
	enumeration	69	documentation
			Other causes related to Rolling Stock
	enumeration	70	documentation
			Delay caused by next RU
	enumeration	71	documentation
			Delay caused by previous RU
	enumeration	80	documentation
			Strike
	enumeration	81	documentation
			Administrative formalites
	enumeration	82	documentation
			Outside influence
	enumeration	83	documentation
			Effects of weather and natural causes
	enumeration	84	documentation
			Delay caused by external reasons on the next network
	enumeration	89	documentation
			Other external causes
	enumeration	90	documentation
			Dangerous incidents, accidents and hazards
	enumeration	91	documentation
			Track occupation caused by the lateness of the same train
	enumeration	92	documentation
			Track occupation caused by the lateness of another train
	enumeration	93	documentation
			Turn round
	enumeration	94	documentation
			Connection
	enumeration	95	documentation
			Further investigation needed
annotation	documentation This element identifies the reason for an interruption of the train running		
source	<xs:element name="InterruptionReason" type="DelayCode"> <xs:annotation> <xs:documentation>This element identifies the reason for an interruption of the train running</xs:documentation> </xs:annotation> </xs:element>		

element **ITU**

diagram	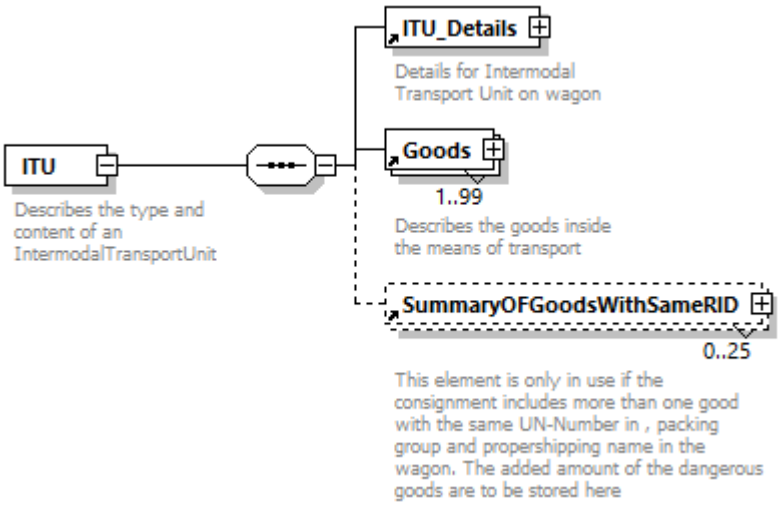
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**ITU_Details Goods SummaryOFGoodsWithSameRID**
annotation	documentation Describes the type and content of an IntermodalTransportUnit

source	`<xs:element name="ITU">`
	`<xs:annotation>`
	`<xs:documentation>Describes the type and content of an IntermodalTransportUnit</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="ITU_Details">`
	`<xs:annotation>`
	`<xs:documentation>Details for Intermodal Transport Unit on wagon</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element ref="Goods" maxOccurs="99"/>`
	`<xs:element ref="SummaryOFGoodsWithSameRID" minOccurs="0" maxOccurs="25"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **ITU_Details**

diagram	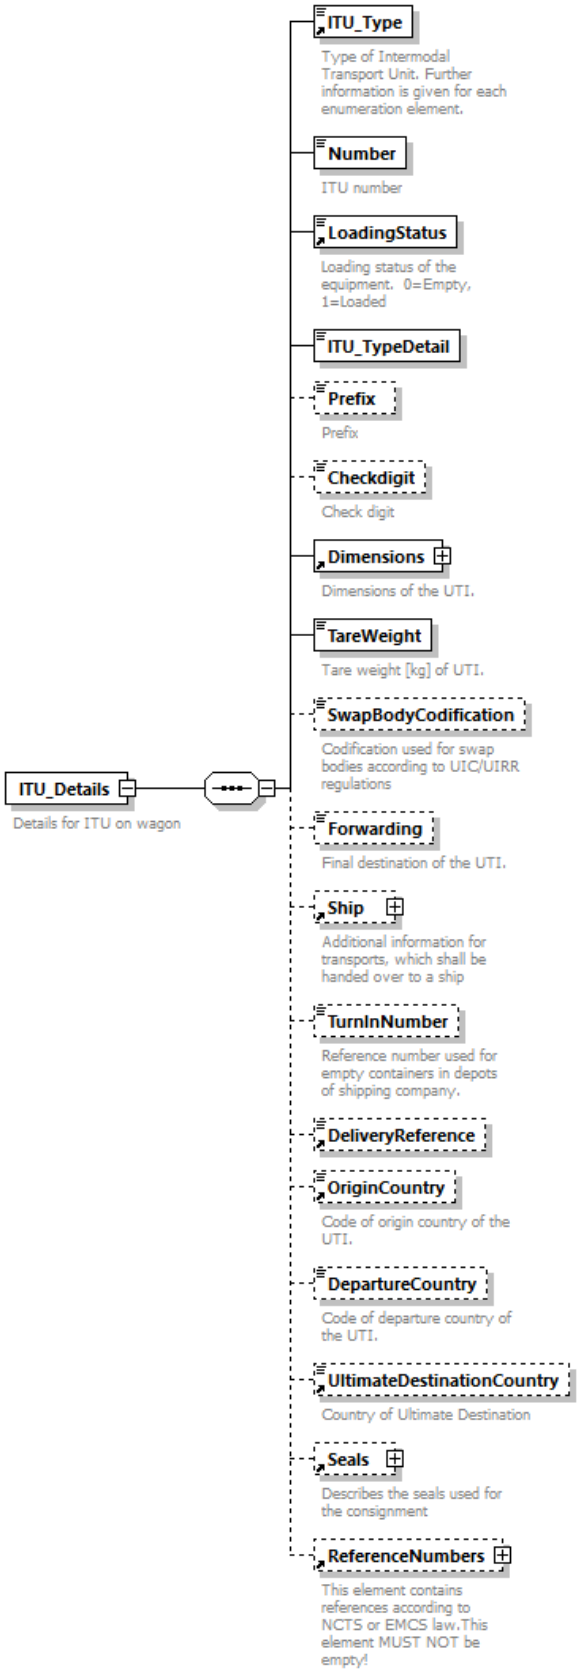
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

properties	content complex
children	ITU_Type Number LoadingStatus ITU_TypeDetail Prefix Checkdigit Dimensions TareWeight SwapBodyCodification Forwarding Ship TurnInNumber DeliveryReference OriginCountry DepartureCountry UltimateDestinationCountry Seals ReferenceNumbers
used by	element ITU
annotation	documentation Details for ITU on wagon

source

```
<xs:element name="ITU_Details">
  <xs:annotation>
    <xs:documentation>Details for ITU on wagon</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="ITU_Type">
        <xs:annotation>
          <xs:documentation>Type of Intermodal Transport Unit. Further information is
given for each enumeration element.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="Number">
        <xs:annotation>
          <xs:documentation>ITU number</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="EquipmentNumberType"/>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="LoadingStatus"/>
      <xs:element name="ITU_TypeDetail">
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="BX"/>
            <xs:enumeration value="BK"/>
            <xs:enumeration value="FL"/>
            <xs:enumeration value="HT"/>
            <xs:enumeration value="HC"/>
            <xs:enumeration value="IN"/>
            <xs:enumeration value="OT"/>
            <xs:enumeration value="HH"/>
            <xs:enumeration value="PW"/>
            <xs:enumeration value="OS"/>
            <xs:enumeration value="RF"/>
            <xs:enumeration value="SD"/>
            <xs:enumeration value="SL"/>
            <xs:enumeration value="VE"/>
            <xs:enumeration value="TC"/>
            <xs:enumeration value="RH"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Prefix" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Prefix</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="5"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Checkdigit" minOccurs="0">
        <xs:annotation>
```

```
            <xs:documentation>Check digit</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:int">
              <xs:totalDigits value="1"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element ref="Dimensions"/>
        <xs:element name="TareWeight" type="WeightValueKilo">
          <xs:annotation>
            <xs:documentation>Tare weight [kg] of UTI.</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="SwapBodyCodification" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Codification used for swap bodies according to UIC/UIRR
regulations </xs:documentation>
            <xs:documentation>CODE:</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:minLength value="3"/>
              <xs:maxLength value="4"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element name="Forwarding" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Final destination of the UTI.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="80"/>
              <xs:minLength value="1"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element ref="Ship" minOccurs="0">
          <xs:annotation/>
        </xs:element>
        <xs:element name="TurnInNumber" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Reference number used for empty containers in depots of
shipping company.</xs:documentation>
          </xs:annotation>
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:maxLength value="30"/>
              <xs:minLength value="1"/>
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
        <xs:element ref="DeliveryReference" minOccurs="0"/>
        <xs:element ref="OriginCountry" minOccurs="0"/>
        <xs:element name="DepartureCountry" type="CountryIdentISO" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Code of departure country of the UTI.</xs:documentation>
            <xs:documentation>CODE: ISO-3166-2</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element ref="UltimateDestinationCountry" minOccurs="0"/>
        <xs:element ref="Seals" minOccurs="0"/>
        <xs:element ref="ReferenceNumbers" minOccurs="0"/>
```

```
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ITU_Details/Number**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **EquipmentNumberType**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 13
annotation	documentation ITU number

source	`<xs:element name="Number">`
	`  <xs:annotation>`
	`  <xs:documentation>ITU number</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="EquipmentNumberType"/>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ITU_Details/ITU_TypeDetail**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
facets	Kind Value Annotation enumeration BX enumeration BK enumeration FL enumeration HT enumeration HC enumeration IN enumeration OT enumeration HH enumeration PW enumeration OS enumeration RF enumeration SD enumeration SL enumeration VE enumeration TC enumeration RH

source	`<xs:element name="ITU_TypeDetail">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:token">`
	`  <xs:enumeration value="BX"/>`

```
        <xs:enumeration value="BK"/>
        <xs:enumeration value="FL"/>
        <xs:enumeration value="HT"/>
        <xs:enumeration value="HC"/>
        <xs:enumeration value="IN"/>
        <xs:enumeration value="OT"/>
        <xs:enumeration value="HH"/>
        <xs:enumeration value="PW"/>
        <xs:enumeration value="OS"/>
        <xs:enumeration value="RF"/>
        <xs:enumeration value="SD"/>
        <xs:enumeration value="SL"/>
        <xs:enumeration value="VE"/>
        <xs:enumeration value="TC"/>
        <xs:enumeration value="RH"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **ITU_Details/Prefix**

diagram	Prefix
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 5
annotation	documentation Prefix

source	`<xs:element name="Prefix" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Prefix</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="5"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ITU_Details/Checkdigit**

diagram	 Check digit
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation totalDigits 1

annotation	documentation Check digit
source	<xs:element name="Checkdigit" minOccurs="0"> <xs:annotation> <xs:documentation>Check digit</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:totalDigits value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ITU_Details/TareWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	content simple
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation Tare weight [kg] of UTI.
source	<xs:element name="TareWeight" type="WeightValueKilo"> <xs:annotation> <xs:documentation>Tare weight [kg] of UTI.</xs:documentation> </xs:annotation> </xs:element>

element **ITU_Details/SwapBodyCodification**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 3 maxLength 4
annotation	documentation Codification used for swap bodies according to UIC/UIRR regulations documentation CODE:
source	<xs:element name="SwapBodyCodification" minOccurs="0"> <xs:annotation> <xs:documentation>Codification used for swap bodies according to UIC/UIRR regulations </xs:documentation> <xs:documentation>CODE:</xs:documentation>

```
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="3"/>
      <xs:maxLength value="4"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ITU_Details/Forwarding**

diagram	Final destination of the UTI.
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 80
annotation	documentation Final destination of the UTI.

source	`<xs:element name="Forwarding" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Final destination of the UTI.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="80"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ITU_Details/TurnInNumber**

diagram	 Reference number used for empty containers in depots of shipping company.
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 30
annotation	documentation Reference number used for empty containers in depots of shipping company.

source	`<xs:element name="TurnInNumber" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Reference number used for empty containers in depots of shipping company.</xs:documentation>`
	`  </xs:annotation>`

```
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:maxLength value="30"/>
      <xs:minLength value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ITU_Details/DepartureCountry**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation Code of departure country of the UTI. documentation CODE: ISO-3166-2

source	`<xs:element name="DepartureCountry" type="CountryIdentISO" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Code of departure country of the UTI.</xs:documentation>`
	`  <xs:documentation>CODE: ISO-3166-2</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ITU_Type**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **EquipmentTypeType**
properties	content simple
used by	element **ITU_Details**
facets	Kind Value Annotation enumeration cn documentation Container enumeration sw documentation swap body enumeration te documentation Trailer (RollingRoad)
annotation	documentation Type of ITU. Further information is given for each enumeration element.

source	`<xs:element name="ITU_Type">`
	`  <xs:annotation>`
	`  <xs:documentation>Type of ITU. Further information is given for each enumeration element.</xs:documentation>`
	`  </xs:annotation>`

```
  <xs:simpleType>
    <xs:restriction base="EquipmentTypeType"/>
  </xs:simpleType>
</xs:element>
```

element **JourneySection**

diagram

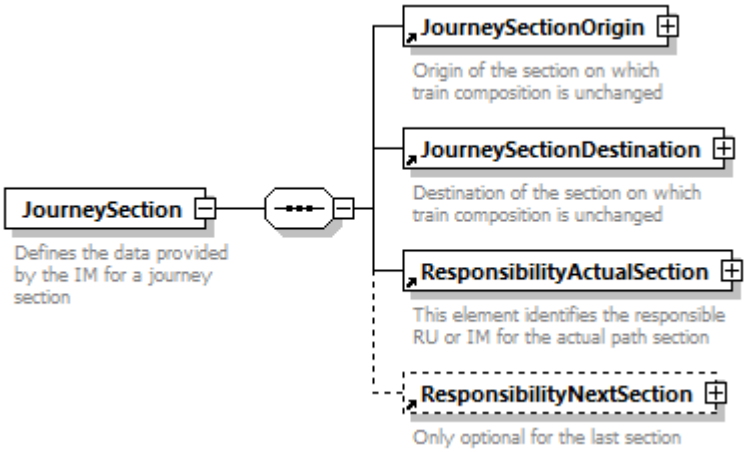

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties: content complex

children: JourneySectionOrigin JourneySectionDestination ResponsibilityActualSection ResponsibilityNextSection

used by: element TrainCompositionJourneySection

annotation: documentation
Defines the data provided by the IM for a journey section

source

```
<xs:element name="JourneySection">
  <xs:annotation>
    <xs:documentation>Defines the data provided by the IM for a journey
section</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="JourneySectionOrigin"/>
      <xs:element ref="JourneySectionDestination"/>
      <xs:element ref="ResponsibilityActualSection"/>
      <xs:element ref="ResponsibilityNextSection" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Only optional for the last section</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **JourneySectionDestination**

diagram	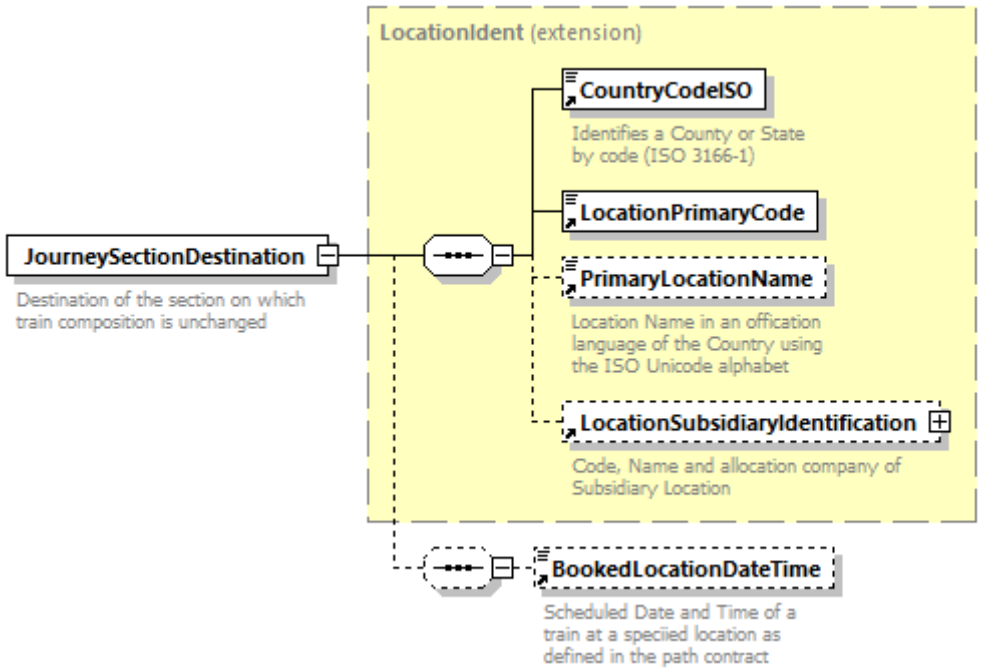
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification** **BookedLocationDateTime**
used by	element **JourneySection**
annotation	documentation Destination of the section on which train composition is unchanged

source	`<xs:element name="JourneySectionDestination">`
	`<xs:annotation>`
	`<xs:documentation>Destination of the section on which train composition is unchanged</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:complexContent>`
	`<xs:extension base="LocationIdent">`
	`<xs:sequence minOccurs="0">`
	`<xs:element ref="BookedLocationDateTime" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:extension>`
	`</xs:complexContent>`
	`</xs:complexType>`
	`</xs:element>`

element **JourneySectionOrigin**

diagram	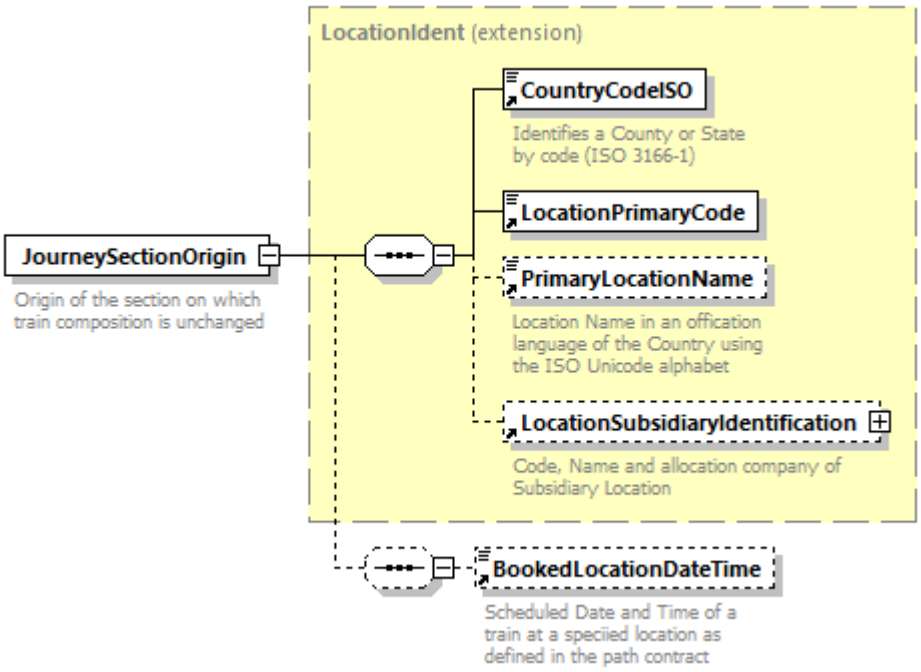
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification** **BookedLocationDateTime**
used by	element **JourneySection**
annotation	documentation Origin of the section on which train composition is unchanged

source	`<xs:element name="JourneySectionOrigin">`
	`<xs:annotation>`
	`<xs:documentation>Origin of the section on which train composition is unchanged</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:complexContent>`
	`<xs:extension base="LocationIdent">`
	`<xs:sequence minOccurs="0">`
	`<xs:element ref="BookedLocationDateTime" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:extension>`
	`</xs:complexContent>`
	`</xs:complexType>`
	`</xs:element>`

element **KeeperShortNameVKM**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	elements **RollingStockDataset/AdministrativeDataSet** **RollingStockDatasetMessage/RefusedWagonNumbers**
facets	Kind Value Annotation maxLength 10
annotation	documentation Free text, short name/vehicle keeper marking of the wagon keeper as listed in VKM register (https://www.era.europa.eu/domains/registers/vkm_en, 2nd column (UNIQUE) - without special characters)

source	`<xs:element name="KeeperShortNameVKM">`
	`  <xs:annotation>`
	`  <xs:documentation>Free text, short name/vehicle keeper marking of the wagon keeper as listed in VKM register (https://www.era.europa.eu/domains/registers/vkm_en, 2nd column (UNIQUE) - without special characters)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="10"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **LastModifiedDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation Date and Time of last update or modification of data

source	`<xs:element name="LastModifiedDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Date and Time of last update or modification of data</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Latitude**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:float**
properties	content simple
used by	element **GeographicCoordinates**
annotation	documentation Latitudinal Coordinates as expressed in decimal degrees with a precision of 6 decimals.

source	<xs:element name="Latitude" type="xs:float"> <xs:annotation> <xs:documentation>Latitudinal Coordinates as expressed in decimal degrees with a precision of 6 decimals.</xs:documentation> </xs:annotation> </xs:element>

element **LeadRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	CompanyCode
properties	content simple
used by	elements PathCanceledMessage PathConfirmedMessage PathDetailsMessage PathDetailsRefusedMessage PathNotAvailableMessage PathRequestMessage
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Lead Railway Undertaking
source	<xs:element name="LeadRU" type="CompanyCode"> <xs:annotation> <xs:documentation>Lead Railway Undertaking</xs:documentation> </xs:annotation> </xs:element>

element **Length**

diagram	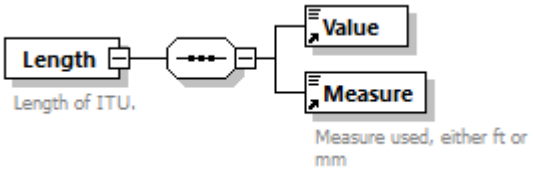
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	Value Measure
used by	elements Dimensions TractionDetails complexType DimensionValue
annotation	documentation Length of ITU.
source	<xs:element name="Length"> <xs:annotation> <xs:documentation>Length of ITU.</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Value"/> <xs:element ref="Measure"/> </xs:sequence> </xs:complexType> </xs:element>

element **LengthOfSetOfCarriages**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric4-4**
properties	content simple
used by	element **PlannedTrainTechnicalData**
facets	Kind Value Annotation minInclusive 0001 maxInclusive 9999
annotation	documentation The calculated and rounded up maximum length of all wagons/coaches of the train (sum of all length over buffer of the wagons) expressed in metres. This is made optional together with TrainLength, but it could be implemented by applications as mandatory.

source	`<xs:element name="LengthOfSetOfCarriages" type="Numeric4-4">`
	`  <xs:annotation>`
	`  <xs:documentation>The calculated and rounded up maximum length of all wagons/coaches of the train (sum of all length over buffer of the wagons) expressed in metres. This is made optional together with TrainLength, but it could be implemented by applications as mandatory.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **LengthOverBuffers**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	elements **RollingStockDataset/DesignDataSet WagonTechData**
facets	Kind Value Annotation minInclusive 1 maxInclusive 999999
annotation	documentation Length over buffers is expressed in cm.

source	`<xs:element name="LengthOverBuffers">`
	`  <xs:annotation>`
	`  <xs:documentation>Length over buffers is expressed in cm.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="999999"/>`
	`  </xs:restriction>`

```
  </xs:simpleType>
</xs:element>
```

element **LoadArea**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation totalDigits 5 fractionDigits 1
annotation	documentation Payload Area - measured in M2

source	`<xs:element name="LoadArea">`
	`<xs:annotation>`
	`<xs:documentation>Payload Area - measured in M2</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:decimal">`
	`<xs:totalDigits value="5"/>`
	`<xs:fractionDigits value="1"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **LoadingCapacity**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation totalDigits 5 fractionDigits 1
annotation	documentation Usable Cube - measured in M3

source	`<xs:element name="LoadingCapacity">`
	`<xs:annotation>`
	`<xs:documentation>Usable Cube - measured in M3</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:decimal">`
	`<xs:totalDigits value="5"/>`
	`<xs:fractionDigits value="1"/>`
	`</xs:restriction>`
	`</xs:simpleType>`

	`</xs:element>`

element **LoadingFacility**

diagram	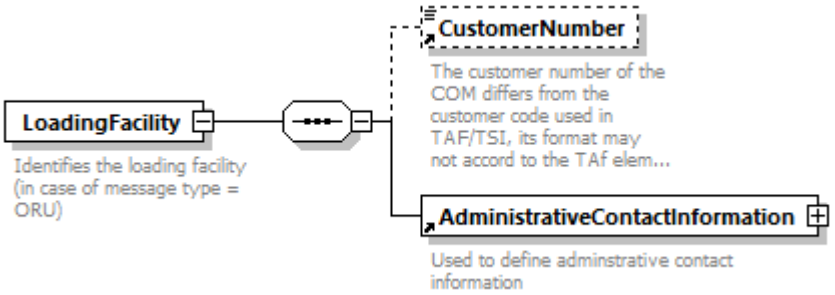
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**CustomerNumber** **AdministrativeContactInformation**
annotation	documentation Identifies the loading facility (in case of message type = ORU)

source	`<xs:element name="LoadingFacility">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the loading facility (in case of message type = ORU)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="CustomerNumber" minOccurs="0"/>`
	`  <xs:element ref="AdministrativeContactInformation"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **LoadingStatus**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	elements **ILU_Details** **ITU_Details** **RollingRoadUnit/RollingRoadUnitDetails** **Wagons/WagonDetails** **WagonInformation**
facets	Kind Value Annotation enumeration 0 enumeration 1
annotation	documentation Loading status of the equipment. 0=Empty, 1=Loaded

source	`<xs:element name="LoadingStatus">`
	`  <xs:annotation>`
	`  <xs:documentation>Loading status of the equipment.  0=Empty, 1=Loaded</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`

```
      <xs:enumeration value="0"/>
      <xs:enumeration value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **LoadingTackles**

diagram

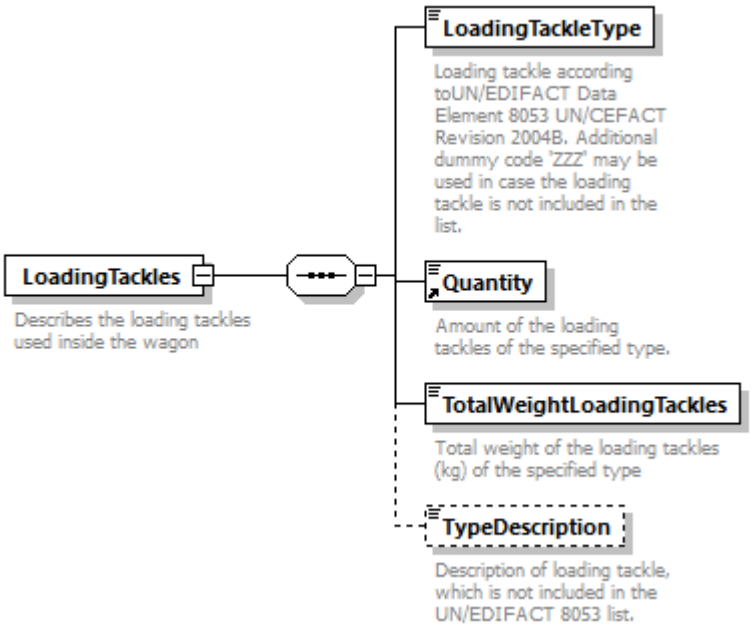

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**LoadingTackleType Quantity TotalWeightLoadingTackles TypeDescription**
used by	elements **ILU Wagons**
annotation	documentation Describes the loading tackles used inside the wagon

source

```
<xs:element name="LoadingTackles">
  <xs:annotation>
    <xs:documentation>Describes the loading tackles used inside the
wagon</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="LoadingTackleType">
        <xs:annotation>
          <xs:documentation>Loading tackle according toUN/EDIFACT Data Element 8053
UN/CEFACT Revision 2004B. Additional dummy code 'ZZZ' may be used in case the loading
tackle is not included in the list. </xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string"/>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="Quantity"/>
      <xs:element name="TotalWeightLoadingTackles" type="WeightValueKilo">
        <xs:annotation>
          <xs:documentation>Total weight of the loading tackles (kg) of the specified
type</xs:documentation>
        </xs:annotation>
```

```
      </xs:element>
      <xs:element name="TypeDescription" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Description of loading tackle, which is not included in
the UN/EDIFACT 8053 list.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="35"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **LoadingTackles/LoadingTackleType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
annotation	documentation Loading tackle according toUN/EDIFACT Data Element 8053 UN/CEFACT Revision 2004B. Additional dummy code 'ZZZ' may be used in case the loading tackle is not included in the list.

source	`<xs:element name="LoadingTackleType">`
	`  <xs:annotation>`
	`  <xs:documentation>Loading tackle according toUN/EDIFACT Data Element 8053 UN/CEFACT Revision 2004B. Additional dummy code 'ZZZ' may be used in case the loading tackle is not included in the list. </xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string"/>`
	`  </xs:simpleType>`
	`</xs:element>`

element **LoadingTackles/TotalWeightLoadingTackles**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	content simple
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999

	whiteSpace collapse
annotation	documentation Total weight of the loading tackles (kg) of the specified type

source	`<xs:element name="TotalWeightLoadingTackles" type="WeightValueKilo">`
	`  <xs:annotation>`
	`  <xs:documentation>Total weight of the loading tackles (kg) of the specified type</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **LoadingTackles/TypeDescription**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Description of loading tackle, which is not included in the UN/EDIFACT 8053 list.

source	`<xs:element name="TypeDescription" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Description of loading tackle, which is not included in the UN/EDIFACT 8053 list.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="35"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Location**

diagram	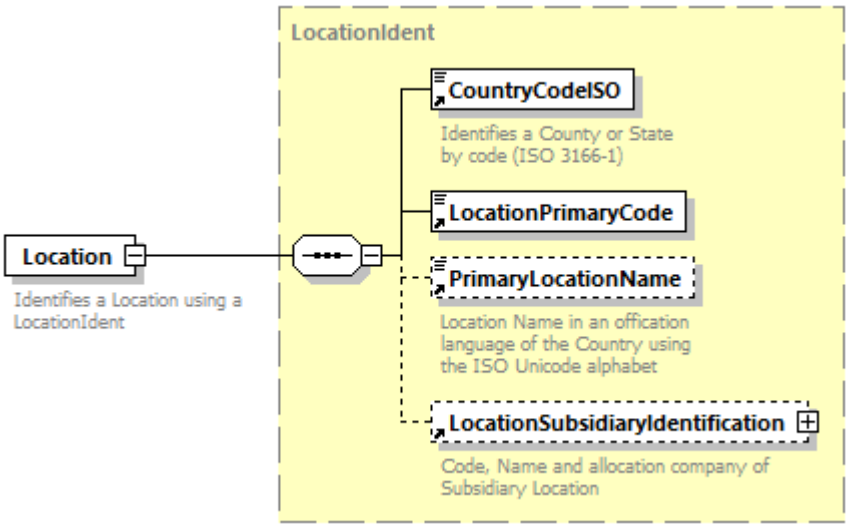
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
used by	elements **AffectedLocation** **ArrivalInterchangeReport** **ConsignmentOrderMessage/COMS/COM/CustomsProcedures** **DepartureInterchangeReport** **ExceptionPoint** **InterruptionPoint** **LocationModified** **ProductionStation** **SpecialTreatments** **TrainForecastAtReportingLocationMessage** **TrainLocationReport** **WagonAtDeparture** **WagonEventInformation** **WagonPickupAtOrigin** **YardArrival** **YardDeparture**
annotation	documentation Identifies a Location using a LocationIdent

source	`<xs:element name="Location" type="LocationIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies a Location using a LocationIdent</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **LocationActualTrack**

diagram	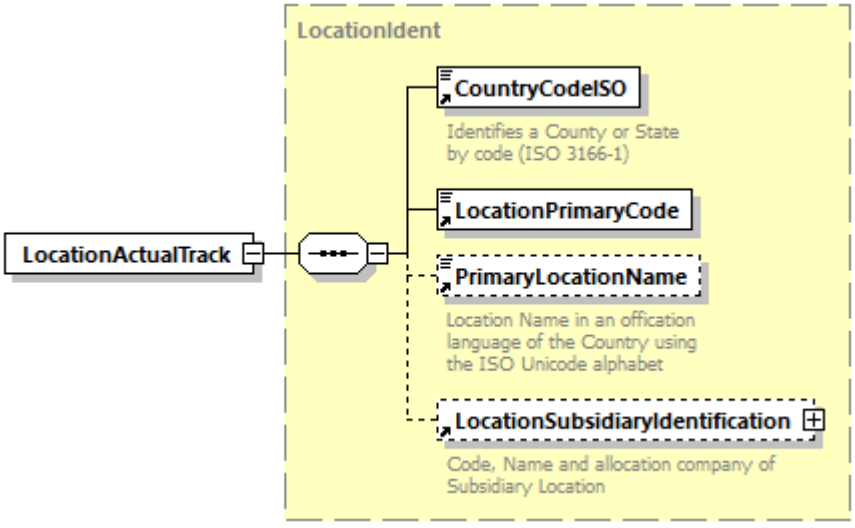
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
used by	element **ChangeofTrackMessage**
source	`<xs:element name="LocationActualTrack" type="LocationIdent"/>`

element **LocationDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements **AffectedLocation** **TrainAtLocation** **TrainLocationReport**
annotation	documentation Identifies the actual or forecasted Date / Time at a specific reporting point

source	`<xs:element name="LocationDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the actual or forecasted Date / Time at a specific reporting point</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **LocationFileDatasetMessage**

diagram	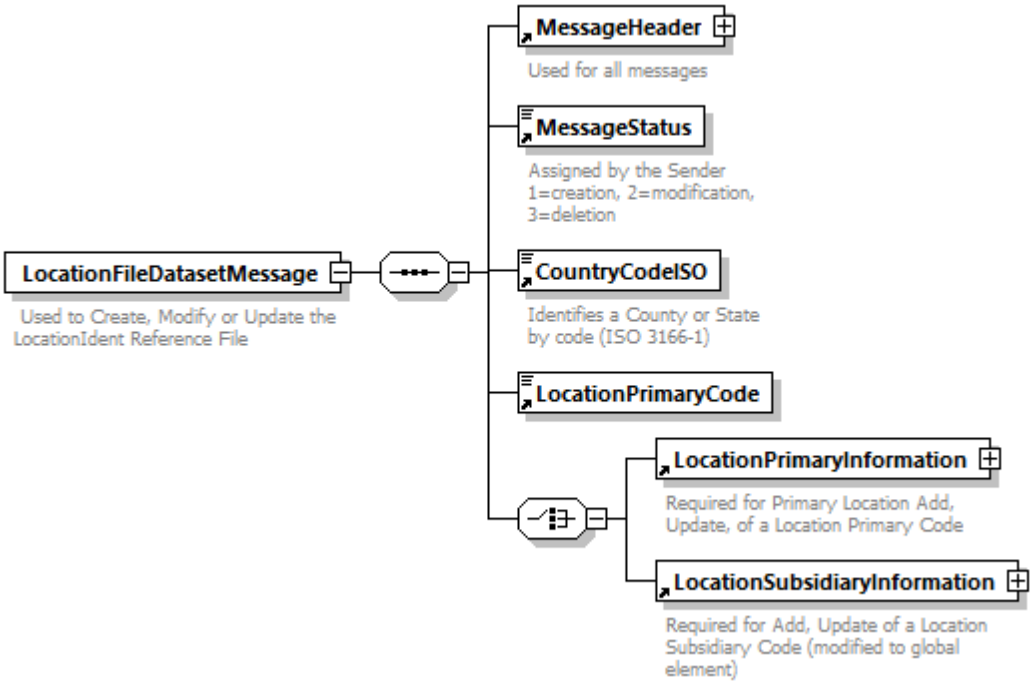
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	MessageHeader MessageStatus CountryCodeISO LocationPrimaryCode LocationPrimaryInformation LocationSubsidiaryInformation
annotation	documentation Used to Create, Modify or Update the LocationIdent Reference File
source	<xs:element name="LocationFileDatasetMessage"> <xs:annotation> <xs:documentation> Used to Create, Modify or Update the LocationIdent Reference File</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="MessageHeader"/> <xs:element ref="MessageStatus"/> <xs:element ref="CountryCodeISO"/> <xs:element ref="LocationPrimaryCode"/> <xs:choice> <xs:element ref="LocationPrimaryInformation"/> <xs:element ref="LocationSubsidiaryInformation"/> </xs:choice> </xs:sequence> </xs:complexType> </xs:element>

element **LocationModified**

diagram	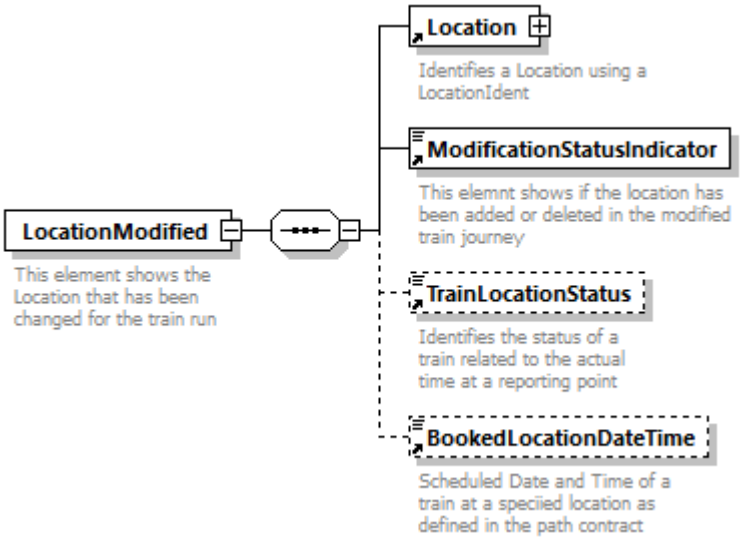
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	Location ModificationStatusIndicator TrainLocationStatus BookedLocationDateTime
used by	element TrainJourneyModification
annotation	documentation This element shows the Location that has been changed for the train run
source	<xs:element name="LocationModified"> <xs:annotation> <xs:documentation>This element shows the Location that has been changed for the train run </xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Location"/> <xs:element ref="ModificationStatusIndicator"/>

```
      <xs:element ref="TrainLocationStatus" minOccurs="0"/>
      <xs:element ref="BookedLocationDateTime" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **LocationPlannedTrack**

diagram

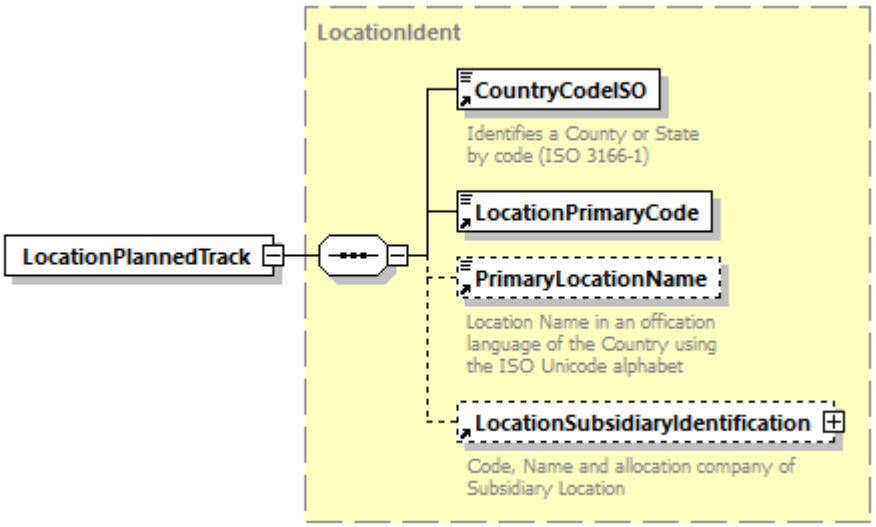

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
used by	element **ChangeofTrackMessage**
source	`<xs:element name="LocationPlannedTrack" type="LocationIdent"/>`

element **LocationPrimaryCode**

diagram	LocationPrimaryCode
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric1-5**
properties	content simple
used by	element **LocationFileDatasetMessage** complexType **LocationIdent**
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
source	`<xs:element name="LocationPrimaryCode" type="Numeric1-5"/>`

element **LocationPrimaryInformation**

diagram

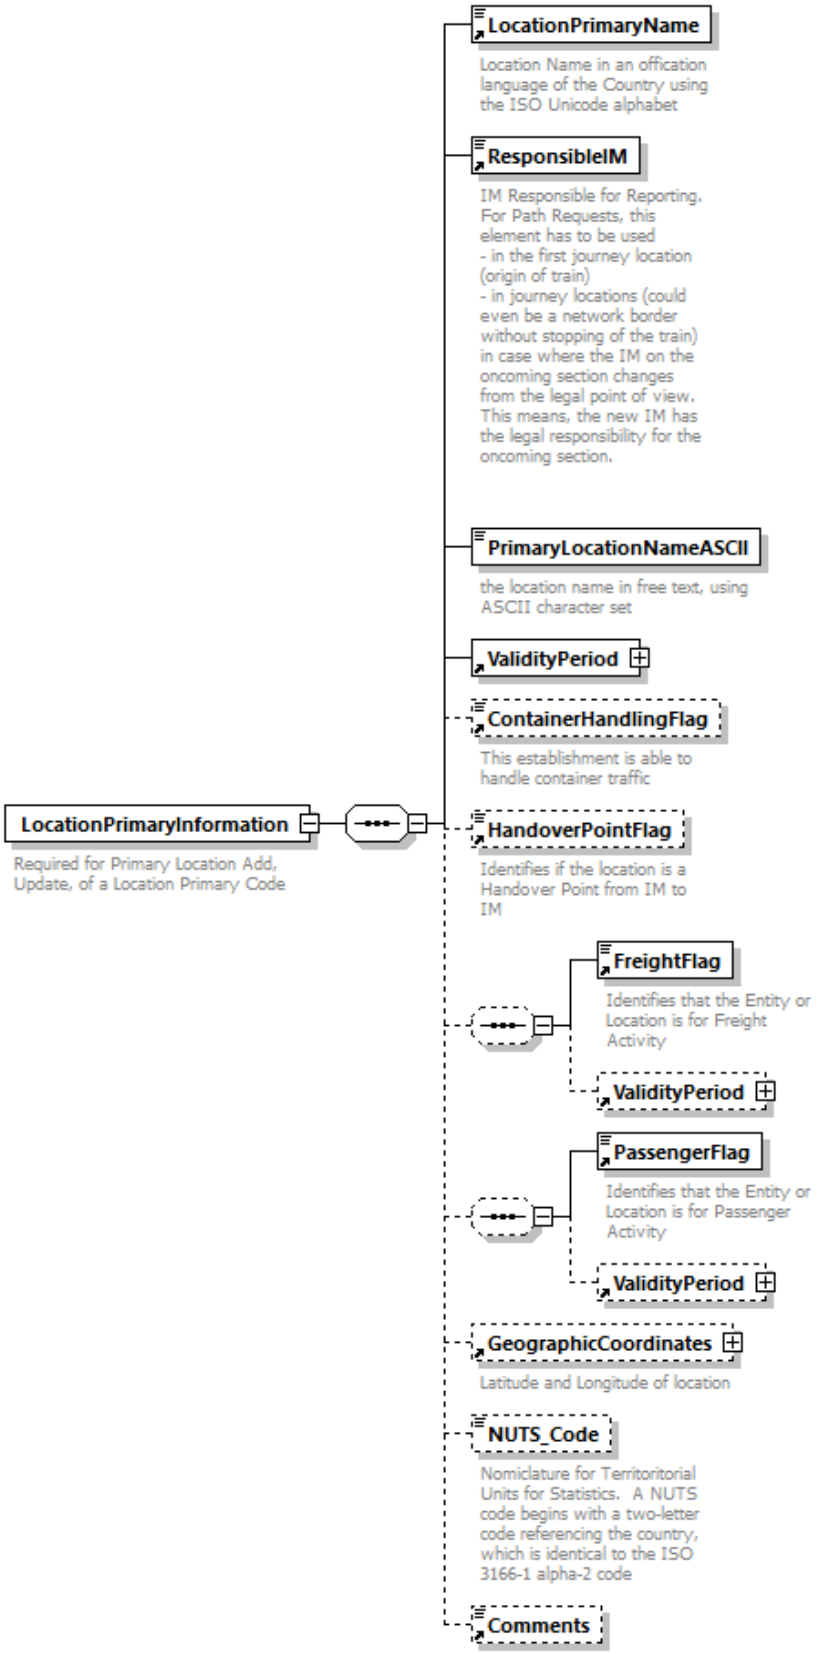

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	LocationPrimaryName ResponsibleIM PrimaryLocationNameASCII ValidityPeriod ContainerHandlingFlag HandoverPointFlag FreightFlag PassengerFlag GeographicCoordinates NUTS_Code Comments
used by	element LocationFileDatasetMessage
annotation	documentation Required for Primary Location Add, Update, of a Location Primary Code

source

```
<xs:element name="LocationPrimaryInformation">
  <xs:annotation>
    <xs:documentation>Required for Primary Location Add, Update, of a Location
Primary Code</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="LocationPrimaryName"/>
      <xs:element ref="ResponsibleIM"/>
      <xs:element name="PrimaryLocationNameASCII">
        <xs:annotation>
          <xs:documentation>the location name in free text, using ASCII character
set</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="255"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="ValidityPeriod"/>
      <xs:element ref="ContainerHandlingFlag" minOccurs="0"/>
      <xs:element ref="HandoverPointFlag" minOccurs="0"/>
      <xs:sequence minOccurs="0">
        <xs:element ref="FreightFlag"/>
        <xs:element ref="ValidityPeriod" minOccurs="0"/>
      </xs:sequence>
      <xs:sequence minOccurs="0">
        <xs:element ref="PassengerFlag"/>
        <xs:element ref="ValidityPeriod" minOccurs="0"/>
      </xs:sequence>
      <xs:element ref="GeographicCoordinates" minOccurs="0"/>
      <xs:element name="NUTS_Code" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Nomiclature for Territoritorial Units for Statistics.  A
NUTS code begins with a two-letter code referencing the country, which is identical
to the ISO 3166-1 alpha-2 code </xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="50"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="Comments" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **LocationPrimaryInformation/PrimaryLocationNameASCII**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation the location name in free text, using ASCII character set
source	<xs:element name="PrimaryLocationNameASCII"> <xs:annotation> <xs:documentation>the location name in free text, using ASCII character set</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </xs:element>

element **LocationPrimaryInformation/NUTS_Code**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 50
annotation	documentation Nomiclature for Territoritorial Units for Statistics. A NUTS code begins with a two-letter code referencing the country, which is identical to the ISO 3166-1 alpha-2 code
source	<xs:element name="NUTS_Code" minOccurs="0"> <xs:annotation> <xs:documentation>Nomiclature for Territoritorial Units for Statistics. A NUTS code begins with a two-letter code referencing the country, which is identical to the ISO 3166-1 alpha-2 code </xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="50"/> </xs:restriction> </xs:simpleType>

	</xs:element>

element **LocationPrimaryName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
used by	element **LocationPrimaryInformation**
annotation	documentation Location Name in an offication language of the Country using the ISO Unicode alphabet
source	<xs:element name="LocationPrimaryName"> <xs:annotation> <xs:documentation>Location Name in an offication language of the Country using the ISO Unicode alphabet</xs:documentation> </xs:annotation> </xs:element>

element **LocationSubsidiaryCode**

diagram	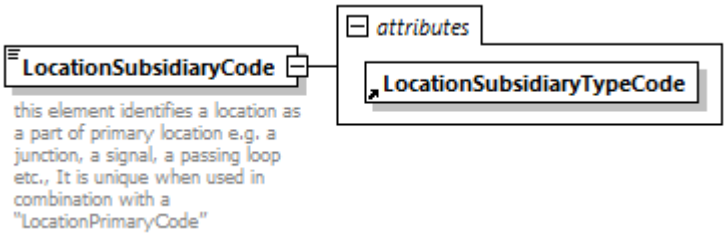
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **String1-10**
properties	content complex
used by	elements **LocationSubsidiaryIdentification** **LocationSubsidiaryInformation**
facets	Kind Value Annotation minLength 1 maxLength 10
attributes	Name Type Use Default Fixed Annotation LocationSubsidiaryTypeCode **derived by: xs:token** required
annotation	documentation this element identifies a location as a part of primary location e.g. a junction, a signal, a passing loop etc., It is unique when used in combination with a "LocationPrimaryCode"
source	<xs:element name="LocationSubsidiaryCode"> <xs:annotation> <xs:documentation>this element identifies a location as a part of primary location e.g. a junction, a signal, a passing loop etc., It is unique when used in combination with a "LocationPrimaryCode"</xs:documentation> </xs:annotation> <xs:complexType> <xs:simpleContent> <xs:extension base="String1-10"> <xs:attribute ref="LocationSubsidiaryTypeCode" use="required"/> </xs:extension> </xs:simpleContent> </xs:complexType>

	</xs:element>

element **LocationSubsidiaryIdentification**

diagram	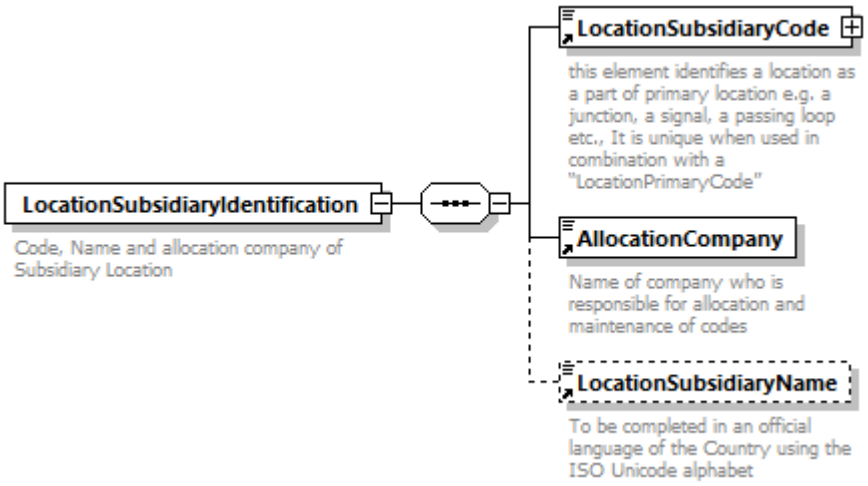
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**LocationSubsidiaryCode** **AllocationCompany** **LocationSubsidiaryName**
used by	complexType **LocationIdent**
annotation	documentation Code, Name and allocation company of Subsidiary Location
source	<xs:element name="LocationSubsidiaryIdentification"> <xs:annotation> <xs:documentation>Code, Name and allocation company of Subsidiary Location</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="LocationSubsidiaryCode"/> <xs:element ref="AllocationCompany"/> <xs:element ref="LocationSubsidiaryName" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **LocationSubsidiaryInformation**

diagram	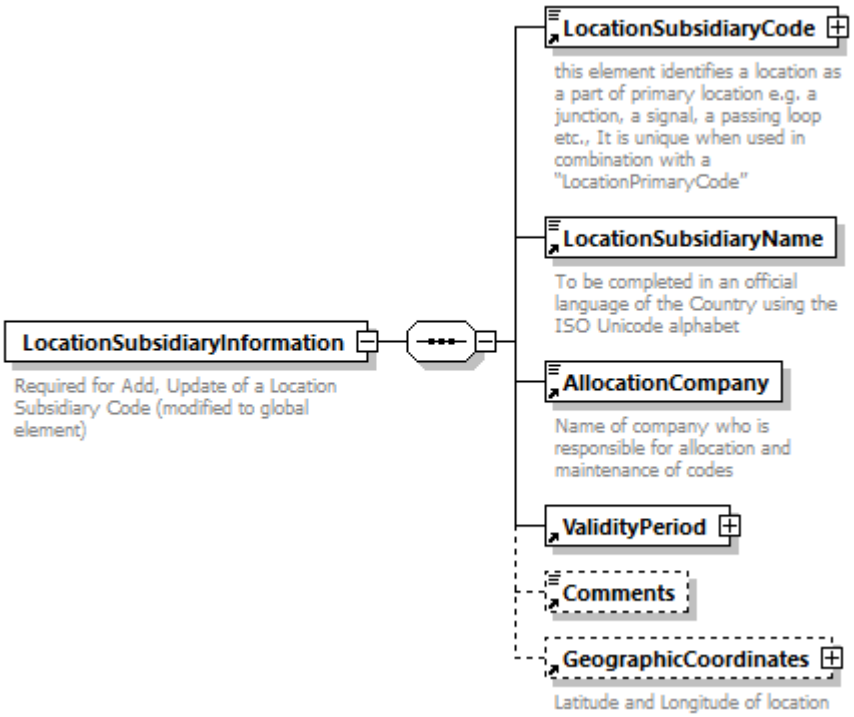
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	LocationSubsidiaryCode LocationSubsidiaryName AllocationCompany ValidityPeriod Comments GeographicCoordinates
used by	element LocationFileDatasetMessage
annotation	documentation Required for Add, Update of a Location Subsidiary Code (modified to global element)
source	<xs:element name="LocationSubsidiaryInformation"> <xs:annotation> <xs:documentation>Required for Add, Update of a Location Subsidiary Code (modified to global element)</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="LocationSubsidiaryCode"/> <xs:element ref="LocationSubsidiaryName"/> <xs:element ref="AllocationCompany"/> <xs:element ref="ValidityPeriod"/> <xs:element ref="Comments" minOccurs="0"/> <xs:element ref="GeographicCoordinates" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **LocationSubsidiaryName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	**FreeText**
properties	content simple
used by	elements **LocationSubsidiaryIdentification** **LocationSubsidiaryInformation**
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation To be completed in an official language of the Country using the ISO Unicode alphabet

source	`<xs:element name="LocationSubsidiaryName" type="FreeText">`
	`  <xs:annotation>`
	`  <xs:documentation>To be completed in an official language of the Country using the ISO Unicode alphabet</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **LocoNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	element **TrainCompositionJourneySection/LocoIdent**
facets	Kind Value Annotation minLength 4 maxLength 12
annotation	documentation Identifies the number of the locomotive, usually the European Vehicle Number on 12N. It is currently not restricted only to numeric values.

source	`<xs:element name="LocoNumber">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the number of the locomotive, usually the European Vehicle Number on 12N. It is currently not restricted only to numeric values.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="12"/>`
	`  <xs:minLength value="4"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **LocoTypeNumber**

diagram	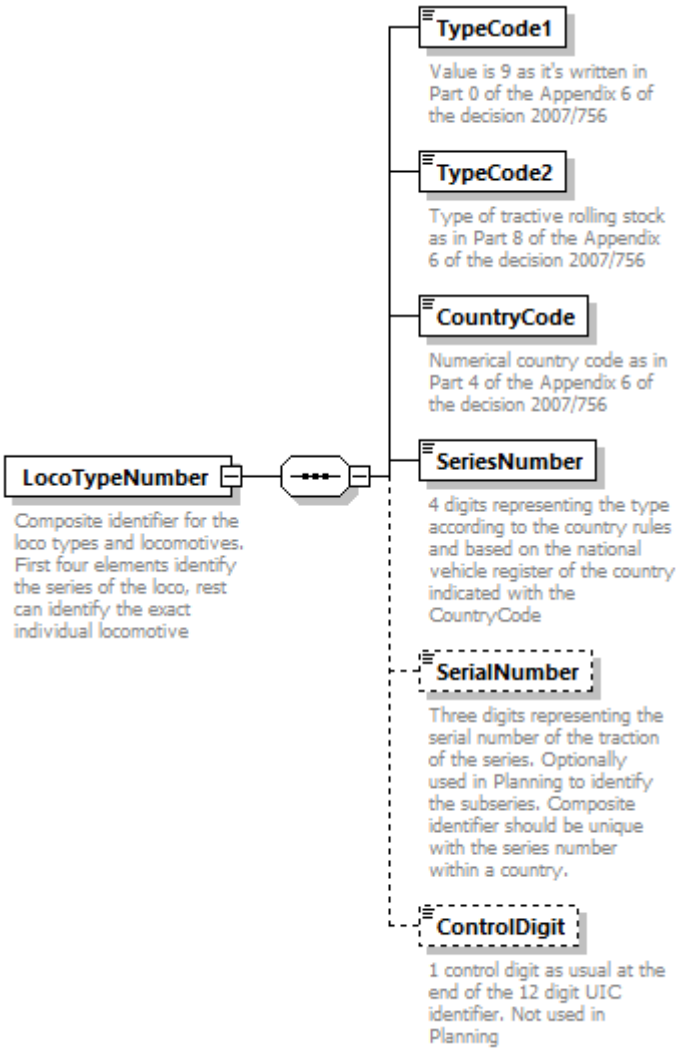
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**TypeCode1 TypeCode2 CountryCode SeriesNumber SerialNumber ControlDigit**
used by	elements **TrainCompositionJourneySection/LocoIdent TractionDetails**
annotation	documentation Composite identifier for the loco types and locomotives. First four elements identify the series of the loco, rest can identify the exact individual locomotive

source	`<xs:element name="LocoTypeNumber">`
	`<xs:annotation>`
	`<xs:documentation>Composite identifier for the loco types and locomotives. First four elements identify the series of the loco, rest can identify the exact individual locomotive</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element name="TypeCode1">`
	`<xs:annotation>`
	`<xs:documentation>Value is 9 as it's written in Part 0 of the Appendix 6 of the decision 2007/756</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`

```
            <xs:minLength value="1"/>
            <xs:whiteSpace value="replace"/>
            <xs:maxLength value="1"/>
            <xs:pattern value="[9]"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="TypeCode2">
        <xs:annotation>
          <xs:documentation>Type of tractive rolling stock as in Part 8 of the
Appendix 6 of the decision 2007/756</xs:documentation>
        </xs:annotation>
        <!--In PCS the following types are differentiated: Eletric, Diesel, Steam,
Hybrid:-->
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:whiteSpace value="replace"/>
            <xs:maxLength value="1"/>
            <xs:pattern value="[0-9]"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CountryCode">
        <xs:annotation>
          <xs:documentation>Numerical country code as in Part 4 of the Appendix 6 of
the decision 2007/756</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="2"/>
            <xs:whiteSpace value="replace"/>
            <xs:maxLength value="2"/>
            <xs:pattern value="[0-9]{2}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SeriesNumber">
        <xs:annotation>
          <xs:documentation>4 digits representing the type according to the country
rules and based on the national vehicle register of the country indicated with the
CountryCode</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="4"/>
            <xs:whiteSpace value="replace"/>
            <xs:maxLength value="4"/>
            <xs:pattern value="[0-9]{4}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SerialNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Three digits representing the serial number of the
traction of the series. Optionally used in Planning to identify the subseries.
Composite identifier should be unique with the series number within a
country.</xs:documentation>
        </xs:annotation>
        <!--Not necessary for Planning. Composite identifier should be unique with
the series number inside one country:-->
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="3"/>
```

```
            <xs:whiteSpace value="replace"/>
            <xs:maxLength value="3"/>
            <xs:pattern value="[0-9]{3}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ControlDigit" minOccurs="0">
        <xs:annotation>
          <xs:documentation>1 control digit as usual at the end of the 12 digit UIC
identifier. Not used in Planning</xs:documentation>
        </xs:annotation>
        <!--Not necessary for Planning. Composite identifier should be unique with
the series number inside one country:-->
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:whiteSpace value="replace"/>
            <xs:maxLength value="1"/>
            <xs:pattern value="[0-9]"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **LocoTypeNumber/TypeCode1**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:string**

properties: content simple

facets

Kind	Value	Annotation
minLength	1	
maxLength	1	
whiteSpace	replace	
pattern	[9]	

annotation: documentation
Value is 9 as it's written in Part 0 of the Appendix 6 of the decision 2007/756

source

```
<xs:element name="TypeCode1">
  <xs:annotation>
    <xs:documentation>Value is 9 as it's written in Part 0 of the Appendix 6 of the
decision 2007/756</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:whiteSpace value="replace"/>
      <xs:maxLength value="1"/>
      <xs:pattern value="[9]"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **LocoTypeNumber/TypeCode2**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind / Value / Annotation minLength 1 maxLength 1 whiteSpace replace pattern [0-9]
annotation	documentation Type of tractive rolling stock as in Part 8 of the Appendix 6 of the decision 2007/756

source	`<xs:element name="TypeCode2">`
	`<xs:annotation>`
	`<xs:documentation>Type of tractive rolling stock as in Part 8 of the Appendix 6 of the decision 2007/756</xs:documentation>`
	`</xs:annotation>`
	`<!--In PCS the following types are differentiated: Eletric, Diesel, Steam, Hybrid:-->`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:minLength value="1"/>`
	`<xs:whiteSpace value="replace"/>`
	`<xs:maxLength value="1"/>`
	`<xs:pattern value="[0-9]"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **LocoTypeNumber/CountryCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind / Value / Annotation minLength 2 maxLength 2 whiteSpace replace pattern [0-9]{2}
annotation	documentation Numerical country code as in Part 4 of the Appendix 6 of the decision 2007/756

source	`<xs:element name="CountryCode">`
	`<xs:annotation>`
	`<xs:documentation>Numerical country code as in Part 4 of the Appendix 6 of the decision 2007/756</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`

```
      <xs:minLength value="2"/>
      <xs:whiteSpace value="replace"/>
      <xs:maxLength value="2"/>
      <xs:pattern value="[0-9]{2}"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **LocoTypeNumber/SeriesNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind / Value / Annotation minLength 4 maxLength 4 whiteSpace replace pattern [0-9]{4}
annotation	documentation 4 digits representing the type according to the country rules and based on the national vehicle register of the country indicated with the CountryCode

source

```
<xs:element name="SeriesNumber">
  <xs:annotation>
    <xs:documentation>4 digits representing the type according to the country rules
and based on the national vehicle register of the country indicated with the
CountryCode</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="4"/>
      <xs:whiteSpace value="replace"/>
      <xs:maxLength value="4"/>
      <xs:pattern value="[0-9]{4}"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **LocoTypeNumber/SerialNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 3 maxLength 3 whiteSpace replace pattern [0-9]{3}
annotation	documentation Three digits representing the serial number of the traction of the series. Optionally used in Planning to identify the subseries. Composite identifier should be unique with the series number within a country.
source	<xs:element name="SerialNumber" minOccurs="0"> <xs:annotation> <xs:documentation>Three digits representing the serial number of the traction of the series. Optionally used in Planning to identify the subseries. Composite identifier should be unique with the series number within a country.</xs:documentation> </xs:annotation> <!--Not necessary for Planning. Composite identifier should be unique with the series number inside one country:--> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="3"/> <xs:whiteSpace value="replace"/> <xs:maxLength value="3"/> <xs:pattern value="[0-9]{3}"/> </xs:restriction> </xs:simpleType> </xs:element>

element **LocoTypeNumber/ControlDigit**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 1 whiteSpace replace pattern [0-9]
annotation	documentation 1 control digit as usual at the end of the 12 digit UIC identifier. Not used in Planning
source	<xs:element name="ControlDigit" minOccurs="0"> <xs:annotation> <xs:documentation>1 control digit as usual at the end of the 12 digit UIC identifier. Not used in Planning</xs:documentation> </xs:annotation> <!--Not necessary for Planning. Composite identifier should be unique with the series number inside one country:--> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:whiteSpace value="replace"/>

```
      <xs:maxLength value="1"/>
      <xs:pattern value="[0-9]"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **Longitude**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:float**
properties	content simple
used by	element **GeographicCoordinates**
annotation	documentation Longitudinal Coordinates as expressed in decimal degrees with a precision of 6 decimals.

source	`<xs:element name="Longitude" type="xs:float">`
	`  <xs:annotation>`
	`  <xs:documentation>Longitudinal Coordinates as expressed in decimal degrees with a precision of 6 decimals.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **MaxAxleWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	content simple
used by	elements **RollingStockDataset/DesignDataSet** **PlannedTrainTechnicalData** **TrainRunningTechData**
facets	Kind Value Annotation minInclusive 0.1 maxInclusive 99.9
annotation	documentation Indicates the maximum design axle weight (to).

source	`<xs:element name="MaxAxleWeight">`
	`  <xs:annotation>`
	`  <xs:documentation>Indicates the maximum design axle weight (to).</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:minInclusive value="0.1"/>`
	`  <xs:maxInclusive value="99.9"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **MaxDesignSpeed**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 1 maxInclusive 999
annotation	documentation Maximum approved speed of the wagon (km/h)

source	`<xs:element name="MaxDesignSpeed">`
	`  <xs:annotation>`
	`  <xs:documentation>Maximum approved speed of the wagon (km/h)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **MaxGrossWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation Weight of max Gross Load Weight plus the tare weight of the equipment

source	`<xs:element name="MaxGrossWeight" type="WeightValueKilo">`
	`  <xs:annotation>`
	`  <xs:documentation>Weight of max Gross Load Weight plus the tare weight of the equipment</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **MaxLengthOfLoad**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 1 maxInclusive 999999
annotation	documentation Measured in mm

source	`<xs:element name="MaxLengthOfLoad">`
	`<xs:annotation>`
	`<xs:documentation>Measured in mm</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:integer">`
	`<xs:minInclusive value="1"/>`
	`<xs:maxInclusive value="999999"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **MaxTemp**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet/TemperatureRange**
facets	Kind Value Annotation minInclusive 0 maxInclusive 99
annotation	documentation Maximum Temperature in °Celsius

source	`<xs:element name="MaxTemp">`
	`<xs:annotation>`
	`<xs:documentation>Maximum Temperature in °Celsius</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:int">`
	`<xs:minInclusive value="0"/>`
	`<xs:maxInclusive value="99"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **Measure**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	elements **Height Length Width**
facets	Kind Value Annotation enumeration ft enumeration mm
annotation	documentation Measure used, either ft or mm

source	`<xs:element name="Measure">`
	`  <xs:annotation>`
	`  <xs:documentation>Measure used, either ft or mm</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:token">`
	`  <xs:enumeration value="ft"/>`
	`  <xs:enumeration value="mm"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **MessageDateTimeCreated**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **MessageHeader**
annotation	documentation Date and time when the message was created by the legacy system

source	`<xs:element name="MessageDateTimeCreated" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Date and time when the message was created by the legacy system</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **MessageHeader**

diagram	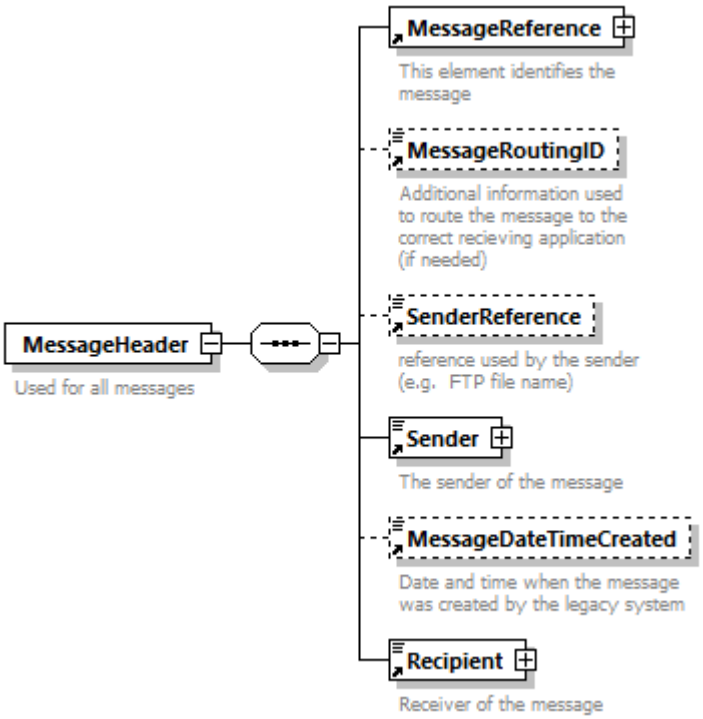
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	MessageReference MessageRoutingID SenderReference Sender MessageDateTimeCreated Recipient
used by	elements AlertMessage ChangeofTrackMessage ConsignmentOrderMessage ErrorMessage LocationFileDatasetMessage PathCanceledMessage PathConfirmedMessage PathDetailsMessage PathDetailsRefusedMessage PathNotAvailableMessage PathRequestMessage ReceiptConfirmationMessage RollingStockDatasetMessage RollingStockDatasetQueryMessage TrainCompositionMessage TrainDelayCauseMessage TrainForecastAtReportingLocationMessage TrainJourneyModificationMessage TrainReadyMessage TrainRunningForecastMessage TrainRunningInformationMessage TrainRunningInterruptionMessage WagonETI_ETA_Message WagonStatusMessages
annotation	documentation Used for all messages

source	`<xs:element name="MessageHeader">`
	`<xs:annotation>`
	`<xs:documentation>Used for all messages</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="MessageReference"/>`
	`<xs:element ref="MessageRoutingID" minOccurs="0"/>`
	`<xs:element ref="SenderReference" minOccurs="0"/>`
	`<xs:element ref="Sender"/>`
	`<xs:element ref="MessageDateTimeCreated" minOccurs="0"/>`
	`<xs:element ref="Recipient"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **MessageIdentifier**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	element **MessageReference**
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Identification of the Message

source	`<xs:element name="MessageIdentifier" type="FreeText">`
	`  <xs:annotation>`
	`  <xs:documentation>Identification of the Message</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **MessageReference**

diagram	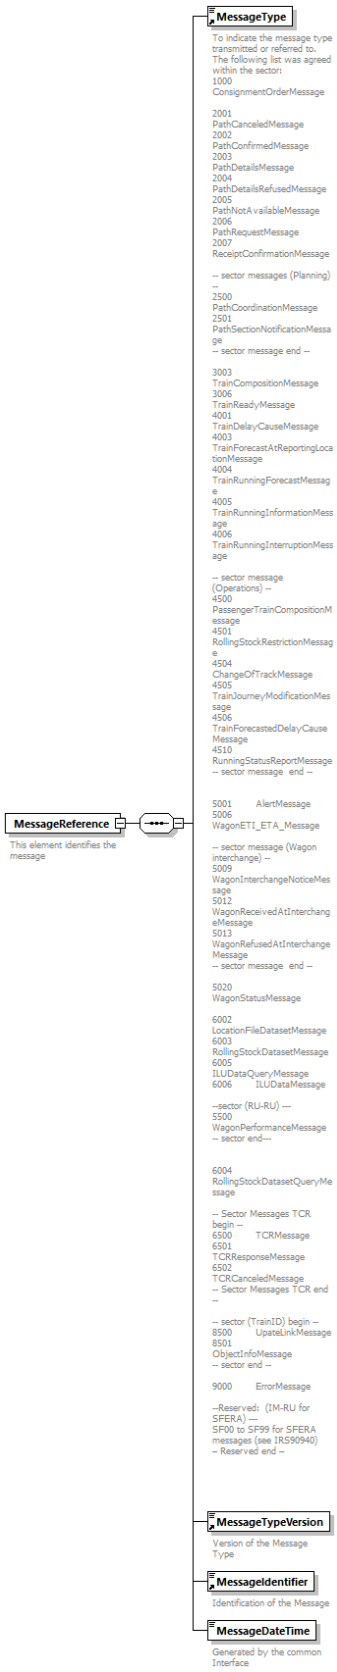
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	**MessageType MessageTypeVersion MessageIdentifier MessageDateTime**
used by	elements **ErrorMessage/ErrorCauseReference MessageHeader**
annotation	documentation This element identifies the message

source	`<xs:element name="MessageReference">`
	`<xs:annotation>`
	`<xs:documentation>This element identifies the message</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="MessageType"/>`
	`<xs:element ref="MessageTypeVersion"/>`
	`<xs:element ref="MessageIdentifier"/>`
	`<xs:element name="MessageDateTime" type="xs:dateTime">`
	`<xs:annotation>`
	`<xs:documentation>Generated by the common Interface</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **MessageReference/MessageDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation Generated by the common Interface

source	`<xs:element name="MessageDateTime" type="xs:dateTime">`
	`<xs:annotation>`
	`<xs:documentation>Generated by the common Interface</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **MessageRoutingID**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric2-2**
properties	content simple
used by	element **MessageHeader**
facets	Kind Value Annotation minInclusive 01 maxInclusive 99

annotation	documentation Additional information used to route the message to the correct recieving application (if needed)
source	<xs:element name="MessageRoutingID" type="Numeric2-2"> <xs:annotation> <xs:documentation>Additional information used to route the message to the correct recieving application (if needed)</xs:documentation> </xs:annotation> </xs:element>

element **MessageType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	content simple
used by	element **MessageReference**
facets	Kind Value Annotation minLength 1 maxLength 4
annotation	documentation To indicate the message type transmitted or referred to. The following list was agreed within the sector: 1000 ConsignmentOrderMessage 2001 PathCanceledMessage 2002 PathConfirmedMessage 2003 PathDetailsMessage 2004 PathDetailsRefusedMessage 2005 PathNotAvailableMessage 2006 PathRequestMessage 2007 ReceiptConfirmationMessage -- sector messages (Planning) -- 2500 PathCoordinationMessage 2501 PathSectionNotificationMessage -- sector message end -- 3003 TrainCompositionMessage 3006 TrainReadyMessage 4001 TrainDelayCauseMessage 4003 TrainForecastAtReportingLocationMessage 4004 TrainRunningForecastMessage 4005 TrainRunningInformationMessage 4006 TrainRunningInterruptionMessage -- sector message (Operations) -- 4500 PassengerTrainCompositionMessage 4501 RollingStockRestrictionMessage 4504 ChangeOfTrackMessage 4505 TrainJourneyModificationMessage 4506 TrainForecastedDelayCauseMessage 4510 RunningStatusReportMessage -- sector message end -- 5001 AlertMessage 5006 WagonETI_ETA_Message -- sector message (Wagon interchange) -- 5009 WagonInterchangeNoticeMessage 5012 WagonReceivedAtInterchangeMessage 5013 WagonRefusedAtInterchangeMessage -- sector message end -- 5020 WagonStatusMessage 6002 LocationFileDatasetMessage 6003 RollingStockDatasetMessage 6005 ILUDataQueryMessage 6006 ILUDataMessage --sector (RU-RU) --- 5500 WagonPerformanceMessage -- sector end--- 6004 RollingStockDatasetQueryMessage -- Sector Messages TCR begin -- 6500 TCRMessage 6501 TCRResponseMessage 6502 TCRCanceledMessage -- Sector Messages TCR end -- -- sector (TrainID) begin -- 8500 UpateLinkMessage

8501 ObjectInfoMessage
-- sector end --

9000 ErrorMessage

--Reserved: (IM-RU for SFERA) ---
SF00 to SF99 for SFERA messages (see IRS90940)
– Reserved end –

source

```
<xs:element name="MessageType">
  <xs:annotation>
    <xs:documentation>To indicate the message type transmitted or referred to. The
following list was agreed within the sector:
1000        ConsignmentOrderMessage

2001        PathCanceledMessage
2002        PathConfirmedMessage
2003        PathDetailsMessage
2004        PathDetailsRefusedMessage
2005        PathNotAvailableMessage
2006        PathRequestMessage
2007        ReceiptConfirmationMessage

-- sector messages (Planning) --
2500      PathCoordinationMessage
2501      PathSectionNotificationMessage
-- sector message end --

3003        TrainCompositionMessage
3006        TrainReadyMessage
4001        TrainDelayCauseMessage
4003        TrainForecastAtReportingLocationMessage
4004        TrainRunningForecastMessage
4005        TrainRunningInformationMessage
4006        TrainRunningInterruptionMessage

-- sector message (Operations) --
4500        PassengerTrainCompositionMessage
4501      RollingStockRestrictionMessage
4504      ChangeOfTrackMessage
4505      TrainJourneyModificationMessage
4506      TrainForecastedDelayCauseMessage
4510      RunningStatusReportMessage
-- sector message  end --


5001        AlertMessage
5006        WagonETI_ETA_Message

-- sector message (Wagon interchange) --
5009        WagonInterchangeNoticeMessage
5012        WagonReceivedAtInterchangeMessage
5013        WagonRefusedAtInterchangeMessage
-- sector message  end --

5020        WagonStatusMessage

6002        LocationFileDatasetMessage
6003        RollingStockDatasetMessage
6005        ILUDataQueryMessage
6006        ILUDataMessage

--sector (RU-RU) ---
5500        WagonPerformanceMessage
```

```
-- sector end---


6004        RollingStockDatasetQueryMessage

-- Sector Messages TCR begin --
6500        TCRMessage
6501        TCRResponseMessage
6502        TCRCanceledMessage
-- Sector Messages TCR end --

-- sector (TrainID) begin --
8500        UpateLinkMessage
8501        ObjectInfoMessage
-- sector end --

9000        ErrorMessage

--Reserved:  (IM-RU for SFERA) ---
SF00 to SF99 for SFERA messages (see IRS90940)
- Reserved end -
```

```
                    </xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="4"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **MessageTypeVersion**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	element **MessageReference**
facets	Kind Value Annotation maxLength 25
annotation	documentation Version of the Message Type
source	<xs:element name="MessageTypeVersion"> <xs:annotation> <xs:documentation>Version of the Message Type</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="25"/> </xs:restriction> </xs:simpleType> </xs:element>

element **MinBrakedWeightPercent**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **PlannedTrainTechnicalData**
facets	Kind Value Annotation minInclusive 1 maxInclusive 999
annotation	documentation Minimum percentage of braking claimed by IM for safety reasons.

source	`<xs:element name="MinBrakedWeightPercent">`
	`  <xs:annotation>`
	`  <xs:documentation>Minimum percentage of braking claimed by IM for safety reasons.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **MinCurveRadius**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 1 maxInclusive 999
annotation	documentation Measured in Metres

source	`<xs:element name="MinCurveRadius">`
	`  <xs:annotation>`
	`  <xs:documentation>Measured in Metres</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **MinTemp**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet/TemperatureRange**
facets	Kind Value Annotation minInclusive -99 maxInclusive 0
annotation	documentation Minimum temperature in ° Celsius

source	`<xs:element name="MinTemp">`
	`  <xs:annotation>`
	`  <xs:documentation>Minimum temperature in ° Celsius</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:int">`
	`  <xs:minInclusive value="-99"/>`
	`  <xs:maxInclusive value="0"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **MinVerticalRadiusYardHump**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 1 maxInclusive 999
annotation	documentation Minimum allowed vertical radius over yard humps. Measured in meters.

source	`<xs:element name="MinVerticalRadiusYardHump">`
	`  <xs:annotation>`
	`  <xs:documentation>Minimum allowed vertical radius over yard humps. Measured in meters.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ModificationReason**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**DelayCode**
properties	content simple
used by	element **TrainJourneyModificationMessage**

facets

Kind	Value	Annotation
enumeration	11	documentation Formation of trains if managed by infrastructure manager
enumeration	10	documentation Timetable compilation
enumeration	12	documentation Mistakes in operational procedures
enumeration	13	documentation Wrong application of priority rules
enumeration	14	
enumeration	18	documentation Staff
enumeration	19	documentation Other causes related to the operational planning and management
enumeration	20	documentation Signalling installations
enumeration	21	documentation Signalling installations at level crossings
enumeration	22	documentation Telecommunication installations
enumeration	23	documentation Power supply equipment
enumeration	24	documentation Track
enumeration	25	documentation Structures
enumeration	28	documentation Staff
enumeration	29	documentation Other causes related to infrastructure installations
enumeration	31	documentation Irregularities in execution of construction work
enumeration	30	documentation Planned construction work
enumeration	32	documentation Speed restrictions due to defective track
enumeration	39	documentation Other causes related to Civil engineering
enumeration	40	documentation Delay caused by next IM
enumeration	41	documentation Delay caused by previous IM
enumeration	50	documentation exceeding the stop time
enumeration	51	documentation Request of the RU
enumeration	52	documentation Loading operations
enumeration	53	documentation Loading irregularities
enumeration	54	documentation Commercial preparation of the train
enumeration	58	documentation Staff
enumeration	59	documentation Other causes related to commercial causes
enumeration	60	documentation Roster planning/re-rostering

	enumeration 61 documentation Formation of trains by the RU enumeration 62 documentation Problems affecting coaches enumeration 63 documentation Problems affecting wagons enumeration 64 documentation Problems affecting traction units enumeration 68 documentation Staff enumeration 69 documentation Other causes related to Rolling Stock enumeration 70 documentation Delay caused by next RU enumeration 71 documentation Delay caused by previous RU enumeration 80 documentation Strike enumeration 81 documentation Administrative formalites enumeration 82 documentation Outside influence enumeration 83 documentation Effects of weather and natural causes enumeration 84 documentation Delay caused by external reasons on the next network enumeration 89 documentation Other external causes enumeration 90 documentation Dangerous incidents, accidents and hazards enumeration 91 documentation Track occupation caused by the lateness of the same train enumeration 92 documentation Track occupation caused by the lateness of another train enumeration 93 documentation Turn round enumeration 94 documentation Connection enumeration 95 documentation Further investigation needed
annotation	documentation Identifiies the reason for the train journey being modified

source	`<xs:element name="ModificationReason" type="DelayCode">`
	`<xs:annotation>`
	`<xs:documentation>Identifiies the reason for the train journey being modified</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **ModificationStatusIndicator**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **LocationModified**
facets	Kind Value Annotation minInclusive 1 maxInclusive 99
annotation	documentation This elemnt shows if the location has been added or deleted in the modified train journey

source	<xs:element name="ModificationStatusIndicator"> <xs:annotation> <xs:documentation>This elemnt shows if the location has been added or deleted in the modified train journey</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Name**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	FreeText
properties	content simple
used by	elements AdministrativeContactInformation Customer Customers RollingRoadUnit/RollingRoadUnitDetails/Haulier NetworkSpecificParameter
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Generic Name in Free Text
source	<xs:element name="Name" type="FreeText"> <xs:annotation> <xs:documentation>Generic Name in Free Text</xs:documentation> </xs:annotation> </xs:element>

element **NetworkProjectedLocation**

diagram	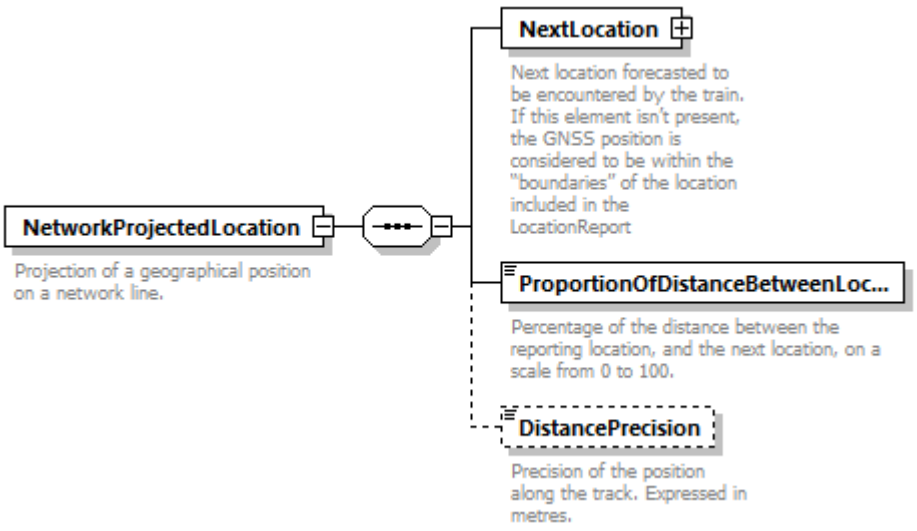
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	**NextLocation** **ProportionOfDistanceBetweenLocations** **DistancePrecision**
used by	element **GeoLocalisationOnNetwork**
annotation	documentation Projection of a geographical position on a network line.
source	<xs:element name="NetworkProjectedLocation"> <xs:annotation> <xs:documentation>Projection of a geographical position on a network line. </xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="NextLocation" type="LocationIdent"> <xs:annotation> <xs:documentation>Next location forecasted to be encountered by the train. If this element isn't present, the GNSS position is considered to be within the "boundaries" of the location included in the LocationReport</xs:documentation> </xs:annotation> </xs:element> <xs:element name="ProportionOfDistanceBetweenLocations" type="Percentage"> <xs:annotation> <xs:documentation>Percentage of the distance between the reporting location, and the next location, on a scale from 0 to 100. </xs:documentation> </xs:annotation> </xs:element> <xs:element name="DistancePrecision" type="xs:float" minOccurs="0"> <xs:annotation> <xs:documentation>Precision of the position along the track. Expressed in metres.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **NetworkProjectedLocation/NextLocation**

diagram	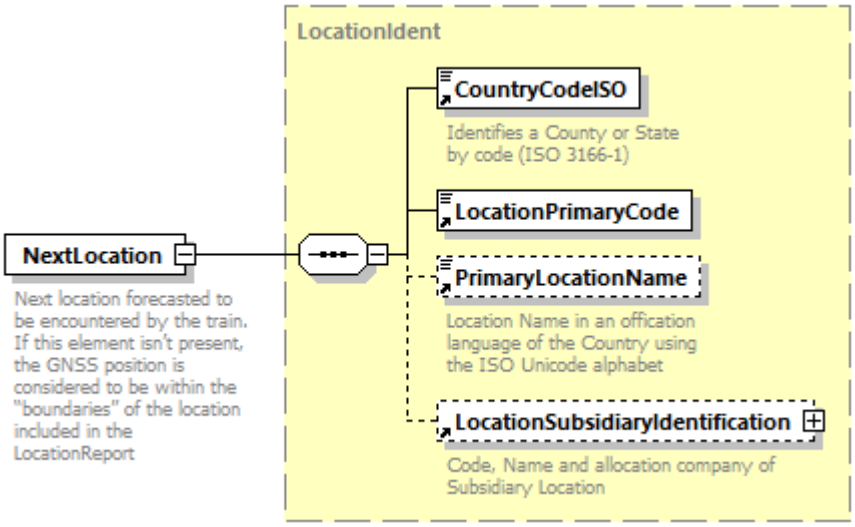
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**

annotation	documentation Next location forecasted to be encountered by the train. If this element isn't present, the GNSS position is considered to be within the "boundaries" of the location included in the LocationReport

source	`<xs:element name="NextLocation" type="LocationIdent">`
	`<xs:annotation>`
	`<xs:documentation>Next location forecasted to be encountered by the train. If this element isn't present, the GNSS position is considered to be within the "boundaries" of the location included in the LocationReport</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **NetworkProjectedLocation/ProportionOfDistanceBetweenLocations**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Percentage**
properties	content simple
facets	Kind Value Annotation minInclusive 0 maxInclusive 100
annotation	documentation Percentage of the distance between the reporting location, and the next location, on a scale from 0 to 100.

source	`<xs:element name="ProportionOfDistanceBetweenLocations" type="Percentage">`
	`<xs:annotation>`
	`<xs:documentation>Percentage of the distance between the reporting location, and the next location, on a scale from 0 to 100. </xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **NetworkProjectedLocation/DistancePrecision**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:float**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Precision of the position along the track. Expressed in metres.

source	`<xs:element name="DistancePrecision" type="xs:float" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Precision of the position along the track. Expressed in metres.</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **NetworkSpecificParameter**

diagram	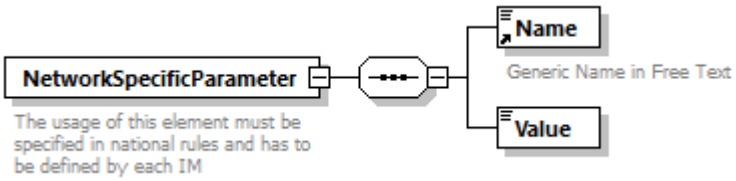
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Name Value**
used by	elements **AffectedSection PathDetailsMessage PathRequestMessage PlannedJourneyLocation**
annotation	documentation The usage of this element must be specified in national rules and has to be defined by each IM
source	<xs:element name="NetworkSpecificParameter"> <xs:annotation> <xs:documentation>The usage of this element must be specified in national rules and has to be defined by each IM</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Name"/> <xs:element name="Value" type="FreeText"/> </xs:sequence> </xs:complexType> </xs:element>

element **NetworkSpecificParameter/Value**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	elements **Height Length Width**
facets	Kind Value Annotation minLength 1 maxLength 255
source	<xs:element name="Value" type="FreeText"/>

element **NextIntermediateDestination**

diagram	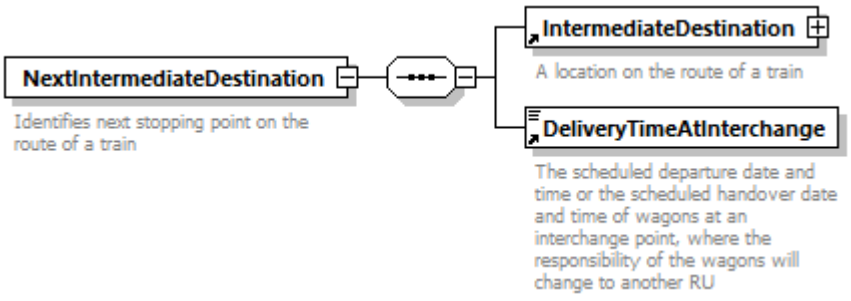
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

properties	content complex
children	**IntermediateDestination DeliveryTimeAtInterchange**
used by	element **WIMO_Dataset/ConsignmentLevelData**
annotation	documentation Identifies next stopping point on the route of a train
source	<xs:element name="NextIntermediateDestination"> <xs:annotation> <xs:documentation>Identifies next stopping point on the route of a train</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="IntermediateDestination"/> <xs:element ref="DeliveryTimeAtInterchange"/> </xs:sequence> </xs:complexType> </xs:element>

element **NextResponsibleRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
used by	element **WIMO_Dataset/ConsignmentLevelData**
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation The RU who is responsible for the train operation on the next journey section.
source	<xs:element name="NextResponsibleRU" type="CompanyCode"> <xs:annotation> <xs:documentation>The RU who is responsible for the train operation on the next journey section.</xs:documentation> </xs:annotation> </xs:element>

element **NHM_Code**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**NHMCodeType**
properties	content simple
used by	elements **Goods GoodsInWagon/GoodsInContainer GoodsInWagon Wagons/GoodsInWagon**
facets	Kind Value Annotation length 6

	pattern \d*[1-9]\d*
annotation	documentation NHM code of the goods

source	`<xs:element name="NHM_Code" type="NHMCodeType">`
	`<xs:annotation>`
	`<xs:documentation>NHM code of the goods</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **Noise**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 999
annotation	documentation Noise level at stand still in decibels

source	`<xs:element name="Noise">`
	`<xs:annotation>`
	`<xs:documentation>Noise level at stand still in decibels</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:integer">`
	`<xs:minInclusive value="1"/>`
	`<xs:maxInclusive value="999"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **NoiseByPassLimit**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 999
annotation	documentation Noise limit on reference track

source	`<xs:element name="NoiseByPassLimit">`
	`<xs:annotation>`
	`<xs:documentation>Noise limit on reference track</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:integer">`
	`<xs:minInclusive value="1"/>`
	`<xs:maxInclusive value="999"/>`

```
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **Notes**

diagram

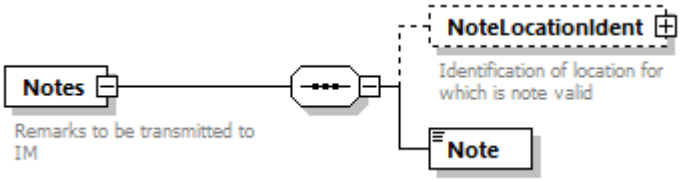

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**NoteLocationIdent** **Note**
used by	element **TrainRunningData**
annotation	documentation Remarks to be transmitted to IM

source

```
<xs:element name="Notes">
  <xs:annotation>
    <xs:documentation>Remarks to be transmitted to IM</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="NoteLocationIdent" type="LocationIdent" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Identification of location for which is note
valid</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="Note" type="FreeText"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Notes/NoteLocationIdent**

diagram

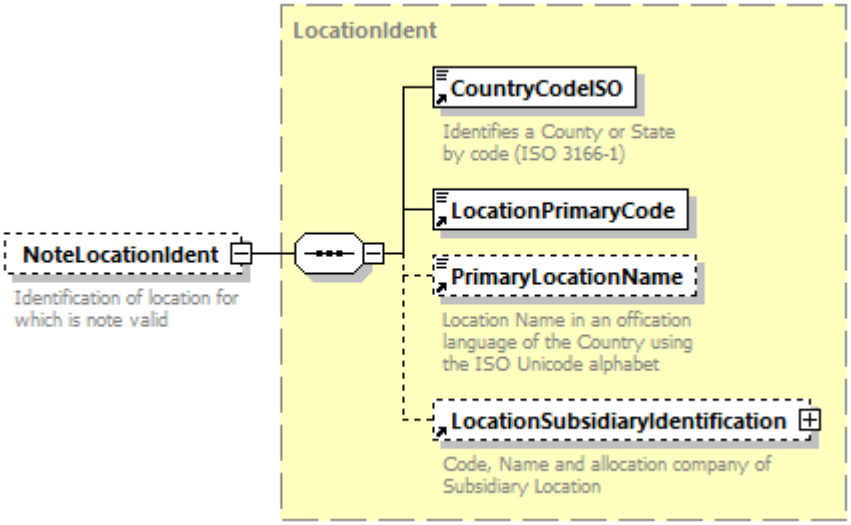

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	**LocationIdent**
properties	minOcc 0 maxOcc 1 content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
annotation	documentation Identification of location for which is note valid

source	`<xs:element name="NoteLocationIdent" type="LocationIdent" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Identification of location for which is note valid</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Notes/Note**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 255
source	`<xs:element name="Note" type="FreeText"/>`

element **NumberOfAxles**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **TrainRunningTechData**
facets	Kind Value Annotation minInclusive 0000 maxInclusive 9999
annotation	documentation The sum of number of axles of all wagons and all traction units

source	`<xs:element name="NumberOfAxles">`
	`  <xs:annotation>`
	`  <xs:documentation>The sum of number of axles of all wagons and all traction units</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="0000"/>`
	`  <xs:maxInclusive value="9999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **NumberOfBogies**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 1 maxInclusive 9

source	`<xs:element name="NumberOfBogies">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:int">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="9"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **NumberOfVehicles**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **TrainRunningTechData**
facets	Kind Value Annotation minInclusive 0000 maxInclusive 9999
annotation	documentation The sum of number of wagons and number of traction units

source	`<xs:element name="NumberOfVehicles">`
	`  <xs:annotation>`
	`  <xs:documentation>The sum of number of wagons and number of traction units</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="0000"/>`
	`  <xs:maxInclusive value="9999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ObjectType**

diagram	**ObjectType** Provides a possibility for differentiation between the objects: Train (TR), Route (RO), Path (PA), Case Reference (CR), Path Request (PR), Capacity Needs Announcements (CN), Capacity Model (CM), Catalogue Path (CP)
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	complexTypes **CompositIdentifierOperationalType** **CompositIdentifierPlannedType**
facets	Kind / Value / Annotation pattern [0-9A-Z]{2} enumeration TR — documentation: Train (TR) enumeration RO — documentation: Route (RO) enumeration PA — documentation: Path (PA) enumeration CR — documentation: Case Reference (CR) enumeration PR — documentation: Path Request (PR) enumeration CN — documentation: Capacity Needs Announcements (CN) enumeration CM — documentation: Capacity Model (CM) enumeration CP — documentation: Catalogue Path (CP)
annotation	documentation Provides a possibility for differentiation between the objects: Train (TR), Route (RO), Path (PA), Case Reference (CR), Path Request (PR), Capacity Needs Announcements (CN), Capacity Model (CM), Catalogue Path (CP)

source

```
<xs:element name="ObjectType">
  <xs:annotation>
    <xs:documentation>Provides a possibility for differentiation between the objects:
Train (TR), Route (RO), Path (PA), Case Reference (CR), Path Request (PR), Capacity
Needs Announcements (CN), Capacity Model (CM), Catalogue Path (CP)</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:pattern value="[0-9A-Z]{2}"/>
      <xs:enumeration value="TR">
        <xs:annotation>
          <xs:documentation>Train (TR)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="RO">
        <xs:annotation>
          <xs:documentation>Route (RO)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="PA">
        <xs:annotation>
          <xs:documentation>Path (PA)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="CR">
        <xs:annotation>
          <xs:documentation>Case Reference (CR)</xs:documentation>
```

```
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="PR">
          <xs:annotation>
            <xs:documentation>Path Request (PR)</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="CN">
          <xs:annotation>
            <xs:documentation>Capacity Needs Announcements (CN)</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="CM">
          <xs:annotation>
            <xs:documentation>Capacity Model (CM)</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="CP">
          <xs:annotation>
            <xs:documentation>Catalogue Path (CP)</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **Offset**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:integer**
properties	content simple
used by	element **TimingAtLocation/Timing**
source	`<xs:element name="Offset" type="xs:integer"/>`

element **OffsetToReference**

diagram	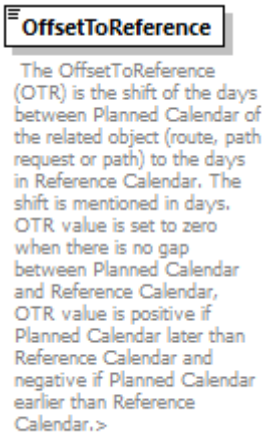
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:integer**

properties	content simple
used by	element **PlannedCalendar**
annotation	documentation The OffsetToReference (OTR) is the shift of the days between Planned Calendar of the related object (route, path request or path) to the days in Reference Calendar. The shift is mentioned in days. OTR value is set to zero when there is no gap between Planned Calendar and Reference Calendar, OTR value is positive if Planned Calendar later than Reference Calendar and negative if Planned Calendar earlier than Reference Calendar.>
source	<xs:element name="OffsetToReference" type="xs:integer"> <xs:annotation> <xs:documentation> The OffsetToReference (OTR) is the shift of the days between Planned Calendar of the related object (route, path request or path) to the days in Reference Calendar. The shift is mentioned in days. OTR value is set to zero when there is no gap between Planned Calendar and Reference Calendar, OTR value is positive if Planned Calendar later than Reference Calendar and negative if Planned Calendar earlier than Reference Calendar.></xs:documentation> </xs:annotation> </xs:element>

element **OnDemandPath**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **PlannedJourneyLocation**
annotation	documentation For the use of on demand or optional path (has to be either activated or deactived depending to network rules)
source	<xs:element name="OnDemandPath" type="xs:boolean"> <xs:annotation> <xs:documentation>For the use of on demand or optional path (has to be either activated or deactived depending to network rules)</xs:documentation> </xs:annotation> </xs:element>

element **OperationalTrainCouplingStrength**

diagram	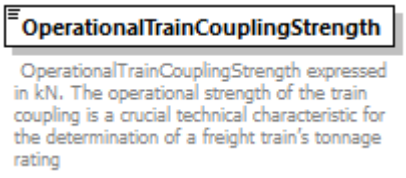
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **PlannedTrainTechnicalData**
facets	Kind Value Annotation minInclusive 1 maxInclusive 9999

annotation	documentation OperationalTrainCouplingStrength expressed in kN. The operational strength of the train coupling is a crucial technical characteristic for the determination of a freight train's tonnage rating
source	<xs:element name="OperationalTrainCouplingStrength"> <xs:annotation> <xs:documentation> OperationalTrainCouplingStrength expressed in kN. The operational strength of the train coupling is a crucial technical characteristic for the determination of a freight train's tonnage rating </xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="9999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **OperationalTrainNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	String1-8
properties	content simple
used by	elements OperationalTrainNumberIdentifier WagonStatusMessages/WagonStatusMessage/Train/OperationalTrainNumberIdentifier PlannedJourneyLocation
facets	Kind Value Annotation minLength 1 maxLength 8
annotation	documentation Identifies the train for traffic management purposes by the Dispatcher, GSMR services, etc.
source	<xs:element name="OperationalTrainNumber" type="String1-8"> <xs:annotation> <xs:documentation>Identifies the train for traffic management purposes by the Dispatcher, GSMR services, etc.</xs:documentation> </xs:annotation> </xs:element>

element **OperationalTrainNumberIdentifier**

diagram	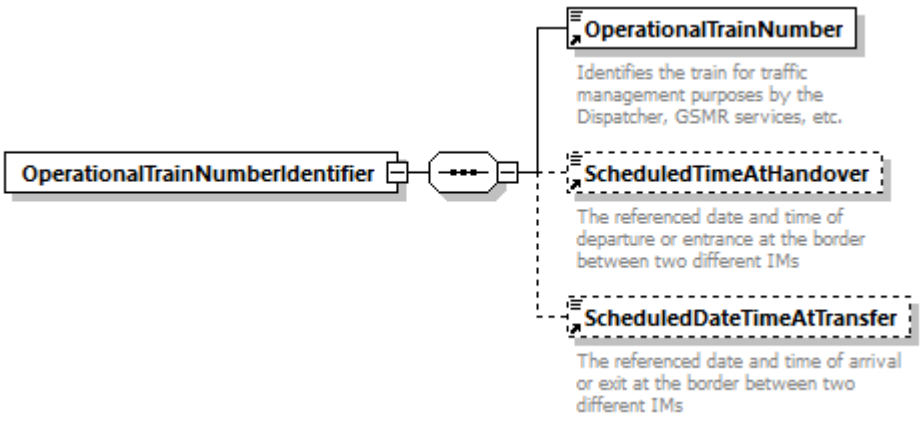

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	OperationalTrainNumber ScheduledTimeAtHandover ScheduledDateTimeAtTransfer
used by	elements AffectedLocation AffectedSection ChangeofTrackMessage ReferenceOTN TrainAtLocation TrainCompositionMessage TrainDelayCauseMessage TrainJourneyModificationMessage TrainReadyMessage TrainRunningForecastMessage TrainRunningInformationMessage TrainRunningInterruptionMessage

source

```
<xs:element name="OperationalTrainNumberIdentifier">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="OperationalTrainNumber"/>
      <xs:element ref="ScheduledTimeAtHandover" minOccurs="0"/>
      <xs:element ref="ScheduledDateTimeAtTransfer" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **OriginCountry**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of CountryIdentISO
properties	content simple
used by	elements ILU_Details ITU_Details Wagons/WagonDetails

facets

Kind	Value	Annotation
minLength	2	
maxLength	2	
pattern	[A-Z][A-Z]	

annotation

documentation
Code of origin country of the UTI.
documentation
CODE: ISO-3166-2

source

```
<xs:element name="OriginCountry">
  <xs:annotation>
    <xs:documentation>Code of origin country of the UTI.</xs:documentation>
    <xs:documentation>CODE: ISO-3166-2</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="CountryIdentISO">
      <xs:pattern value="[A-Z][A-Z]"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **OverhaulValidityPeriod**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**

properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 1 maxExclusive 20
annotation	documentation Validity period of last overhaul in years as marked on the wagon

source	`<xs:element name="OverhaulValidityPeriod">`
	`  <xs:annotation>`
	`  <xs:documentation>Validity period of last overhaul in years as marked on the wagon</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxExclusive value="20"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ParkingBrakeForce**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	content simple
used by	elements **HandBrake** **WagonTechData**
facets	Kind Value Annotation totalDigits 5 fractionDigits 1
annotation	documentation Indicates the parking brake force of the hand brake (kN). When the parking brake force is marked on the wagon the information must be provided in the RSRD message.

source	`<xs:element name="ParkingBrakeForce">`
	`  <xs:annotation>`
	`  <xs:documentation>Indicates the parking brake force of the hand brake (kN). When the parking brake force is marked on the wagon the information must be provided in the RSRD message.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:totalDigits value="5"/>`
	`  <xs:fractionDigits value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **PassengerFlag**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **LocationPrimaryInformation**
annotation	documentation Identifies that the Entity or Location is for Passenger Activity

source	`<xs:element name="PassengerFlag" type="xs:boolean">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies that the Entity or Location is for Passenger Activity</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **PathCanceledMessage**

diagram

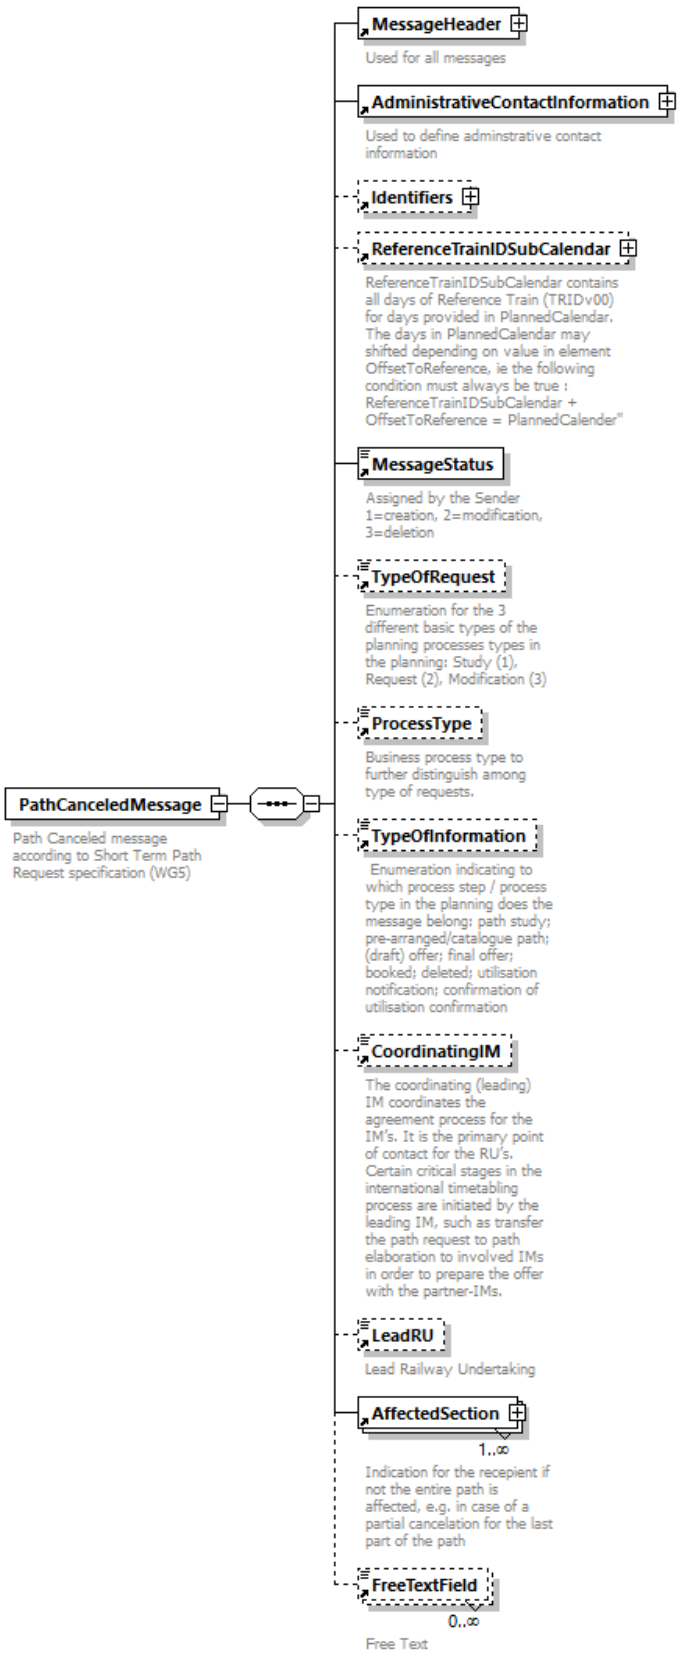

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	**MessageHeader AdministrativeContactInformation Identifiers ReferenceTrainIDSubCalendar MessageStatus TypeOfRequest ProcessType TypeOfInformation CoordinatingIM LeadRU AffectedSection FreeTextField**
annotation	documentation Path Canceled message according to Short Term Path Request specification (WG5)
source	<xs:element name="PathCanceledMessage"> <xs:annotation> <xs:documentation>Path Canceled message according to Short Term Path Request specification (WG5)</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="MessageHeader"/> <xs:element ref="AdministrativeContactInformation"/> <xs:element ref="Identifiers" minOccurs="0"/> <xs:element ref="ReferenceTrainIDSubCalendar" minOccurs="0"/> <xs:element ref="MessageStatus"/> <xs:element ref="TypeOfRequest" minOccurs="0"/> <xs:element ref="ProcessType" minOccurs="0"/> <xs:element ref="TypeOfInformation" minOccurs="0"/> <xs:element ref="CoordinatingIM" minOccurs="0"/> <xs:element ref="LeadRU" minOccurs="0"/> <xs:element ref="AffectedSection" maxOccurs="unbounded"/> <xs:element ref="FreeTextField" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </xs:element>

element **PathConfirmedMessage**

diagram

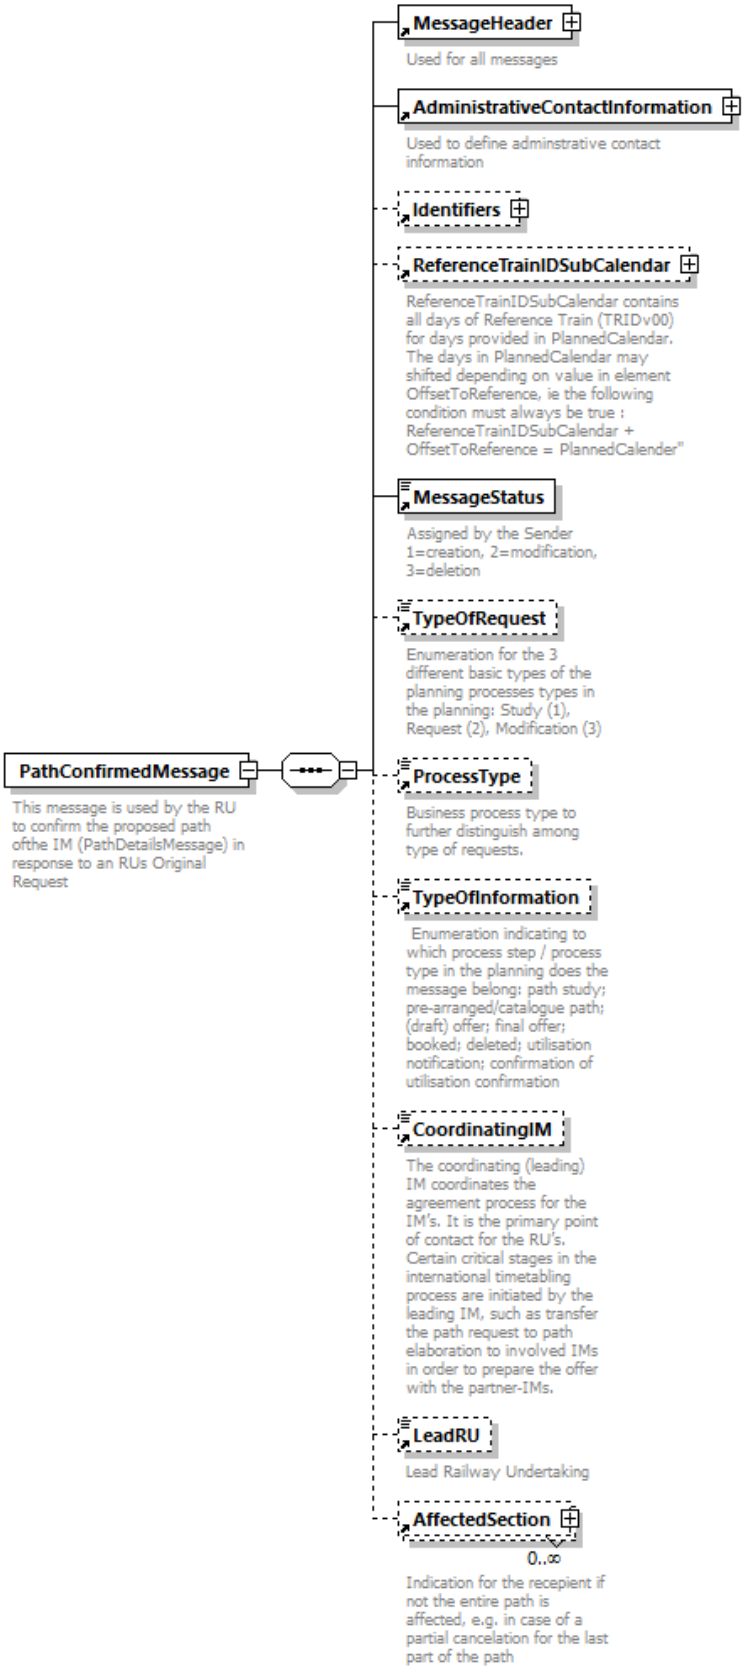

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	**MessageHeader AdministrativeContactInformation Identifiers ReferenceTrainIDSubCalendar MessageStatus TypeOfRequest ProcessType TypeOfInformation CoordinatingIM LeadRU AffectedSection**
annotation	documentation This message is used by the RU to confirm the proposed path ofthe IM (PathDetailsMessage) in response to an RUs Original Request
source	<xs:element name="PathConfirmedMessage"> <xs:annotation> <xs:documentation>This message is used by the RU to confirm the proposed path ofthe IM (PathDetailsMessage) in response to an RUs Original Request</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="MessageHeader"/> <xs:element ref="AdministrativeContactInformation"/> <xs:element ref="Identifiers" minOccurs="0"/> <xs:element ref="ReferenceTrainIDSubCalendar" minOccurs="0"/> <xs:element ref="MessageStatus"/> <xs:element ref="TypeOfRequest" minOccurs="0"/> <xs:element ref="ProcessType" minOccurs="0"/> <xs:element ref="TypeOfInformation" minOccurs="0"/> <xs:element ref="CoordinatingIM" minOccurs="0"/> <xs:element ref="LeadRU" minOccurs="0"/> <xs:element ref="AffectedSection" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </xs:element>

element **PathDetailsMessage**

diagram	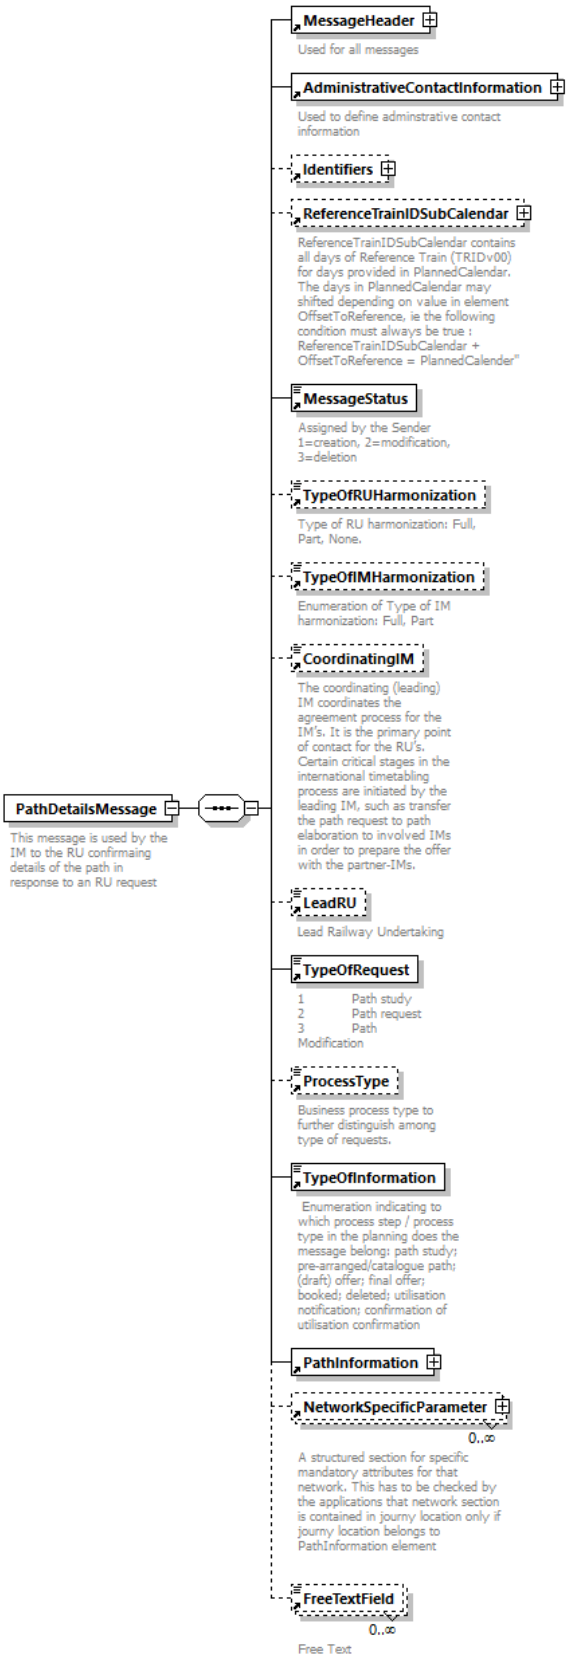
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	MessageHeader AdministrativeContactInformation Identifiers ReferenceTrainIDSubCalendar MessageStatus TypeOfRUHarmonization TypeOfIMHarmonization CoordinatingIM LeadRU TypeOfRequest ProcessType TypeOfInformation PathInformation NetworkSpecificParameter FreeTextField
annotation	documentation This message is used by the IM to the RU confirmaing details of the path in response to an RU request
source	

```
<xs:element name="PathDetailsMessage">
  <xs:annotation>
    <xs:documentation>This message is used by the IM to the RU confirmaing details of
the path in response to an RU request</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="AdministrativeContactInformation"/>
      <xs:element ref="Identifiers" minOccurs="0"/>
      <xs:element ref="ReferenceTrainIDSubCalendar" minOccurs="0"/>
      <xs:element ref="MessageStatus"/>
      <xs:element ref="TypeOfRUHarmonization" minOccurs="0"/>
      <xs:element ref="TypeOfIMHarmonization" minOccurs="0"/>
      <xs:element ref="CoordinatingIM" minOccurs="0"/>
      <xs:element ref="LeadRU" minOccurs="0"/>
      <xs:element ref="TypeOfRequest">
        <xs:annotation>
          <xs:documentation>1Path study
2       Path request
3       Path Modification
</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="ProcessType" minOccurs="0"/>
      <xs:element ref="TypeOfInformation"/>
      <xs:element ref="PathInformation"/>
      <xs:element ref="NetworkSpecificParameter" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>A structured section for specific mandatory attributes
for that network. This has to be checked by the applications that network section is
contained in journy location only if journy location belongs to PathInformation
element
</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="FreeTextField" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **PathDetailsRefusedMessage**

diagram

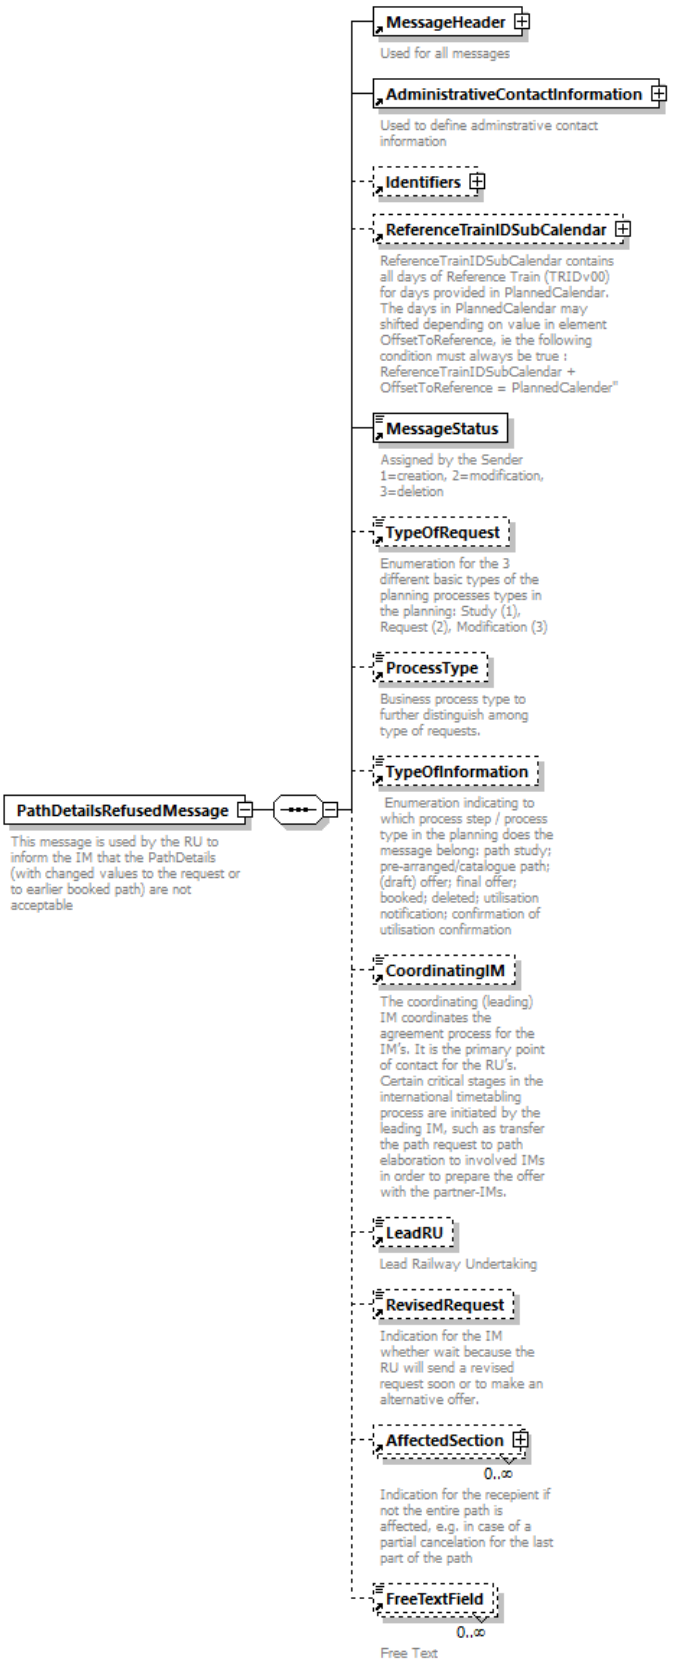

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	MessageHeader AdministrativeContactInformation Identifiers ReferenceTrainIDSubCalendar MessageStatus TypeOfRequest ProcessType TypeOfInformation CoordinatingIM LeadRU RevisedRequest AffectedSection FreeTextField
annotation	documentation This message is used by the RU to inform the IM that the PathDetails (with changed values to the request or to earlier booked path) are not acceptable

source

```
<xs:element name="PathDetailsRefusedMessage">
  <xs:annotation>
    <xs:documentation>This message is used by the RU to inform the IM that the PathDetails (with changed values to the request or to earlier booked path) are not acceptable</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="AdministrativeContactInformation"/>
      <xs:element ref="Identifiers" minOccurs="0"/>
      <xs:element ref="ReferenceTrainIDSubCalendar" minOccurs="0"/>
      <xs:element ref="MessageStatus"/>
      <xs:element ref="TypeOfRequest" minOccurs="0"/>
      <xs:element ref="ProcessType" minOccurs="0"/>
      <xs:element ref="TypeOfInformation" minOccurs="0"/>
      <xs:element ref="CoordinatingIM" minOccurs="0"/>
      <xs:element ref="LeadRU" minOccurs="0"/>
      <xs:element ref="RevisedRequest" minOccurs="0"/>
      <xs:element ref="AffectedSection" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element ref="FreeTextField" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **PathInformation**

diagram	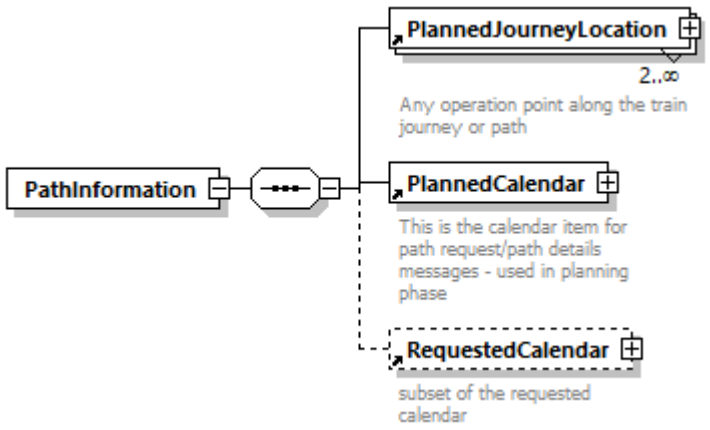
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	PlannedJourneyLocation PlannedCalendar RequestedCalendar
used by	elements PathDetailsMessage PathRequestMessage

source

```
<xs:element name="PathInformation">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="PlannedJourneyLocation" minOccurs="2" maxOccurs="unbounded"/>
      <xs:element ref="PlannedCalendar"/>
      <xs:element ref="RequestedCalendar" minOccurs="0">
        <xs:annotation>
          <xs:documentation>subset of the requested calendar</xs:documentation>
```

```
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **PathNotAvailableMessage**

diagram	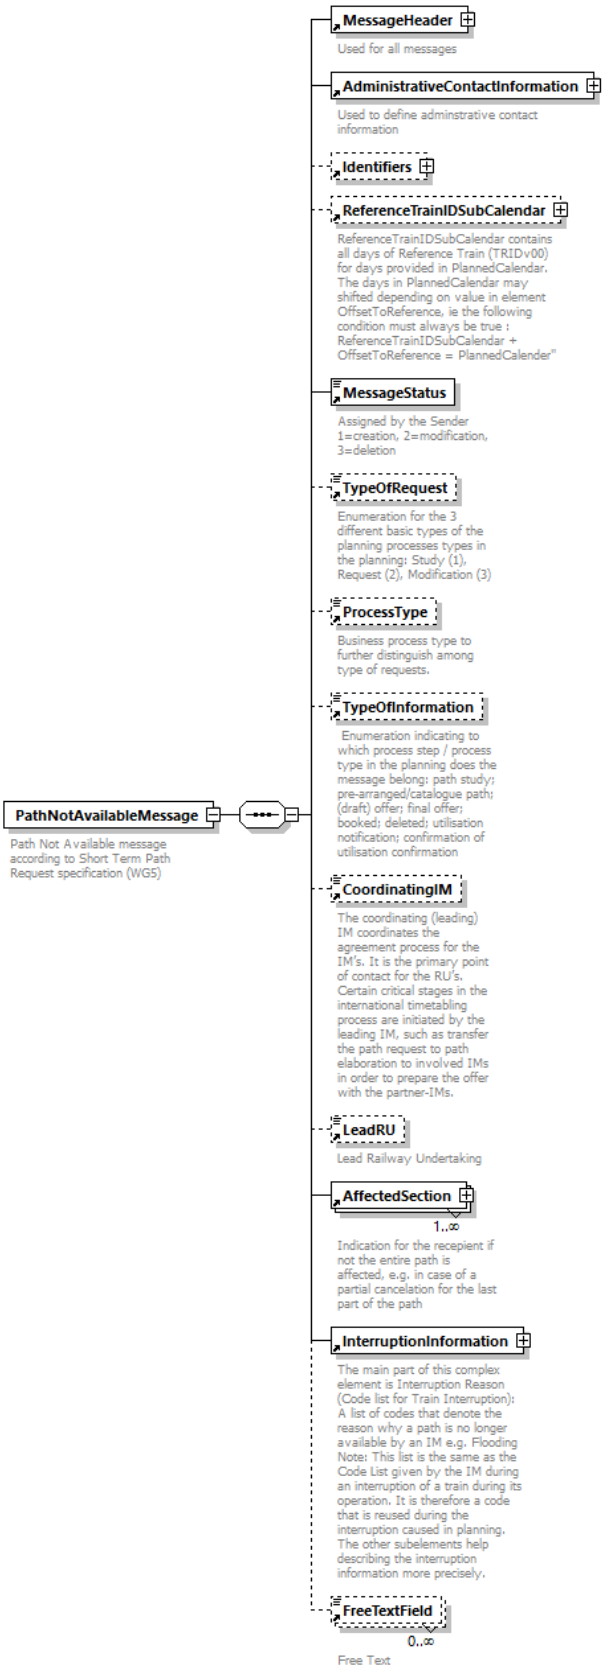
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	**MessageHeader AdministrativeContactInformation Identifiers ReferenceTrainIDSubCalendar MessageStatus TypeOfRequest ProcessType TypeOfInformation CoordinatingIM LeadRU AffectedSection InterruptionInformation FreeTextField**
annotation	documentation Path Not Available message according to Short Term Path Request specification (WG5)
source	<xs:element name="PathNotAvailableMessage"> <xs:annotation> <xs:documentation>Path Not Available message according to Short Term Path Request specification (WG5) </xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="MessageHeader"/> <xs:element ref="AdministrativeContactInformation"/> <xs:element ref="Identifiers" minOccurs="0"/> <xs:element ref="ReferenceTrainIDSubCalendar" minOccurs="0"/> <xs:element ref="MessageStatus"/> <xs:element ref="TypeOfRequest" minOccurs="0"/> <xs:element ref="ProcessType" minOccurs="0"/> <xs:element ref="TypeOfInformation" minOccurs="0"/> <xs:element ref="CoordinatingIM" minOccurs="0"/> <xs:element ref="LeadRU" minOccurs="0"/> <xs:element ref="AffectedSection" maxOccurs="unbounded"/> <xs:element ref="InterruptionInformation"/> <xs:element ref="FreeTextField" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </xs:element>

element **PathRequestMessage**

diagram	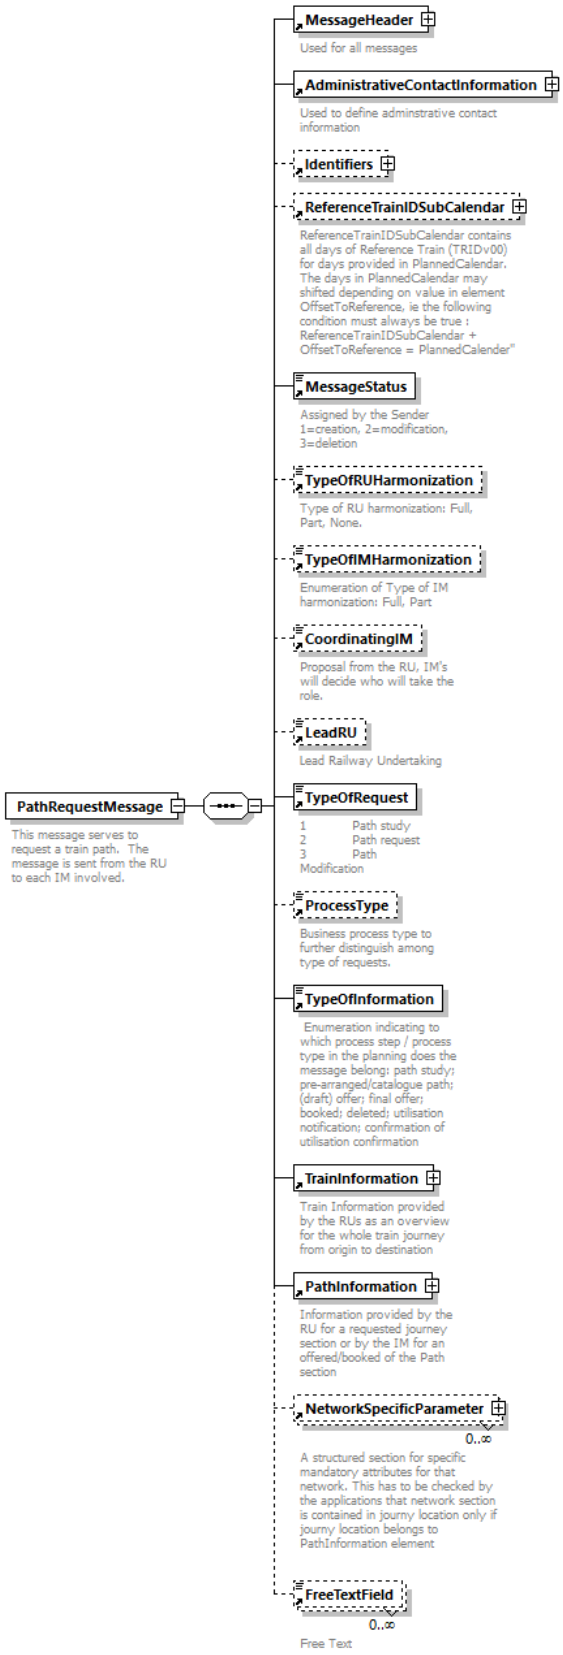
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	MessageHeader AdministrativeContactInformation Identifiers ReferenceTrainIDSubCalendar MessageStatus TypeOfRUHarmonization TypeOfIMHarmonization CoordinatingIM LeadRU TypeOfRequest ProcessType TypeOfInformation TrainInformation PathInformation NetworkSpecificParameter FreeTextField
annotation	documentation This message serves to request a train path. The message is sent from the RU to each IM involved.
source	

```
<xs:element name="PathRequestMessage">
  <xs:annotation>
    <xs:documentation>This message serves to request a train path.  The message is
sent from the RU to each IM involved.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="AdministrativeContactInformation"/>
      <xs:element ref="Identifiers" minOccurs="0"/>
      <xs:element ref="ReferenceTrainIDSubCalendar" minOccurs="0"/>
      <xs:element ref="MessageStatus"/>
      <xs:element ref="TypeOfRUHarmonization" minOccurs="0"/>
      <xs:element ref="TypeOfIMHarmonization" minOccurs="0"/>
      <xs:element ref="CoordinatingIM" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Proposal from the RU, IM's will decide who will take the
role.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="LeadRU" minOccurs="0"/>
      <xs:element ref="TypeOfRequest">
        <xs:annotation>
          <xs:documentation>1Path study
2      Path request
3      Path Modification
</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="ProcessType" minOccurs="0"/>
      <xs:element ref="TypeOfInformation"/>
      <xs:element ref="TrainInformation">
        <xs:annotation>
          <xs:documentation>Train Information provided by the RUs as an overview for
the whole train journey from origin to destination</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="PathInformation">
        <xs:annotation>
          <xs:documentation>Information provided by the RU for a requested journey
section or by the IM for an offered/booked of the Path section</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="NetworkSpecificParameter" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>A structured section for specific mandatory attributes
for that network. This has to be checked by the applications that network section is
contained in journy location only if journy location belongs to PathInformation
element
</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="FreeTextField" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **PermittedTolerance**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 0 maxInclusive 99
annotation	documentation Permitted tolerance after date of overhaul (in months)

source	`<xs:element name="PermittedTolerance">`
	`  <xs:annotation>`
	`  <xs:documentation>Permitted tolerance after date of overhaul (in months)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="0"/>`
	`  <xs:maxInclusive value="99"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **PhoneNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CommunicationRefID**
properties	content simple
used by	element **AdministrativeContactInformation**
facets	Kind Value Annotation minLength 1 maxLength 70
annotation	documentation Generic Phone number in Free text

source	`<xs:element name="PhoneNumber" type="CommunicationRefID">`
	`  <xs:annotation>`
	`  <xs:documentation>Generic Phone number in Free text</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **PickupTimeAtLocation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation The date and time of the release of a wagon at customer sidings

source	`<xs:element name="PickupTimeAtLocation" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>The date and time of the release of a wagon at customer sidings</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **PlannedCalendar**

diagram	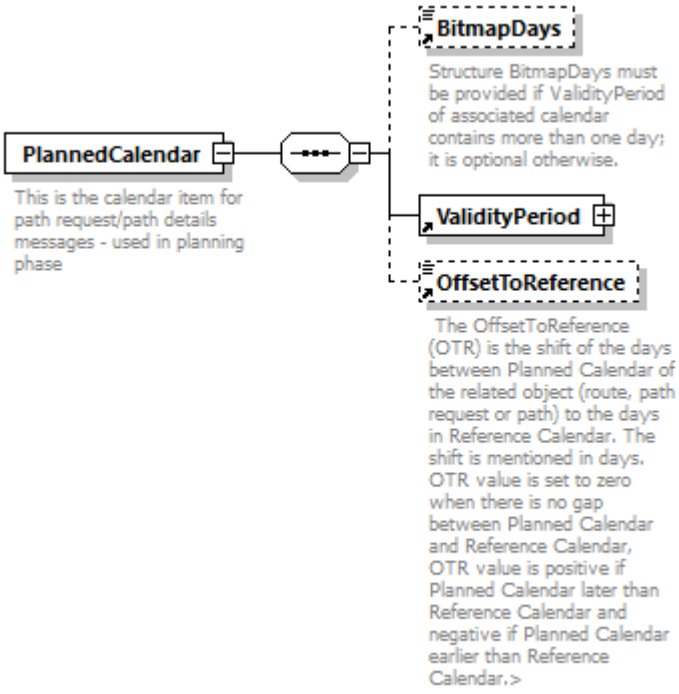
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**BitmapDays ValidityPeriod OffsetToReference**
used by	elements **AffectedSection PathInformation TrainInformation**
annotation	documentation This is the calendar item for path request/path details messages - used in planning phase

source	`<xs:element name="PlannedCalendar">`
	`  <xs:annotation>`
	`  <xs:documentation>This is the calendar item for path request/path details messages - used in planning phase</xs:documentation>`
	`  </xs:annotation>`

```
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="BitmapDays" minOccurs="0"/>
      <xs:element ref="ValidityPeriod"/>
      <xs:element ref="OffsetToReference" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **PlannedDateNextOverhaul**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
annotation	documentation Date of planned next overhaul. It must be within the validity period of the last overhaul. The element serves as indication of the actually planned date of next overhaul by the wagon keeper/ECM. Minimum planned date next overhaul or overhaul validity period must be provided by the wagon keeper.
source	`<xs:element name="PlannedDateNextOverhaul" type="xs:date">` `  <xs:annotation>` ` <xs:documentation> Date of planned next overhaul. It must be within the validity period of the last overhaul. The element serves as indication of the actually planned date of next overhaul by the wagon keeper/ECM. Minimum planned date next overhaul or overhaul validity period must be provided by the wagon keeper. </xs:documentation>` ` </xs:annotation>` `</xs:element>`

element **PlannedJourneyLocation**

diagram	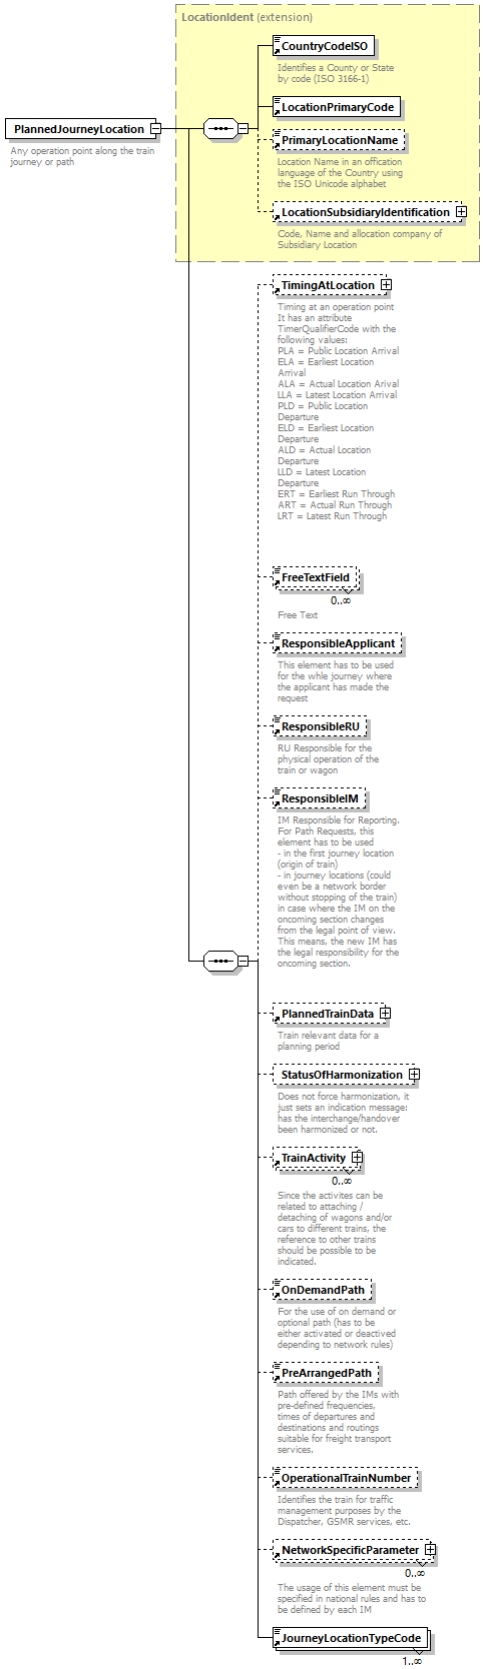
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **LocationIdent**

properties	content complex
children	CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification TimingAtLocation FreeTextField ResponsibleApplicant ResponsibleRU ResponsibleIM PlannedTrainData StatusOfHarmonization TrainActivity OnDemandPath PreArrangedPath OperationalTrainNumber NetworkSpecificParameter JourneyLocationTypeCode
used by	elements PathInformation TrainInformation
annotation	documentation Any operation point along the train journey or path

source

```
<xs:element name="PlannedJourneyLocation">
  <xs:annotation>
    <xs:documentation>Any operation point along the train journey or
path</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:complexContent>
      <xs:extension base="LocationIdent">
        <xs:sequence minOccurs="1">
          <xs:element ref="TimingAtLocation" minOccurs="0"/>
          <xs:element ref="FreeTextField" minOccurs="0" maxOccurs="unbounded"/>
          <xs:element ref="ResponsibleApplicant" minOccurs="0"/>
          <xs:element ref="ResponsibleRU" minOccurs="0"/>
          <xs:element ref="ResponsibleIM" minOccurs="0"/>
          <xs:element ref="PlannedTrainData" minOccurs="0"/>
          <xs:element name="StatusOfHarmonization" minOccurs="0">
            <xs:annotation>
              <xs:documentation>Does not force harmonization, it just sets an
indication message: has the interchange/handover been harmonized or
not.</xs:documentation>
            </xs:annotation>
            <xs:complexType>
              <xs:sequence>
                <xs:element name="HandoverHarmonized" type="xs:boolean"
minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>IM indicates that he has finished to harmonized
the handover point. Used for PathDetails message, should be mandatory for
applications.</xs:documentation>
                  </xs:annotation>
                </xs:element>
                <xs:element name="InterchangeHarmonized" type="xs:boolean"
minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>RU indicates that it has harmonized the
interchange point with its' partner. Used for PathRequest, should be mandatory for
applications</xs:documentation>
                  </xs:annotation>
                </xs:element>
              </xs:sequence>
            </xs:complexType>
          </xs:element>
          <xs:element ref="TrainActivity" minOccurs="0" maxOccurs="unbounded"/>
          <xs:element ref="OnDemandPath" minOccurs="0"/>
          <xs:element ref="PreArrangedPath" minOccurs="0"/>
          <xs:element ref="OperationalTrainNumber" minOccurs="0"/>
          <xs:element ref="NetworkSpecificParameter" minOccurs="0"
maxOccurs="unbounded"/>
          <xs:element ref="JourneyLocationTypeCode" minOccurs="1"
maxOccurs="unbounded"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
</xs:element>
```

element **PlannedJourneyLocation/StatusOfHarmonization**

diagram	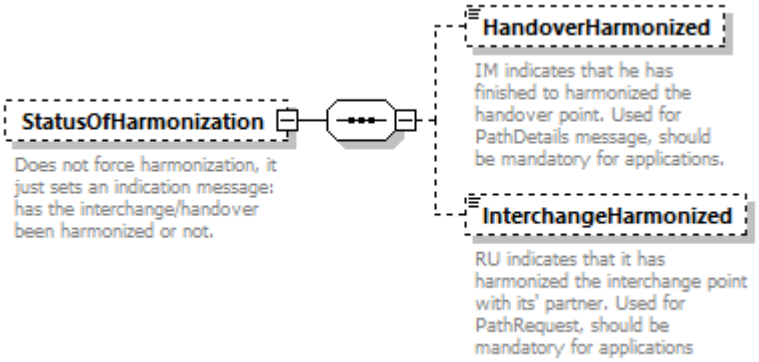
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**HandoverHarmonized** **InterchangeHarmonized**
annotation	documentation Does not force harmonization, it just sets an indication message: has the interchange/handover been harmonized or not.

source	`<xs:element name="StatusOfHarmonization" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Does not force harmonization, it just sets an indication message: has the interchange/handover been harmonized or not.</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element name="HandoverHarmonized" type="xs:boolean" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>IM indicates that he has finished to harmonized the handover point. Used for PathDetails message, should be mandatory for applications.</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element name="InterchangeHarmonized" type="xs:boolean" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>RU indicates that it has harmonized the interchange point with its' partner. Used for PathRequest, should be mandatory for applications</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **PlannedJourneyLocation/StatusOfHarmonization/HandoverHarmonized**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**

properties	minOcc 0 maxOcc 1 content simple
annotation	documentation IM indicates that he has finished to harmonized the handover point. Used for PathDetails message, should be mandatory for applications.
source	<xs:element name="HandoverHarmonized" type="xs:boolean" minOccurs="0"> <xs:annotation> <xs:documentation>IM indicates that he has finished to harmonized the handover point. Used for PathDetails message, should be mandatory for applications.</xs:documentation> </xs:annotation> </xs:element>

element **PlannedJourneyLocation/StatusOfHarmonization/InterchangeHarmonized**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation RU indicates that it has harmonized the interchange point with its' partner. Used for PathRequest, should be mandatory for applications
source	<xs:element name="InterchangeHarmonized" type="xs:boolean" minOccurs="0"> <xs:annotation> <xs:documentation>RU indicates that it has harmonized the interchange point with its' partner. Used for PathRequest, should be mandatory for applications</xs:documentation> </xs:annotation> </xs:element>

element **PlannedSpeed**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Speed**
properties	content simple
used by	element **PlannedTrainTechnicalData**
facets	Kind Value Annotation minInclusive 001 maxInclusive 999
annotation	documentation IM may inform the RA on the speed which was the basis for path construction
source	<xs:element name="PlannedSpeed" type="Speed"> <xs:annotation> <xs:documentation>IM may inform the RA on the speed which was the basis for path

	construction</xs:documentation> </xs:annotation> </xs:element>

element **PlannedTrainData**

diagram

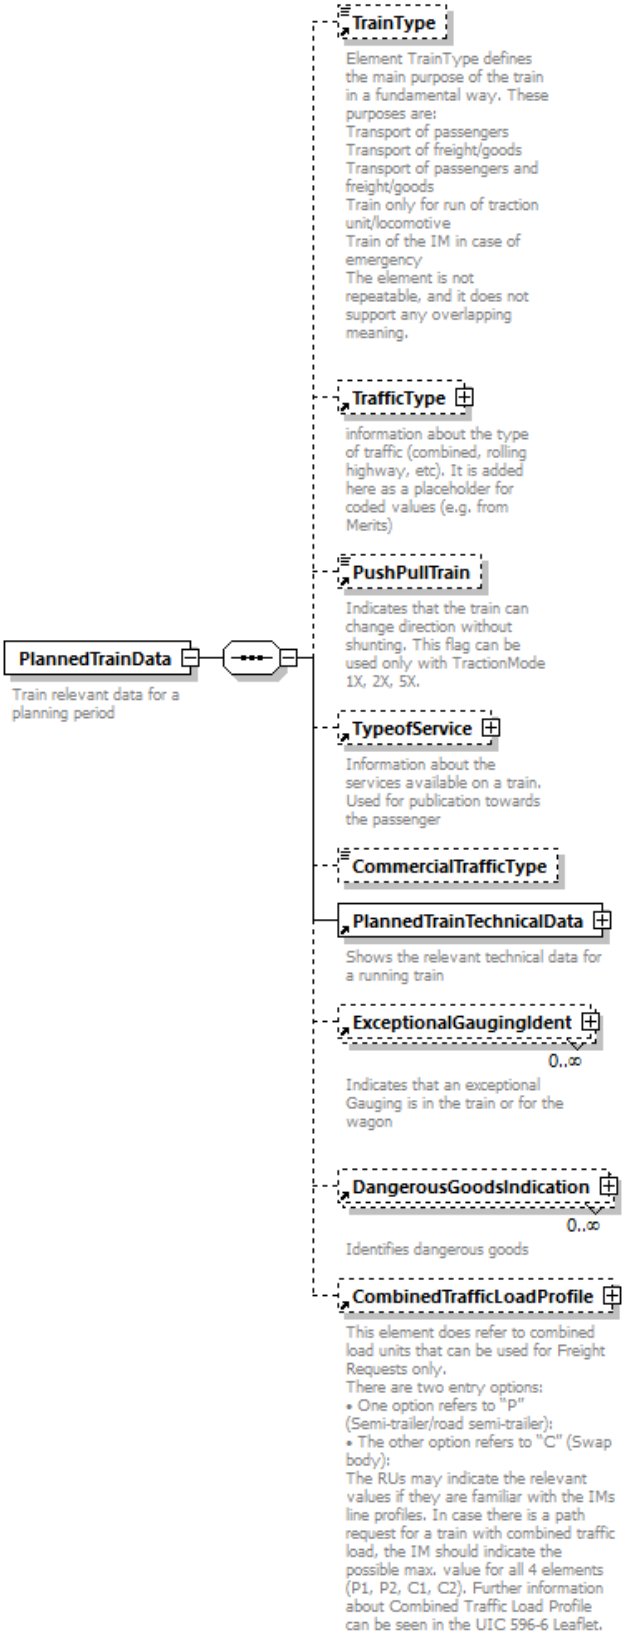

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	TrainType TrafficType PushPullTrain TypeofService CommercialTrafficType PlannedTrainTechnicalData ExceptionalGaugingIdent DangerousGoodsIndication CombinedTrafficLoadProfile
used by	element PlannedJourneyLocation
annotation	documentation Train relevant data for a planning period

source

```
<xs:element name="PlannedTrainData">
  <xs:annotation>
    <xs:documentation>Train relevant data for a planning period</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="TrainType" minOccurs="0"/>
      <xs:element ref="TrafficType" minOccurs="0"/>
      <xs:element ref="PushPullTrain" minOccurs="0"/>
      <xs:element ref="TypeofService" minOccurs="0"/>
      <xs:element name="CommercialTrafficType" type="tap:type7009BrandNameCodeList"
minOccurs="0"/>
      <xs:element ref="PlannedTrainTechnicalData"/>
      <xs:element ref="ExceptionalGaugingIdent" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element ref="DangerousGoodsIndication" minOccurs="0"
maxOccurs="unbounded"/>
      <xs:element ref="CombinedTrafficLoadProfile" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **PlannedTrainData/CommercialTrafficType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	type7009BrandNameCodeList
properties	minOcc 0 maxOcc 1 content simple

facets

Kind	Value	Annotation
maxLength	17	
enumeration	46	documentation TAJ documentation TAJ documentation Day car train documentation 13 documentation 0
enumeration	47	documentation TAC documentation TAC documentation Car sleeper train, motor rail (CST) documentation 14 documentation 0
enumeration	48	documentation SAE documentation SAE documentation Unaccompanied car service, motor rail

			documentation 14 documentation 0
	enumeration	49	documentation EIC documentation EkspresIC documentation Fast and Comfortable Interregional trains documentation 10 documentation 0
	enumeration	50	documentation EC documentation EuroCity documentation EuroCity documentation 9 documentation 0
	enumeration	51	documentation ICE documentation ICE documentation ICE documentation 8 documentation 0
	enumeration	52	documentation AVE documentation AVE documentation AVE documentation 8 documentation 0
	enumeration	53	documentation EIL documentation EUROSTAR documentation Eurostar documentation 8 documentation 0
	enumeration	54	documentation documentation documentation Talgo documentation 9 documentation 0
	enumeration	55	documentation OTU documentation Oresundstog documentation Oresundstog documentation 10

			documentation 0
	enumeration	56	documentation TGV documentation TGV documentation TGV Bruxelles – Lille / Province documentation 8 documentation 0
	enumeration	58	documentation TRN documentation Intercités documentation Intercités documentation 9 documentation 0
	enumeration	59	documentation AE documentation ALLEGRO documentation Allegro documentation 8 documentation 0
	enumeration	60	documentation ECB documentation EuroCityBrenner documentation EuroCityBrenner documentation 9 documentation 0
	enumeration	62	documentation documentation documentation Suburban service documentation 12 documentation 0
	enumeration	63	documentation IC documentation Intercity documentation Intercity documentation 9 documentation 0
	enumeration	64	documentation documentation documentation Hotel Train documentation 13 documentation 0

	enumeration	65	documentation documentation Ferry documentation hydrofoil documentation 33 documentation 0
	enumeration	66	documentation IC documentation Intercity documentation Inter City Lyn documentation 9 documentation 0
	enumeration	67	documentation documentation documentation TRN documentation 10 documentation 0
	enumeration	68	documentation documentation documentation International documentation 9 documentation 0
	enumeration	69	documentation documentation documentation Express documentation 10 documentation 0
	enumeration	70	documentation EN documentation EuroNight documentation Euro Night documentation 13 documentation 0
	enumeration	71	documentation HST documentation High-speed train documentation High-speed train documentation 8 documentation 0
	enumeration	72	documentation

			TRN documentation TRAIN documentation Train SNCF documentation 9 documentation 0
	enumeration	73	documentation TGV documentation TGV documentation TGV Sud-Est documentation 8 documentation 0
	enumeration	74	documentation TGV documentation TGV documentation TGV Atlantique documentation 8 documentation 0
	enumeration	75	documentation TGV documentation TGV documentation TGV Nord documentation 8 documentation 0
	enumeration	76	documentation TGV documentation TGV documentation TGV Lyria documentation 8 documentation 0
	enumeration	77	documentation TGV documentation TGV documentation TGV Duplex documentation 8 documentation 0
	enumeration	79	documentation TGV documentation TGV documentation TGV Est documentation 8 documentation 0
	enumeration	80	documentation TGV documentation TGV

			documentation
			TGV Interconnexion
			documentation
			8
			documentation
			0
	enumeration	82	documentation
			documentation
			THALYS
			documentation
			Thalys
			documentation
			8
			documentation
			0
	enumeration	83	documentation
			documentation
			Ferry
			documentation
			hovercraft
			documentation
			33
			documentation
			0
	enumeration	84	documentation
			RE
			documentation
			regional train
			documentation
			Regional
			documentation
			11
			documentation
			0
	enumeration	85	documentation
			WTE
			documentation
			Wilhelm Tell Express
			documentation
			Wilhelm Tell Express
			documentation
			10
			documentation
			0
	enumeration	87	documentation
			documentation
			PENDOLINO
			documentation
			Pendolino
			documentation
			8
			documentation
			0
	enumeration	88	documentation
			Suburban
			documentation
			8
			documentation
			0
	enumeration	89	documentation
			ALV
			documentation
			Alvia
			documentation
			Alvia
			documentation
			8
			documentation
			0

	enumeration	90	documentation AVN documentation Avant documentation Avant documentation 8 documentation 0
	enumeration	91	documentation TER documentation TRAIN documentation Regional TER documentation 11 documentation 0
	enumeration	92	documentation REG documentation NSB Regiontog documentation NSB Regiontog documentation 37 documentation 0
	enumeration	93	documentation FB documentation FRECCIABIANCA documentation FRECCIABIANCA documentation 8 documentation 0
	enumeration	94	documentation SC documentation SuperCity documentation Supercity documentation 9 documentation 0
	enumeration	95	documentation CNL documentation City Night Line (D) documentation DB Nachtzug documentation 13 documentation 0
	enumeration	96	documentation INI documentation InterCityNotte Italia documentation InterCityNotte documentation 13 documentation 0
	enumeration	97	documentation GB documentation

			ATOC MEMBER OPERATED SERVICE documentation ATOC MEMBER OPERATED SERVICE documentation 37 documentation 0
	enumeration	98	documentation ESI documentation ES* Italia documentation Eurostar Italia documentation 8 documentation 0
	enumeration	99	documentation documentation documentation Funicular documentation 15 documentation 0
	enumeration	100	documentation documentation documentation Airport train documentation 12 documentation 0
	enumeration	101	documentation Night train documentation 13 documentation 0
	enumeration	102	documentation documentation documentation Touristic train documentation 9 documentation 0
	enumeration	107	documentation documentation documentation Historical train, steam engine train documentation 16 documentation 0
	enumeration	108	documentation IRE documentation IRE documentation Interregio-Express documentation 10

			documentation 0
	enumeration	109	documentation RB documentation RB documentation Regionalbahn documentation 11 documentation 0
	enumeration	110	documentation RE documentation RE documentation Regional-Express documentation 11 documentation 0
	enumeration	111	documentation RT documentation RT documentation RegioTram documentation 11 documentation 0
	enumeration	112	documentation documentation documentation Shinkansen documentation 8 documentation 0
	enumeration	113	documentation THT documentation TrainHotel Talgo documentation Train hotel talgo documentation 13 documentation 0
	enumeration	114	documentation EUR documentation Euromed documentation Euromed documentation 9 documentation 0
	enumeration	115	documentation ALR documentation Alaris documentation Alaris documentation 9 documentation 0

enumeration 116 documentation
ALT
documentation
Altaria
documentation
Altaria
documentation
9
documentation
0
enumeration 117 documentation
ARC
documentation
Arco
documentation
intercity
documentation
9
documentation
2
enumeration 119 documentation

documentation

documentation
S-Bahn
documentation
12
documentation
0
enumeration 121 documentation
Night Train
documentation
Night Train
documentation
13
documentation
0
enumeration 122 documentation
IR
documentation
Interregional
documentation
Interregional
documentation
10
documentation
0
enumeration 123 documentation
IRN
documentation
Interregional Night Train
documentation
Interregional Night Train
documentation
13
documentation
2
enumeration 124 documentation
NLT
documentation
TOLSTOI
documentation
Tolstoi
documentation
13
documentation
0
enumeration 126 documentation

documentation

			documentation ARZ documentation 14 documentation 0
	enumeration	128	documentation AVE documentation RENFE SNCF EN COOPERATION documentation RENFE SNCF documentation 8 documentation 0
	enumeration	129	documentation TGV documentation RENFE SNCF EN COOPERATION documentation RENFE SNCF documentation 8 documentation 0
	enumeration	130	documentation BUS documentation IC Bus documentation Bus documentation 32 documentation 0
	enumeration	131	documentation BUS documentation IC Bus international documentation Bus documentation 32 documentation 0
	enumeration	153	documentation documentation special train documentation Sonderzug documentation 9 documentation 0
	enumeration	154	documentation documentation documentation InterCityRapid documentation 9 documentation 0
	enumeration	155	documentation documentation documentation InterPici

			documentation 9 documentation 0
	enumeration	157	documentation documentation documentation Fast train documentation 9 documentation 0
	enumeration	158	documentation documentation documentation Euregio documentation 11 documentation 0
	enumeration	159	documentation documentation Bus documentation IC Ersatzbus documentation 32 documentation 0
	enumeration	160	documentation documentation Bus documentation IP Ersatzbus documentation 32 documentation 0
	enumeration	162	documentation documentation Bus documentation Replacement Bus documentation 32 documentation 0
	enumeration	163	documentation TGV documentation TGV documentation TGV Duplex Lyria documentation 8 documentation 0
	enumeration	166	documentation TGV documentation TGV INOUI documentation TGV Duplex France Allemagne documentation

			8 documentation 2
	enumeration	170	documentation YHT documentation YHT documentation High speed train in Turkey documentation 8 documentation 0
	enumeration	171	documentation FA documentation FRECCIARGENTO documentation FRECCIARGENTO documentation 8 documentation 0
	enumeration	172	documentation FR documentation FRECCIAROSSA documentation FRECCIAROSSA documentation 8 documentation 0
	enumeration	173	documentation AP documentation Albula Panoramawagen documentation Albula Panoramawagen documentation 10 documentation 0
	enumeration	174	documentation BEX documentation Bernina Express documentation Bernina Express (Panorama Train) documentation 10 documentation 0
	enumeration	175	documentation GEX documentation Glacier Express documentation Glacier Express (Panorama Train) documentation 10 documentation 0
	enumeration	176	documentation GP documentation Golden Pass documentation Golden Pass (Panorama Train) documentation 10 documentation 0

	enumeration	177	documentation BNI documentation Bernina Panorama documentation Bernina Panorama documentation 11 documentation 0
	enumeration	178	documentation zb documentation zb Zentralbahn AG documentation Luzern-Interlaken Express (Panorama Train) documentation 10 documentation 0
	enumeration	179	documentation BXB documentation Bernina Express Bus documentation Bernina Express (Panorama Bus) documentation 32 documentation 0
	enumeration	200	documentation GGB documentation Gornergrat Bahn documentation Mountain train documentation 10 documentation 0
	enumeration	202	documentation ICE documentation ICE-Allemagne France documentation ICE Allemagne-France documentation 8 documentation 0
	enumeration	203	documentation documentation ÖBB-NIGHTLINE documentation ÖBB Night Line documentation 13 documentation 0
	enumeration	205	documentation ICP documentation Intercity Plus documentation Intercity Plus documentation 9 documentation 0
	enumeration	206	documentation RID documentation

			Riviera Day documentation Riviera day documentation 9 documentation 0
	enumeration	207	documentation RIN documentation Riviera Night documentation Riviera night documentation 9 documentation 0
	enumeration	209	documentation RJ documentation R A I L JET documentation Rail Jet documentation 9 documentation 0
	enumeration	213	documentation AZ documentation DB Autozug documentation DB Autozug documentation 14 documentation 0
	enumeration	214	documentation documentation Berlin-Warszawa-Express documentation Berlin-Warszawa-Express documentation 8 documentation 0
	enumeration	215	documentation documentation Railpromo Austria Express/Treski documentation Austria Express/Treski documentation 13 documentation 0
	enumeration	216	documentation documentation PRECIOS MERCADO documentation Precios Mercado documentation 9 documentation 0
	enumeration	219	documentation TGV documentation TGV documentation

			TGV documentation 8 documentation 0
	enumeration	223	documentation FB documentation FB documentation FernBus documentation 32 documentation 0
	enumeration	224	documentation ICB documentation Intercitybus documentation ÖBB-Intercitybus documentation 32 documentation 0
	enumeration	225	documentation TLK documentation TLK train documentation Yours Rail Lines documentation 10 documentation 0
	enumeration	226	documentation A documentation RailBus documentation RailBus documentation 32 documentation 0
	enumeration	227	documentation BUS documentation Replacement bus for Regional Train documentation Replacement bus for Regional Train documentation 32 documentation 0
	enumeration	228	documentation IR documentation InterREGIO train documentation InterREGIO train documentation 10 documentation 0
	enumeration	229	documentation IRB documentation Replacement bus for InterRegio train documentation Replacement bus for InterRegio train documentation 32

			documentation 0
	enumeration	230	documentation MP documentation Fast International Train documentation Fast International Train documentation 10 documentation 0
	enumeration	231	documentation MR documentation musicREGIO train documentation musicREGIO train documentation 11 documentation 0
	enumeration	232	documentation Os documentation Stopping Train documentation Stopping Train documentation 11 documentation 0
	enumeration	233	documentation P documentation Fast Train documentation Fast Train documentation 10 documentation 0
	enumeration	234	documentation R documentation REGIO train documentation REGIO train documentation 11 documentation 0
	enumeration	235	documentation RE documentation REGIOekspres train documentation REGIOekspres train documentation 10 documentation 0
	enumeration	236	documentation VR documentation viaREGIO train documentation viaREGIO train documentation 11 documentation 0
	enumeration	237	documentation

			TK documentation TurKol documentation TurKol documentation 11 documentation 0
	enumeration	238	documentation EIP documentation EIC Premium documentation High-speed train documentation 8 documentation 0
	enumeration	239	documentation SKM documentation PKP SKM w Trojmiescie documentation PKP SKM w Trojmiescie documentation 12 documentation 0
	enumeration	240	documentation SA documentation SAPSAN documentation High speed train documentation 8 documentation 0
	enumeration	242	documentation STR documentation STRIZH documentation Strizh night train documentation 13 documentation 0
	enumeration	243	documentation STR documentation STRIZH documentation Strizh interregional documentation 8 documentation 0
	enumeration	244	documentation NJ documentation NJ documentation NJ Night Jet documentation 13 documentation 0
	enumeration	245	documentation CAR documentation AUTOCAR

			documentation
			French regional buses (not sold via Hermes)
			documentation
			32
			documentation
			0
	enumeration	246	documentation
			RJX
			documentation
			RJX
			documentation
			RJX railjet xpress
			documentation
			8
			documentation
			0
	enumeration	247	documentation
			CJX
			documentation
			CJX
			documentation
			CJX cityjet xpress
			documentation
			10
			documentation
			0
	enumeration	248	documentation
			Night train BC
			documentation
			Night train BC
			documentation
			13
			documentation
			0
	enumeration	249	documentation
			TGV
			documentation
			TGV INOUI
			documentation
			TGV INOUI
			documentation
			8
			documentation
			0
	enumeration	250	documentation
			TGV
			documentation
			TGV INOUI
			documentation
			TGV INOUI DUPLEX (double decker TGV)
			documentation
			8
			documentation
			0
	enumeration	251	documentation
			ALI
			documentation
			Aare Linth
			documentation
			Aare Linth (Panorama Train)
			documentation
			10
			documentation
			0
	enumeration	252	documentation
			TGO
			documentation
			Treno Gottardo
			documentation
			Treno Gottardo (Panorama Train)
			documentation
			10
			documentation

	0 enumeration 253 documentation VAE documentation Voralpen-Express documentation Voralpen-Express (Panorama Train) documentation 10 documentation 0 enumeration 254 documentation LK documentation FRECCIALINK documentation FRECCIALINK documentation 32 documentation 0 enumeration 255 documentation FRN documentation FRECCIAROSSA NOTTE documentation FRECCIAROSSA NOTTE documentation 13 documentation 0 enumeration 256 documentation ABS documentation ANEK – SUPERFAST JOINT VENTURE documentation Domestic routes Crete documentation 33 documentation 0 enumeration 257 documentation ASF documentation ANEK – SUPERFAST JOINT VENTURE documentation International Lines Italy-Greece and V.V. documentation 33 documentation 0 enumeration 258 documentation BSF documentation BLUE STAR FERRIES MARITIME SA CO JOINT VENTURE documentation Domestic routes Greece documentation 33 documentation 0 enumeration 259 documentation HSW documentation BLUE STAR FERRIES MARITIME SA CO JOINT VENTURE documentation Domestic routes Greece documentation 33 documentation 0
source	<xs:element name="CommercialTrafficType" type="tap:type7009BrandNameCodeList"

	minOccurs="0"/>

element **PlannedTrainTechnicalData**

diagram

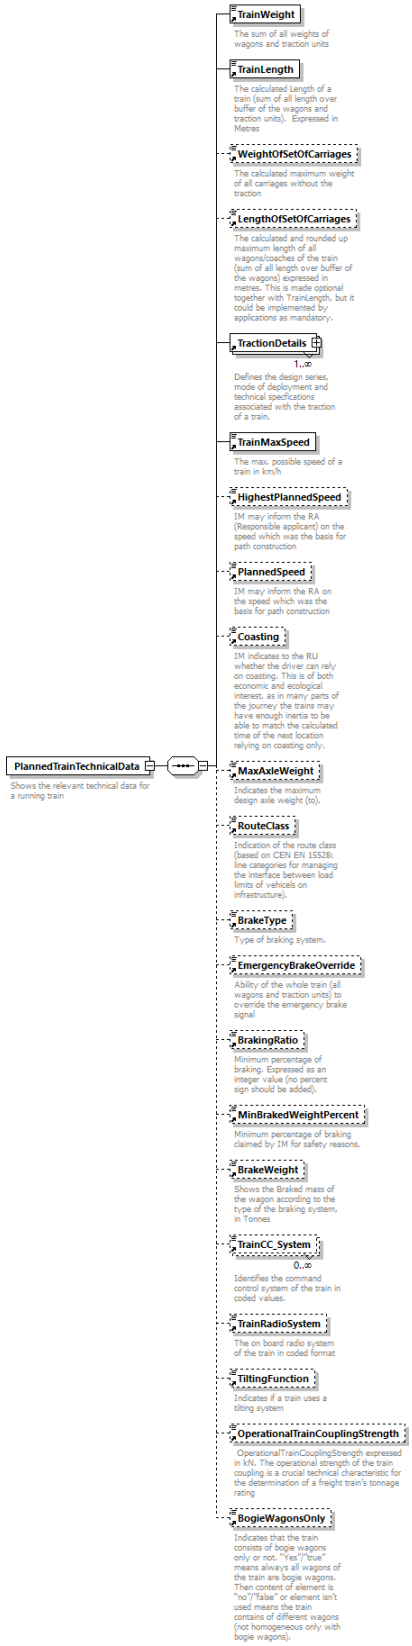

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**TrainWeight TrainLength WeightOfSetOfCarriages LengthOfSetOfCarriages TractionDetails TrainMaxSpeed HighestPlannedSpeed PlannedSpeed Coasting MaxAxleWeight RouteClass BrakeType EmergencyBrakeOverride BrakingRatio MinBrakedWeightPercent BrakeWeight TrainCC_System TrainRadioSystem TiltingFunction OperationalTrainCouplingStrength BogieWagonsOnly**
used by	element **PlannedTrainData**
annotation	documentation Shows the relevant technical data for a running train

source

```
<xs:element name="PlannedTrainTechnicalData">
  <xs:annotation>
    <xs:documentation>Shows the relevant technical data for a running
train</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="TrainWeight"/>
      <xs:element ref="TrainLength"/>
      <xs:element ref="WeightOfSetOfCarriages" minOccurs="0"/>
      <xs:element ref="LengthOfSetOfCarriages" minOccurs="0"/>
      <xs:element ref="TractionDetails" maxOccurs="unbounded"/>
      <xs:element ref="TrainMaxSpeed"/>
      <xs:element ref="HighestPlannedSpeed" minOccurs="0"/>
      <xs:element ref="PlannedSpeed" minOccurs="0"/>
      <xs:element ref="Coasting" minOccurs="0"/>
      <xs:element ref="MaxAxleWeight" minOccurs="0"/>
      <xs:element ref="RouteClass" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Indication of the route class (based on CEN EN 15528:
line categories for managing the interface between load limits of vehicels on
infrastructure).</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="BrakeType" minOccurs="0"/>
      <xs:element ref="EmergencyBrakeOverride" minOccurs="0"/>
      <xs:element ref="BrakingRatio" minOccurs="0"/>
      <xs:element ref="MinBrakedWeightPercent" minOccurs="0"/>
      <xs:element ref="BrakeWeight" minOccurs="0"/>
      <xs:element ref="TrainCC_System" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element ref="TrainRadioSystem" minOccurs="0"/>
      <xs:element ref="TiltingFunction" minOccurs="0"/>
      <xs:element ref="OperationalTrainCouplingStrength" minOccurs="0"/>
      <xs:element ref="BogieWagonsOnly" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **PlannedTransportIdentifiers**

diagram	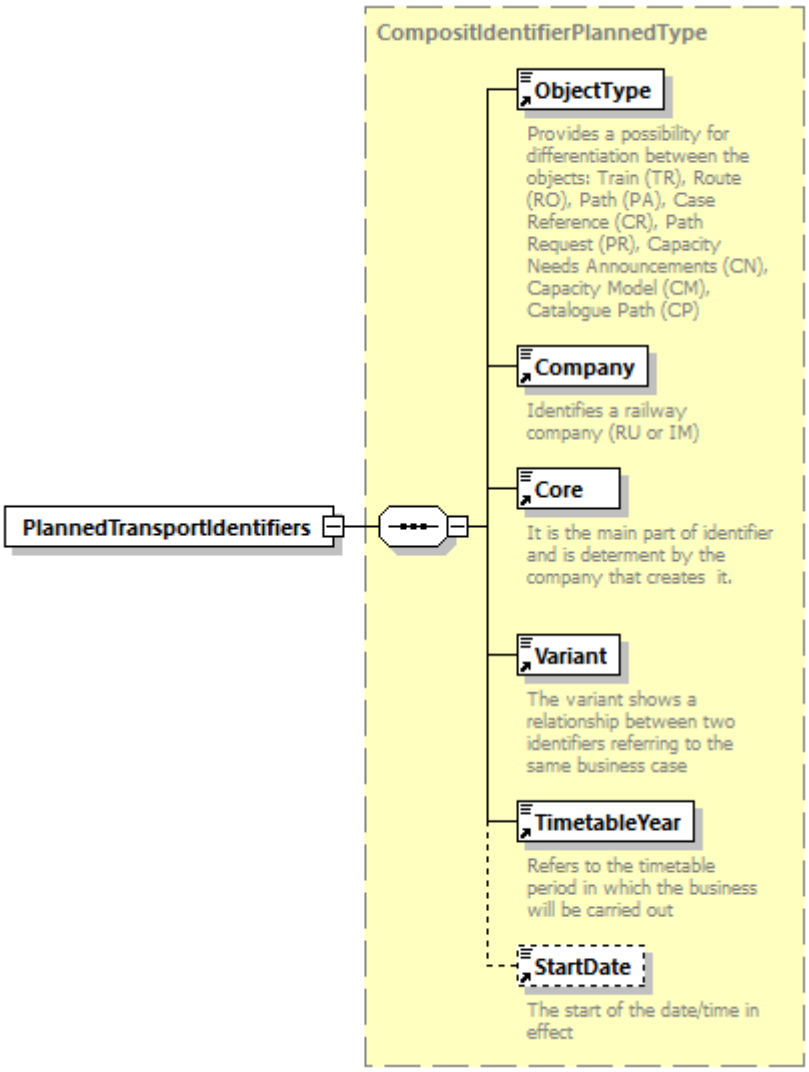
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompositIdentifierPlannedType**
properties	content complex
children	**ObjectType Company Core Variant TimetableYear StartDate**
used by	elements **ErrorMessage Identifiers**
source	`<xs:element name="PlannedTransportIdentifiers" type="CompositIdentifierPlannedType"/>`

element **PostalCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple

facets	Kind Value Annotation minLength 1 maxLength 10
annotation	documentation The postal code for the postal address
source	<xs:element name="PostalCode"> <xs:annotation> <xs:documentation>The postal code for the postal address</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="10"/> </xs:restriction> </xs:simpleType> </xs:element>

element **PreArrangedPath**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	element **PlannedJourneyLocation**
facets	Kind Value Annotation minLength 1 maxLength 9
annotation	documentation Path offered by the IMs with pre-defined frequencies, times of departures and destinations and routings suitable for freight transport services.
source	<xs:element name="PreArrangedPath"> <xs:annotation> <xs:documentation>Path offered by the IMs with pre-defined frequencies, times of departures and destinations and routings suitable for freight transport services. </xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="9"/> </xs:restriction> </xs:simpleType> </xs:element>

element **PreviousConsignmentNumber**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**ConsignmentIdent**
properties	content complex
used by	element **WIMO_Dataset/ConsignmentLevelData**
annotation	documentation This element shows the previous Reference number assigned to a consignment by a lead RU

source	`<xs:element name="PreviousConsignmentNumber" type="ConsignmentIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>This element shows the previous Reference number assigned to a consignment by a lead RU</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **PreviousResponsibleRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
used by	element **WIMO_Dataset/ConsignmentLevelData**
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation This element identifies the RU, who was responsible for the train operation on the journey section before an interchange point

source	`<xs:element name="PreviousResponsibleRU" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>This element identifies the RU, who was responsible for the train operation on the journey section before an interchange point</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **PrimaryLocationName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	complexType **LocationIdent**
facets	Kind Value Annotation minLength 1 maxLength 255

annotation	documentation Location Name in an offication language of the Country using the ISO Unicode alphabet
source	<xs:element name="PrimaryLocationName" type="FreeText"> <xs:annotation> <xs:documentation>Location Name in an offication language of the Country using the ISO Unicode alphabet</xs:documentation> </xs:annotation> </xs:element>

element **ProductionStation**

diagram	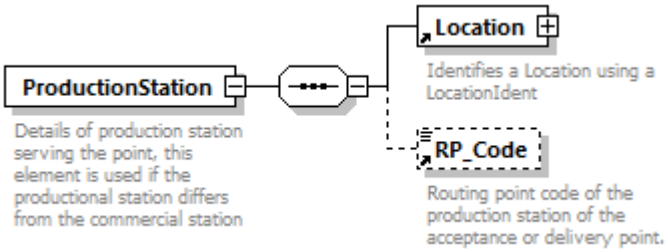
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Location** **RP_Code**
used by	elements **ConsignmentOrderMessage/COMS/COM/AcceptancePoint** **ConsignmentOrderMessage/COMS/COM/DeliveryPoint**
annotation	documentation Details of production station serving the point, this element is used if the productional station differs from the commercial station
source	<xs:element name="ProductionStation"> <xs:annotation> <xs:documentation>Details of production station serving the point, this element is used if the productional station differs from the commercial station</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Location"/> <xs:element ref="RP_Code" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **PushPullTrain**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **PlannedTrainData**
annotation	documentation Indicates that the train can change direction without shunting. This flag can be used only with TractionMode 1X, 2X, 5X.

source	<xs:element name="PushPullTrain" type="xs:boolean"> <xs:annotation> <xs:documentation>Indicates that the train can change direction without shunting. This flag can be used only with TractionMode 1X, 2X, 5X.</xs:documentation> </xs:annotation> </xs:element>

element **Quantity**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
used by	elements **ConsignmentOrderMessage/COMS/COM/AttachedDocuments LoadingTackles**
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation Amount of the loading tackles of the specified type.
source	<xs:element name="Quantity"> <xs:annotation> <xs:documentation>Amount of the loading tackles of the specified type.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ReceiptConfirmationMessage**

diagram

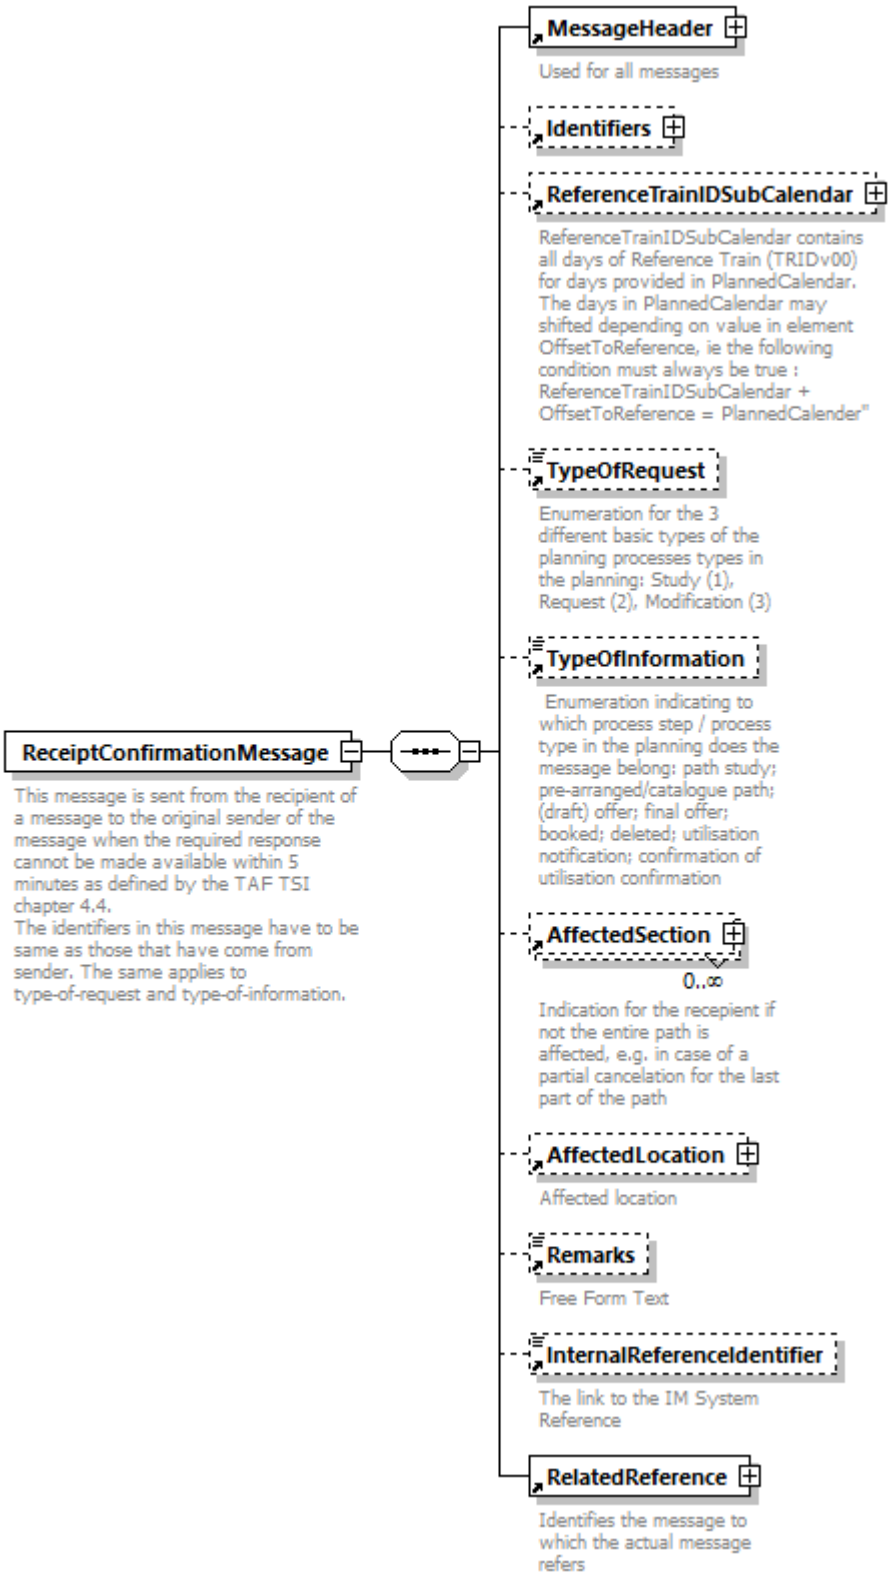

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	MessageHeader Identifiers ReferenceTrainIDSubCalendar TypeOfRequest TypeOfInformation AffectedSection AffectedLocation Remarks InternalReferenceIdentifier RelatedReference

annotation	documentation This message is sent from the recipient of a message to the original sender of the message when the required response cannot be made available within 5 minutes as defined by the TAF TSI chapter 4.4. The identifiers in this message have to be same as those that have come from sender. The same applies to type-of-request and type-of-information.

source

```
<xs:element name="ReceiptConfirmationMessage">
  <xs:annotation>
    <xs:documentation>This message is sent from the recipient of a message to the
original sender of the message when the required response cannot be made available
within 5 minutes as defined by the TAF TSI chapter 4.4.
The identifiers in this message have to be same as those that have come from sender.
The same applies to type-of-request and type-of-information.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="Identifiers" minOccurs="0"/>
      <xs:element ref="ReferenceTrainIDSubCalendar" minOccurs="0"/>
      <xs:element ref="TypeOfRequest" minOccurs="0"/>
      <xs:element ref="TypeOfInformation" minOccurs="0"/>
      <xs:element ref="AffectedSection" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element ref="AffectedLocation" minOccurs="0"/>
      <xs:element ref="Remarks" minOccurs="0"/>
      <xs:element ref="InternalReferenceIdentifier" minOccurs="0"/>
      <xs:element ref="RelatedReference"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Recipient**

diagram	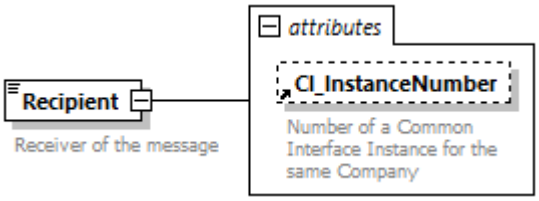
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **CompanyCode**
properties	content complex
used by	element **MessageHeader**

facets

Kind	Value	Annotation
minLength	4	
maxLength	4	
pattern	[0-9A-Z]{4}	

attributes

Name	Type	Use	Default	Fixed	Annotation
CI_InstanceNumber	**Numeric2-2**				documentation Number of a Common Interface Instance for the same Company

annotation	documentation Receiver of the message

source

```
<xs:element name="Recipient">
  <xs:annotation>
    <xs:documentation>Receiver of the message</xs:documentation>
  </xs:annotation>
  <xs:complexType>
```

```
    <xs:simpleContent>
      <xs:extension base="CompanyCode">
        <xs:attribute ref="CI_InstanceNumber"/>
      </xs:extension>
    </xs:simpleContent>
  </xs:complexType>
</xs:element>
```

element **ReferencedLocationDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements **DelayEventReport InterruptionPoint TrainAtLocation TrainLocationReport**
annotation	documentation Reference to original planned Date and Time agreed by all involved IMs and RUs.

source	`<xs:element name="ReferencedLocationDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Reference to original planned Date and Time agreed by all involved IMs and RUs. </xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **ReferenceNumbers**

diagram	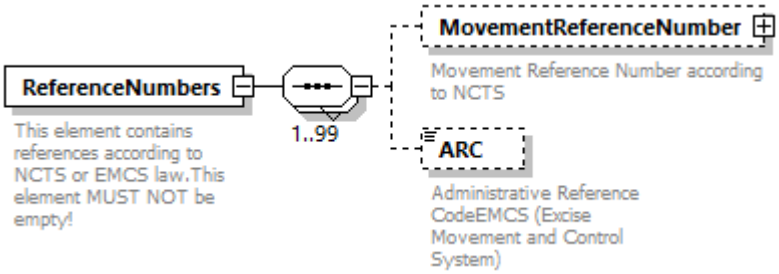
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MovementReferenceNumber ARC**
used by	elements **Wagons/GoodsInWagon ILU_Details ITU_Details Goods/Packing**
annotation	documentation This element contains references according to NCTS or EMCS law.This element MUST NOT be empty!

source	`<xs:element name="ReferenceNumbers">`
	`  <xs:annotation>`
	`  <xs:documentation>This element contains references according to NCTS or EMCS law.This element MUST NOT be empty!</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence maxOccurs="99">`
	`  <xs:element name="MovementReferenceNumber" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Movement Reference Number according to`

```
NCTS</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="MRN_Type"/>
            <xs:element name="MRN_Number">
              <xs:annotation>
                <xs:documentation>Movement reference number. Data element in
accordance with Regulation (EC) 1875/2006).</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="21"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="ARC" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Administrative Reference CodeEMCS (Excise Movement and
Control System)</xs:documentation>
          <xs:documentation>CODE: EU (EC) No 684/2009</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:length value="21"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ReferenceNumbers/MovementReferenceNumber**

diagram	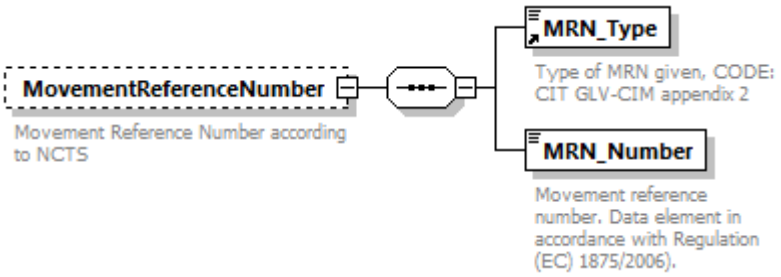
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	MRN_Type MRN_Number
annotation	documentation Movement Reference Number according to NCTS

source	`<xs:element name="MovementReferenceNumber" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Movement Reference Number according to NCTS</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`

```
      <xs:element ref="MRN_Type"/>
      <xs:element name="MRN_Number">
        <xs:annotation>
          <xs:documentation>Movement reference number. Data element in accordance
with Regulation (EC) 1875/2006).</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="21"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ReferenceNumbers/MovementReferenceNumber/MRN_Number**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 21
annotation	documentation Movement reference number. Data element in accordance with Regulation (EC) 1875/2006).

source	`<xs:element name="MRN_Number">`
	`  <xs:annotation>`
	`  <xs:documentation>Movement reference number. Data element in accordance with Regulation (EC) 1875/2006).</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="21"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **ReferenceNumbers/ARC**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1

	content simple
facets	Kind Value Annotation length 21
annotation	documentation Administrative Reference CodeEMCS (Excise Movement and Control System) documentation CODE: EU (EC) No 684/2009
source	<xs:element name="ARC" minOccurs="0"> <xs:annotation> <xs:documentation>Administrative Reference CodeEMCS (Excise Movement and Control System)</xs:documentation> <xs:documentation>CODE: EU (EC) No 684/2009</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:length value="21"/> </xs:restriction> </xs:simpleType> </xs:element>

element **ReferenceOTN**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	OperationalTrainNumberIdentifier
used by	elements ChangeofTrackMessage TrainAtLocation TrainCompositionMessage TrainDelayCauseMessage TrainJourneyModificationMessage TrainReadyMessage TrainRunningForecastMessage TrainRunningInformationMessage TrainRunningInterruptionMessage
source	<xs:element name="ReferenceOTN"> <xs:complexType> <xs:sequence> <xs:element ref="OperationalTrainNumberIdentifier"/> </xs:sequence> </xs:complexType> </xs:element>

element **ReferenceTrainIDSubCalendar**

diagram	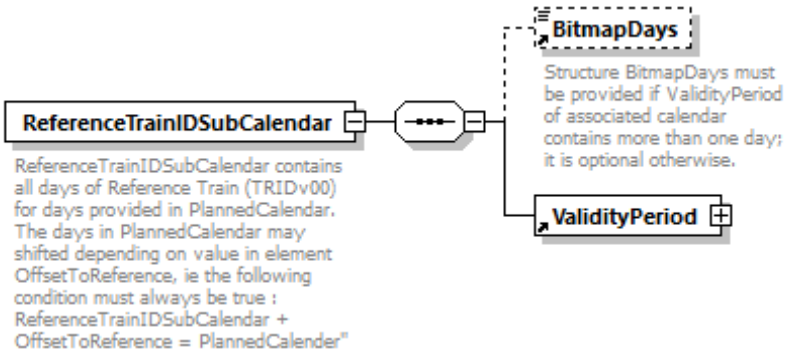
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	BitmapDays ValidityPeriod

used by	elements PathCanceledMessage PathConfirmedMessage PathDetailsMessage PathDetailsRefusedMessage PathNotAvailableMessage PathRequestMessage ReceiptConfirmationMessage
annotation	documentation ReferenceTrainIDSubCalendar contains all days of Reference Train (TRIDv00) for days provided in PlannedCalendar. The days in PlannedCalendar may shifted depending on value in element OffsetToReference, ie the following condition must always be true : ReferenceTrainIDSubCalendar + OffsetToReference = PlannedCalender"
source	<xs:element name="ReferenceTrainIDSubCalendar"> <xs:annotation> <xs:documentation>ReferenceTrainIDSubCalendar contains all days of Reference Train (TRIDv00) for days provided in PlannedCalendar. The days in PlannedCalendar may shifted depending on value in element OffsetToReference, ie the following condition must always be true : ReferenceTrainIDSubCalendar + OffsetToReference = PlannedCalender"</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="BitmapDays" minOccurs="0"/> <xs:element ref="ValidityPeriod"/> </xs:sequence> </xs:complexType> </xs:element>

element **RegenerativeBrake**

diagram	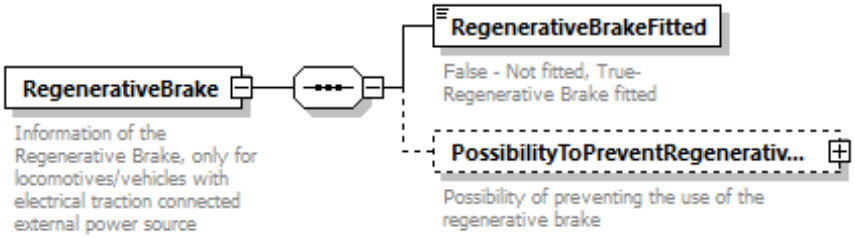
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	RegenerativeBrakeFitted PossibilityToPreventRegenerativeBrake
used by	element TrainCompositionJourneySection/LocoIdent
annotation	documentation Information of the Regenerative Brake, only for locomotives/vehicles with electrical traction connected external power source
source	<xs:element name="RegenerativeBrake"> <xs:annotation> <xs:documentation>Information of the Regenerative Brake, only for locomotives/vehicles with electrical traction connected external power source</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="RegenerativeBrakeFitted" type="xs:boolean" minOccurs="1"> <xs:annotation> <xs:documentation>False - Not fitted, True- Regenerative Brake fitted</xs:documentation> </xs:annotation> </xs:element> <xs:element name="PossibilityToPreventRegenerativeBrake" minOccurs="0"> <xs:annotation> <xs:documentation>Possibility of preventing the use of the regenerative brake </xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence>

```
            <xs:element name="PossibilityToPreventUseOfRegenerativeBrake"
type="xs:boolean" minOccurs="1">
              <xs:annotation>
                <xs:documentation>False - not fitted, True - fitted the possibility
of preventing the use of the regenerative brake </xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="RegenerativeBrakePreventionInUse" type="xs:boolean"
minOccurs="1">
              <xs:annotation>
                <xs:documentation>False - Regenerative Brake Prevention not in use,
True Regenerative Brake Prevention in use (obligatory if fitted with the possibility
of preventing the use of the regenerative brake)</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RegenerativeBrake/RegenerativeBrakeFitted**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
annotation	documentation False - Not fitted, True- Regenerative Brake fitted

source	`<xs:element name="RegenerativeBrakeFitted" type="xs:boolean" minOccurs="1">`
	`  <xs:annotation>`
	`  <xs:documentation>False - Not fitted, True- Regenerative Brake fitted</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RegenerativeBrake/PossibilityToPreventRegenerativeBrake**

diagram	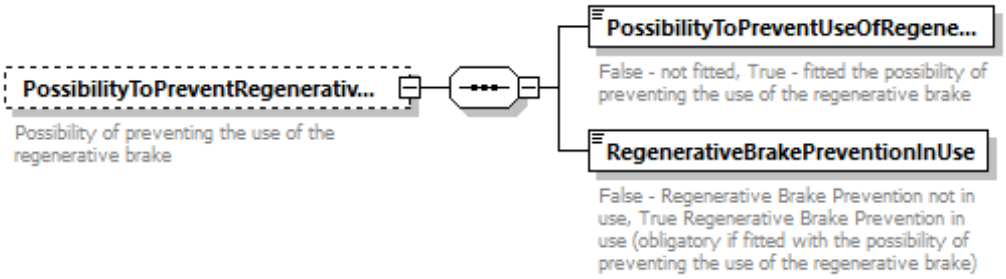
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	PossibilityToPreventUseOfRegenerativeBrake RegenerativeBrakePreventionInUse

annotation	documentation Possibility of preventing the use of the regenerative brake
source	<xs:element name="PossibilityToPreventRegenerativeBrake" minOccurs="0"> <xs:annotation> <xs:documentation>Possibility of preventing the use of the regenerative brake</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="PossibilityToPreventUseOfRegenerativeBrake" type="xs:boolean" minOccurs="1"> <xs:annotation> <xs:documentation>False - not fitted, True - fitted the possibility of preventing the use of the regenerative brake </xs:documentation> </xs:annotation> </xs:element> <xs:element name="RegenerativeBrakePreventionInUse" type="xs:boolean" minOccurs="1"> <xs:annotation> <xs:documentation>False - Regenerative Brake Prevention not in use, True Regenerative Brake Prevention in use (obligatory if fitted with the possibility of preventing the use of the regenerative brake)</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **RegenerativeBrake/PossibilityToPreventRegenerativeBrake/PossibilityToPreventUseOfRegenerativeBrake**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
annotation	documentation False - not fitted, True - fitted the possibility of preventing the use of the regenerative brake
source	<xs:element name="PossibilityToPreventUseOfRegenerativeBrake" type="xs:boolean" minOccurs="1"> <xs:annotation> <xs:documentation>False - not fitted, True - fitted the possibility of preventing the use of the regenerative brake </xs:documentation> </xs:annotation> </xs:element>

element **RegenerativeBrake/PossibilityToPreventRegenerativeBrake/RegenerativeBrakePreventionInUse**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**

properties	content simple
annotation	documentation False - Regenerative Brake Prevention not in use, True Regenerative Brake Prevention in use (obligatory if fitted with the possibility of preventing the use of the regenerative brake)
source	<xs:element name="RegenerativeBrakePreventionInUse" type="xs:boolean" minOccurs="1"> <xs:annotation> <xs:documentation>False - Regenerative Brake Prevention not in use, True Regenerative Brake Prevention in use (obligatory if fitted with the possibility of preventing the use of the regenerative brake)</xs:documentation> </xs:annotation> </xs:element>

element **RelatedIdentifier**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	element **RelatedReference**
facets	Kind Value Annotation minLength 1 maxLength 255
source	<xs:element name="RelatedIdentifier" type="FreeText"/>

element **RelatedPlannedTransportIdentifiers**

diagram	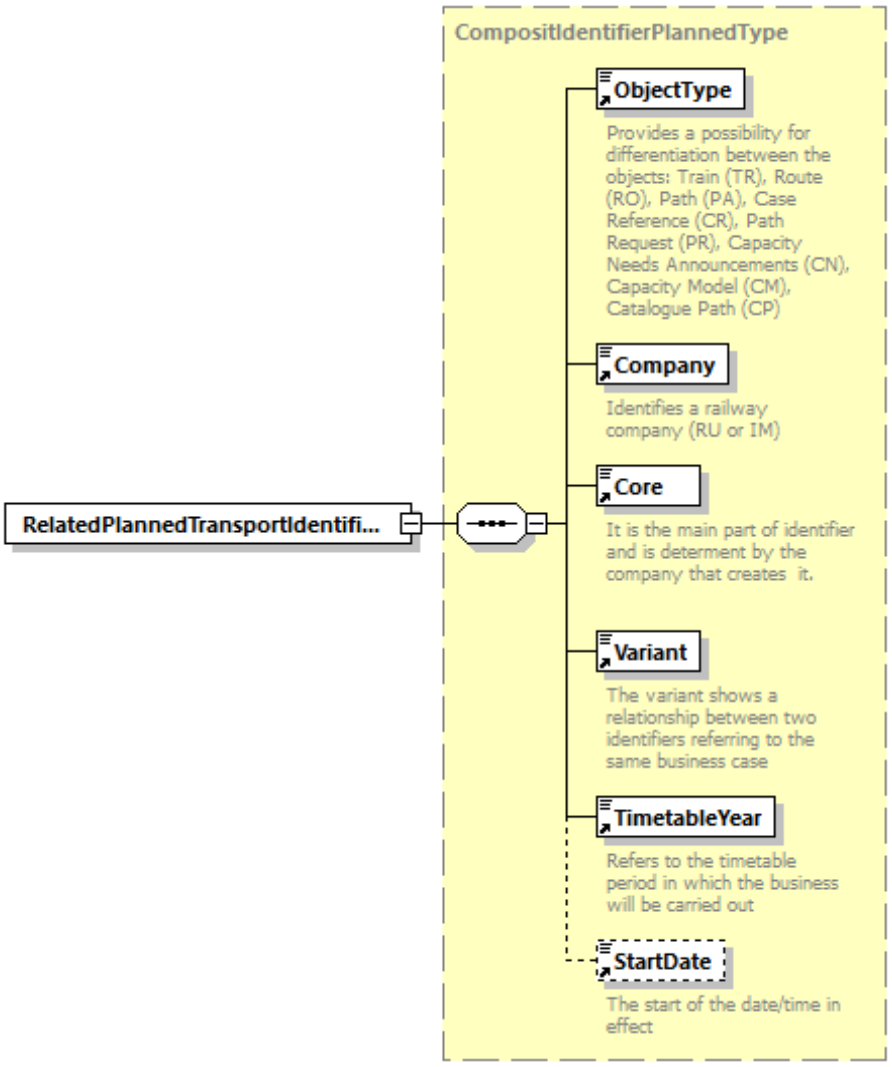
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompositIdentifierPlannedType**
properties	content complex
children	**ObjectType Company Core Variant TimetableYear StartDate**
used by	element **Identifiers**
source	`<xs:element name="RelatedPlannedTransportIdentifiers" type="CompositIdentifierPlannedType"/>`

element **RelatedReference**

diagram	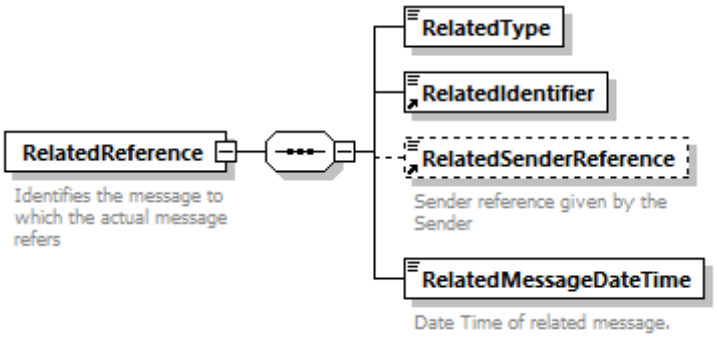
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	RelatedType RelatedIdentifier RelatedSenderReference RelatedMessageDateTime
used by	elements ReceiptConfirmationMessage WagonETI_ETA_Message
annotation	documentation Identifies the message to which the actual message refers
source	<xs:element name="RelatedReference"> <xs:annotation> <xs:documentation>Identifies the message to which the actual message refers</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="RelatedType" type="MessageCode"/> <xs:element ref="RelatedIdentifier"/> <xs:element ref="RelatedSenderReference" minOccurs="0"/> <xs:element name="RelatedMessageDateTime" type="xs:dateTime"> <xs:annotation> <xs:documentation>Date Time of related message. </xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **RelatedReference/RelatedType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	MessageCode
properties	content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 9999
source	<xs:element name="RelatedType" type="MessageCode"/>

element **RelatedReference/RelatedMessageDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation Date Time of related message.

source	`<xs:element name="RelatedMessageDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Date Time of related message. </xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RelatedSenderReference**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	element **RelatedReference**
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Sender reference given by the Sender

source	`<xs:element name="RelatedSenderReference" type="FreeText">`
	`  <xs:annotation>`
	`  <xs:documentation>Sender reference given by the Sender</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RelatedTransportOperationalIdentifiers**

diagram	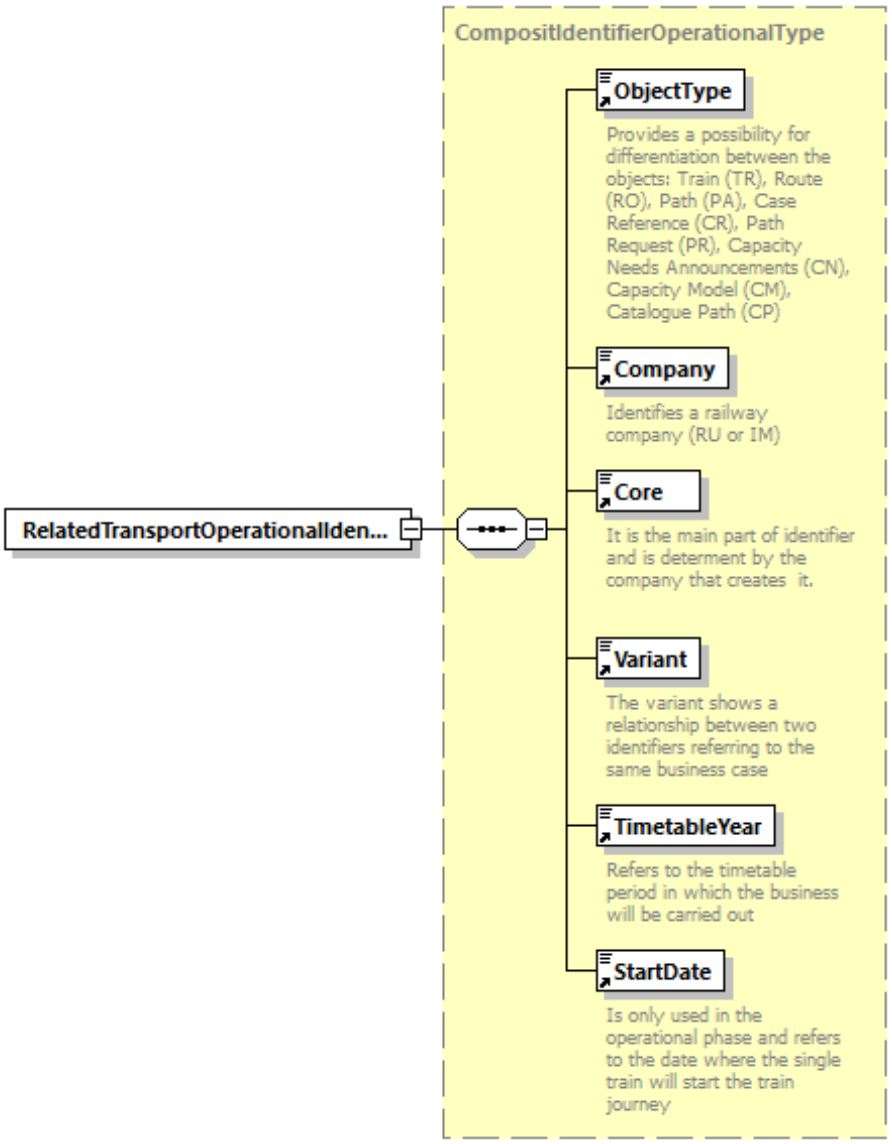
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompositIdentifierOperationalType**
properties	content complex
children	**ObjectType Company Core Variant TimetableYear StartDate**
used by	element **TrainOperationalIdentification**
source	`<xs:element name="RelatedTransportOperationalIdentifiers" type="CompositIdentifierOperationalType"/>`

element **Remarks**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**

properties	content simple
used by	elements **DelayCauseTime** **InterruptionPoint** **ReceiptConfirmationMessage** **TrainJourneyModificationMessage**
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Free Form Text

source	`<xs:element name="Remarks" type="FreeText">`
	`  <xs:annotation>`
	`  <xs:documentation>Free Form Text</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RequestedCalendar**

diagram	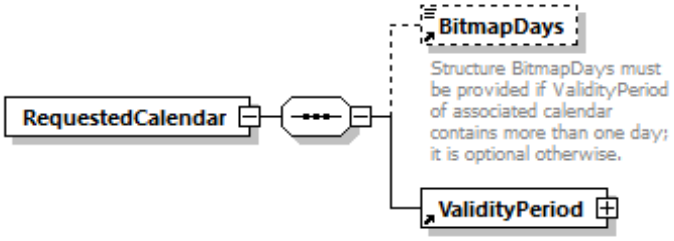
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**BitmapDays** **ValidityPeriod**
used by	element **PathInformation**

source	`<xs:element name="RequestedCalendar">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="BitmapDays" minOccurs="0"/>`
	`  <xs:element ref="ValidityPeriod"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **RequestedPeriod**

diagram	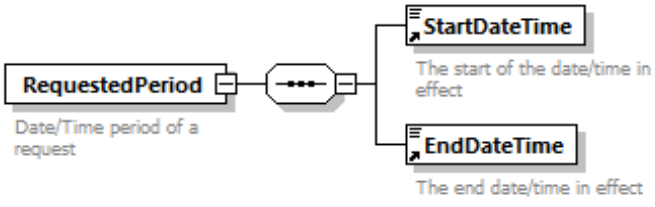
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**StartDateTime** **EndDateTime**
annotation	documentation Date/Time period of a request

source	`<xs:element name="RequestedPeriod">`
	`  <xs:annotation>`
	`  <xs:documentation>Date/Time period of a request</xs:documentation>`

```
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="StartDateTime"/>
      <xs:element ref="EndDateTime"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RequestedTimeframe**

diagram

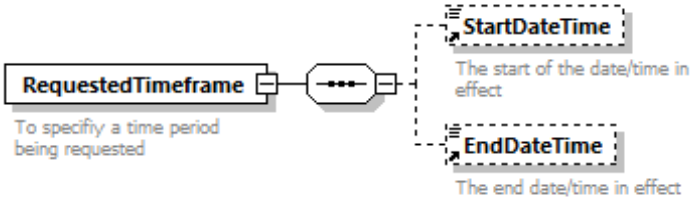

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**StartDateTime EndDateTime**
annotation	documentation To specifiy a time period being requested

source

```
<xs:element name="RequestedTimeframe">
  <xs:annotation>
    <xs:documentation>To specifiy a time period being requested</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="StartDateTime" minOccurs="0"/>
      <xs:element ref="EndDateTime" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **ResponsibilityActualSection**

diagram

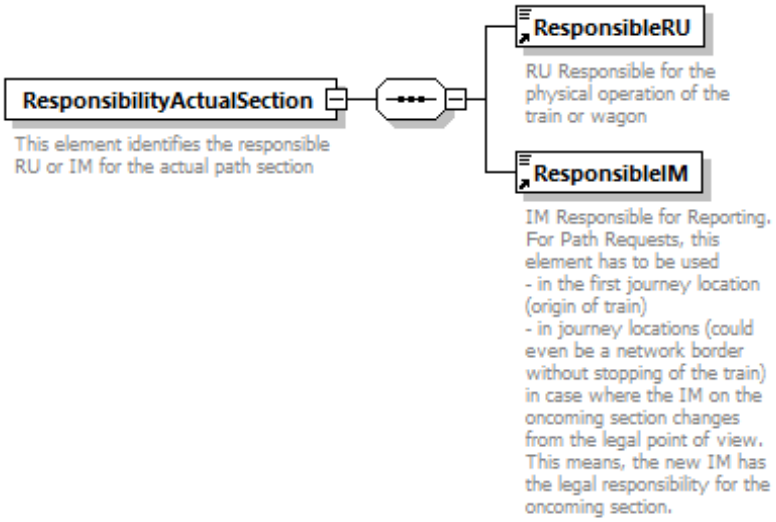

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**ResponsibleRU** **ResponsibleIM**
used by	element **JourneySection**
annotation	documentation This element identifies the responsible RU or IM for the actual path section
source	<xs:element name="ResponsibilityActualSection"> <xs:annotation> <xs:documentation>This element identifies the responsible RU or IM for the actual path section</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="ResponsibleRU"/> <xs:element ref="ResponsibleIM"/> </xs:sequence> </xs:complexType> </xs:element>

element **ResponsibilityNextSection**

diagram	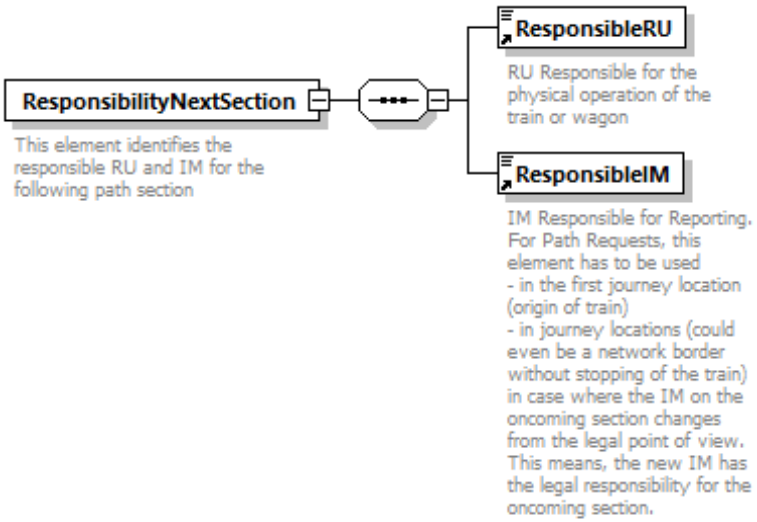
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**ResponsibleRU** **ResponsibleIM**
used by	element **JourneySection**
annotation	documentation This element identifies the responsible RU and IM for the following path section
source	<xs:element name="ResponsibilityNextSection"> <xs:annotation> <xs:documentation>This element identifies the responsible RU and IM for the following path section</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="ResponsibleRU"/> <xs:element ref="ResponsibleIM"/> </xs:sequence>

```
  </xs:complexType>
</xs:element>
```

element **ResponsibleApplicant**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **CompanyCode**

properties: content simple

used by: element **PlannedJourneyLocation**

facets

Kind	Value	Annotation
minLength	4	
maxLength	4	
pattern	[0-9A-Z]{4}	

annotation: documentation
This element has to be used for the whle journey where the applicant has made the request

source

```
<xs:element name="ResponsibleApplicant">
  <xs:annotation>
    <xs:documentation>This element has to be used for the whle journey where the
applicant has made the request</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="CompanyCode"/>
  </xs:simpleType>
</xs:element>
```

element **ResponsibleIM**

diagram

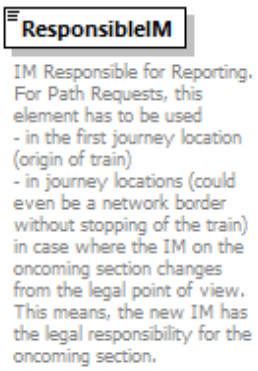

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: **CompanyCode**

properties: content simple

used by: elements **LocationPrimaryInformation** **PlannedJourneyLocation** **ResponsibilityActualSection** **ResponsibilityNextSection**

facets

Kind	Value	Annotation
minLength	4	
maxLength	4	
pattern	[0-9A-Z]{4}	

annotation	documentation IM Responsible for Reporting. For Path Requests, this element has to be used - in the first journey location (origin of train) - in journey locations (could even be a network border without stopping of the train) in case where the IM on the oncoming section changes from the legal point of view. This means, the new IM has the legal responsibility for the oncoming section.
source	<xs:element name="ResponsibleIM" type="CompanyCode"> <xs:annotation> <xs:documentation>IM Responsible for Reporting. For Path Requests, this element has to be used - in the first journey location (origin of train) - in journey locations (could even be a network border without stopping of the train) in case where the IM on the oncoming section changes from the legal point of view. This means, the new IM has the legal responsibility for the oncoming section. </xs:documentation> </xs:annotation> </xs:element>

element **ResponsibleRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	CompanyCode
properties	content simple
used by	elements ExceptionPoint PlannedJourneyLocation ResponsibilityActualSection ResponsibilityNextSection TrainDelayCauseMessage TrainReadyMessage TrainRunningForecastMessage TrainRunningInformationMessage TrainRunningInterruptionMessage
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation RU Responsible for the physical operation of the train or wagon
source	<xs:element name="ResponsibleRU" type="CompanyCode"> <xs:annotation> <xs:documentation>RU Responsible for the physical operation of the train or wagon</xs:documentation> </xs:annotation> </xs:element>

element **RestrictionsDueToLoadOrDamage**

diagram	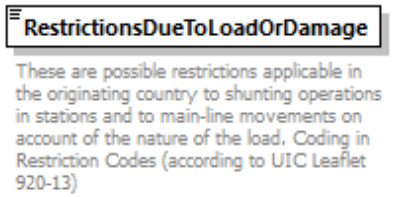
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	RestrictionCodes

properties	content simple
used by	element **WagonOperationalData**

facets

Kind	Value	Annotation
enumeration	07	documentation F - Shunt only when hand brake operable with ground staff
enumeration	08	documentation F - Tank wagon loaded with liquid
enumeration	09	documentation F - Wagon loaded with people
enumeration	11	documentation F - Wagon other than bogie wagon with wheelbase of more than 9 metres
enumeration	12	documentation F - Bogie wagon with distance between wheels of more than 14 metres and up to and including a distance of 17,50 metres
enumeration	13	documentation F - Bogie wagon with distance between wheels of more than 17,50 metres
enumeration	15	documentation F - Wagon not allowed over the hump
enumeration	16	documentation F - Do not fly shunt or gravity shunt (3 red triangles)
enumeration	18	documentation F - Must not use active braking equipment
enumeration	25	documentation F - Gas carrying tank wagon with orange side stripe
enumeration	30	documentation P (+F) - CCS fault (see CCS coding list)
enumeration	31	documentation P (+F) - Braking system fault
enumeration	32	documentation P (+F) - Wheelset, bogie fault
enumeration	33	documentation P (+F) - Headlighting or back lighting fault
enumeration	34	documentation P (+F) - Front glass broken
enumeration	35	documentation P (+F) - Horn fault
enumeration	36	documentation P (+F) - Radio fault
enumeration	37	documentation P (+F) - Energy supply fault
enumeration	38	documentation P (+F) - Traction or motor fault
enumeration	39	documentation P - Access door fault
enumeration	41	documentation F - Place this wagon at the front of the train
enumeration	42	documentation F - Place this wagon at the rear of the train
enumeration	50	documentation P (+F) - Speed restriction
enumeration	52	documentation P (+F) - Diesel locomotive instead of electric locomotive
enumeration	61	documentation F - Wagon forming part of a consignment of several wagons
enumeration	62	documentation F - Wagon forming part of a group of wagons from which it must not be separated
enumeration	63	documentation F (+P) - Special consignment or (for Passengers trains) loading/cinematic gauge larger than the planned one
enumeration	68	documentation F - First or last wagon of a wagon group from which it must not be separated
enumeration	70	documentation F - Shunt with care (1 red triangle)
enumeration	71	documentation F - Shunt with special care (2 red triangle)
enumeration	90	documentation P - Train planned with passengers operated without passengers
enumeration	91	documentation P - Train planned without passengers operated with passengers
enumeration	92	documentation P - Train planned with hauled rolling stock and operated without any coaches (light engine)

	enumeration 94 documentation F - Gas carrying wagon without orange side stripe enumeration 99 documentation P - Other
annotation	documentation These are possible restrictions applicable in the originating country to shunting operations in stations and to main-line movements on account of the nature of the load. Coding in Restriction Codes (according to UIC Leaflet 920-13)
source	<xs:element name="RestrictionsDueToLoadOrDamage" type="RestrictionCodes"> <xs:annotation> <xs:documentation>These are possible restrictions applicable in the originating country to shunting operations in stations and to main-line movements on account of the nature of the load. Coding in Restriction Codes (according to UIC Leaflet 920-13)</xs:documentation> </xs:annotation> </xs:element>

element **RevisedRequest**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **PathDetailsRefusedMessage**
annotation	documentation Indication for the IM whether wait because the RU will send a revised request soon or to make an alternative offer.
source	<xs:element name="RevisedRequest" type="xs:boolean"> <xs:annotation> <xs:documentation>Indication for the IM whether wait because the RU will send a revised request soon or to make an alternative offer.</xs:documentation> </xs:annotation> </xs:element>

element **RID**

diagram	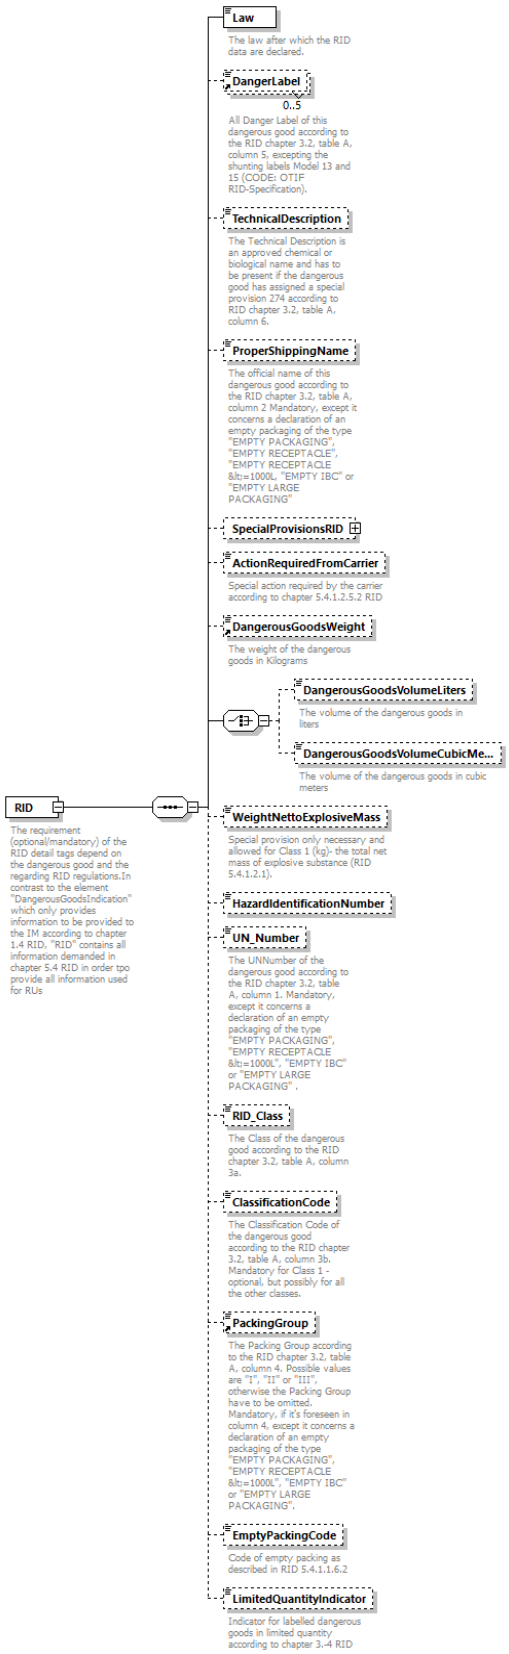
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	Law DangerLabel TechnicalDescription ProperShippingName SpecialProvisionsRID ActionRequiredFromCarrier DangerousGoodsWeight DangerousGoodsVolumeLiters DangerousGoodsVolumeCubicMeters WeightNettoExplosiveMass HazardIdentificationNumber UN_Number RID_Class ClassificationCode PackingGroup EmptyPackingCode LimitedQuantityIndicator
used by	elements Goods Wagons/GoodsInWagon
annotation	documentation The requirement (optional/mandatory) of the RID detail tags depend on the dangerous good and the regarding RID regulations.In contrast to the element "DangerousGoodsIndication" which only provides information to be provided to the IM according to chapter 1.4 RID, "RID" contains all information demanded in chapter 5.4 RID in order tpo provide all information used for RUs

source

```
<xs:element name="RID">
  <xs:annotation>
    <xs:documentation>The requirement (optional/mandatory) of the RID detail tags
depend on the dangerous good and the regarding RID regulations.In contrast to the
element "DangerousGoodsIndication" which only provides information to be provided to
the IM according to chapter 1.4 RID, "RID" contains all information demanded in
chapter 5.4 RID in order tpo provide all information used for RUs</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Law">
        <xs:annotation>
          <xs:documentation>The law after which the RID data are
declared.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:int">
            <xs:enumeration value="2013"/>
            <xs:enumeration value="2015"/>
            <xs:enumeration value="2017"/>
            <xs:enumeration value="2019"/>
            <xs:enumeration value="2021"/>
            <xs:enumeration value="2023"/>
            <xs:enumeration value="2025"/>
            <xs:enumeration value="2027"/>
            <xs:enumeration value="2029"/>
            <xs:enumeration value="2031"/>
            <xs:enumeration value="2033"/>
            <xs:enumeration value="2035"/>
            <xs:enumeration value="2037"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="DangerLabel" minOccurs="0" maxOccurs="5"/>
      <xs:element name="TechnicalDescription" minOccurs="0">
        <xs:annotation>
          <xs:documentation>The Technical Description is an approved chemical or
biological name and has to be present if the dangerous good has assigned a special
provision 274 according to RID chapter 3.2, table A, column 6.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="350"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ProperShippingName" minOccurs="0">
        <xs:annotation>
          <xs:documentation>The official name of this dangerous good according to the
RID chapter 3.2, table A, column 2 Mandatory, except it concerns a declaration of an
empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE", "EMPTY RECEPTACLE
&lt;=1000L, "EMPTY IBC" or "EMPTY LARGE PACKAGING"</xs:documentation>
        </xs:annotation>
```

```
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="350"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SpecialProvisionsRID" minOccurs="0">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="SpecialProvisionsRID3.3" minOccurs="0" maxOccurs="25">
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="5"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="SpecialProvisionRID5.4" minOccurs="0" maxOccurs="25">
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="350"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Waste" type="xs:boolean" minOccurs="0"/>
            <xs:element name="SpecialProvisionsEnvironment" minOccurs="0">
              <xs:complexType>
                <xs:choice>
                  <xs:element name="EnvironmentalHazardous" type="xs:boolean"/>
                  <xs:element name="MarinePollutant" type="xs:boolean"/>
                </xs:choice>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="ActionRequiredFromCarrier" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Special action required by the carrier according to
chapter 5.4.1.2.5.2 RID</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="350"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="DangerousGoodsWeight" minOccurs="0">
        <xs:annotation>
          <xs:documentation>The weight of the dangerous goods in
Kilograms</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:choice>
        <xs:element name="DangerousGoodsVolumeLiters" type="VolumeValueLiter"
minOccurs="0">
          <xs:annotation>
            <xs:documentation>The volume of the dangerous goods in
liters</xs:documentation>
          </xs:annotation>
        </xs:element>
```

```
        <xs:element name="DangerousGoodsVolumeCubicMeters" type="VolumeValue"
minOccurs="0">
          <xs:annotation>
            <xs:documentation>The volume of the dangerous goods in cubic
meters</xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:choice>
      <xs:element name="WeightNettoExplosiveMass" type="WeightValueKilo"
minOccurs="0">
        <xs:annotation>
          <xs:documentation>Special provision only necessary and allowed for Class 1
(kg)- the total net mass of explosive substance (RID 5.4.1.2.1).</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="HazardIdentificationNumber" minOccurs="0">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="2"/>
            <xs:maxLength value="4"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="UN_Number" minOccurs="0">
        <xs:annotation>
          <xs:documentation>The UNNumber of the dangerous good according to the RID
chapter 3.2, table A, column 1. Mandatory, except it concerns a declaration of an
empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE &lt;=1000L", "EMPTY
IBC" or "EMPTY LARGE PACKAGING" .</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:length value="4"/>
            <xs:pattern value="\d*[1-9]\d*"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="RID_Class" minOccurs="0">
        <xs:annotation>
          <xs:documentation>The Class of the dangerous good according to the RID
chapter 3.2, table A, column 3a.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="4"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ClassificationCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>The Classification Code of the dangerous good according
to the RID chapter 3.2, table A, column 3b. Mandatory for Class 1 - optional, but
possibly for all the other classes.</xs:documentation>
          <xs:documentation>CODE: OTIF RID-Specification</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="4">
              <xs:annotation>
                <xs:documentation>present only with class 1</xs:documentation>
              </xs:annotation>
            </xs:maxLength>
```

```
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="PackingGroup" minOccurs="0"/>
      <xs:element name="EmptyPackingCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Code of empty packing as described in RID
5.4.1.1.6.2</xs:documentation>
          <xs:documentation>CODE: OTIF RID-Specification, element EMPTY has been
added as 'dummy' until the code list has been finished and approved.
</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="01">
              <xs:annotation>
                <xs:documentation>EMPTY PACKAGING</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="02">
              <xs:annotation>
                <xs:documentation>EMPTY CONTAINER</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="03">
              <xs:annotation>
                <xs:documentation>EMPTY IBC</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="04">
              <xs:annotation>
                <xs:documentation>EMPTY LARGE PACKAGING</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="05">
              <xs:annotation>
                <xs:documentation>EMPTY TANK-VEHICLE</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="06">
              <xs:annotation>
                <xs:documentation>EMPTY TANK-WAGON</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="07">
              <xs:annotation>
                <xs:documentation>EMPTY DETACHABLE TANK</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="08">
              <xs:annotation>
                <xs:documentation>EMPTY DEMOUNTABLE TANK</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="09">
              <xs:annotation>
                <xs:documentation>EMPTY TANK-CONTAINER</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="10">
              <xs:annotation>
                <xs:documentation>EMPTY PORTABLE TANK</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
```

```
            <xs:enumeration value="11">
              <xs:annotation>
                <xs:documentation>EMPTY BATTERY-VEHICLE</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="12">
              <xs:annotation>
                <xs:documentation>EMPTY BATTERY-WAGON</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="13">
              <xs:annotation>
                <xs:documentation>EMPTY LARGE CONTAINER WITH MULTIPLE LINKED
ELEMENTS</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="14">
              <xs:annotation>
                <xs:documentation>EMPTY VEHICLE</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="15">
              <xs:annotation>
                <xs:documentation>EMPTY WAGON</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="16">
              <xs:annotation>
                <xs:documentation>EMPTY RECEPTACLE le 1000L</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="17">
              <xs:annotation>
                <xs:documentation>EMPTY RECEPTACLE gt 1000L</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="18">
              <xs:annotation>
                <xs:documentation>EMPTY</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="LimitedQuantityIndicator" type="xs:boolean" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Indicator for labelled dangerous goods in limited
quantity according to chapter 3.-4 RID</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RID/Law**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	restriction of **xs:int**
properties	content simple
facets	Kind / Value / Annotation enumeration 2013 enumeration 2015 enumeration 2017 enumeration 2019 enumeration 2021 enumeration 2023 enumeration 2025 enumeration 2027 enumeration 2029 enumeration 2031 enumeration 2033 enumeration 2035 enumeration 2037
annotation	documentation The law after which the RID data are declared.

source	`<xs:element name="Law">`
	`<xs:annotation>`
	`<xs:documentation>The law after which the RID data are declared.</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:int">`
	`<xs:enumeration value="2013"/>`
	`<xs:enumeration value="2015"/>`
	`<xs:enumeration value="2017"/>`
	`<xs:enumeration value="2019"/>`
	`<xs:enumeration value="2021"/>`
	`<xs:enumeration value="2023"/>`
	`<xs:enumeration value="2025"/>`
	`<xs:enumeration value="2027"/>`
	`<xs:enumeration value="2029"/>`
	`<xs:enumeration value="2031"/>`
	`<xs:enumeration value="2033"/>`
	`<xs:enumeration value="2035"/>`
	`<xs:enumeration value="2037"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **RID/TechnicalDescription**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple

facets	Kind Value Annotation minLength 1 maxLength 350
annotation	documentation The Technical Description is an approved chemical or biological name and has to be present if the dangerous good has assigned a special provision 274 according to RID chapter 3.2, table A, column 6.
source	<xs:element name="TechnicalDescription" minOccurs="0"> <xs:annotation> <xs:documentation>The Technical Description is an approved chemical or biological name and has to be present if the dangerous good has assigned a special provision 274 according to RID chapter 3.2, table A, column 6.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="350"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RID/ProperShippingName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 350
annotation	documentation The official name of this dangerous good according to the RID chapter 3.2, table A, column 2 Mandatory, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE", "EMPTY RECEPTACLE <=1000L, "EMPTY IBC" or "EMPTY LARGE PACKAGING"
source	<xs:element name="ProperShippingName" minOccurs="0"> <xs:annotation> <xs:documentation>The official name of this dangerous good according to the RID chapter 3.2, table A, column 2 Mandatory, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE", "EMPTY RECEPTACLE <=1000L, "EMPTY IBC" or "EMPTY LARGE PACKAGING"</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="350"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RID/SpecialProvisionsRID**

diagram	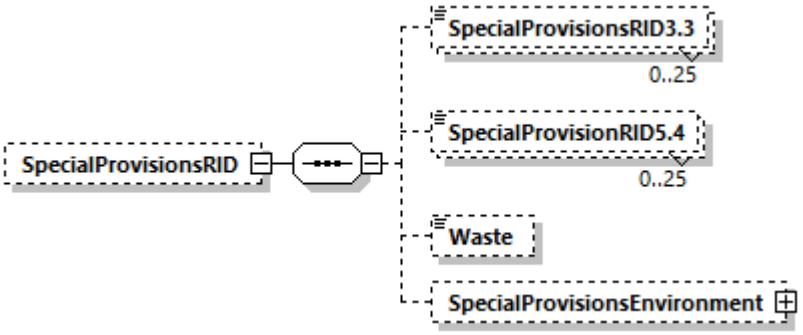
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	SpecialProvisionsRID3.3 SpecialProvisionRID5.4 Waste SpecialProvisionsEnvironment
source	<xs:element name="SpecialProvisionsRID" minOccurs="0"> <xs:complexType> <xs:sequence> <xs:element name="SpecialProvisionsRID3.3" minOccurs="0" maxOccurs="25"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="5"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="SpecialProvisionRID5.4" minOccurs="0" maxOccurs="25"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="350"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="Waste" type="xs:boolean" minOccurs="0"/> <xs:element name="SpecialProvisionsEnvironment" minOccurs="0"> <xs:complexType> <xs:choice> <xs:element name="EnvironmentalHazardous" type="xs:boolean"/> <xs:element name="MarinePollutant" type="xs:boolean"/> </xs:choice> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **RID/SpecialProvisionsRID/SpecialProvisionsRID3.3**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	minOcc 0 maxOcc 25 content simple
facets	Kind Value Annotation minLength 1 maxLength 5
source	<xs:element name="SpecialProvisionsRID3.3" minOccurs="0" maxOccurs="25"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="5"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RID/SpecialProvisionsRID/SpecialProvisionRID5.4**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 25 content simple
facets	Kind Value Annotation minLength 1 maxLength 350
source	<xs:element name="SpecialProvisionRID5.4" minOccurs="0" maxOccurs="25"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="350"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RID/SpecialProvisionsRID/Waste**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
source	<xs:element name="Waste" type="xs:boolean" minOccurs="0"/>

element **RID/SpecialProvisionsRID/SpecialProvisionsEnvironment**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	EnvironmentalHazardous MarinePollutant
source	<xs:element name="SpecialProvisionsEnvironment" minOccurs="0"> <xs:complexType> <xs:choice> <xs:element name="EnvironmentalHazardous" type="xs:boolean"/> <xs:element name="MarinePollutant" type="xs:boolean"/> </xs:choice> </xs:complexType> </xs:element>

element **RID/SpecialProvisionsRID/SpecialProvisionsEnvironment/EnvironmentalHazardous**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
source	<xs:element name="EnvironmentalHazardous" type="xs:boolean"/>

element **RID/SpecialProvisionsRID/SpecialProvisionsEnvironment/MarinePollutant**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
source	<xs:element name="MarinePollutant" type="xs:boolean"/>

element **RID/ActionRequiredFromCarrier**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 350
annotation	documentation Special action required by the carrier according to chapter 5.4.1.2.5.2 RID
source	<xs:element name="ActionRequiredFromCarrier" minOccurs="0"> <xs:annotation> <xs:documentation>Special action required by the carrier according to chapter

```
5.4.1.2.5.2 RID</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="350"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RID/DangerousGoodsVolumeLiters**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**VolumeValueLiter**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999
annotation	documentation The volume of the dangerous goods in liters

source	`<xs:element name="DangerousGoodsVolumeLiters" type="VolumeValueLiter" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>The volume of the dangerous goods in liters</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RID/DangerousGoodsVolumeCubicMeters**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**VolumeValue**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation The volume of the dangerous goods in cubic meters

source	`<xs:element name="DangerousGoodsVolumeCubicMeters" type="VolumeValue" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>The volume of the dangerous goods in cubic meters</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RID/WeightNettoExplosiveMass**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation Special provision only necessary and allowed for Class 1 (kg)- the total net mass of explosive substance (RID 5.4.1.2.1).

source	`<xs:element name="WeightNettoExplosiveMass" type="WeightValueKilo" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Special provision only necessary and allowed for Class 1 (kg)-the total net mass of explosive substance (RID 5.4.1.2.1).</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RID/HazardIdentificationNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minLength 2 maxLength 4

source	`<xs:element name="HazardIdentificationNumber" minOccurs="0">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="2"/>`
	`  <xs:maxLength value="4"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **RID/UN_Number**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
used by	element **SummaryOFGoodsWithSameRID**
facets	Kind Value Annotation length 4 pattern \d*[1-9]\d*
annotation	documentation The UNNumber of the dangerous good according to the RID chapter 3.2, table A, column 1. Mandatory, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE <=1000L", "EMPTY IBC" or "EMPTY LARGE PACKAGING" .

source	`<xs:element name="UN_Number" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>The UNNumber of the dangerous good according to the RID chapter 3.2, table A, column 1. Mandatory, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE <=1000L", "EMPTY IBC" or "EMPTY LARGE PACKAGING" .</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:length value="4"/>`
	`<xs:pattern value="\d*[1-9]\d*"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **RID/RID_Class**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 4
annotation	documentation The Class of the dangerous good according to the RID chapter 3.2, table A, column 3a.

source

```
<xs:element name="RID_Class" minOccurs="0">
  <xs:annotation>
    <xs:documentation>The Class of the dangerous good according to the RID chapter 3.2, table A, column 3a.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="4"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RID/ClassificationCode**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:string**

properties

minOcc	0
maxOcc	1
content	simple

facets

Kind	Value	Annotation
minLength	1	
maxLength	4	documentation: present only with class 1

annotation

documentation
The Classification Code of the dangerous good according to the RID chapter 3.2, table A, column 3b. Mandatory for Class 1 - optional, but possibly for all the other classes.
documentation
CODE: OTIF RID-Specification

source

```
<xs:element name="ClassificationCode" minOccurs="0">
  <xs:annotation>
    <xs:documentation>The Classification Code of the dangerous good according to the RID chapter 3.2, table A, column 3b. Mandatory for Class 1 - optional, but possibly for all the other classes.</xs:documentation>
    <xs:documentation>CODE: OTIF RID-Specification</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="4">
        <xs:annotation>
          <xs:documentation>present only with class 1</xs:documentation>
        </xs:annotation>
      </xs:maxLength>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RID/EmptyPackingCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation enumeration 01 documentation: EMPTY PACKAGING enumeration 02 documentation: EMPTY CONTAINER enumeration 03 documentation: EMPTY IBC enumeration 04 documentation: EMPTY LARGE PACKAGING enumeration 05 documentation: EMPTY TANK-VEHICLE enumeration 06 documentation: EMPTY TANK-WAGON enumeration 07 documentation: EMPTY DETACHABLE TANK enumeration 08 documentation: EMPTY DEMOUNTABLE TANK enumeration 09 documentation: EMPTY TANK-CONTAINER enumeration 10 documentation: EMPTY PORTABLE TANK enumeration 11 documentation: EMPTY BATTERY-VEHICLE enumeration 12 documentation: EMPTY BATTERY-WAGON enumeration 13 documentation: EMPTY LARGE CONTAINER WITH MULTIPLE LINKED ELEMENTS enumeration 14 documentation: EMPTY VEHICLE enumeration 15 documentation: EMPTY WAGON enumeration 16 documentation: EMPTY RECEPTACLE le 1000L enumeration 17 documentation: EMPTY RECEPTACLE gt 1000L enumeration 18 documentation: EMPTY
annotation	documentation Code of empty packing as described in RID 5.4.1.1.6.2 documentation CODE: OTIF RID-Specification, element EMPTY has been added as 'dummy' until the code list has been finished and approved.

source

```
<xs:element name="EmptyPackingCode" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Code of empty packing as described in RID
5.4.1.1.6.2</xs:documentation>
    <xs:documentation>CODE: OTIF RID-Specification, element EMPTY has been added as
'dummy' until the code list has been finished and approved. </xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="01">
        <xs:annotation>
          <xs:documentation>EMPTY PACKAGING</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="02">
        <xs:annotation>
```

```
            <xs:documentation>EMPTY CONTAINER</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="03">
          <xs:annotation>
            <xs:documentation>EMPTY IBC</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="04">
          <xs:annotation>
            <xs:documentation>EMPTY LARGE PACKAGING</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="05">
          <xs:annotation>
            <xs:documentation>EMPTY TANK-VEHICLE</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="06">
          <xs:annotation>
            <xs:documentation>EMPTY TANK-WAGON</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="07">
          <xs:annotation>
            <xs:documentation>EMPTY DETACHABLE TANK</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="08">
          <xs:annotation>
            <xs:documentation>EMPTY DEMOUNTABLE TANK</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="09">
          <xs:annotation>
            <xs:documentation>EMPTY TANK-CONTAINER</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="10">
          <xs:annotation>
            <xs:documentation>EMPTY PORTABLE TANK</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="11">
          <xs:annotation>
            <xs:documentation>EMPTY BATTERY-VEHICLE</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="12">
          <xs:annotation>
            <xs:documentation>EMPTY BATTERY-WAGON</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="13">
          <xs:annotation>
            <xs:documentation>EMPTY LARGE CONTAINER WITH MULTIPLE LINKED
ELEMENTS</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="14">
          <xs:annotation>
            <xs:documentation>EMPTY VEHICLE</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
```

```
      <xs:enumeration value="15">
        <xs:annotation>
          <xs:documentation>EMPTY WAGON</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="16">
        <xs:annotation>
          <xs:documentation>EMPTY RECEPTACLE le 1000L</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="17">
        <xs:annotation>
          <xs:documentation>EMPTY RECEPTACLE gt 1000L</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="18">
        <xs:annotation>
          <xs:documentation>EMPTY</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RID/LimitedQuantityIndicator**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Indicator for labelled dangerous goods in limited quantity according to chapter 3.-4 RID

source	`<xs:element name="LimitedQuantityIndicator" type="xs:boolean" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Indicator for labelled dangerous goods in limited quantity according to chapter 3.-4 RID</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RID_Checking**

diagram

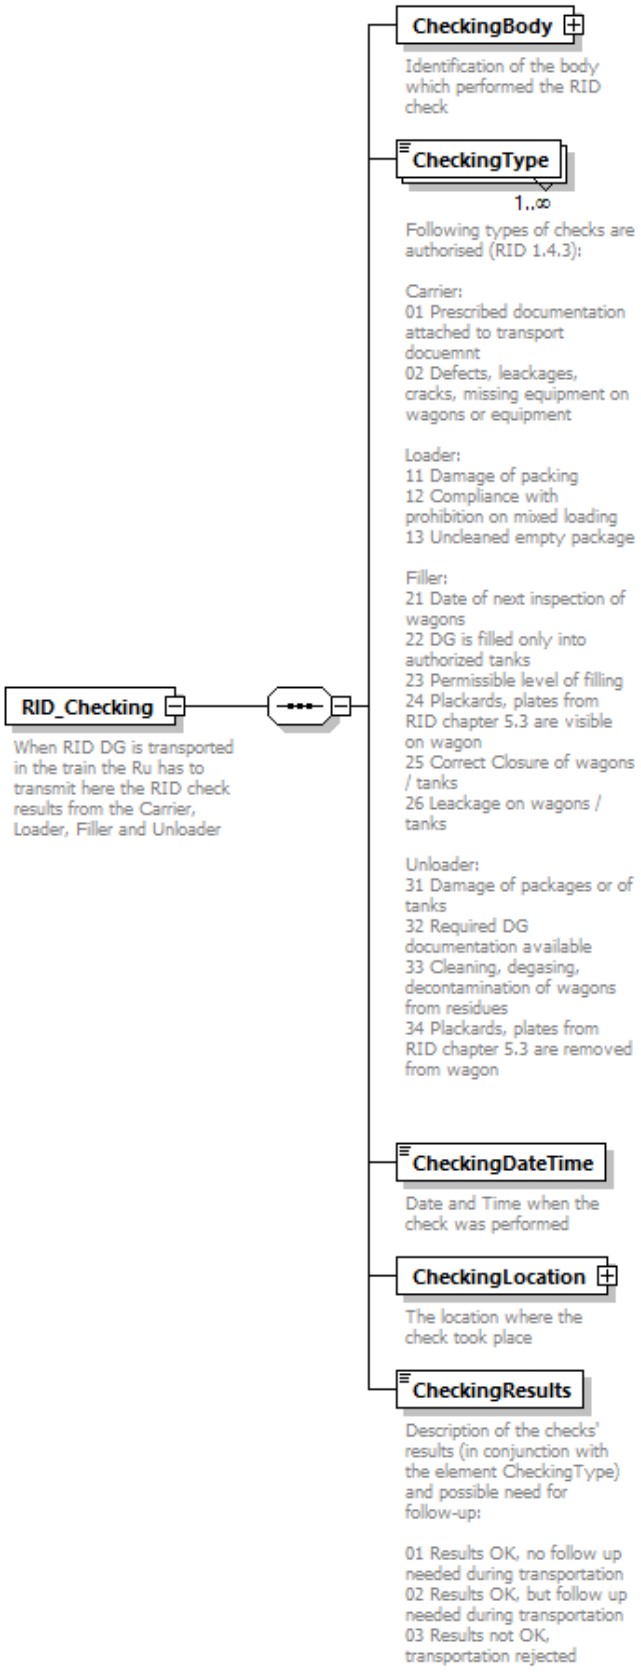

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

properties	content complex
children	**CheckingBody CheckingType CheckingDateTime CheckingLocation CheckingResults**
used by	element **Goods**
annotation	documentation When RID DG is transported in the train the Ru has to transmit here the RID check results from the Carrier, Loader, Filler and Unloader

source

```
<xs:element name="RID_Checking">
  <xs:annotation>
    <xs:documentation>When RID DG is transported in the train the Ru has to transmit
here the RID check results from the Carrier, Loader, Filler and Unloader
</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="CheckingBody">
        <xs:annotation>
          <xs:documentation>Identification of the body which performed the RID
check</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="BodyType">
              <xs:annotation>
                <xs:documentation>Following types of bodies are authorised (RID
1.4.3):

01 Carrier
02 Loader
03 Filler
04 Unloader</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:enumeration value="01"/>
                  <xs:enumeration value="02"/>
                  <xs:enumeration value="03"/>
                  <xs:enumeration value="04"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="BodyID" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>4N Company Code</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="CheckingType" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>Following types of checks are authorised (RID 1.4.3):

Carrier:
01 Prescribed documentation attached to transport docuemnt
02 Defects, leackages, cracks, missing equipment on wagons or equipment

Loader:
11 Damage of packing
12 Compliance with prohibition on mixed loading
13 Uncleaned empty package

Filler:
```

```
21 Date of next inspection of wagons
22 DG is filled only into authorized tanks
23 Permissible level of filling
24 Plackards, plates from RID chapter 5.3 are visible on wagon
25 Correct Closure of wagons / tanks
26 Leackage on wagons / tanks

Unloader:
31 Damage of packages or of tanks
32 Required DG documentation available
33 Cleaning, degasing, decontamination of wagons from residues
34 Plackards, plates from RID chapter 5.3 are removed from wagon
</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:enumeration value="01"/>
            <xs:enumeration value="02"/>
            <xs:enumeration value="11"/>
            <xs:enumeration value="12"/>
            <xs:enumeration value="13"/>
            <xs:enumeration value="21"/>
            <xs:enumeration value="22"/>
            <xs:enumeration value="23"/>
            <xs:enumeration value="24"/>
            <xs:enumeration value="25"/>
            <xs:enumeration value="26"/>
            <xs:enumeration value="31"/>
            <xs:enumeration value="32"/>
            <xs:enumeration value="33"/>
            <xs:enumeration value="34"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CheckingDateTime" type="xs:dateTime">
        <xs:annotation>
          <xs:documentation>Date and Time when the check was
performed</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="CheckingLocation" type="LocationIdent">
        <xs:annotation>
          <xs:documentation>The location where the check took
place</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="CheckingResults">
        <xs:annotation>
          <xs:documentation>Description of the checks' results (in conjunction with
the element CheckingType) and possible need for follow-up:

01 Results OK, no follow up needed during transportation
02 Results OK, but follow up needed during transportation
03 Results not OK, transportation rejected</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:pattern value="01"/>
            <xs:pattern value="02"/>
            <xs:pattern value="03"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
```

```
  </xs:complexType>
</xs:element>
```

element **RID_Checking/CheckingBody**

diagram

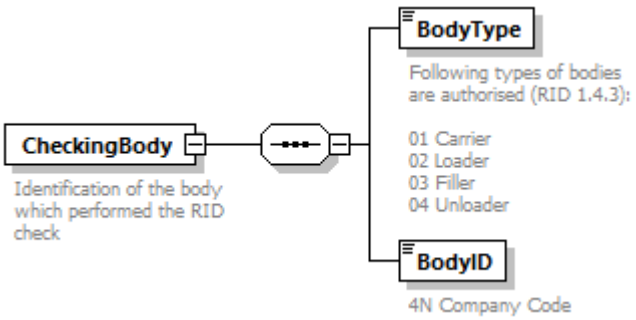

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties: content complex

children: **BodyType** **BodyID**

annotation: documentation
Identification of the body which performed the RID check

source

```
<xs:element name="CheckingBody">
  <xs:annotation>
    <xs:documentation>Identification of the body which performed the RID
check</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="BodyType">
        <xs:annotation>
          <xs:documentation>Following types of bodies are authorised (RID 1.4.3):

01 Carrier
02 Loader
03 Filler
04 Unloader</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:enumeration value="01"/>
            <xs:enumeration value="02"/>
            <xs:enumeration value="03"/>
            <xs:enumeration value="04"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="BodyID" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>4N Company Code</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RID_Checking/CheckingBody/BodyType**

diagram	**BodyType** Following types of bodies are authorised (RID 1.4.3): 01 Carrier 02 Loader 03 Filler 04 Unloader
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind / Value / Annotation enumeration 01 enumeration 02 enumeration 03 enumeration 04
annotation	documentation Following types of bodies are authorised (RID 1.4.3): 01 Carrier 02 Loader 03 Filler 04 Unloader
source	<xs:element name="BodyType"> <xs:annotation> <xs:documentation>Following types of bodies are authorised (RID 1.4.3): 01 Carrier 02 Loader 03 Filler 04 Unloader</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="01"/> <xs:enumeration value="02"/> <xs:enumeration value="03"/> <xs:enumeration value="04"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RID_Checking/CheckingBody/BodyID**

diagram	**BodyID** 4N Company Code
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind / Value / Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation 4N Company Code

source	<xs:element name="BodyID" type="CompanyCode"> <xs:annotation> <xs:documentation>4N Company Code</xs:documentation> </xs:annotation> </xs:element>

element **RID_Checking/CheckingType**

diagram	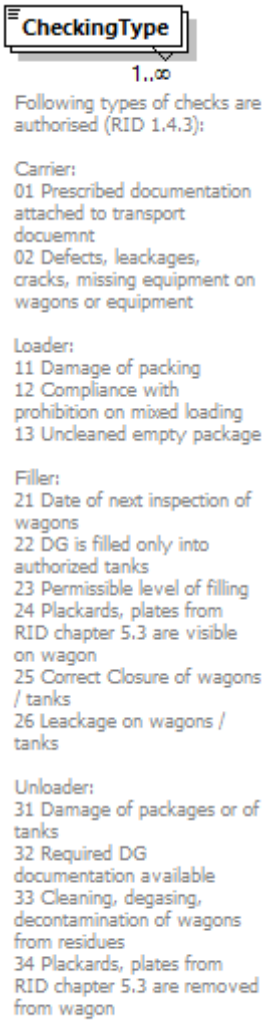
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 1 maxOcc unbounded content simple
facets	Kind Value Annotation enumeration 01 enumeration 02 enumeration 11 enumeration 12 enumeration 13 enumeration 21 enumeration 22 enumeration 23

	enumeration 24 enumeration 25 enumeration 26 enumeration 31 enumeration 32 enumeration 33 enumeration 34
annotation	documentation Following types of checks are authorised (RID 1.4.3): Carrier: 01 Prescribed documentation attached to transport docuemnt 02 Defects, leackages, cracks, missing equipment on wagons or equipment Loader: 11 Damage of packing 12 Compliance with prohibition on mixed loading 13 Uncleaned empty package Filler: 21 Date of next inspection of wagons 22 DG is filled only into authorized tanks 23 Permissible level of filling 24 Plackards, plates from RID chapter 5.3 are visible on wagon 25 Correct Closure of wagons / tanks 26 Leackage on wagons / tanks Unloader: 31 Damage of packages or of tanks 32 Required DG documentation available 33 Cleaning, degasing, decontamination of wagons from residues 34 Plackards, plates from RID chapter 5.3 are removed from wagon
source	<xs:element name="CheckingType" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Following types of checks are authorised (RID 1.4.3): Carrier: 01 Prescribed documentation attached to transport docuemnt 02 Defects, leackages, cracks, missing equipment on wagons or equipment Loader: 11 Damage of packing 12 Compliance with prohibition on mixed loading 13 Uncleaned empty package Filler: 21 Date of next inspection of wagons 22 DG is filled only into authorized tanks 23 Permissible level of filling 24 Plackards, plates from RID chapter 5.3 are visible on wagon 25 Correct Closure of wagons / tanks 26 Leackage on wagons / tanks Unloader: 31 Damage of packages or of tanks 32 Required DG documentation available 33 Cleaning, degasing, decontamination of wagons from residues 34 Plackards, plates from RID chapter 5.3 are removed from wagon </xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="01"/> <xs:enumeration value="02"/> <xs:enumeration value="11"/>

```
        <xs:enumeration value="12"/>
        <xs:enumeration value="13"/>
        <xs:enumeration value="21"/>
        <xs:enumeration value="22"/>
        <xs:enumeration value="23"/>
        <xs:enumeration value="24"/>
        <xs:enumeration value="25"/>
        <xs:enumeration value="26"/>
        <xs:enumeration value="31"/>
        <xs:enumeration value="32"/>
        <xs:enumeration value="33"/>
        <xs:enumeration value="34"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **RID_Checking/CheckingDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation Date and Time when the check was performed

source	`<xs:element name="CheckingDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Date and Time when the check was performed</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RID_Checking/CheckingLocation**

diagram	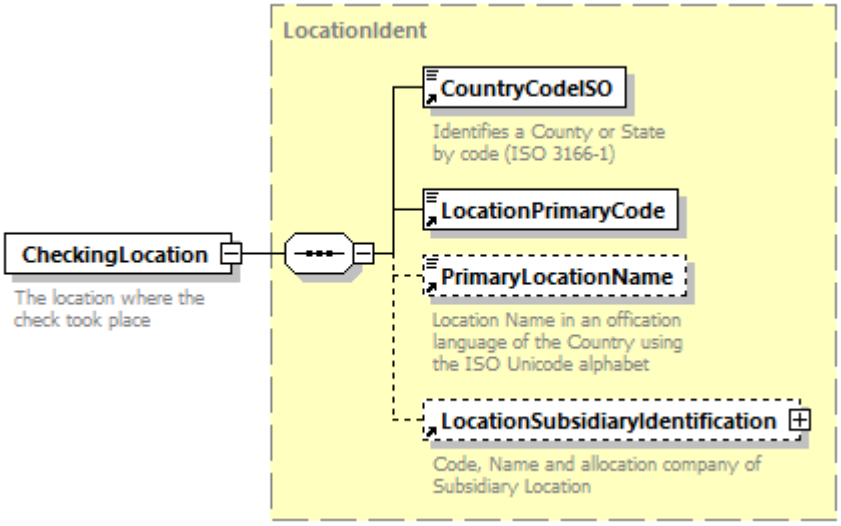
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex

children	**CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification**
annotation	documentation The location where the check took place

source	`<xs:element name="CheckingLocation" type="LocationIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>The location where the check took place</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RID_Checking/CheckingResults**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation pattern 01 pattern 02 pattern 03
annotation	documentation Description of the checks' results (in conjunction with the element CheckingType) and possible need for follow-up: 01 Results OK, no follow up needed during transportation 02 Results OK, but follow up needed during transportation 03 Results not OK, transportation rejected

source	`<xs:element name="CheckingResults">`
	`  <xs:annotation>`
	`  <xs:documentation>Description of the checks' results (in conjunction with the element CheckingType) and possible need for follow-up:`
	
	`01 Results OK, no follow up needed during transportation`
	`02 Results OK, but follow up needed during transportation`
	`03 Results not OK, transportation rejected</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:pattern value="01"/>`
	`  <xs:pattern value="02"/>`
	`  <xs:pattern value="03"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **RollingRoadUnit**

diagram	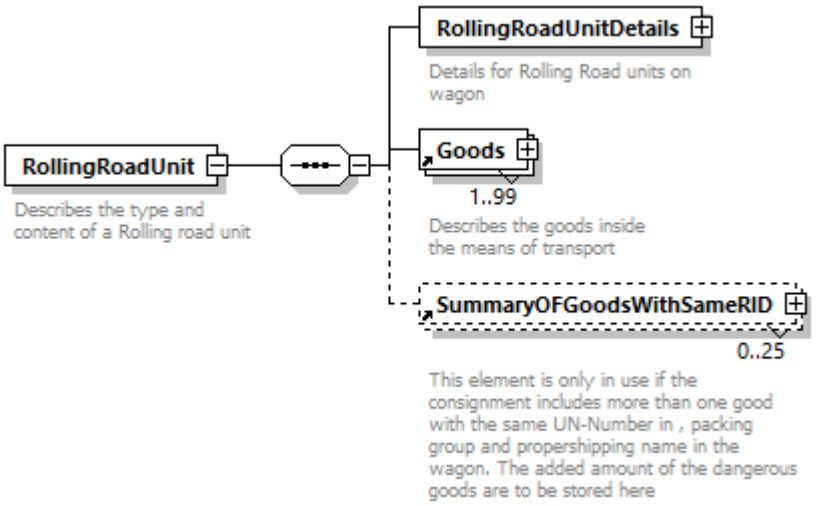
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	RollingRoadUnitDetails Goods SummaryOFGoodsWithSameRID
used by	element Wagons/GoodsInWagon
annotation	documentation Describes the type and content of a Rolling road unit

source

```
<xs:element name="RollingRoadUnit">
  <xs:annotation>
    <xs:documentation>Describes the type and content of a Rolling road
unit</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="RollingRoadUnitDetails">
        <xs:annotation>
          <xs:documentation>Details for Rolling Road units on
wagon</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="LoadingStatus"/>
            <xs:element name="RollingRoadUnitType" default="HGZ" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Type of Rolling Road unit on
Wagon</xs:documentation>
                <xs:documentation>CODE:</xs:documentation>
                <xs:documentation>READ: <br/> - Consignee</xs:documentation>
                <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
                <xs:documentation>AMEND: <br/> - Contractual carrier <br/> -
Successive carrier<br/> (With the agreement of the consignor)</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="3"/>
                  <xs:enumeration value="HGZ">
                    <xs:annotation>
                      <xs:documentation>articulated lorry</xs:documentation>
                    </xs:annotation>
                  </xs:enumeration>
                  <xs:enumeration value="SAL">
```

```
                    <xs:annotation>
                      <xs:documentation>semi-trailer</xs:documentation>
                    </xs:annotation>
                  </xs:enumeration>
                  <xs:enumeration value="MW">
                    <xs:annotation>
                      <xs:documentation>motor vehicle</xs:documentation>
                    </xs:annotation>
                  </xs:enumeration>
                  <xs:enumeration value="ANH">
                    <xs:annotation>
                      <xs:documentation>trailer</xs:documentation>
                    </xs:annotation>
                  </xs:enumeration>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="Vehicles" minOccurs="0" maxOccurs="2">
              <xs:annotation>
                <xs:documentation>List of vehicles loaded (i.e. truck and
trailer).</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="NumberPlate">
                    <xs:annotation>
                      <xs:documentation>Number plate of the
vehicle.</xs:documentation>
                      <xs:documentation>READ: <br/> - Consignee</xs:documentation>
                      <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
                      <xs:documentation>AMEND: <br/> - Contractual carrier <br/> -
Successive carrier<br/> (With the agreement of the consignor)</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:maxLength value="10"/>
                        <xs:minLength value="1"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element ref="CountryCodeISO"/>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="TareWeightVehicle" type="WeightValueKilo">
              <xs:annotation>
                <xs:documentation>Total weight [kg] of vehicle (truck and
trailer).</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="Haulier" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Information concerning the
haulier.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element ref="Name">
                    <xs:annotation>
                      <xs:documentation>Name of haulier.</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element ref="CountryCodeISO"/>
                </xs:sequence>
```

```
              </xs:complexType>
            </xs:element>
            <xs:element name="Attendants" minOccurs="0" maxOccurs="2">
              <xs:annotation>
                <xs:documentation>Attendants during the transport.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="LastName">
                    <xs:annotation>
                      <xs:documentation>Last name of attendant.</xs:documentation>
                      <xs:documentation>READ: <br/> - Consignee</xs:documentation>
                      <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
                      <xs:documentation>AMEND: <br/> - Contractual carrier <br/> -
Successive carrier <br/> (With the agreement of the consignor)</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="25"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="FirstName" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Optional first name of the
attendant.</xs:documentation>
                      <xs:documentation>READ: <br/> - Consignee</xs:documentation>
                      <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
                      <xs:documentation>AMEND: <br/> - Contractual carrier <br/> -
Successive carrier <br/> (With the agreement of the consignor)</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="15"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="Goods" maxOccurs="99">
        <xs:annotation/>
      </xs:element>
      <xs:element ref="SummaryOFGoodsWithSameRID" minOccurs="0" maxOccurs="25"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingRoadUnit/RollingRoadUnitDetails**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	LoadingStatus RollingRoadUnitType Vehicles TareWeightVehicle Haulier Attendants
annotation	documentation Details for Rolling Road units on wagon

source

```
<xs:element name="RollingRoadUnitDetails">
  <xs:annotation>
    <xs:documentation>Details for Rolling Road units on wagon</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="LoadingStatus"/>
      <xs:element name="RollingRoadUnitType" default="HGZ" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Type of Rolling Road unit on Wagon</xs:documentation>
          <xs:documentation>CODE:</xs:documentation>
          <xs:documentation>READ: <br/> - Consignee</xs:documentation>
          <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
          <xs:documentation>AMEND: <br/> - Contractual carrier <br/> - Successive
carrier<br/> (With the agreement of the consignor)</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="3"/>
            <xs:enumeration value="HGZ">
              <xs:annotation>
                <xs:documentation>articulated lorry</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="SAL">
```

```
              <xs:annotation>
                <xs:documentation>semi-trailer</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="MW">
              <xs:annotation>
                <xs:documentation>motor vehicle</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="ANH">
              <xs:annotation>
                <xs:documentation>trailer</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="Vehicles" minOccurs="0" maxOccurs="2">
        <xs:annotation>
          <xs:documentation>List of vehicles loaded (i.e. truck and
trailer).</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="NumberPlate">
              <xs:annotation>
                <xs:documentation>Number plate of the vehicle.</xs:documentation>
                <xs:documentation>READ: <br/> - Consignee</xs:documentation>
                <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
                <xs:documentation>AMEND: <br/> - Contractual carrier <br/> -
Successive carrier<br/> (With the agreement of the consignor)</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="10"/>
                  <xs:minLength value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="CountryCodeISO"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="TareWeightVehicle" type="WeightValueKilo">
        <xs:annotation>
          <xs:documentation>Total weight [kg] of vehicle (truck and
trailer).</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="Haulier" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Information concerning the haulier.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="Name">
              <xs:annotation>
                <xs:documentation>Name of haulier.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="CountryCodeISO"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
```

```
      <xs:element name="Attendants" minOccurs="0" maxOccurs="2">
        <xs:annotation>
          <xs:documentation>Attendants during the transport.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="LastName">
              <xs:annotation>
                <xs:documentation>Last name of attendant.</xs:documentation>
                <xs:documentation>READ: <br/> - Consignee</xs:documentation>
                <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
                <xs:documentation>AMEND: <br/> - Contractual carrier <br/> -
Successive carrier <br/> (With the agreement of the consignor)</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="25"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="FirstName" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Optional first name of the
attendant.</xs:documentation>
                <xs:documentation>READ: <br/> - Consignee</xs:documentation>
                <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
                <xs:documentation>AMEND: <br/> - Contractual carrier <br/> -
Successive carrier <br/> (With the agreement of the consignor)</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="15"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingRoadUnit/RollingRoadUnitDetails/RollingRoadUnitType**

diagram	**RollingRoadUnitType** Type of Rolling Road unit on Wagon
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple default HGZ
facets	Kind / Value / Annotation minLength 1 maxLength 3 enumeration HGZ — documentation: articulated lorry enumeration SAL — documentation

	semi-trailer enumeration MW documentation motor vehicle enumeration ANH documentation trailer
annotation	documentation Type of Rolling Road unit on Wagon documentation CODE: documentation READ: - Consignee documentation WRITE: - Consignor documentation AMEND: - Contractual carrier - Successive carrier (With the agreement of the consignor)
source	<xs:element name="RollingRoadUnitType" default="HGZ" minOccurs="0"> <xs:annotation> <xs:documentation>Type of Rolling Road unit on Wagon</xs:documentation> <xs:documentation>CODE:</xs:documentation> <xs:documentation>READ: - Consignee</xs:documentation> <xs:documentation>WRITE: - Consignor</xs:documentation> <xs:documentation>AMEND: - Contractual carrier - Successive carrier (With the agreement of the consignor)</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="3"/> <xs:enumeration value="HGZ"> <xs:annotation> <xs:documentation>articulated lorry</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="SAL"> <xs:annotation> <xs:documentation>semi-trailer</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="MW"> <xs:annotation> <xs:documentation>motor vehicle</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="ANH"> <xs:annotation> <xs:documentation>trailer</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </xs:element>

element **RollingRoadUnit/RollingRoadUnitDetails/Vehicles**

diagram	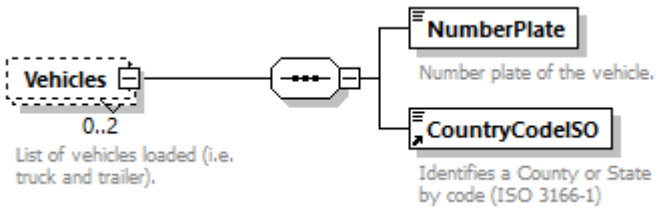
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

properties	minOcc 0 maxOcc 2 content complex
children	**NumberPlate CountryCodeISO**
annotation	documentation List of vehicles loaded (i.e. truck and trailer).

source

```
<xs:element name="Vehicles" minOccurs="0" maxOccurs="2">
  <xs:annotation>
    <xs:documentation>List of vehicles loaded (i.e. truck and
trailer).</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="NumberPlate">
        <xs:annotation>
          <xs:documentation>Number plate of the vehicle.</xs:documentation>
          <xs:documentation>READ: <br/> - Consignee</xs:documentation>
          <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
          <xs:documentation>AMEND: <br/> - Contractual carrier <br/> - Successive
carrier<br/> (With the agreement of the consignor)</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="10"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="CountryCodeISO"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingRoadUnit/RollingRoadUnitDetails/Vehicles/NumberPlate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 10
annotation	documentation Number plate of the vehicle. documentation READ: - Consignee documentation WRITE: - Consignor documentation AMEND: - Contractual carrier - Successive carrier (With the agreement of the consignor)

source

```
<xs:element name="NumberPlate">
  <xs:annotation>
    <xs:documentation>Number plate of the vehicle.</xs:documentation>
    <xs:documentation>READ: <br/> - Consignee</xs:documentation>
    <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
    <xs:documentation>AMEND: <br/> - Contractual carrier <br/> - Successive
carrier<br/> (With the agreement of the consignor)</xs:documentation>
  </xs:annotation>
```

```
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:maxLength value="10"/>
      <xs:minLength value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RollingRoadUnit/RollingRoadUnitDetails/TareWeightVehicle**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	content simple
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation Total weight [kg] of vehicle (truck and trailer).

source	`<xs:element name="TareWeightVehicle" type="WeightValueKilo">`
	`  <xs:annotation>`
	`  <xs:documentation>Total weight [kg] of vehicle (truck and trailer).</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingRoadUnit/RollingRoadUnitDetails/Haulier**

diagram	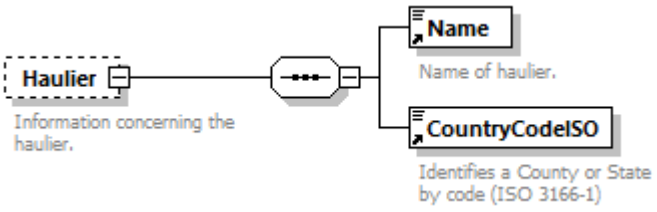
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**Name CountryCodeISO**
annotation	documentation Information concerning the haulier.

source	`<xs:element name="Haulier" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Information concerning the haulier.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="Name">`
	`  <xs:annotation>`
	`  <xs:documentation>Name of haulier.</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`

```
      <xs:element ref="CountryCodeISO"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingRoadUnit/RollingRoadUnitDetails/Attendants**

diagram

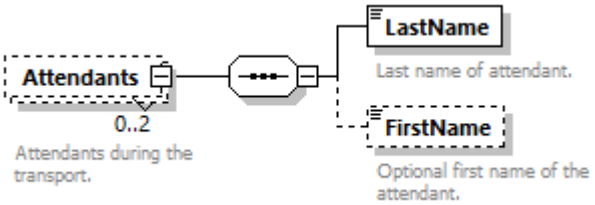

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties:
minOcc 0
maxOcc 2
content complex

children: **LastName FirstName**

annotation:
documentation
Attendants during the transport.

source

```
<xs:element name="Attendants" minOccurs="0" maxOccurs="2">
  <xs:annotation>
    <xs:documentation>Attendants during the transport.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="LastName">
        <xs:annotation>
          <xs:documentation>Last name of attendant.</xs:documentation>
          <xs:documentation>READ: <br/> - Consignee</xs:documentation>
          <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
          <xs:documentation>AMEND: <br/> - Contractual carrier <br/> - Successive
carrier <br/> (With the agreement of the consignor)</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="25"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="FirstName" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Optional first name of the attendant.</xs:documentation>
          <xs:documentation>READ: <br/> - Consignee</xs:documentation>
          <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
          <xs:documentation>AMEND: <br/> - Contractual carrier <br/> - Successive
carrier <br/> (With the agreement of the consignor)</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="15"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingRoadUnit/RollingRoadUnitDetails/Attendants/LastName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 25
annotation	documentation Last name of attendant. documentation READ: - Consignee documentation WRITE: - Consignor documentation AMEND: - Contractual carrier - Successive carrier (With the agreement of the consignor)
source	<xs:element name="LastName"> <xs:annotation> <xs:documentation>Last name of attendant.</xs:documentation> <xs:documentation>READ: - Consignee</xs:documentation> <xs:documentation>WRITE: - Consignor</xs:documentation> <xs:documentation>AMEND: - Contractual carrier - Successive carrier (With the agreement of the consignor)</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="25"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RollingRoadUnit/RollingRoadUnitDetails/Attendants/FirstName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 15
annotation	documentation Optional first name of the attendant. documentation READ: - Consignee documentation WRITE: - Consignor documentation AMEND: - Contractual carrier - Successive carrier (With the agreement of the consignor)
source	<xs:element name="FirstName" minOccurs="0">

```
  <xs:annotation>
    <xs:documentation>Optional first name of the attendant.</xs:documentation>
    <xs:documentation>READ: <br/> - Consignee</xs:documentation>
    <xs:documentation>WRITE: <br/> - Consignor</xs:documentation>
    <xs:documentation>AMEND: <br/> - Contractual carrier <br/> - Successive carrier
<br/> (With the agreement of the consignor)</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="15"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RollingStockDataset**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	AdministrativeDataSet DesignDataSet
used by	elements RollingStockDatasetMessage WIMO_Dataset
annotation	documentation Rolling Stock adminsitrative and Technical Dataset

source

```
<xs:element name="RollingStockDataset">
  <xs:annotation>
    <xs:documentation>Rolling Stock adminsitrative and Technical
Dataset</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="AdministrativeDataSet">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="WagonNumberFreight"/>
            <xs:element name="PreviousWagonNumberFreight" type="WagonIdent"
minOccurs="0">
              <xs:annotation>
                <xs:documentation>For identification of a wagon after
renumbering</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="RegistrationCountry" type="CountryIdentISO">
              <xs:annotation>
                <xs:documentation>ISO country code of registration
country</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="DatePutIntoService">
              <xs:annotation>
                <xs:documentation>Date of first operation</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="AuthorisationValidUntil" type="xs:date" minOccurs="0">
              <xs:annotation>
                <xs:documentation>End date for restricted authorisation (special
```

```
case)</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="SuspensionOfAuthorisation" type="xs:boolean">
                <xs:annotation>
                  <xs:documentation>Information if authorisation has been suspended by
the authority</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="DateSuspensionOfAuthorisation" type="xs:date"
minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Date of the suspension of authorisation; must be
provided in case of suspension</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="MultilateralAuthorisationCountries"
type="CountryIdentISO" minOccurs="0" maxOccurs="unbounded">
                <xs:annotation>
                  <xs:documentation> ISO country code of countries where the wagon is
authorised (applies only in case of limited interoperability); first entry indicates
the initial authorisation country</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="ChannelTunnelPermitted" type="xs:boolean"
minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Indication if wagon is allowed to pass the Channel
Tunnel - if the transport is planned between UK and France and should use Eurotunnel
infrastructure.</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="QuieterRoutesExemptionCountry" type="CountryIdentISO"
minOccurs="0" maxOccurs="unbounded">
                <xs:annotation>
                  <xs:documentation>ISO code of country where the wagon has an
exemption in accordance with TSI Noise to run on quieter routes although it is not
TSI noise compliant</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element ref="KeeperShortNameVKM">
                <xs:annotation>
                  <xs:documentation>Vehicle Keeper Marking of the wagon keeper as
listed in VKM register (https://www.era.europa.eu/domains/registers/vkm_en, column B
- without special characters)</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="ECM">
                <xs:annotation>
                  <xs:documentation> Full name of the assigned Entity in Charge of
Maintenance</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:maxLength value="256"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="PlannedChangeOfECM" minOccurs="0">
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="CurrentECMAssignedUntil" type="xs:date">
                      <xs:annotation>
                        <xs:documentation> Date until the current Entity in Charge of
```

```
Maintenance is assigned to the wagon</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="SubsequentECM">
                    <xs:annotation>
                      <xs:documentation> Full name of the following Entity in Charge
of Maintenance</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:maxLength value="256"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="ECMCertificate">
              <xs:annotation>
                <xs:documentation>ECM certificate information</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="EINNumber">
                    <xs:annotation>
                      <xs:documentation>ECM certificate reference number
NOTE: this is a placeholder! CR 335 by ERA is containing this element and its full
description and code lists.</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element ref="CountryCodeISO"/>
                        <xs:element name="TypeDocumentEIN" type="Numeric2-2">
                          <xs:annotation>
                            <xs:documentation>Code List Candidate:
31, 34</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element name="CounterAcreditedRecognizedBody"
type="Numeric0-2"/>
                        <xs:element name="EINYear" type="Numeric2-2"/>
                        <xs:element name="EINCounter">
                          <xs:simpleType>
                            <xs:restriction base="xs:integer">
                              <xs:minInclusive value="0"/>
                              <xs:maxInclusive value="9999"/>
                            </xs:restriction>
                          </xs:simpleType>
                        </xs:element>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                  <xs:element name="ECMCertificateValidFrom" type="xs:date">
                    <xs:annotation>
                      <xs:documentation>Certificate valid from
date</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="ECMCertificateValidTo" type="xs:date">
                    <xs:annotation>
                      <xs:documentation>Certificate valid to date</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="CoversTankWagonsForDangerousGoods"
```

```
type="xs:boolean">
                    <xs:annotation>
                      <xs:documentation>Certificate covers tank wagons for dangerous
goods</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="CoversNonTankWagonsForDangerousGoods"
type="xs:boolean">
                    <xs:annotation>
                      <xs:documentation>Certificate covers other wagons specialised
in transport of dangerous goods</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="ECMCertificateSuspended" type="xs:boolean">
                    <xs:annotation>
                      <xs:documentation>Identification if certificate has been
suspended for any reason</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="DateECMCertificateSuspended" type="xs:date"
minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Date of the suspension of the ECM
certificate; must be provided in case of suspension</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element ref="InteropCapability">
              <xs:annotation>
                <xs:documentation>Identification of the general interoperability
capability of the wagon
The following values/codes are proposed for the usage (defined in the
InteropCapabilityCode):

01 = National
02 = Bi-/Multilateral (with agreement or authorisation grid)

03 = RIV
05 = TEN

06 = TEN-GE

07 = TEN-CW

08 = TEN RIV</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="GCUWagon" type="xs:boolean">
              <xs:annotation>
                <xs:documentation>Indication if wagon is operated under the GCU
contract</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="DesignDataSet">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="LetterMarking">
              <xs:annotation>
                <xs:documentation>Complete wagon category letter code. The
```

```
Identification marking for freight rolling stock (wagon type) is defined in UIC
Leaflet 438-2</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:maxLength value="20"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="TankCode" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Tank code (applies only for tank wagons). The codes
are defined in the RID regulation, chapter 4.3.3 and 4.3.4.1.1</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:maxLength value="20"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element ref="WagonNumberOfAxles"/>
              <xs:element name="WheelSetType" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Type name of the wheel sets, and the name of the
type depends on the manufacturer.</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:maxLength value="256"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element ref="WheelDiameter" minOccurs="0"/>
              <xs:element ref="WheelsetGauge" minOccurs="0" maxOccurs="unbounded"/>
              <xs:element ref="WheelSetTransformationMethod" minOccurs="0"/>
              <xs:element ref="NumberOfBogies" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Number of bogies for a wagon (applies for bogie
wagons only)</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element ref="BogiePitch" minOccurs="0"/>
              <xs:element name="BogiePivotPitch" type="Numeric1-5" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Largest distance between two adjacent bogie pitches
in mm</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="InnerWheelbase" type="Numeric1-5">
                <xs:annotation>
                  <xs:documentation>Maximum distance between two adjacent  axles in
mm</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element ref="CouplingType" minOccurs="0"/>
              <xs:element name="BufferType" minOccurs="0">
                <xs:annotation>
                  <xs:documentation> Classification of buffer. The following values are
mostly used in the sector.: A, AX, B, C, CX, L0 (130), L0 (150), L2 (130), L2 (150),
L4 (130), L4 (150)</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:maxLength value="256"/>
```

```
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="NormalLoadingGauge" minOccurs="0"/>
            <xs:element ref="MinCurveRadius">
              <xs:annotation>
                <xs:documentation> Minimum allowed curve radius due to design
characteristics, measured in meters</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="MinVerticalRadiusYardHump" minOccurs="0"/>
            <xs:element ref="WagonWeightEmpty">
              <xs:annotation>
                <xs:documentation>Weight of the empty wagon (tara weight) in
kg</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="LengthOverBuffers"/>
            <xs:element ref="MaxAxleWeight"/>
            <xs:element name="LoadTable" minOccurs="0" maxOccurs="unbounded">
              <xs:annotation>
                <xs:documentation>Indicates the load tables marked on the wagon.
When load tables are marked on the wagon the information must be provided in the RSRD
message.
Several load tables (international, product specific for LPG wagons  and
additional/country specific) can be specified by providing the element several times
consecutively.
For special wagons with specific load tables (e.g. heavy haul wagons) no load table
need to be provided.
The complete load table must be provided including the empty load row (if
existent).</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="LoadTableProduct" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Product description, only applies for
product-specific load tables</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="ProductUNCode" type="Numeric4-4">
                          <xs:annotation>
                            <xs:documentation>UN code of product if product specific
load table</xs:documentation>
                          </xs:annotation>
                        </xs:element>
                        <xs:element name="ProductRIDName">
                          <xs:annotation>
                            <xs:documentation> RID product name as written on the
folding panel</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:string">
                              <xs:maxLength value="256"/>
                            </xs:restriction>
                          </xs:simpleType>
                        </xs:element>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                  <xs:element name="LoadTableCountry" type="CountryIdentISO"
minOccurs="0" maxOccurs="unbounded">
                    <xs:annotation>
```

```
                        <xs:documentation>ISO country code of countries for additional
load tables</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element name="SpeedCategory" type="Numeric1-5"
maxOccurs="unbounded">
                      <xs:annotation>
                        <xs:documentation>Numeric speed in load table, without speed
empty in km/h</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element ref="LoadTableStars" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Number of load table stars. Currently
recognized values/codes:
1 = Authorised to run loaded in trains up to 100 km/h with a brake that does not meet
all the requirements for 100 km/h conditions
2 = Authorised to run loaded in trains up to 120 km/h with a brake that does not meet
all the requirements for 120 km/h conditions
3 = Authorised to run loaded in trains up to 120 km/h with a brake that does not meet
all the requirements for 120 km/h conditions. Wagon is fitted with an automatic load-
proportional braking system.
 </xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element name="RouteClassPayloads" maxOccurs="unbounded">
                      <xs:complexType>
                        <xs:sequence>
                          <xs:element ref="RouteClass"/>
                          <xs:element name="MaxPayload" maxOccurs="unbounded">
                            <xs:annotation>
                              <xs:documentation>Maximum payload in tonns of line
category; number of entries must fit to number of entries in
SpeedCategory</xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:decimal">
                                <xs:totalDigits value="4"/>
                                <xs:fractionDigits value="1"/>
                              </xs:restriction>
                            </xs:simpleType>
                          </xs:element>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element ref="MaxDesignSpeed"/>
              <xs:element ref="AirBrake"/>
              <xs:element ref="HandBrake">
                <xs:annotation>
                  <xs:documentation>Characteristics of hand brake</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="DerailmentDetectionDevice"
type="DerailmentDetectionDevice" minOccurs="0"/>
              <xs:element name="BrakeBlock" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Characteristics of brake blocks</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="BrakeBlockName" minOccurs="0">
```

```
                    <xs:annotation>
                      <xs:documentation>Name of the brake block type, including the
length in mm</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:maxLength value="256"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="CompositeBrakeBlockRetrofitted" type="xs:boolean"
minOccurs="0">
                    <xs:annotation>
                      <xs:documentation> Indication if composite brake blocks are
retrofitted or originally equipped</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="CompositeBrakeBlockInstallationDate"
type="xs:date" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Date of composite brake block installation,
for originally equipped wagon = date put into service</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="WagonTelematics" type="WagonTelematics" minOccurs="0">
              <xs:annotation>
                <xs:documentation xml:lang="en">Information about telematics devices
mounted on the wagon.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="MaxLengthOfLoad" minOccurs="0">
              <xs:annotation>
                <xs:documentation> Maximum length of the load measured in mm
</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="LoadArea" minOccurs="0"/>
            <xs:element name="HeightOfLoadingPlaneUnladen" type="Numeric1-5"
minOccurs="0">
              <xs:annotation>
                <xs:documentation>Height of the loading plane when wagon is empty
measured in mm</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="RemovableAccessories" minOccurs="0"
maxOccurs="unbounded">
              <xs:complexType>
                <xs:sequence>
                  <xs:element ref="TypeOfRemovableAccessories">
                    <xs:annotation>
                      <xs:documentation>Specification of removable accessory.
TypeOfRemovableAccessories code list is used. Values refer to UIC Leaflet 920-13:
01 = Removable stanchion
02 = Removable side flap of flat wagon
03 = Removable end flap of flat wagon
04 = Removable side rail
05 = Removable intermediate upright for securing the load
06 = Stanchion chain
07 = Removable handle and wheel for winch on car-carrying wagon
08 = Swivelling bolster (with stanchions)
09 = Coupling rod (rigid coupling)
```

```
10 = Ice bunker
11 = Ice bunker screen
12 = Ice bunker frame
13 = Trestle or bar with hooks for hanging meat
14 = Movable cross-member of wagon with low loading plane
15 = Removable support
16 = Mooring cross-member on wagon for special loads
17 = Movable floor panel on wagon for special loads
18 = Scotch
19 = Skid bar with or without shoes on car-carrying wagon
20 = Mooring strap on car-carrying wagon
21 = Beam for movable ramp on car-carrying wagon
22 = Spare heating half-coupling
23 = Fire extinguisher
24 = Wheel scotches (for cars) on car-carrying wagon
25 = Gangway loading ramp on car-carrying wagon
26 = Metal cradles for rolls of metal sheeting
27 = Panel for covering markings
28 = Loading frame for special types of goods
29 = Headstock for "rolling roads"
99 = Other wagon accessories
</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="NumberOfAccessorOfSpecType" type="Numeric2-2">
                    <xs:annotation>
                      <xs:documentation>Number of specified accessory equipped on the
wagon</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element ref="LoadingCapacity" minOccurs="0"/>
            <xs:element ref="MaxGrossWeight">
              <xs:annotation>
                <xs:documentation>Weight of max Gross Load Weight  plus the tare
weight of the equipment in kg</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="VapourReturnSystem" type="xs:boolean" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Indication if tank wagon is equipped with a vapour
return system</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="FerryPermittedFlag" minOccurs="0">
              <xs:annotation>
                <xs:documentation> Indication if wagon is permitted to be used on
ferries</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="FerryRampAngle" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Maximum allowed angle of the ferry ramp (in grades:
°)</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:decimal">
                  <xs:totalDigits value="3"/>
                  <xs:fractionDigits value="2"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
```

```
            <xs:element name="TemperatureRange" minOccurs="0">
              <xs:complexType>
                <xs:sequence>
                  <xs:annotation>
                    <xs:documentation>Temperature Range</xs:documentation>
                  </xs:annotation>
                  <xs:element ref="MaxTemp"/>
                  <xs:element ref="MinTemp"/>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element ref="TechnicalForwardingRestrictions" minOccurs="0"
maxOccurs="unbounded">
              <xs:annotation>
                <xs:documentation>Restrictions relevant to wagon operations in train
formation, yards or in trains due to design characteristics.
Type will be the RestrictionCode instead of ForwardingRestrictionType, according to
920-13: annotation will carry the information that only thechnical parameters are
allowed to be used here. Only the code numbers should be in the
annotation</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="DateLastOverhaul">
              <xs:annotation>
                <xs:documentation>Date of the last overhaul, if yet no overhaul date
of putting into service</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="OverhaulValidityPeriod"/>
            <xs:element ref="PermittedTolerance"/>
            <xs:element ref="PlannedDateNextOverhaul" minOccurs="0"/>
            <xs:element name="DateOfNextTankInspection" type="xs:date" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Date of the next tank inspection, applies only for
tank wagons</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingStockDataset/AdministrativeDataSet**

diagram

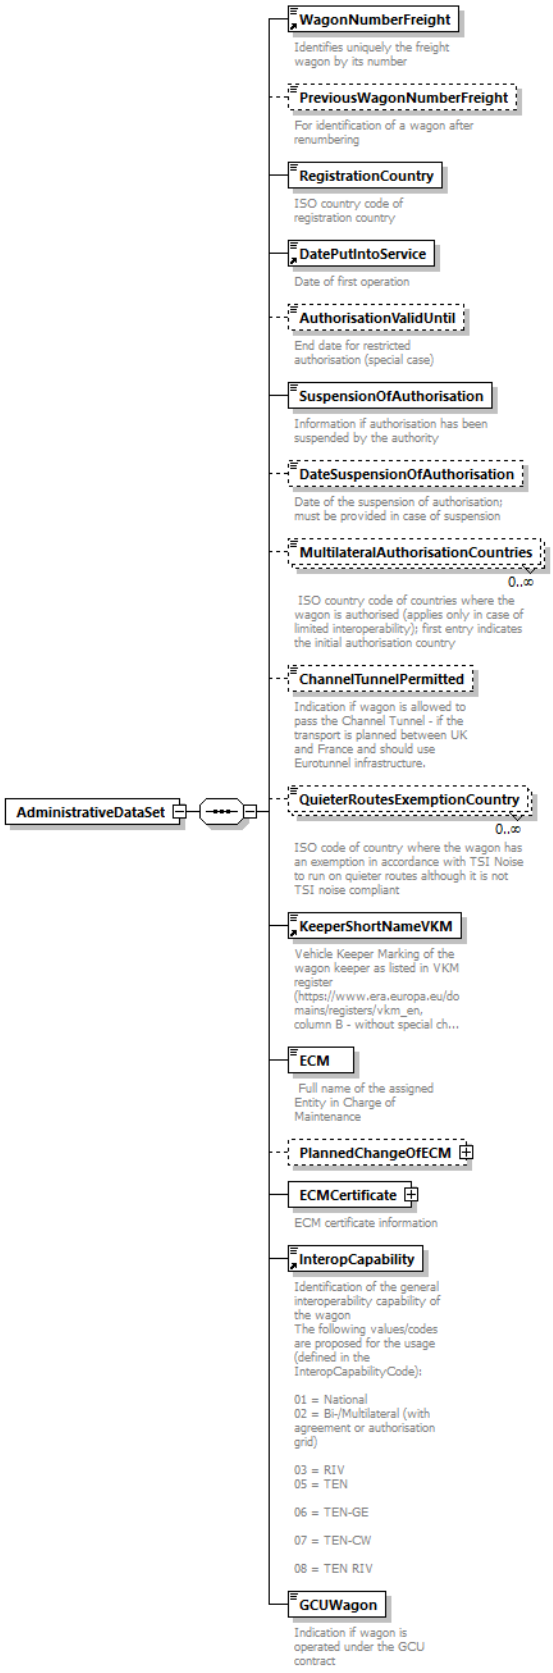

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	WagonNumberFreight PreviousWagonNumberFreight RegistrationCountry DatePutIntoService AuthorisationValidUntil SuspensionOfAuthorisation DateSuspensionOfAuthorisation MultilateralAuthorisationCountries ChannelTunnelPermitted QuieterRoutesExemptionCountry KeeperShortNameVKM ECM PlannedChangeOfECM ECMCertificate InteropCapability GCUWagon

source

```
<xs:element name="AdministrativeDataSet">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="WagonNumberFreight"/>
      <xs:element name="PreviousWagonNumberFreight" type="WagonIdent" minOccurs="0">
        <xs:annotation>
          <xs:documentation>For identification of a wagon after
renumbering</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="RegistrationCountry" type="CountryIdentISO">
        <xs:annotation>
          <xs:documentation>ISO country code of registration
country</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="DatePutIntoService">
        <xs:annotation>
          <xs:documentation>Date of first operation</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="AuthorisationValidUntil" type="xs:date" minOccurs="0">
        <xs:annotation>
          <xs:documentation>End date for restricted authorisation (special
case)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="SuspensionOfAuthorisation" type="xs:boolean">
        <xs:annotation>
          <xs:documentation>Information if authorisation has been suspended by the
authority</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="DateSuspensionOfAuthorisation" type="xs:date" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Date of the suspension of authorisation; must be provided
in case of suspension</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="MultilateralAuthorisationCountries" type="CountryIdentISO"
minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation> ISO country code of countries where the wagon is
authorised (applies only in case of limited interoperability); first entry indicates
the initial authorisation country</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ChannelTunnelPermitted" type="xs:boolean" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Indication if wagon is allowed to pass the Channel Tunnel
- if the transport is planned between UK and France and should use Eurotunnel
infrastructure.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="QuieterRoutesExemptionCountry" type="CountryIdentISO"
minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>ISO code of country where the wagon has an exemption in
accordance with TSI Noise to run on quieter routes although it is not TSI noise
compliant</xs:documentation>
```

```
        </xs:annotation>
      </xs:element>
      <xs:element ref="KeeperShortNameVKM">
        <xs:annotation>
          <xs:documentation>Vehicle Keeper Marking of the wagon keeper as listed in
VKM register (https://www.era.europa.eu/domains/registers/vkm_en, column B - without
special characters)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ECM">
        <xs:annotation>
          <xs:documentation> Full name of the assigned Entity in Charge of
Maintenance</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="256"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="PlannedChangeOfECM" minOccurs="0">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="CurrentECMAssignedUntil" type="xs:date">
              <xs:annotation>
                <xs:documentation> Date until the current Entity in Charge of
Maintenance is assigned to the wagon</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="SubsequentECM">
              <xs:annotation>
                <xs:documentation> Full name of the following Entity in Charge of
Maintenance</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="256"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="ECMCertificate">
        <xs:annotation>
          <xs:documentation>ECM certificate information</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="EINNumber">
              <xs:annotation>
                <xs:documentation>ECM certificate reference number
NOTE: this is a placeholder! CR 335 by ERA is containing this element and its full
description and code lists.</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element ref="CountryCodeISO"/>
                  <xs:element name="TypeDocumentEIN" type="Numeric2-2">
                    <xs:annotation>
                      <xs:documentation>Code List Candidate:
31, 34</xs:documentation>
                    </xs:annotation>
                  </xs:element>
```

```
                    <xs:element name="CounterAcreditedRecognizedBody" type="Numeric0-
2"/>
                    <xs:element name="EINYear" type="Numeric2-2"/>
                    <xs:element name="EINCounter">
                      <xs:simpleType>
                        <xs:restriction base="xs:integer">
                          <xs:minInclusive value="0"/>
                          <xs:maxInclusive value="9999"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element name="ECMCertificateValidFrom" type="xs:date">
                <xs:annotation>
                  <xs:documentation>Certificate valid from date</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="ECMCertificateValidTo" type="xs:date">
                <xs:annotation>
                  <xs:documentation>Certificate valid to date</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="CoversTankWagonsForDangerousGoods" type="xs:boolean">
                <xs:annotation>
                  <xs:documentation>Certificate covers tank wagons for dangerous
goods</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="CoversNonTankWagonsForDangerousGoods"
type="xs:boolean">
                <xs:annotation>
                  <xs:documentation>Certificate covers other wagons specialised in
transport of dangerous goods</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="ECMCertificateSuspended" type="xs:boolean">
                <xs:annotation>
                  <xs:documentation>Identification if certificate has been suspended
for any reason</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="DateECMCertificateSuspended" type="xs:date"
minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Date of the suspension of the ECM certificate; must
be provided in case of suspension</xs:documentation>
                </xs:annotation>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element ref="InteropCapability">
          <xs:annotation>
            <xs:documentation>Identification of the general interoperability capability
of the wagon
The following values/codes are proposed for the usage (defined in the
InteropCapabilityCode):

01 = National
02 = Bi-/Multilateral (with agreement or authorisation grid)

03 = RIV
```

```
05 = TEN

06 = TEN-GE

07 = TEN-CW

08 = TEN RIV</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="GCUWagon" type="xs:boolean">
        <xs:annotation>
          <xs:documentation>Indication if wagon is operated under the GCU
contract</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingStockDataset/AdministrativeDataSet/PreviousWagonNumberFreight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WagonIdent**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation maxLength 12 pattern [0-9]{12}
annotation	documentation For identification of a wagon after renumbering

source	`<xs:element name="PreviousWagonNumberFreight" type="WagonIdent" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>For identification of a wagon after renumbering</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/AdministrativeDataSet/RegistrationCountry**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	content simple
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation ISO country code of registration country
source	`<xs:element name="RegistrationCountry" type="CountryIdentISO">`

```
  <xs:annotation>
    <xs:documentation>ISO country code of registration country</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **RollingStockDataset/AdministrativeDataSet/AuthorisationValidUntil**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation End date for restricted authorisation (special case)

source	`<xs:element name="AuthorisationValidUntil" type="xs:date" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>End date for restricted authorisation (special case)</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/AdministrativeDataSet/SuspensionOfAuthorisation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
annotation	documentation Information if authorisation has been suspended by the authority

source	`<xs:element name="SuspensionOfAuthorisation" type="xs:boolean">`
	`  <xs:annotation>`
	`  <xs:documentation>Information if authorisation has been suspended by the authority</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/AdministrativeDataSet/DateSuspensionOfAuthorisation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	minOcc 0 maxOcc 1 content simple

annotation	documentation Date of the suspension of authorisation; must be provided in case of suspension
source	<xs:element name="DateSuspensionOfAuthorisation" type="xs:date" minOccurs="0"> <xs:annotation> <xs:documentation>Date of the suspension of authorisation; must be provided in case of suspension</xs:documentation> </xs:annotation> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/MultilateralAuthorisationCountries**

diagram	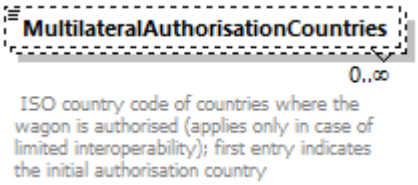
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation ISO country code of countries where the wagon is authorised (applies only in case of limited interoperability); first entry indicates the initial authorisation country
source	<xs:element name="MultilateralAuthorisationCountries" type="CountryIdentISO" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation> ISO country code of countries where the wagon is authorised (applies only in case of limited interoperability); first entry indicates the initial authorisation country</xs:documentation> </xs:annotation> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/ChannelTunnelPermitted**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Indication if wagon is allowed to pass the Channel Tunnel - if the transport is planned between UK and France and should use Eurotunnel infrastructure.
source	<xs:element name="ChannelTunnelPermitted" type="xs:boolean" minOccurs="0"> <xs:annotation> <xs:documentation>Indication if wagon is allowed to pass the Channel Tunnel - if the transport is planned between UK and France and should use Eurotunnel

```
infrastructure.</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **RollingStockDataset/AdministrativeDataSet/QuieterRoutesExemptionCountry**

diagram	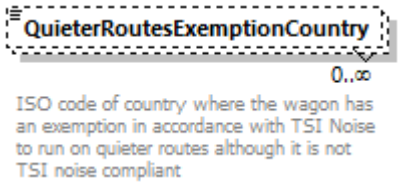
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation ISO code of country where the wagon has an exemption in accordance with TSI Noise to run on quieter routes although it is not TSI noise compliant

source	`<xs:element name="QuieterRoutesExemptionCountry" type="CountryIdentISO" minOccurs="0" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>ISO code of country where the wagon has an exemption in accordance with TSI Noise to run on quieter routes although it is not TSI noise compliant</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/AdministrativeDataSet/ECM**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation maxLength 256
annotation	documentation Full name of the assigned Entity in Charge of Maintenance

source	`<xs:element name="ECM">`
	`  <xs:annotation>`
	`  <xs:documentation> Full name of the assigned Entity in Charge of Maintenance</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="256"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **RollingStockDataset/AdministrativeDataSet/PlannedChangeOfECM**

diagram	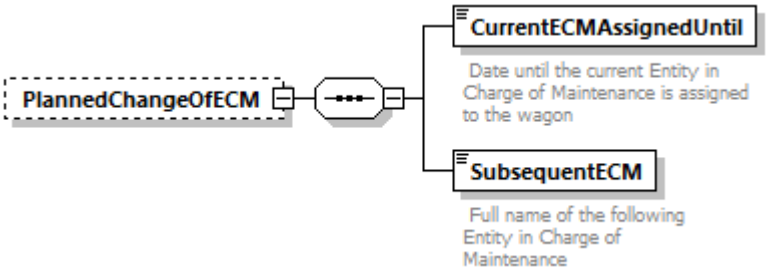
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**CurrentECMAssignedUntil SubsequentECM**
source	<xs:element name="PlannedChangeOfECM" minOccurs="0"> <xs:complexType> <xs:sequence> <xs:element name="CurrentECMAssignedUntil" type="xs:date"> <xs:annotation> <xs:documentation> Date until the current Entity in Charge of Maintenance is assigned to the wagon</xs:documentation> </xs:annotation> </xs:element> <xs:element name="SubsequentECM"> <xs:annotation> <xs:documentation> Full name of the following Entity in Charge of Maintenance</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="256"/> </xs:restriction> </xs:simpleType> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/PlannedChangeOfECM/CurrentECMAssignedUntil**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
annotation	documentation Date until the current Entity in Charge of Maintenance is assigned to the wagon
source	<xs:element name="CurrentECMAssignedUntil" type="xs:date"> <xs:annotation> <xs:documentation> Date until the current Entity in Charge of Maintenance is assigned to the wagon</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

element **RollingStockDataset/AdministrativeDataSet/PlannedChangeOfECM/SubsequentECM**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind: maxLength; Value: 256; Annotation:
annotation	documentation Full name of the following Entity in Charge of Maintenance
source	<xs:element name="SubsequentECM"> <xs:annotation> <xs:documentation> Full name of the following Entity in Charge of Maintenance</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="256"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate**

diagram	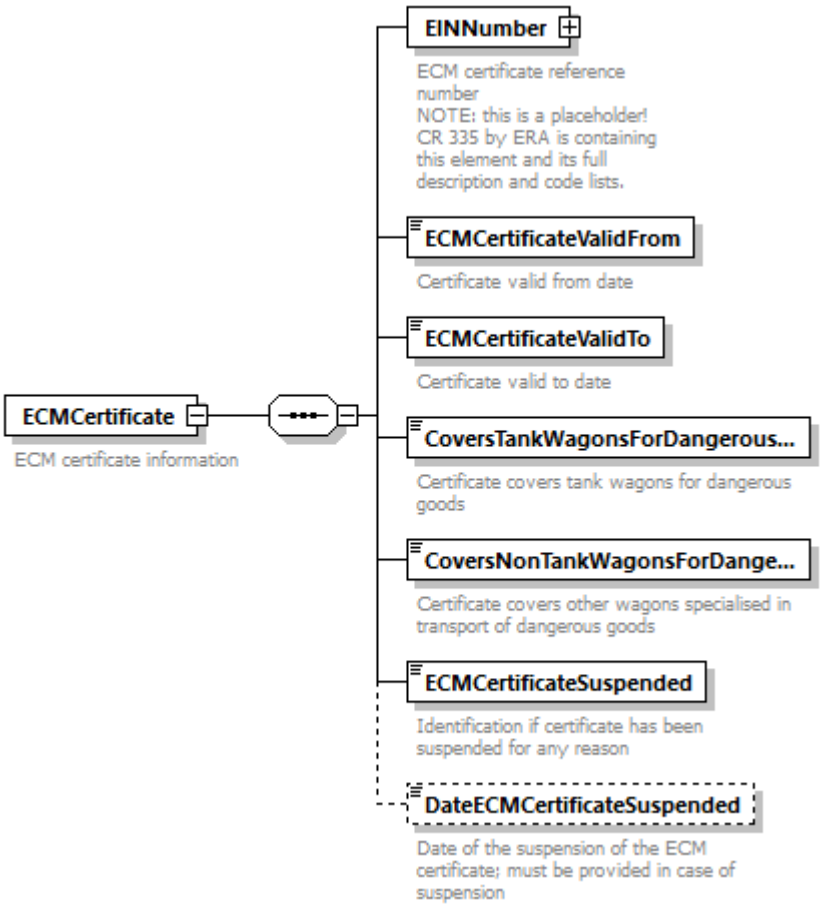
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	EINNumber ECMCertificateValidFrom ECMCertificateValidTo CoversTankWagonsForDangerousGoods CoversNonTankWagonsForDangerousGoods ECMCertificateSuspended DateECMCertificateSuspended
annotation	documentation ECM certificate information

source

```
<xs:element name="ECMCertificate">
  <xs:annotation>
    <xs:documentation>ECM certificate information</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="EINNumber">
        <xs:annotation>
          <xs:documentation>ECM certificate reference number
NOTE: this is a placeholder! CR 335 by ERA is containing this element and its full
description and code lists.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="CountryCodeISO"/>
            <xs:element name="TypeDocumentEIN" type="Numeric2-2">
              <xs:annotation>
                <xs:documentation>Code List Candidate:
31, 34</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="CounterAcreditedRecognizedBody" type="Numeric0-2"/>
```

```
            <xs:element name="EINYear" type="Numeric2-2"/>
            <xs:element name="EINCounter">
              <xs:simpleType>
                <xs:restriction base="xs:integer">
                  <xs:minInclusive value="0"/>
                  <xs:maxInclusive value="9999"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="ECMCertificateValidFrom" type="xs:date">
        <xs:annotation>
          <xs:documentation>Certificate valid from date</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ECMCertificateValidTo" type="xs:date">
        <xs:annotation>
          <xs:documentation>Certificate valid to date</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="CoversTankWagonsForDangerousGoods" type="xs:boolean">
        <xs:annotation>
          <xs:documentation>Certificate covers tank wagons for dangerous
goods</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="CoversNonTankWagonsForDangerousGoods" type="xs:boolean">
        <xs:annotation>
          <xs:documentation>Certificate covers other wagons specialised in transport
of dangerous goods</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ECMCertificateSuspended" type="xs:boolean">
        <xs:annotation>
          <xs:documentation>Identification if certificate has been suspended for any
reason</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="DateECMCertificateSuspended" type="xs:date" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Date of the suspension of the ECM certificate; must be
provided in case of suspension</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/EINNumber**

diagram	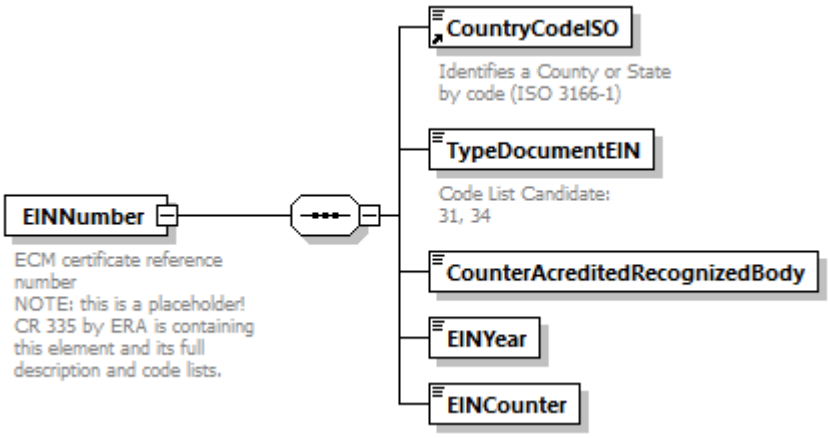
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**CountryCodeISO TypeDocumentEIN CounterAcreditedRecognizedBody EINYear EINCounter**
annotation	documentation ECM certificate reference number NOTE: this is a placeholder! CR 335 by ERA is containing this element and its full description and code lists.

source

```
<xs:element name="EINNumber">
  <xs:annotation>
    <xs:documentation>ECM certificate reference number
NOTE: this is a placeholder! CR 335 by ERA is containing this element and its full
description and code lists.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="CountryCodeISO"/>
      <xs:element name="TypeDocumentEIN" type="Numeric2-2">
        <xs:annotation>
          <xs:documentation>Code List Candidate:
31, 34</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="CounterAcreditedRecognizedBody" type="Numeric0-2"/>
      <xs:element name="EINYear" type="Numeric2-2"/>
      <xs:element name="EINCounter">
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:minInclusive value="0"/>
            <xs:maxInclusive value="9999"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/EINNumber/TypeDocumentEIN**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	**Numeric2-2**
properties	content simple
facets	Kind Value Annotation minInclusive 01 maxInclusive 99
annotation	documentation Code List Candidate: 31, 34

source	`<xs:element name="TypeDocumentEIN" type="Numeric2-2">`
	`<xs:annotation>`
	`<xs:documentation>Code List Candidate:`
	`31, 34</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/EINNumber/CounterAcreditedRecognizedBody**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric0-2**
properties	content simple
facets	Kind Value Annotation minInclusive 00 maxInclusive 99
source	`<xs:element name="CounterAcreditedRecognizedBody" type="Numeric0-2"/>`

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/EINNumber/EINYear**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric2-2**
properties	content simple
facets	Kind Value Annotation minInclusive 01 maxInclusive 99
source	`<xs:element name="EINYear" type="Numeric2-2"/>`

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/EINNumber/EINCounter**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
facets	Kind Value Annotation minInclusive 0 maxInclusive 9999

source	<xs:element name="EINCounter"> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="0"/> <xs:maxInclusive value="9999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/ECMCertificateValidFrom**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
annotation	documentation Certificate valid from date
source	<xs:element name="ECMCertificateValidFrom" type="xs:date"> <xs:annotation> <xs:documentation>Certificate valid from date</xs:documentation> </xs:annotation> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/ECMCertificateValidTo**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
annotation	documentation Certificate valid to date
source	<xs:element name="ECMCertificateValidTo" type="xs:date"> <xs:annotation> <xs:documentation>Certificate valid to date</xs:documentation> </xs:annotation> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/CoversTankWagonsForDangerousGoods**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
annotation	documentation Certificate covers tank wagons for dangerous goods

source	<xs:element name="CoversTankWagonsForDangerousGoods" type="xs:boolean"> <xs:annotation> <xs:documentation>Certificate covers tank wagons for dangerous goods</xs:documentation> </xs:annotation> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/CoversNonTankWagonsForDangerousGoods**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
annotation	documentation Certificate covers other wagons specialised in transport of dangerous goods
source	<xs:element name="CoversNonTankWagonsForDangerousGoods" type="xs:boolean"> <xs:annotation> <xs:documentation>Certificate covers other wagons specialised in transport of dangerous goods</xs:documentation> </xs:annotation> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/ECMCertificateSuspended**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
annotation	documentation Identification if certificate has been suspended for any reason
source	<xs:element name="ECMCertificateSuspended" type="xs:boolean"> <xs:annotation> <xs:documentation>Identification if certificate has been suspended for any reason</xs:documentation> </xs:annotation> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/DateECMCertificateSuspended**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	minOcc 0 maxOcc 1

	content simple
annotation	documentation Date of the suspension of the ECM certificate; must be provided in case of suspension
source	<xs:element name="DateECMCertificateSuspended" type="xs:date" minOccurs="0"> <xs:annotation> <xs:documentation>Date of the suspension of the ECM certificate; must be provided in case of suspension</xs:documentation> </xs:annotation> </xs:element>

element **RollingStockDataset/AdministrativeDataSet/GCUWagon**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
annotation	documentation Indication if wagon is operated under the GCU contract
source	<xs:element name="GCUWagon" type="xs:boolean"> <xs:annotation> <xs:documentation>Indication if wagon is operated under the GCU contract</xs:documentation> </xs:annotation> </xs:element>

element **RollingStockDataset/DesignDataSet**

diagram	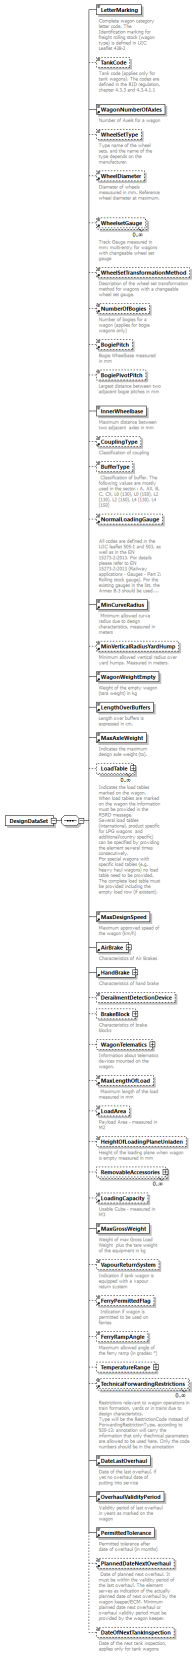
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children

LetterMarking TankCode WagonNumberOfAxles WheelSetType WheelDiameter WheelsetGauge WheelSetTransformationMethod NumberOfBogies BogiePitch BogiePivotPitch InnerWheelbase CouplingType BufferType NormalLoadingGauge MinCurveRadius MinVerticalRadiusYardHump WagonWeightEmpty LengthOverBuffers MaxAxleWeight LoadTable MaxDesignSpeed AirBrake HandBrake DerailmentDetectionDevice BrakeBlock WagonTelematics MaxLengthOfLoad LoadArea HeightOfLoadingPlaneUnladen RemovableAccessories LoadingCapacity MaxGrossWeight VapourReturnSystem FerryPermittedFlag FerryRampAngle TemperatureRange TechnicalForwardingRestrictions DateLastOverhaul OverhaulValidityPeriod PermittedTolerance PlannedDateNextOverhaul DateOfNextTankInspection

source

```
<xs:element name="DesignDataSet">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="LetterMarking">
        <xs:annotation>
          <xs:documentation>Complete wagon category letter code. The Identification
marking for freight rolling stock (wagon type) is defined in UIC Leaflet 438-
2</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="20"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="TankCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Tank code (applies only for tank wagons). The codes are
defined in the RID regulation, chapter 4.3.3 and 4.3.4.1.1</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="20"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="WagonNumberOfAxles"/>
      <xs:element name="WheelSetType" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Type name of the wheel sets, and the name of the type
depends on the manufacturer.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="256"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="WheelDiameter" minOccurs="0"/>
      <xs:element ref="WheelsetGauge" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element ref="WheelSetTransformationMethod" minOccurs="0"/>
      <xs:element ref="NumberOfBogies" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Number of bogies for a wagon (applies for bogie wagons
only)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="BogiePitch" minOccurs="0"/>
      <xs:element name="BogiePivotPitch" type="Numeric1-5" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Largest distance between two adjacent bogie pitches in
mm</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="InnerWheelbase" type="Numeric1-5">
        <xs:annotation>
          <xs:documentation>Maximum distance between two adjacent  axles in
```

```
mm</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="CouplingType" minOccurs="0"/>
      <xs:element name="BufferType" minOccurs="0">
        <xs:annotation>
          <xs:documentation> Classification of buffer. The following values are
mostly used in the sector.: A, AX, B, C, CX, L0 (130), L0 (150), L2 (130), L2 (150),
L4 (130), L4 (150)</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="256"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="NormalLoadingGauge" minOccurs="0"/>
      <xs:element ref="MinCurveRadius">
        <xs:annotation>
          <xs:documentation> Minimum allowed curve radius due to design
characteristics, measured in meters</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="MinVerticalRadiusYardHump" minOccurs="0"/>
      <xs:element ref="WagonWeightEmpty">
        <xs:annotation>
          <xs:documentation>Weight of the empty wagon (tara weight) in
kg</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="LengthOverBuffers"/>
      <xs:element ref="MaxAxleWeight"/>
      <xs:element name="LoadTable" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>Indicates the load tables marked on the wagon.
When load tables are marked on the wagon the information must be provided in the RSRD
message.
Several load tables (international, product specific for LPG wagons  and
additional/country specific) can be specified by providing the element several times
consecutively.
For special wagons with specific load tables (e.g. heavy haul wagons) no load table
need to be provided.
The complete load table must be provided including the empty load row (if
existent).</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="LoadTableProduct" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Product description, only applies for product-
specific load tables</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="ProductUNCode" type="Numeric4-4">
                    <xs:annotation>
                      <xs:documentation>UN code of product if product specific load
table</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="ProductRIDName">
                    <xs:annotation>
                      <xs:documentation> RID product name as written on the folding
panel</xs:documentation>
```

```
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:maxLength value="256"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="LoadTableCountry" type="CountryIdentISO" minOccurs="0"
maxOccurs="unbounded">
              <xs:annotation>
                <xs:documentation>ISO country code of countries for additional load
tables</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="SpeedCategory" type="Numeric1-5" maxOccurs="unbounded">
              <xs:annotation>
                <xs:documentation>Numeric speed in load table, without speed empty in
km/h</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="LoadTableStars" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Number of load table stars. Currently recognized
values/codes:
1 = Authorised to run loaded in trains up to 100 km/h with a brake that does not meet
all the requirements for 100 km/h conditions
2 = Authorised to run loaded in trains up to 120 km/h with a brake that does not meet
all the requirements for 120 km/h conditions
3 = Authorised to run loaded in trains up to 120 km/h with a brake that does not meet
all the requirements for 120 km/h conditions. Wagon is fitted with an automatic load-
proportional braking system.
 </xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="RouteClassPayloads" maxOccurs="unbounded">
              <xs:complexType>
                <xs:sequence>
                  <xs:element ref="RouteClass"/>
                  <xs:element name="MaxPayload" maxOccurs="unbounded">
                    <xs:annotation>
                      <xs:documentation>Maximum payload in tonns of line category;
number of entries must fit to number of entries in SpeedCategory</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:decimal">
                        <xs:totalDigits value="4"/>
                        <xs:fractionDigits value="1"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="MaxDesignSpeed"/>
      <xs:element ref="AirBrake"/>
      <xs:element ref="HandBrake">
        <xs:annotation>
          <xs:documentation>Characteristics of hand brake</xs:documentation>
```

```
        </xs:annotation>
      </xs:element>
      <xs:element name="DerailmentDetectionDevice" type="DerailmentDetectionDevice"
minOccurs="0"/>
      <xs:element name="BrakeBlock" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Characteristics of brake blocks</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="BrakeBlockName" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Name of the brake block type, including the length
in mm</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="256"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="CompositeBrakeBlockRetrofitted" type="xs:boolean"
minOccurs="0">
              <xs:annotation>
                <xs:documentation> Indication if composite brake blocks are
retrofitted or originally equipped</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="CompositeBrakeBlockInstallationDate" type="xs:date"
minOccurs="0">
              <xs:annotation>
                <xs:documentation>Date of composite brake block installation, for
originally equipped wagon = date put into service</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="WagonTelematics" type="WagonTelematics" minOccurs="0">
        <xs:annotation>
          <xs:documentation xml:lang="en">Information about telematics devices
mounted on the wagon.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="MaxLengthOfLoad" minOccurs="0">
        <xs:annotation>
          <xs:documentation> Maximum length of the load measured in mm
</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="LoadArea" minOccurs="0"/>
      <xs:element name="HeightOfLoadingPlaneUnladen" type="Numeric1-5" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Height of the loading plane when wagon is empty measured
in mm</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="RemovableAccessories" minOccurs="0" maxOccurs="unbounded">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="TypeOfRemovableAccessories">
              <xs:annotation>
                <xs:documentation>Specification of removable accessory.
TypeOfRemovableAccessories code list is used. Values refer to UIC Leaflet 920-13:
```

```
01 = Removable stanchion
02 = Removable side flap of flat wagon
03 = Removable end flap of flat wagon
04 = Removable side rail
05 = Removable intermediate upright for securing the load
06 = Stanchion chain
07 = Removable handle and wheel for winch on car-carrying wagon
08 = Swivelling bolster (with stanchions)
09 = Coupling rod (rigid coupling)
10 = Ice bunker
11 = Ice bunker screen
12 = Ice bunker frame
13 = Trestle or bar with hooks for hanging meat
14 = Movable cross-member of wagon with low loading plane
15 = Removable support
16 = Mooring cross-member on wagon for special loads
17 = Movable floor panel on wagon for special loads
18 = Scotch
19 = Skid bar with or without shoes on car-carrying wagon
20 = Mooring strap on car-carrying wagon
21 = Beam for movable ramp on car-carrying wagon
22 = Spare heating half-coupling
23 = Fire extinguisher
24 = Wheel scotches (for cars) on car-carrying wagon
25 = Gangway loading ramp on car-carrying wagon
26 = Metal cradles for rolls of metal sheeting
27 = Panel for covering markings
28 = Loading frame for special types of goods
29 = Headstock for "rolling roads"
99 = Other wagon accessories
</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="NumberOfAccessorOfSpecType" type="Numeric2-2">
                <xs:annotation>
                  <xs:documentation>Number of specified accessory equipped on the
wagon</xs:documentation>
                </xs:annotation>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element ref="LoadingCapacity" minOccurs="0"/>
        <xs:element ref="MaxGrossWeight">
          <xs:annotation>
            <xs:documentation>Weight of max Gross Load Weight  plus the tare weight of
the equipment in kg</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="VapourReturnSystem" type="xs:boolean" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Indication if tank wagon is equipped with a vapour return
system</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element ref="FerryPermittedFlag" minOccurs="0">
          <xs:annotation>
            <xs:documentation> Indication if wagon is permitted to be used on
ferries</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="FerryRampAngle" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Maximum allowed angle of the ferry ramp (in grades:
```

```
°)</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:decimal">
            <xs:totalDigits value="3"/>
            <xs:fractionDigits value="2"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="TemperatureRange" minOccurs="0">
        <xs:complexType>
          <xs:sequence>
            <xs:annotation>
              <xs:documentation>Temperature Range</xs:documentation>
            </xs:annotation>
            <xs:element ref="MaxTemp"/>
            <xs:element ref="MinTemp"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="TechnicalForwardingRestrictions" minOccurs="0"
maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>Restrictions relevant to wagon operations in train
formation, yards or in trains due to design characteristics.
Type will be the RestrictionCode instead of ForwardingRestrictionType, according to
920-13: annotation will carry the information that only thechnical parameters are
allowed to be used here. Only the code numbers should be in the
annotation</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="DateLastOverhaul">
        <xs:annotation>
          <xs:documentation>Date of the last overhaul, if yet no overhaul date of
putting into service</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="OverhaulValidityPeriod"/>
      <xs:element ref="PermittedTolerance"/>
      <xs:element ref="PlannedDateNextOverhaul" minOccurs="0"/>
      <xs:element name="DateOfNextTankInspection" type="xs:date" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Date of the next tank inspection, applies only for tank
wagons</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingStockDataset/DesignDataSet/LetterMarking**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	content simple
facets	Kind Value Annotation maxLength 20
annotation	documentation Complete wagon category letter code. The Identification marking for freight rolling stock (wagon type) is defined in UIC Leaflet 438-2
source	<xs:element name="LetterMarking"> <xs:annotation> <xs:documentation>Complete wagon category letter code. The Identification marking for freight rolling stock (wagon type) is defined in UIC Leaflet 438-2</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="20"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RollingStockDataset/DesignDataSet/TankCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation maxLength 20
annotation	documentation Tank code (applies only for tank wagons). The codes are defined in the RID regulation, chapter 4.3.3 and 4.3.4.1.1
source	<xs:element name="TankCode" minOccurs="0"> <xs:annotation> <xs:documentation>Tank code (applies only for tank wagons). The codes are defined in the RID regulation, chapter 4.3.3 and 4.3.4.1.1</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="20"/> </xs:restriction> </xs:simpleType> </xs:element>

element **RollingStockDataset/DesignDataSet/WheelSetType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation maxLength 256
annotation	documentation Type name of the wheel sets, and the name of the type depends on the manufacturer.

source	`<xs:element name="WheelSetType" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Type name of the wheel sets, and the name of the type depends on the manufacturer.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="256"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/BogiePivotPitch**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric1-5**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation Largest distance between two adjacent bogie pitches in mm

source	`<xs:element name="BogiePivotPitch" type="Numeric1-5" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Largest distance between two adjacent bogie pitches in mm</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/InnerWheelbase**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric1-5**
properties	content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation Maximum distance between two adjacent axles in mm

source

```
<xs:element name="InnerWheelbase" type="Numeric1-5">
  <xs:annotation>
    <xs:documentation>Maximum distance between two adjacent  axles in
mm</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **RollingStockDataset/DesignDataSet/BufferType**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:string**

properties

minOcc	0
maxOcc	1
content	simple

facets

Kind	Value	Annotation
maxLength	256	

annotation

documentation
Classification of buffer. The following values are mostly used in the sector.: A, AX, B, C, CX, L0 (130), L0 (150), L2 (130), L2 (150), L4 (130), L4 (150)

source

```
<xs:element name="BufferType" minOccurs="0">
  <xs:annotation>
    <xs:documentation> Classification of buffer. The following values are mostly used
in the sector.: A, AX, B, C, CX, L0 (130), L0 (150), L2 (130), L2 (150), L4 (130), L4
(150)</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:maxLength value="256"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RollingStockDataset/DesignDataSet/LoadTable**

diagram	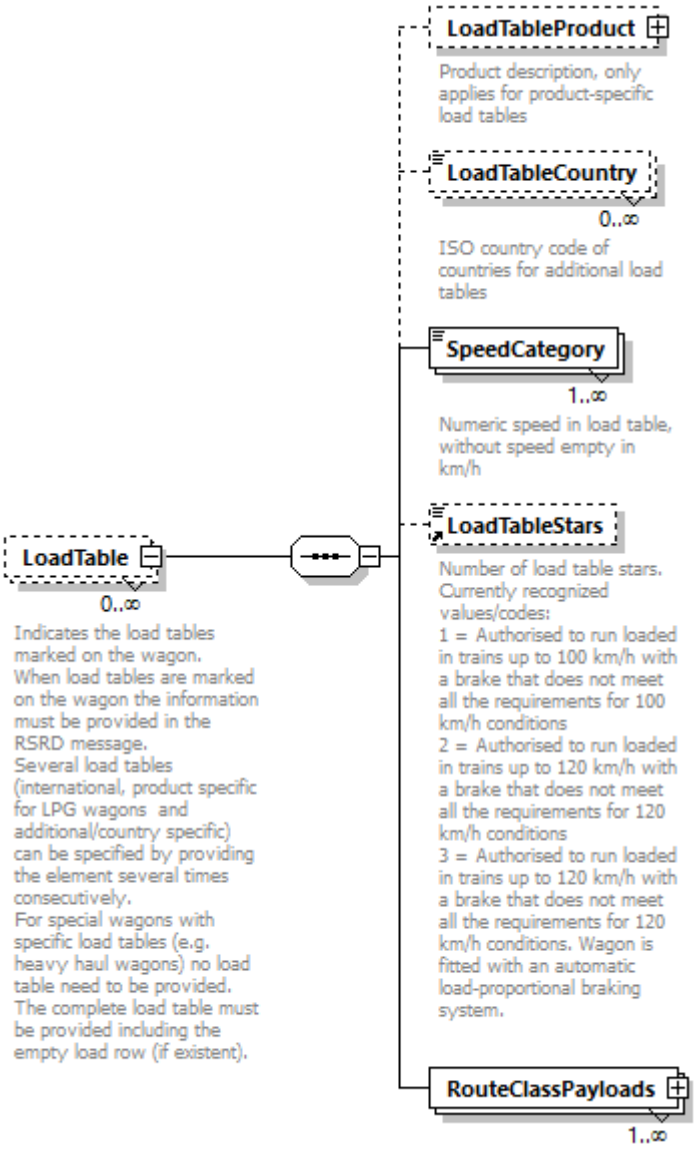
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc unbounded content complex
children	**LoadTableProduct LoadTableCountry SpeedCategory LoadTableStars RouteClassPayloads**
annotation	documentation Indicates the load tables marked on the wagon. When load tables are marked on the wagon the information must be provided in the RSRD message. Several load tables (international, product specific for LPG wagons and additional/country specific) can be specified by providing the element several times consecutively. For special wagons with specific load tables (e.g. heavy haul wagons) no load table need to be provided. The complete load table must be provided including the empty load row (if existent).

source	`<xs:element name="LoadTable" minOccurs="0" maxOccurs="unbounded">`
	`<xs:annotation>`
	`<xs:documentation>`Indicates the load tables marked on the wagon.
	When load tables are marked on the wagon the information must be provided in the RSRD message.
	Several load tables (international, product specific for LPG wagons and additional/country specific) can be specified by providing the element several times consecutively.
	For special wagons with specific load tables (e.g. heavy haul wagons) no load table

```
need to be provided.
The complete load table must be provided including the empty load row (if
existent).</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="LoadTableProduct" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Product description, only applies for product-specific
load tables</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ProductUNCode" type="Numeric4-4">
              <xs:annotation>
                <xs:documentation>UN code of product if product specific load
table</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="ProductRIDName">
              <xs:annotation>
                <xs:documentation> RID product name as written on the folding
panel</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="256"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="LoadTableCountry" type="CountryIdentISO" minOccurs="0"
maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>ISO country code of countries for additional load
tables</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="SpeedCategory" type="Numeric1-5" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>Numeric speed in load table, without speed empty in
km/h</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="LoadTableStars" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Number of load table stars. Currently recognized
values/codes:
1 = Authorised to run loaded in trains up to 100 km/h with a brake that does not meet
all the requirements for 100 km/h conditions
2 = Authorised to run loaded in trains up to 120 km/h with a brake that does not meet
all the requirements for 120 km/h conditions
3 = Authorised to run loaded in trains up to 120 km/h with a brake that does not meet
all the requirements for 120 km/h conditions. Wagon is fitted with an automatic load-
proportional braking system.
 </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="RouteClassPayloads" maxOccurs="unbounded">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="RouteClass"/>
```

```
            <xs:element name="MaxPayload" maxOccurs="unbounded">
              <xs:annotation>
                <xs:documentation>Maximum payload in tonns of line category; number
of entries must fit to number of entries in SpeedCategory</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:decimal">
                  <xs:totalDigits value="4"/>
                  <xs:fractionDigits value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingStockDataset/DesignDataSet/LoadTable/LoadTableProduct**

diagram	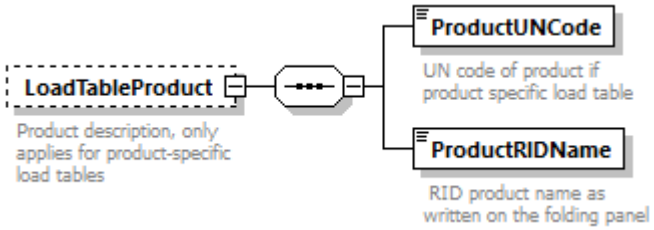
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**ProductUNCode ProductRIDName**
annotation	documentation Product description, only applies for product-specific load tables

source

```
<xs:element name="LoadTableProduct" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Product description, only applies for product-specific load
tables</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ProductUNCode" type="Numeric4-4">
        <xs:annotation>
          <xs:documentation>UN code of product if product specific load
table</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ProductRIDName">
        <xs:annotation>
          <xs:documentation> RID product name as written on the folding
panel</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="256"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
```

```
  </xs:complexType>
</xs:element>
```

element **RollingStockDataset/DesignDataSet/LoadTable/LoadTableProduct/ProductUNCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric4-4**
properties	content simple
facets	Kind Value Annotation minInclusive 0001 maxInclusive 9999
annotation	documentation UN code of product if product specific load table

source	`<xs:element name="ProductUNCode" type="Numeric4-4">`
	`  <xs:annotation>`
	`  <xs:documentation>UN code of product if product specific load table</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/LoadTable/LoadTableProduct/ProductRIDName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation maxLength 256
annotation	documentation RID product name as written on the folding panel

source	`<xs:element name="ProductRIDName">`
	`  <xs:annotation>`
	`  <xs:documentation> RID product name as written on the folding panel</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="256"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/LoadTable/LoadTableCountry**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation ISO country code of countries for additional load tables

source	`<xs:element name="LoadTableCountry" type="CountryIdentISO" minOccurs="0" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>ISO country code of countries for additional load tables</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/LoadTable/SpeedCategory**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric1-5**
properties	minOcc 1 maxOcc unbounded content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation Numeric speed in load table, without speed empty in km/h

source	`<xs:element name="SpeedCategory" type="Numeric1-5" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>Numeric speed in load table, without speed empty in km/h</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/LoadTable/RouteClassPayloads**

diagram	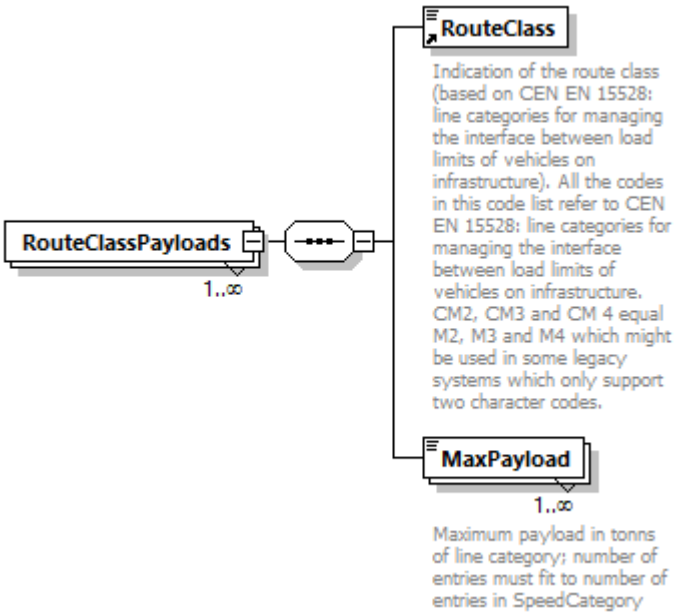
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 1 maxOcc unbounded content complex
children	**RouteClass** **MaxPayload**

source	`<xs:element name="RouteClassPayloads" maxOccurs="unbounded">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="RouteClass"/>`
	`  <xs:element name="MaxPayload" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>Maximum payload in tonns of line category; number of entries must fit to number of entries in SpeedCategory</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:totalDigits value="4"/>`
	`  <xs:fractionDigits value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`  </xs:element>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/LoadTable/RouteClassPayloads/MaxPayload**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**

properties	minOcc 1 maxOcc unbounded content simple
facets	Kind Value Annotation totalDigits 4 fractionDigits 1
annotation	documentation Maximum payload in tonns of line category; number of entries must fit to number of entries in SpeedCategory

source	`<xs:element name="MaxPayload" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>Maximum payload in tonns of line category; number of entries must fit to number of entries in SpeedCategory</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:totalDigits value="4"/>`
	`  <xs:fractionDigits value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/DerailmentDetectionDevice**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**DerailmentDetectionDevice**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration EDT 101 enumeration MDV 100 enumeration Non coded device
source	`<xs:element name="DerailmentDetectionDevice" type="DerailmentDetectionDevice" minOccurs="0"/>`

element **RollingStockDataset/DesignDataSet/BrakeBlock**

diagram	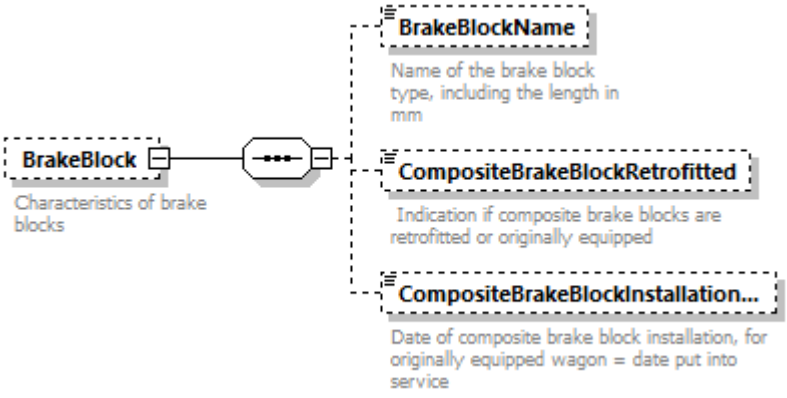
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**BrakeBlockName CompositeBrakeBlockRetrofitted CompositeBrakeBlockInstallationDate**

annotation	documentation Characteristics of brake blocks
source	<xs:element name="BrakeBlock" minOccurs="0"> <xs:annotation> <xs:documentation>Characteristics of brake blocks</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="BrakeBlockName" minOccurs="0"> <xs:annotation> <xs:documentation>Name of the brake block type, including the length in mm</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="256"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="CompositeBrakeBlockRetrofitted" type="xs:boolean" minOccurs="0"> <xs:annotation> <xs:documentation> Indication if composite brake blocks are retrofitted or originally equipped</xs:documentation> </xs:annotation> </xs:element> <xs:element name="CompositeBrakeBlockInstallationDate" type="xs:date" minOccurs="0"> <xs:annotation> <xs:documentation>Date of composite brake block installation, for originally equipped wagon = date put into service</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **RollingStockDataset/DesignDataSet/BrakeBlock/BrakeBlockName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation maxLength 256
annotation	documentation Name of the brake block type, including the length in mm
source	<xs:element name="BrakeBlockName" minOccurs="0"> <xs:annotation> <xs:documentation>Name of the brake block type, including the length in mm</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="256"/>

```
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RollingStockDataset/DesignDataSet/BrakeBlock/CompositeBrakeBlockRetrofitted**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Indication if composite brake blocks are retrofitted or originally equipped

source	`<xs:element name="CompositeBrakeBlockRetrofitted" type="xs:boolean" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation> Indication if composite brake blocks are retrofitted or originally equipped</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/BrakeBlock/CompositeBrakeBlockInstallationDate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Date of composite brake block installation, for originally equipped wagon = date put into service

source	`<xs:element name="CompositeBrakeBlockInstallationDate" type="xs:date" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Date of composite brake block installation, for originally equipped wagon = date put into service</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/WagonTelematics**

diagram	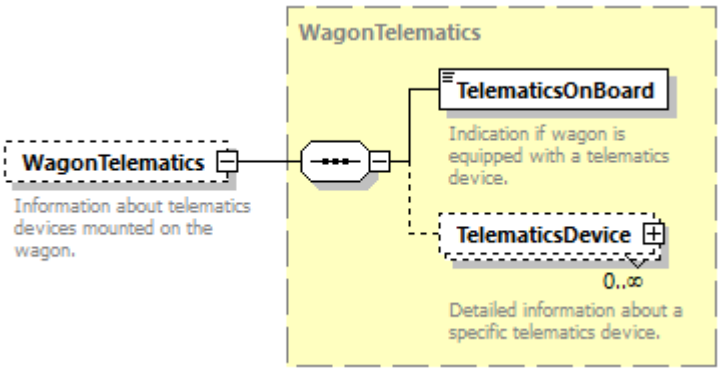
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WagonTelematics**
properties	minOcc 0 maxOcc 1 content complex
children	**TelematicsOnBoard** **TelematicsDevice**
annotation	documentation Information about telematics devices mounted on the wagon.

source	`<xs:element name="WagonTelematics" type="WagonTelematics" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation xml:lang="en">Information about telematics devices mounted on the wagon.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/HeightOfLoadingPlaneUnladen**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric1-5**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation Height of the loading plane when wagon is empty measured in mm

source	`<xs:element name="HeightOfLoadingPlaneUnladen" type="Numeric1-5" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Height of the loading plane when wagon is empty measured in mm</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/RemovableAccessories**

diagram

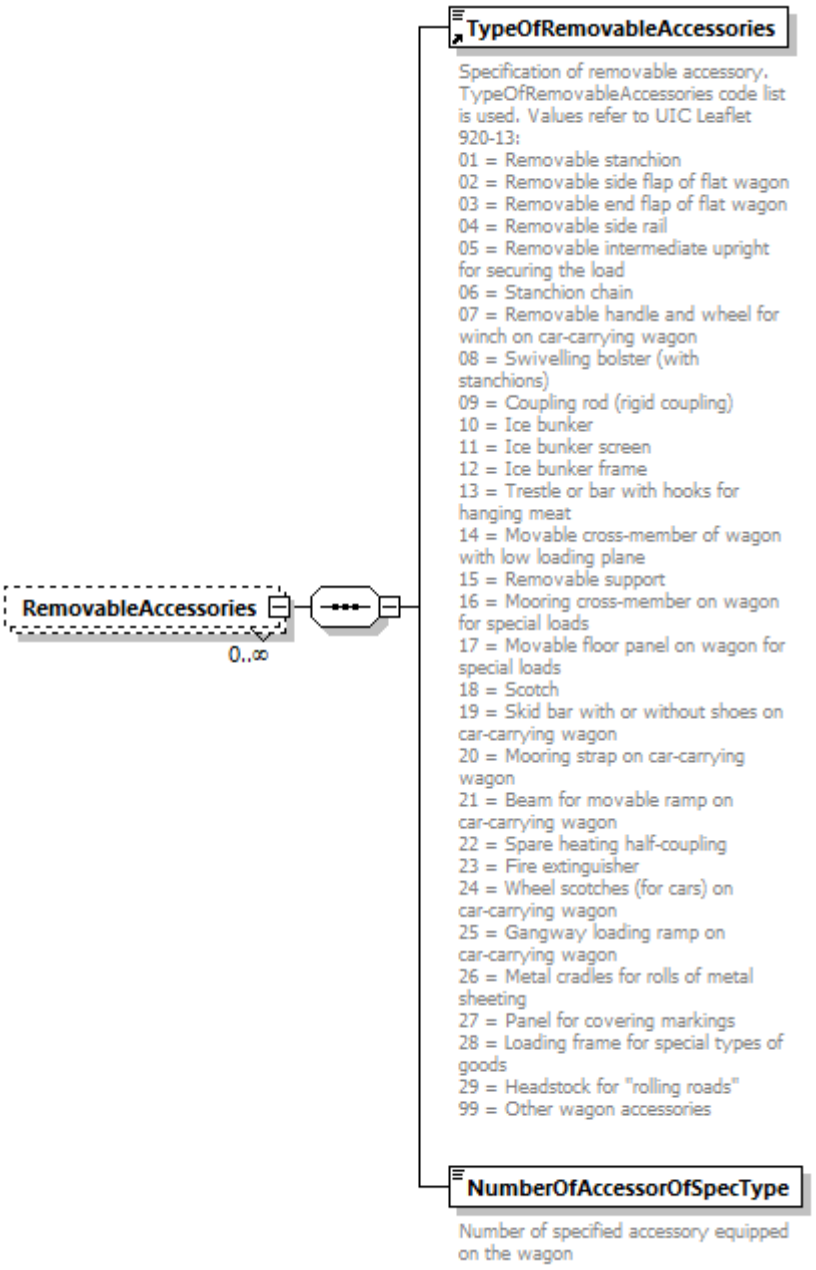

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc unbounded content complex
children	TypeOfRemovableAccessories NumberOfAccessorOfSpecType

source

```
<xs:element name="RemovableAccessories" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="TypeOfRemovableAccessories">
        <xs:annotation>
          <xs:documentation>Specification of removable accessory.
TypeOfRemovableAccessories code list is used. Values refer to UIC Leaflet 920-13:
01 = Removable stanchion
02 = Removable side flap of flat wagon
03 = Removable end flap of flat wagon
04 = Removable side rail
```

```
05 = Removable intermediate upright for securing the load
06 = Stanchion chain
07 = Removable handle and wheel for winch on car-carrying wagon
08 = Swivelling bolster (with stanchions)
09 = Coupling rod (rigid coupling)
10 = Ice bunker
11 = Ice bunker screen
12 = Ice bunker frame
13 = Trestle or bar with hooks for hanging meat
14 = Movable cross-member of wagon with low loading plane
15 = Removable support
16 = Mooring cross-member on wagon for special loads
17 = Movable floor panel on wagon for special loads
18 = Scotch
19 = Skid bar with or without shoes on car-carrying wagon
20 = Mooring strap on car-carrying wagon
21 = Beam for movable ramp on car-carrying wagon
22 = Spare heating half-coupling
23 = Fire extinguisher
24 = Wheel scotches (for cars) on car-carrying wagon
25 = Gangway loading ramp on car-carrying wagon
26 = Metal cradles for rolls of metal sheeting
27 = Panel for covering markings
28 = Loading frame for special types of goods
29 = Headstock for "rolling roads"
99 = Other wagon accessories
</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="NumberOfAccessorOfSpecType" type="Numeric2-2">
        <xs:annotation>
          <xs:documentation>Number of specified accessory equipped on the
wagon</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingStockDataset/DesignDataSet/RemovableAccessories/NumberOfAccessorOfSpecType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric2-2**
properties	content simple
facets	Kind Value Annotation minInclusive 01 maxInclusive 99
annotation	documentation Number of specified accessory equipped on the wagon

source	`<xs:element name="NumberOfAccessorOfSpecType" type="Numeric2-2">`
	`  <xs:annotation>`
	`  <xs:documentation>Number of specified accessory equipped on the wagon</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/VapourReturnSystem**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Indication if tank wagon is equipped with a vapour return system

source	`<xs:element name="VapourReturnSystem" type="xs:boolean" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Indication if tank wagon is equipped with a vapour return system</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/FerryRampAngle**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation totalDigits 3 fractionDigits 2
annotation	documentation Maximum allowed angle of the ferry ramp (in grades: °)

source	`<xs:element name="FerryRampAngle" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Maximum allowed angle of the ferry ramp (in grades: °)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:totalDigits value="3"/>`
	`  <xs:fractionDigits value="2"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/TemperatureRange**

diagram	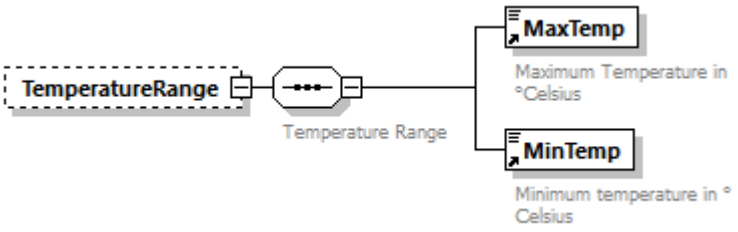
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**MaxTemp MinTemp**

source	`<xs:element name="TemperatureRange" minOccurs="0">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:annotation>`
	`  <xs:documentation>Temperature Range</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:element ref="MaxTemp"/>`
	`  <xs:element ref="MinTemp"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **RollingStockDataset/DesignDataSet/DateOfNextTankInspection**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Date of the next tank inspection, applies only for tank wagons

source	`<xs:element name="DateOfNextTankInspection" type="xs:date" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Date of the next tank inspection, applies only for tank wagons</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **RollingStockDatasetMessage**

diagram	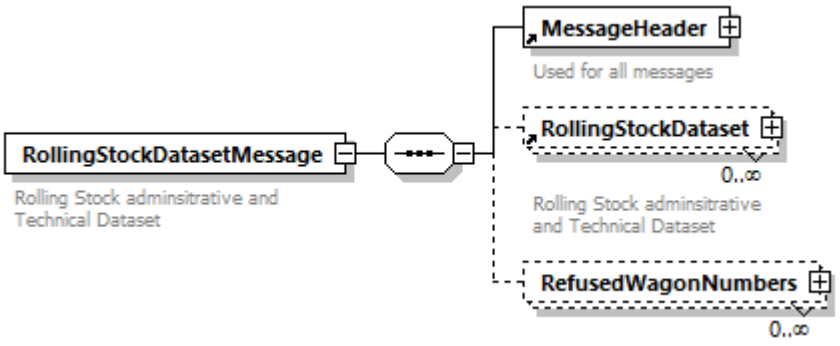
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	MessageHeader RollingStockDataset RefusedWagonNumbers
annotation	documentation Rolling Stock adminsitrative and Technical Dataset

source

```
<xs:element name="RollingStockDatasetMessage">
  <xs:annotation>
    <xs:documentation>Rolling Stock adminsitrative and Technical
Dataset</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="RollingStockDataset" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="RefusedWagonNumbers" minOccurs="0" maxOccurs="unbounded">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="WagonNumberFreight"/>
            <xs:element ref="RefusalCode"/>
            <xs:element ref="KeeperShortNameVKM" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Vehicle Keeper Marking of the wagon keeper as
listed in VKM register (https://www.era.europa.eu/domains/registers/vkm_en, 2nd
column (UNIQUE) - without special characters)</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RollingStockDatasetMessage/RefusedWagonNumbers**

diagram	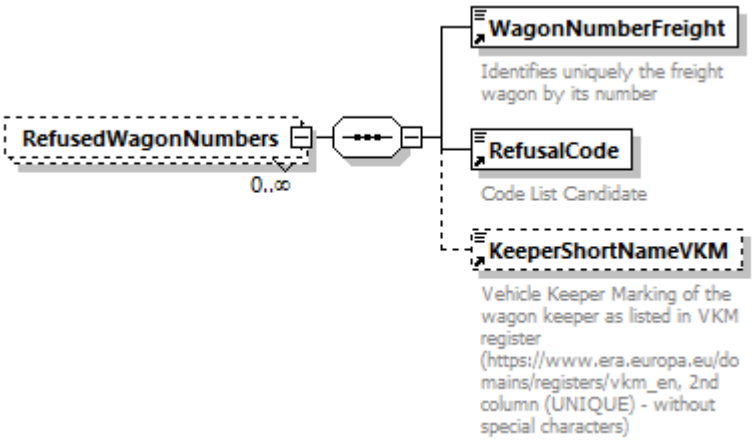
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc unbounded content complex
children	**WagonNumberFreight** **RefusalCode** **KeeperShortNameVKM**

source	`<xs:element name="RefusedWagonNumbers" minOccurs="0" maxOccurs="unbounded">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="WagonNumberFreight"/>`
	`  <xs:element ref="RefusalCode"/>`
	`  <xs:element ref="KeeperShortNameVKM" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Vehicle Keeper Marking of the wagon keeper as listed in VKM register (https://www.era.europa.eu/domains/registers/vkm_en, 2nd column (UNIQUE) - without special characters)</xs:documentation>`
	`  </xs:annotation>`
	`  </xs:element>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **RollingStockDatasetQueryMessage**

diagram	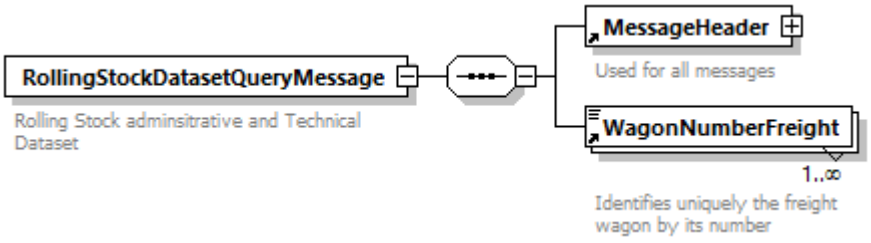
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MessageHeader** **WagonNumberFreight**
annotation	documentation Rolling Stock adminsitrative and Technical Dataset

source	`<xs:element name="RollingStockDatasetQueryMessage">`
	`  <xs:annotation>`
	`  <xs:documentation>Rolling Stock adminsitrative and Technical Dataset</xs:documentation>`

```
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="WagonNumberFreight" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **RouteCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	elements **ConsignmentOrderMessage/COMS/COM/RouteSection** **Routing/RouteSection**
facets	Kind Value Annotation length 5 pattern \d*[1-9]
annotation	documentation Route code (International RouteCode)

source	`<xs:element name="RouteCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Route code (International RouteCode)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:length value="5"/>`
	`  <xs:pattern value="\d*[1-9]"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **RouteInformation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation The route of the journey for a wagon / shipment or Intermodal unit assigned by the LRU

source	`<xs:element name="RouteInformation" type="FreeText">`
	`  <xs:annotation>`
	`  <xs:documentation>The route of the journey for a wagon / shipment or Intermodal unit assigned by the LRU</xs:documentation>`

```
  </xs:annotation>
</xs:element>
```

element **Routing**

diagram

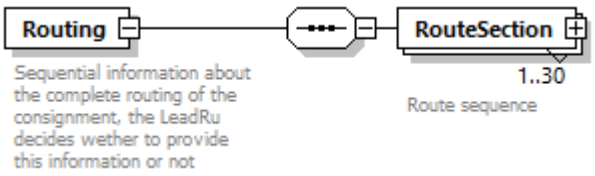

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties: content complex

children: **RouteSection**

used by: element **WagonStatusMessages/WagonStatusMessage**

annotation: documentation
Sequential information about the complete routing of the consignment, the LeadRu decides wether to provide this information or not

source

```
<xs:element name="Routing">
  <xs:annotation>
    <xs:documentation>Sequential information about the complete routing of the
consignment, the LeadRu  decides wether to provide this information or
not</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="RouteSection" maxOccurs="30">
        <xs:annotation>
          <xs:documentation>Route sequence</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="SequenceID" type="xs:int">
              <xs:annotation>
                <xs:documentation>Position of the route section in transport chain.
Used to determine the exact way of the transport for customs
purposes.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:sequence>
              <xs:element ref="RouteCode"/>
              <xs:element name="RouteText" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Description of the specific route
section</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:minLength value="1"/>
                    <xs:maxLength value="80"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
            </xs:sequence>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
```

	</xs:element>

element **Routing/RouteSection**

diagram	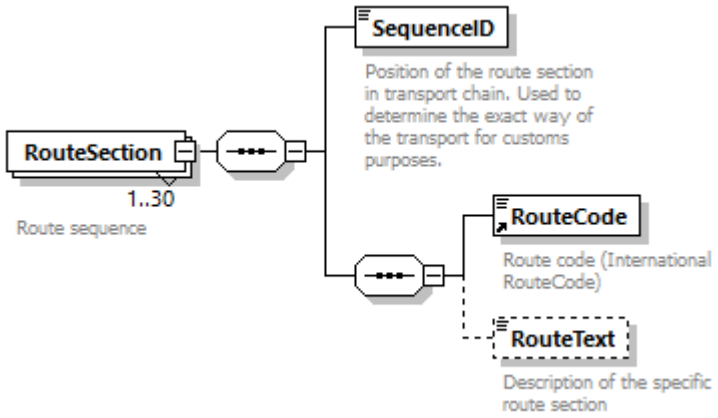
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 1 maxOcc 30 content complex
children	SequenceID RouteCode RouteText
annotation	documentation Route sequence
source	<xs:element name="RouteSection" maxOccurs="30"> <xs:annotation> <xs:documentation>Route sequence</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="SequenceID" type="xs:int"> <xs:annotation> <xs:documentation>Position of the route section in transport chain. Used to determine the exact way of the transport for customs purposes.</xs:documentation> </xs:annotation> </xs:element> <xs:sequence> <xs:element ref="RouteCode"/> <xs:element name="RouteText" minOccurs="0"> <xs:annotation> <xs:documentation>Description of the specific route section</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="80"/> </xs:restriction> </xs:simpleType> </xs:element> </xs:sequence> </xs:sequence> </xs:complexType> </xs:element>

element **Routing/RouteSection/SequenceID**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:int**
properties	content simple
annotation	documentation Position of the route section in transport chain. Used to determine the exact way of the transport for customs purposes.

source	`<xs:element name="SequenceID" type="xs:int">`
	`  <xs:annotation>`
	`  <xs:documentation>Position of the route section in transport chain. Used to determine the exact way of the transport for customs purposes.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Routing/RouteSection/RouteText**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 80
annotation	documentation Description of the specific route section

source	`<xs:element name="RouteText" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Description of the specific route section</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="80"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **RP_Code**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	restriction of **xs:string**
properties	content simple
used by	elements **ConsignmentOrderMessage/COMS/COM/AcceptancePoint** **ConsignmentOrderMessage/COMS/COM/DeliveryPoint** **ProductionStation**
facets	Kind Value Annotation length 5
annotation	documentation Routing point code of the production station of the acceptance or delivery point.

source	`<xs:element name="RP_Code">`
	`<xs:annotation>`
	`<xs:documentation>Routing point code of the production station of the acceptance or delivery point. </xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:length value="5"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **RU_Partner**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
used by	elements **ConsignmentOrderMessage/COMS/COM/CustomsProcedures** **SpecialTreatments**
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Railway Undertaking

source	`<xs:element name="RU_Partner" type="CompanyCode">`
	`<xs:annotation>`
	`<xs:documentation>Railway Undertaking</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **ScheduledDateTimeAtTransfer**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements **OperationalTrainNumberIdentifier** **WagonStatusMessages/WagonStatusMessage/Train/OperationalTrainNumberIdentifier**
annotation	documentation The referenced date and time of arrival or exit at the border between two different IMs

source	<xs:element name="ScheduledDateTimeAtTransfer" type="xs:dateTime"> <xs:annotation> <xs:documentation>The referenced date and time of arrival or exit at the border between two different IMs</xs:documentation> </xs:annotation> </xs:element>

element **ScheduledTimeAtHandover**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements **OperationalTrainNumberIdentifier** **WagonStatusMessages/WagonStatusMessage/Train/OperationalTrainNumberIdentifier**
annotation	documentation The referenced date and time of departure or entrance at the border between two different IMs
source	<xs:element name="ScheduledTimeAtHandover" type="xs:dateTime"> <xs:annotation> <xs:documentation>The referenced date and time of departure or entrance at the border between two different IMs</xs:documentation> </xs:annotation> </xs:element>

element **ScheduledTimeAtLocation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **ExceptionPoint**
annotation	documentation Scheduled Date and Time at a location related to the status of the train or wagon at the given location
source	<xs:element name="ScheduledTimeAtLocation" type="xs:dateTime"> <xs:annotation> <xs:documentation>Scheduled Date and Time at a location related to the status of the train or wagon at the given location</xs:documentation> </xs:annotation> </xs:element>

element **Seals**

diagram	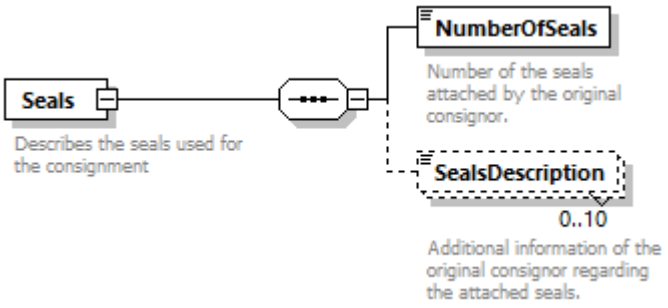
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	NumberOfSeals SealsDescription
used by	elements ILU_Details ITU_Details Wagons/WagonDetails
annotation	documentation Describes the seals used for the consignment
source	<xs:element name="Seals"> <xs:annotation> <xs:documentation>Describes the seals used for the consignment</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="NumberOfSeals"> <xs:annotation> <xs:documentation>Number of the seals attached by the original consignor.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="0"/> <xs:totalDigits value="2"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="SealsDescription" minOccurs="0" maxOccurs="10"> <xs:annotation> <xs:documentation>Additional information of the original consignor regarding the attached seals.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="10"/> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **Seals/NumberOfSeals**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
facets	Kind Value Annotation minInclusive 0 totalDigits 2
annotation	documentation Number of the seals attached by the original consignor.

source	`<xs:element name="NumberOfSeals">`
	`  <xs:annotation>`
	`  <xs:documentation>Number of the seals attached by the original consignor.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:int">`
	`  <xs:minInclusive value="0"/>`
	`  <xs:totalDigits value="2"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Seals/SealsDescription**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 10 content simple
facets	Kind Value Annotation minLength 1 maxLength 10
annotation	documentation Additional information of the original consignor regarding the attached seals.

source	`<xs:element name="SealsDescription" minOccurs="0" maxOccurs="10">`
	`  <xs:annotation>`
	`  <xs:documentation>Additional information of the original consignor regarding the attached seals.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="10"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Sender**

diagram	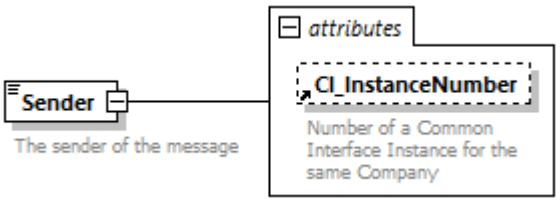
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **CompanyCode**
properties	content complex
used by	element **MessageHeader**
facets	Kind / Value / Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
attributes	Name: CI_InstanceNumber; Type: **Numeric2-2**; Use; Default; Fixed; Annotation: documentation: Number of a Common Interface Instance for the same Company
annotation	documentation The sender of the message

source	`<xs:element name="Sender">`
	`  <xs:annotation>`
	`  <xs:documentation>The sender of the message</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:simpleContent>`
	`  <xs:extension base="CompanyCode">`
	`  <xs:attribute ref="CI_InstanceNumber"/>`
	`  </xs:extension>`
	`  </xs:simpleContent>`
	`  </xs:complexType>`
	`</xs:element>`

element **SenderReference**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
used by	element **MessageHeader**
facets	Kind / Value / Annotation minLength 1 maxLength 255
annotation	documentation reference used by the sender (e.g. FTP file name)

source	`<xs:element name="SenderReference" type="FreeText">`
	`  <xs:annotation>`
	`  <xs:documentation>reference used by the sender (e.g. FTP file`

```
name)</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **Ship**

diagram

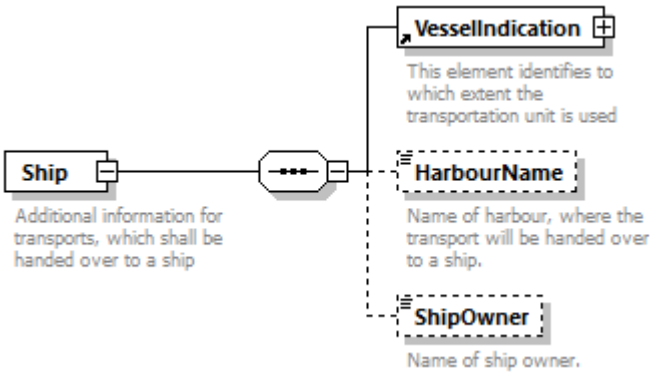

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**VesselIndication HarbourName ShipOwner**
used by	elements **ILU_Details ITU_Details Wagons/WagonDetails**
annotation	documentation Additional information for transports, which shall be handed over to a ship

source

```
<xs:element name="Ship">
  <xs:annotation>
    <xs:documentation>Additional information for transports, which shall be handed
over to a ship</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="VesselIndication"/>
      <xs:element name="HarbourName" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Name of harbour, where the transport will be handed over
to a ship.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ShipOwner" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Name of ship owner.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="35"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Ship/HarbourName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Name of harbour, where the transport will be handed over to a ship.

source	`<xs:element name="HarbourName" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Name of harbour, where the transport will be handed over to a ship.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Ship/ShipOwner**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Name of ship owner.

source	`<xs:element name="ShipOwner" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Name of ship owner.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="35"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **SpecialTreatments**

diagram	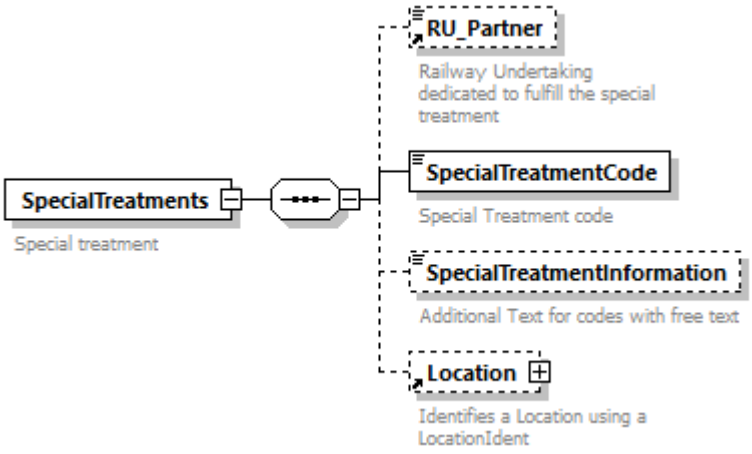
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	RU_Partner SpecialTreatmentCode SpecialTreatmentInformation Location
used by	elements ConsignmentOrderMessage/COMS/COM WIMO_Dataset/ConsignmentLevelData
annotation	documentation Special treatment

source

```
<xs:element name="SpecialTreatments">
  <xs:annotation>
    <xs:documentation>Special treatment</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="RU_Partner" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Railway Undertaking dedicated to fulfill the special
treatment</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="SpecialTreatmentCode">
        <xs:annotation>
          <xs:documentation>Special Treatment code</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:length value="2"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="SpecialTreatmentInformation" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Additional Text for codes with free
text</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="40"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="Location" minOccurs="0"/>
    </xs:sequence>
```

```
  </xs:complexType>
</xs:element>
```

element **SpecialTreatments/SpecialTreatmentCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation length 2
annotation	documentation Special Treatment code

source	`<xs:element name="SpecialTreatmentCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Special Treatment code</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:length value="2"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **SpecialTreatments/SpecialTreatmentInformation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 40
annotation	documentation Additional Text for codes with free text

source	`<xs:element name="SpecialTreatmentInformation" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Additional Text for codes with free text</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="40"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **SRID**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	element **GeographicCoordinates**
facets	Kind Value Annotation pattern [0-9]{4}
annotation	documentation ID of coordinates system used (EPSG code)

source	`<xs:element name="SRID">`
	`  <xs:annotation>`
	`  <xs:documentation>ID of coordinates system used (EPSG code)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:pattern value="[0-9]{4}"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **StartDate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
used by	complexTypes **CompositIdentifierOperationalType** **CompositIdentifierPlannedType**
annotation	documentation The start of the date/time in effect

source	`<xs:element name="StartDate" type="xs:date">`
	`  <xs:annotation>`
	`  <xs:documentation>The start of the date/time in effect</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **StartDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	elements **RequestedPeriod** **RequestedTimeframe** **ValidityPeriod**

annotation	documentation The start of the date/time in effect
source	<xs:element name="StartDateTime" type="xs:dateTime"> <xs:annotation> <xs:documentation>The start of the date/time in effect</xs:documentation> </xs:annotation> </xs:element>

element **StartLocation**

diagram	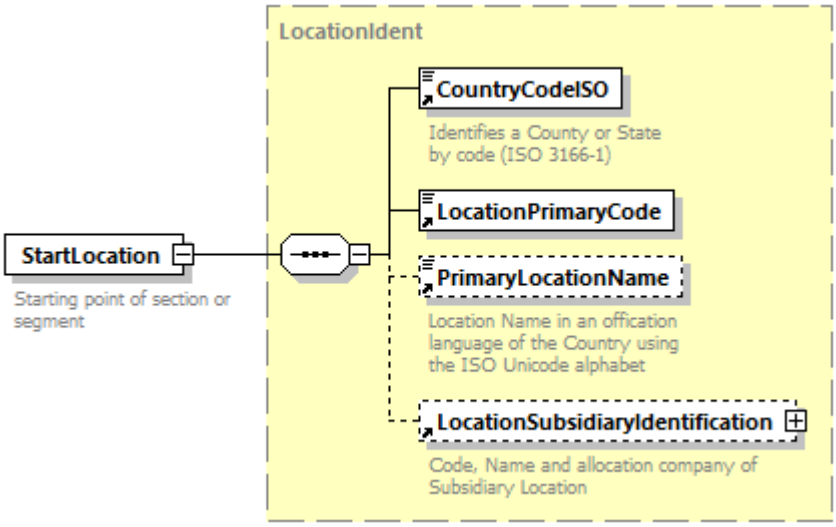
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
annotation	documentation Starting point of section or segment
source	<xs:element name="StartLocation" type="LocationIdent"> <xs:annotation> <xs:documentation>Starting point of section or segment</xs:documentation> </xs:annotation> </xs:element>

element **Station**

diagram	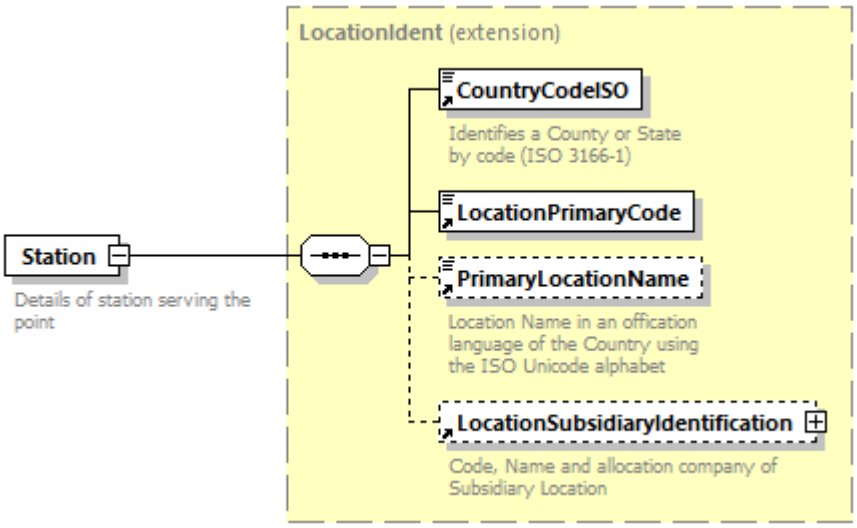
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
used by	elements **ConsignmentOrderMessage/COMS/COM/AcceptancePoint** **ConsignmentOrderMessage/COMS/COM/DeliveryPoint**
annotation	documentation Details of station serving the point

source	`<xs:element name="Station">`
	`  <xs:annotation>`
	`  <xs:documentation>Details of station serving the point</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:complexContent>`
	`  <xs:extension base="LocationIdent"/>`
	`  </xs:complexContent>`
	`  </xs:complexType>`
	`</xs:element>`

element **StatusOfDocument**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **ConsignmentOrderMessage/COMS/COM/AttachedDocuments**

facets	Kind: enumeration, Value: 2 Kind: enumeration, Value: 1
annotation	documentation Enumerated value for the status of the attached document 1 = not electronical attached 2 embedded in ECTD, ECN or PCN

source

```
<xs:element name="StatusOfDocument">
  <xs:annotation>
    <xs:documentation>
                    Enumerated value for  the status of the attached document
                    1 = not electronical attached
                    2 embedded in ECTD, ECN or PCN
                    </xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="2"/>
      <xs:enumeration value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **SummaryOFGoodsWithSameRID**

diagram

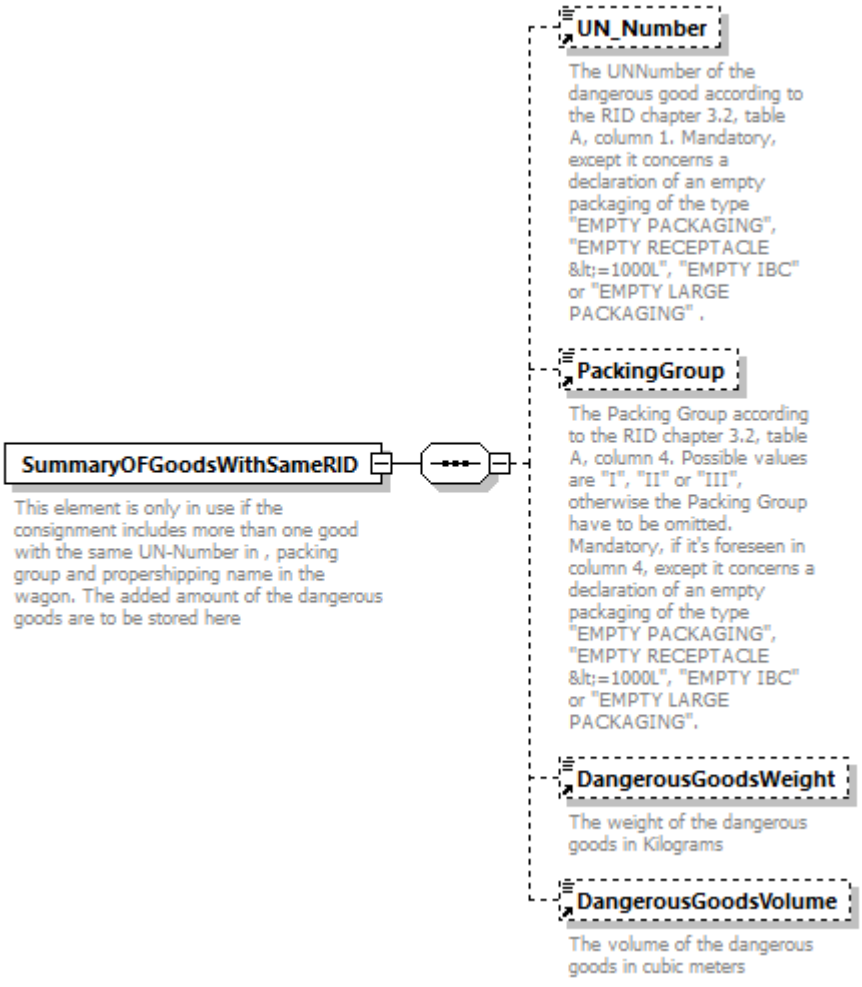

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**UN_Number PackingGroup DangerousGoodsWeight DangerousGoodsVolume**
used by	elements **ILU ITU RollingRoadUnit Wagons**
annotation	documentation This element is only in use if the consignment includes more than one good with the same UN-Number in , packing group and propershipping name in the wagon. The added amount of the dangerous goods are to be stored here
source	<xs:element name="SummaryOFGoodsWithSameRID"> <xs:annotation> <xs:documentation>This element is only in use if the consignment includes more than one good with the same UN-Number in , packing group and propershipping name in the wagon. The added amount of the dangerous goods are to be stored here</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="UN_Number" minOccurs="0"/> <xs:element ref="PackingGroup" minOccurs="0"/> <xs:element ref="DangerousGoodsWeight" minOccurs="0"> <xs:annotation> <xs:documentation>The weight of the dangerous goods in Kilograms</xs:documentation> </xs:annotation> </xs:element> <xs:element ref="DangerousGoodsVolume" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **TechnicalForwardingRestrictions**

diagram

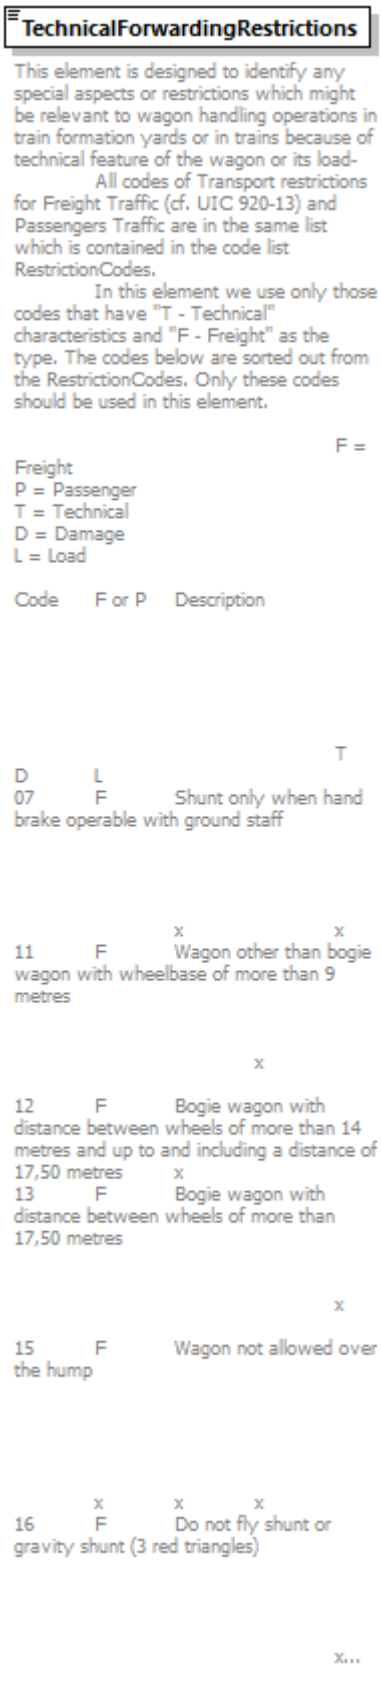

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	**RestrictionCodes**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**

facets

Kind	Value	Annotation
enumeration	07	documentation F - Shunt only when hand brake operable with ground staff
enumeration	08	documentation F - Tank wagon loaded with liquid
enumeration	09	documentation F - Wagon loaded with people
enumeration	11	documentation F - Wagon other than bogie wagon with wheelbase of more than 9 metres
enumeration	12	documentation F - Bogie wagon with distance between wheels of more than 14 metres and up to and including a distance of 17,50 metres
enumeration	13	documentation F - Bogie wagon with distance between wheels of more than 17,50 metres
enumeration	15	documentation F - Wagon not allowed over the hump
enumeration	16	documentation F - Do not fly shunt or gravity shunt (3 red triangles)
enumeration	18	documentation F - Must not use active braking equipment
enumeration	25	documentation F - Gas carrying tank wagon with orange side stripe
enumeration	30	documentation P (+F) - CCS fault (see CCS coding list)
enumeration	31	documentation P (+F) - Braking system fault
enumeration	32	documentation P (+F) - Wheelset, bogie fault
enumeration	33	documentation P (+F) - Headlighting or back lighting fault
enumeration	34	documentation P (+F) - Front glass broken
enumeration	35	documentation P (+F) - Horn fault
enumeration	36	documentation P (+F) - Radio fault
enumeration	37	documentation P (+F) - Energy supply fault
enumeration	38	documentation P (+F) - Traction or motor fault
enumeration	39	documentation P - Access door fault
enumeration	41	documentation F - Place this wagon at the front of the train
enumeration	42	documentation F - Place this wagon at the rear of the train
enumeration	50	documentation P (+F) - Speed restriction
enumeration	52	documentation P (+F) - Diesel locomotive instead of electric locomotive
enumeration	61	documentation F - Wagon forming part of a consignment of several wagons
enumeration	62	documentation F - Wagon forming part of a group of wagons from which it must not be separated
enumeration	63	documentation F (+P) - Special consignment or (for Passengers trains) loading/cinematic gauge larger than the planned one
enumeration	68	documentation F - First or last wagon of a wagon group from which it must not be separated
enumeration	70	documentation F - Shunt with care (1 red triangle)
enumeration	71	documentation F - Shunt with special care (2 red triangle)
enumeration	90	documentation P - Train planned with passengers operated without passengers
enumeration	91	documentation P - Train planned without passengers operated with passengers

	enumeration 92 documentation P - Train planned with hauled rolling stock and operated without any coaches (light engine) enumeration 94 documentation F - Gas carrying wagon without orange side stripe enumeration 99 documentation P - Other
annotation	documentation This element is designed to identify any special aspects or restrictions which might be relevant to wagon handling operations in train formation yards or in trains because of technical feature of the wagon or its load- All codes of Transport restrictions for Freight Traffic (cf. UIC 920-13) and Passengers Traffic are in the same list which is contained in the code list RestrictionCodes. In this element we use only those codes that have "T - Technical" characteristics and "F - Freight" as the type. The codes below are sorted out from the RestrictionCodes. Only these codes should be used in this element. F = Freight P = Passenger T = Technical D = Damage L = Load Code F or P Description T D L 07 F Shunt only when hand brake operable with ground staff x x 11 F Wagon other than bogie wagon with wheelbase of more than 9 metres x 12 F Bogie wagon with distance between wheels of more than 14 metres and up to and including a distance of 17,50 metres x 13 F Bogie wagon with distance between wheels of more than 17,50 metres x 15 F Wagon not allowed over the hump x x x 16 F Do not fly shunt or gravity shunt (3 red triangles) x x x 18 F Must not use active braking equipment x 25 F Gas carrying tank wagon with orange side stripe x 41 F Place this wagon at the front of the train x x x 42 F Place this wagon at the rear of the train x x x 63 F (+P) Special consignment or (for Passengers trains) loading/cinematic gauge larger than the planned one x x 70 F Shunt with care (1 red triangle) x x x 71 F Shunt with special care (2 red triangle) x x x 94 F Gas carrying wagon without orange side stripe x

source

```
<xs:element name="TechnicalForwardingRestrictions" type="RestrictionCodes">
  <xs:annotation>
    <xs:documentation>This element is designed to identify any special aspects or
restrictions which might be relevant to wagon handling operations in train formation
yards or in trains because of technical feature of the wagon or its load-
       All codes of Transport restrictions for Freight Traffic (cf. UIC 920-13) and
Passengers Traffic are in the same list which is contained in the code list
RestrictionCodes.
       In this element we use only those codes that have "T - Technical"
characteristics and "F - Freight" as the type. The codes below are sorted out from
the RestrictionCodes. Only these codes should be used in this element.
                                                                        F = Freight
P = Passenger
T = Technical
D = Damage
L = Load

Code    F or P  Description


                                              T      D      L
07      F       Shunt only when hand brake operable with ground staff

                                                                                x
                x
11      F       Wagon other than bogie wagon with wheelbase of more than 9 metres

                                              x
12      F       Bogie wagon with distance between wheels of more than 14 metres and up
to and including a distance of 17,50 metres x
13      F       Bogie wagon with distance between wheels of more than 17,50 metres

                                                    x
15      F       Wagon not allowed over the hump


                              x      x      x
16      F       Do not fly shunt or gravity shunt (3 red triangles)


                x      x      x
18      F       Must not use active braking equipment


                       x
25      F       Gas carrying tank wagon with orange side stripe


        x
41      F       Place this wagon at the front of the train


                       x      x      x
42      F       Place this wagon at the rear of the train


                       x      x      x
63      F (+P)  Special consignment or (for Passengers trains) loading/cinematic gauge
larger than the planned one                                  x      x
70      F       Shunt with care (1 red triangle)


                                    x      x      x
71      F       Shunt with special care (2 red triangle)
```

	x x x 94 F Gas carrying wagon without orange side stripe x </xs:documentation> </xs:annotation> </xs:element>

element **TiltingFunction**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
used by	element **PlannedTrainTechnicalData**
annotation	documentation Indicates if a train uses a tilting system
source	<xs:element name="TiltingFunction" type="xs:boolean"> <xs:annotation> <xs:documentation>Indicates if a train uses a tilting system</xs:documentation> </xs:annotation> </xs:element>

element **TimetableYear**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	complexTypes **CompositIdentifierOperationalType** **CompositIdentifierPlannedType**
facets	Kind Value Annotation minInclusive 2012 maxInclusive 2097
annotation	documentation Refers to the timetable period in which the business will be carried out
source	<xs:element name="TimetableYear"> <xs:annotation> <xs:documentation>Refers to the timetable period in which the business will be carried out</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="2012"/> <xs:maxInclusive value="2097"/> </xs:restriction>

```
  </xs:simpleType>
</xs:element>
```

element **TimingAtLocation**

diagram

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Timing DwellTime**
used by	elements **AssociatedAttachedTimingAtLocation PlannedJourneyLocation**
annotation	documentation Timing at an operation point It has an attribute TimerQualifierCode with the following values: PLA = Public Location Arrival ELA = Earliest Location Arrival ALA = Actual Location Arival LLA = Latest Location Arrival PLD = Public Location Departure ELD = Earliest Location Departure ALD = Actual Location Departure LLD = Latest Location Departure ERT = Earliest Run Through ART = Actual Run Through LRT = Latest Run Through

source

```
<xs:element name="TimingAtLocation">
  <xs:annotation>
    <xs:documentation>Timing at an operation point
It has an attribute TimerQualifierCode with the following values:
PLA = Public Location Arrival
ELA = Earliest Location Arrival
ALA = Actual Location Arival
LLA = Latest Location Arrival
PLD = Public Location Departure
ELD = Earliest Location Departure
ALD = Actual Location Departure
LLD = Latest Location Departure
ERT = Earliest Run Through
ART = Actual Run Through
LRT = Latest Run Through
```

```
                    </xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Timing" minOccurs="0" maxOccurs="unbounded">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Time">
              <xs:annotation>
                <xs:documentation>hh:mm:ss</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:simpleContent>
                  <xs:extension base="xs:time"/>
                </xs:simpleContent>
              </xs:complexType>
            </xs:element>
            <xs:element ref="Offset">
              <xs:annotation>
                <xs:documentation>in days</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="BookedLocationDateTime" minOccurs="0"/>
          </xs:sequence>
          <xs:attribute ref="TimingQualifierCode"/>
        </xs:complexType>
      </xs:element>
      <xs:element ref="DwellTime" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TimingAtLocation/Timing**

diagram	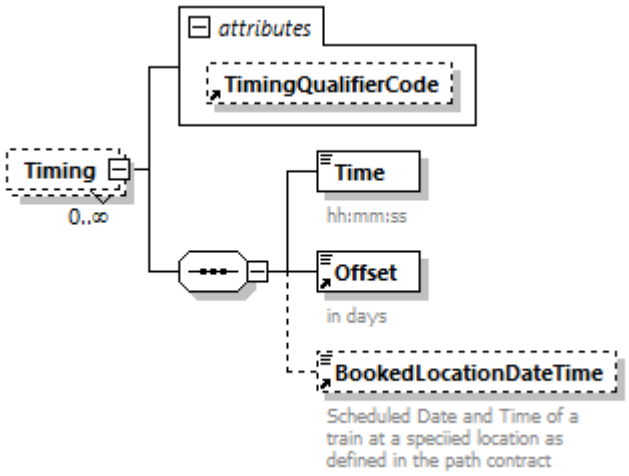
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc unbounded content complex
children	**Time Offset BookedLocationDateTime**

attributes	Name	Type	Use	Default	Fixed	Annotation
	TimingQualifierCode	**derived by: xs:token**				

source

```
<xs:element name="Timing" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
```

```
    <xs:sequence>
      <xs:element name="Time">
        <xs:annotation>
          <xs:documentation>hh:mm:ss</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:simpleContent>
            <xs:extension base="xs:time"/>
          </xs:simpleContent>
        </xs:complexType>
      </xs:element>
      <xs:element ref="Offset">
        <xs:annotation>
          <xs:documentation>in days</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="BookedLocationDateTime" minOccurs="0"/>
    </xs:sequence>
    <xs:attribute ref="TimingQualifierCode"/>
  </xs:complexType>
</xs:element>
```

element **TimingAtLocation/Timing/Time**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **xs:time**
properties	content complex
annotation	documentation hh:mm:ss
source	<xs:element name="Time"> <xs:annotation> <xs:documentation>hh:mm:ss</xs:documentation> </xs:annotation> <xs:complexType> <xs:simpleContent> <xs:extension base="xs:time"/> </xs:simpleContent> </xs:complexType> </xs:element>

element **TotalLoadWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	content simple
used by	element **WagonOperationalData**

facets	Kind / Value / Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation The total weight of the transportation unit on the freight wagon. This is the booked or actual weight of goods including packing and carrier's equipment

source	`<xs:element name="TotalLoadWeight" type="WeightValueKilo">`
	`<xs:annotation>`
	`<xs:documentation>The total weight of the transportation unit on the freight wagon. This is the booked or actual weight of goods including packing and carrier's equipment</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **TotalWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	content simple
used by	elements **Wagons/WagonDetails** **WagonInformation**
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation Total weight of the loaded wagon [kg].

source	`<xs:element name="TotalWeight" type="WeightValueKilo">`
	`<xs:annotation>`
	`<xs:documentation>Total weight of the loaded wagon [kg]. </xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **TractionDetails**

diagram	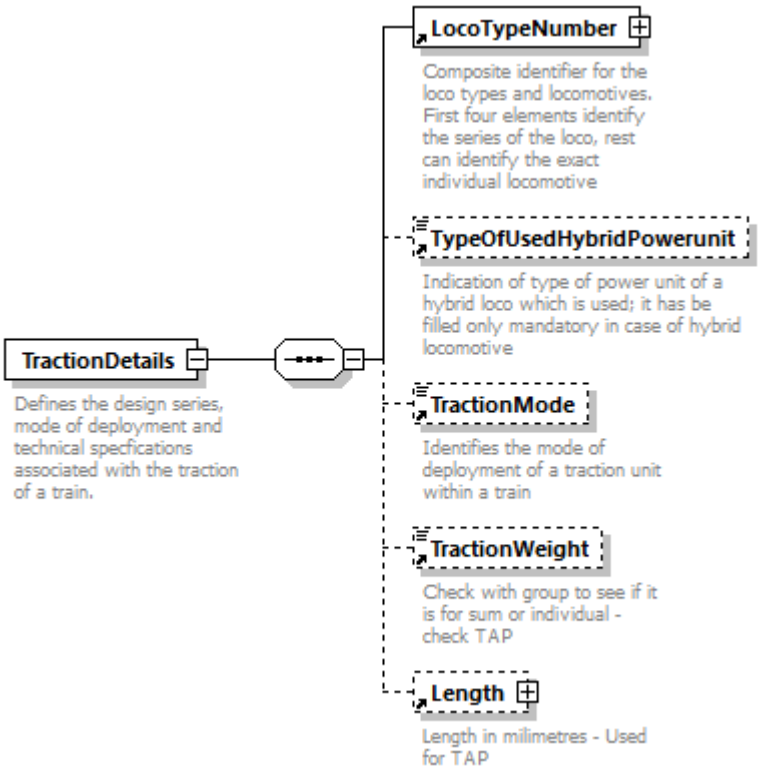
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	LocoTypeNumber TypeOfUsedHybridPowerunit TractionMode TractionWeight Length
used by	element PlannedTrainTechnicalData
annotation	documentation Defines the design series, mode of deployment and technical specfications associated with the traction of a train.

source	`<xs:element name="TractionDetails">`
	`<xs:annotation>`
	`<xs:documentation>Defines the design series, mode of deployment and technical specfications associated with the traction of a train.</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="LocoTypeNumber"/>`
	`<xs:element ref="TypeOfUsedHybridPowerunit" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Indication of type of power unit of a hybrid loco which is used; it has be filled only mandatory in case of hybrid locomotive</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element ref="TractionMode" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Identifies the mode of deployment of a traction unit within a train</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element ref="TractionWeight" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Check with group to see if it is for sum or individual - check TAP</xs:documentation>`
	`</xs:annotation>`

```
      </xs:element>
      <xs:element ref="Length" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Length in milimetres - Used for TAP</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TractionPositionInTrain**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **TrainCompositionJourneySection/LocoIdent**
facets	Kind / Value / Annotation minInclusive 01 maxInclusive 99
annotation	documentation Identifies position of intermediate traction unit(s) in the train indicating after which wagon (specified by order number) the unit is placed.
source	<xs:element name="TractionPositionInTrain"> <xs:annotation> <xs:documentation>Identifies position of intermediate traction unit(s) in the train indicating after which wagon (specified by order number) the unit is placed.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="01"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType> </xs:element>

element **TractionWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueTonne**
properties	content simple
used by	element **TractionDetails**
facets	Kind / Value / Annotation minInclusive 1 maxInclusive 99999

annotation	documentation The weight of the traction unit
source	<xs:element name="TractionWeight" type="WeightValueTonne"> <xs:annotation> <xs:documentation>The weight of the traction unit</xs:documentation> </xs:annotation> </xs:element>

element **TrafficType**

diagram	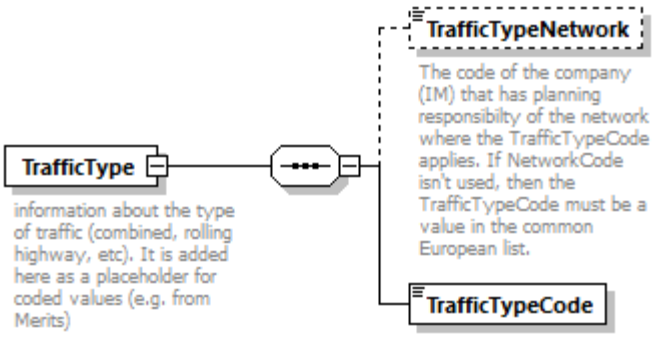
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	TrafficTypeNetwork TrafficTypeCode
used by	element PlannedTrainData
annotation	documentation information about the type of traffic (combined, rolling highway, etc). It is added here as a placeholder for coded values (e.g. from Merits)
source	<xs:element name="TrafficType"> <xs:annotation> <xs:documentation>information about the type of traffic (combined, rolling highway, etc). It is added here as a placeholder for coded values (e.g. from Merits)</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="TrafficTypeNetwork" type="CompanyCode" minOccurs="0"> <xs:annotation> <xs:documentation>The code of the company (IM) that has planning responsibilty of the network where the TrafficTypeCode applies. If NetworkCode isn't used, then the TrafficTypeCode must be a value in the common European list.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="TrafficTypeCode"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="9"/> </xs:restriction> </xs:simpleType> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **TrafficType/TrafficTypeNetwork**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation The code of the company (IM) that has planning responsibilty of the network where the TrafficTypeCode applies. If NetworkCode isn't used, then the TrafficTypeCode must be a value in the common European list.

source	`<xs:element name="TrafficTypeNetwork" type="CompanyCode" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>The code of the company (IM) that has planning responsibilty of the network where the TrafficTypeCode applies. If NetworkCode isn't used, then the TrafficTypeCode must be a value in the common European list.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **TrafficType/TrafficTypeCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 9

source	`<xs:element name="TrafficTypeCode">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="9"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **TrainActivity**

diagram	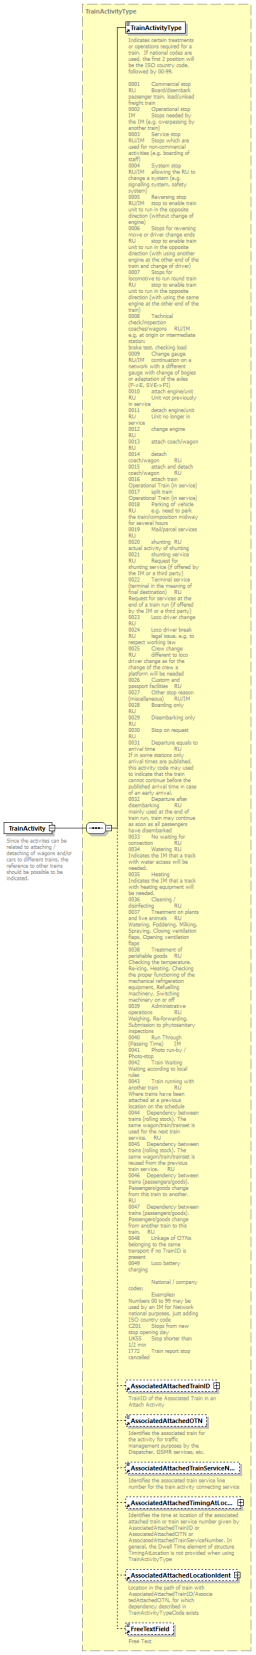
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**TrainActivityType**

properties	content complex
children	**TrainActivityType AssociatedAttachedTrainID AssociatedAttachedOTN AssociatedAttachedTrainServiceNumber AssociatedAttachedTimingAtLocation AssociatedAttachedLocationIdent FreeTextField**
used by	elements **TrainRunningData/Activities PlannedJourneyLocation**
annotation	documentation Since the activites can be related to attaching / detaching of wagons and/or cars to different trains, the reference to other trains should be possible to be indicated.

source	`<xs:element name="TrainActivity" type="TrainActivityType">`
	`  <xs:annotation>`
	`  <xs:documentation>Since the activites can be related to attaching / detaching of wagons and/or cars to different trains, the reference to other trains should be possible to be indicated.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **TrainActivityType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	content simple
used by	complexType **TrainActivityType**
facets	Kind Value Annotation minLength 4 maxLength 4
annotation	documentation Indicates certain treatments or operations required for a train. If national codes are used, the first 2 position will be the ISO country code, followed by 00-99. 0001 Commercial stop RU Board/disembark passenger train, load/unload freight train 0002 Operational stop IM Stops needed by the IM (e.g. overpassing by another train) 0003 Service stop RU/IM Stops which are used for non-commercial activities (e.g. boarding of staff) 0004 System stop RU/IM allowing the RU to change a system (e.g. signalling system, safety system) 0005 Reversing stop RU/IM stop to enable train unit to run in the opposite direction (without change of engine) 0006 Stops for reversing move or driver change ends RU stop to enable train unit to run in the opposite direction (with using another engine at the other end of the train and change of driver) 0007 Stops for locomotive to run round train RU stop to enable train unit to run in the opposite direction (with using the same engine at the other end of the train) 0008 Technical check/inspection coaches/wagons RU/IM e.g. at origin or intermediate station: brake test, checking load 0009 Change gauge RU/IM continuation on a network with a different gauge with change of bogies or adaptation of the axles (F->E, SVE->FI) 0010 attach engine/unit RU Unit not previously in service 0011 detach engine/unit RU Unit no longer in service 0012 change engine RU 0013 attach coach/wagon RU 0014 detach coach/wagon RU 0015 attach and detach coach/wagon RU 0016 attach train Operational Train (in service) 0017 split train Operational Train (in service) 0018 Parking of vehicle RU e.g. need to park the train/composition midway for several hours 0019 Mail/parcel services RU 0020 shunting RU actual activity of shunting 0021 shunting service RU Request for shunting service (if offered by the IM or a third party) 0022 Terminal service (terminal in the meaning of final destination) RU Request for services at the end of a train run (if offered by the IM or a third party) 0023 Loco driver change RU 0024 Loco driver break RU legal issue, e.g. to respect working law 0025 Crew change RU different to loco driver change as for the change of the crew a platform will be needed 0026 Custom and passport facilities RU 0027 Other stop reason (miscellaneous) RU/IM 0028 Boarding only RU 0029 Disembarking only RU 0030 Stop on request RU 0031 Departure equals to arrival time RU If in some stations only arrival times are published, this activity code may used to indicate that the train cannot continue before the published arrival time in case of an early arrival. 0032 Departure after disembarking RU mainly used at the end of train run, train may continue as soon as all passengers have disembarked 0033 No waiting for connection RU 0034 Watering RU Indicates the IM that a track with water access will be needed. 0035 Heating Indicates the IM that a track with heating equipment will be needed. 0036 Cleaning / disinfecting RU 0037 Treatment on plants and live animals RU Watering, Foddering, Milking, Spraying, Closing ventilation flaps, Opening ventilation flaps 0038 Treatment of perishable goods RU Checking the temperature, Re-icing, Heating, Checking the proper functioning of the mechanical refrigeration equipment, Refuelling machinery, Switching machinery on or off 0039 Administrative operations RU Weighing, Re-forwarding, Submission to phytosanitary inspections 0040 Run Through (Passing Time) IM 0041 Photo run-by / Photo-stop 0042 Train Waiting Waiting according to local rules 0043 Train running with another train RU Where trains have been attached at a previous location on the schedule 0044 Dependency between trains (rolling stock). The same wagon/train/trainset is used for the next train service. RU 0045 Dependency between trains (rolling stock). The same wagon/train/trainset is reused from the previous train service. RU 0046 Dependency between trains (passengers/goods). Passengers/goods change from this train to another. RU 0047 Dependency between trains (passengers/goods). Passengers/goods change from another train to this train. RU 0048 Linkage of OTNs belonging to the same transport if no TrainID is present 0049 Loco battery charging National / company codes: Examples: Numbers 00 to 99 may be used by an IM for Network national purposes, just adding ISO country code

	CZ01 Stops from new stop opening day UK55 Stop shorter than 1/2 min IT72 Train report stop cancelled
source	<xs:element name="TrainActivityType"> <xs:annotation> <xs:documentation>Indicates certain treatments or operations required for a train. If national codes are used, the first 2 position will be the ISO country code, followed by 00-99. 0001 Commercial stop RU Board/disembark passenger train, load/unload freight train 0002 Operational stop IM Stops needed by the IM (e.g. overpassing by another train) 0003 Service stop RU/IM Stops which are used for non-commercial activities (e.g. boarding of staff) 0004 System stop RU/IM allowing the RU to change a system (e.g. signalling system, safety system) 0005 Reversing stop RU/IM stop to enable train unit to run in the opposite direction (without change of engine) 0006 Stops for reversing move or driver change ends RU stop to enable train unit to run in the opposite direction (with using another engine at the other end of the train and change of driver) 0007 Stops for locomotive to run round train RU stop to enable train unit to run in the opposite direction (with using the same engine at the other end of the train) 0008 Technical check/inspection coaches/wagons RU/IM e.g. at origin or intermediate station: brake test, checking load 0009 Change gauge RU/IM continuation on a network with a different gauge with change of bogies or adaptation of the axles (F->E, SVE->FI) 0010 attach engine/unit RU Unit not previously in service 0011 detach engine/unit RU Unit no longer in service 0012 change engine RU 0013 attach coach/wagon RU 0014 detach coach/wagon RU 0015 attach and detach coach/wagonRU 0016 attach train Operational Train (in service) 0017 split train Operational Train (in service) 0018 Parking of vehicle RU e.g. need to park the train/composition midway for several hours 0019 Mail/parcel services RU 0020 shunting RU actual activity of shunting 0021 shunting service RU Request for shunting service (if offered by the IM or a third party) 0022 Terminal service (terminal in the meaning of final destination) RU Request for services at the end of a train run (if offered by the IM or a third party) 0023 Loco driver change RU 0024 Loco driver break RU legal issue, e.g. to respect working law 0025 Crew change RU different to loco driver change as for the change of the crew a platform will be needed 0026 Custom and passport facilities RU 0027 Other stop reason (miscellaneous) RU/IM 0028 Boarding only RU 0029 Disembarking only RU 0030 Stop on request RU 0031 Departure equals to arrival time RU If in some stations only arrival times are published, this activity code may used to indicate that the train cannot continue before the published arrival time in case of an early arrival. 0032 Departure after disembarking RU mainly used at the end of train run, train may continue as soon as all passengers have disembarked 0033 No waiting for connection RU 0034 Watering RU Indicates the IM that a track with water access will be needed.

	0035 Heating Indicates the IM that a track with heating equipment will be needed. 0036 Cleaning / disinfecting RU 0037 Treatment on plants and live animals RU Watering, Foddering, Milking, Spraying, Closing ventilation flaps, Opening ventilation flaps 0038 Treatment of perishable goods RU Checking the temperature, Re-icing, Heating, Checking the proper functioning of the mechanical refrigeration equipment, Refuelling machinery, Switching machinery on or off 0039 Administrative operations RU Weighing, Re-forwarding, Submission to phytosanitary inspections 0040 Run Through (Passing Time) IM 0041 Photo run-by / Photo-stop 0042 Train Waiting Waiting according to local rules 0043 Train running with another train RU Where trains have been attached at a previous location on the schedule 0044 Dependency between trains (rolling stock). The same wagon/train/trainset is used for the next train service. RU 0045 Dependency between trains (rolling stock). The same wagon/train/trainset is reused from the previous train service. RU 0046 Dependency between trains (passengers/goods). Passengers/goods change from this train to another. RU 0047 Dependency between trains (passengers/goods). Passengers/goods change from another train to this train. RU 0048 Linkage of OTNs belonging to the same transport if no TrainID is present 0049 Loco battery charging National / company codes: Examples: Numbers 00 to 99 may be used by an IM for Network national purposes, just adding ISO country code CZ01 Stops from new stop opening day UK55 Stop shorter than 1/2 min IT72 Train report stop cancelled </xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="4"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType> </xs:element>

element **TrainAtLocation**

diagram	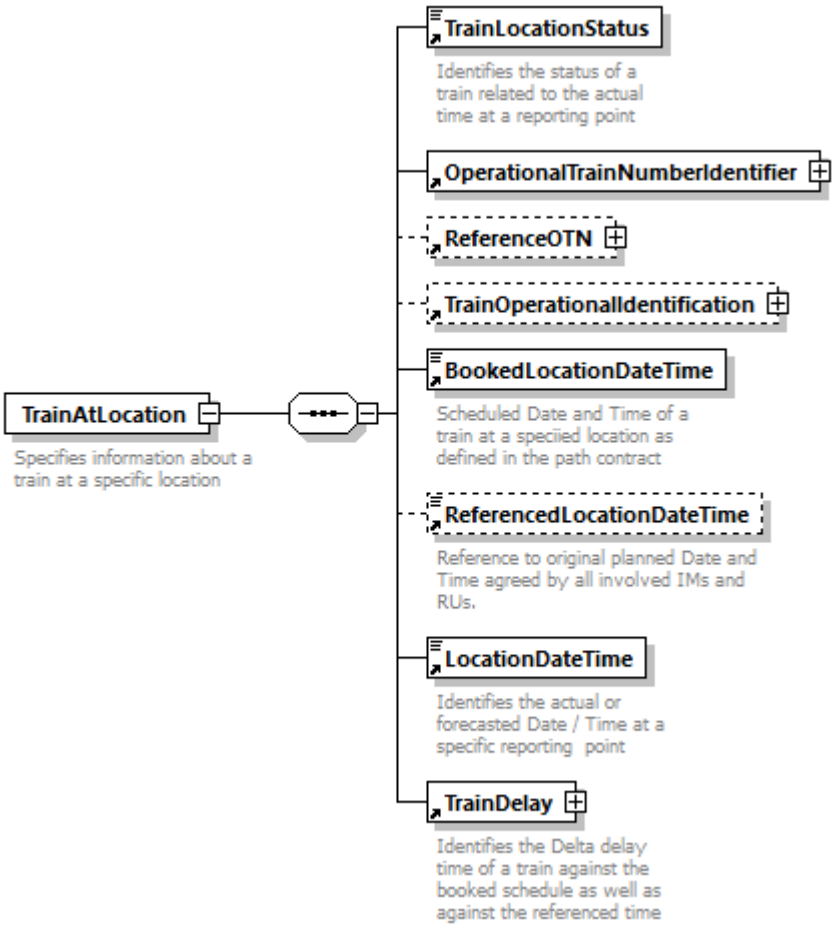
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	TrainLocationStatus OperationalTrainNumberIdentifier ReferenceOTN TrainOperationalIdentification BookedLocationDateTime ReferencedLocationDateTime LocationDateTime TrainDelay
used by	element TrainForecastAtReportingLocationMessage
annotation	documentation Specifies information about a train at a specific location

source	`<xs:element name="TrainAtLocation">`
	`<xs:annotation>`
	`<xs:documentation>Specifies information about a train at a specific location</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="TrainLocationStatus"/>`
	`<xs:element ref="OperationalTrainNumberIdentifier"/>`
	`<xs:element ref="ReferenceOTN" minOccurs="0"/>`
	`<xs:element ref="TrainOperationalIdentification" minOccurs="0"/>`
	`<xs:element ref="BookedLocationDateTime"/>`
	`<xs:element ref="ReferencedLocationDateTime" minOccurs="0"/>`
	`<xs:element ref="LocationDateTime"/>`
	`<xs:element ref="TrainDelay"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **TrainCC_System**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**TrainCC_SystemCode**
properties	content simple
used by	elements **PlannedTrainTechnicalData** **TrainRunningTechData**

facets

Kind	Value	Annotation
enumeration	01	
enumeration	02	
enumeration	03	
enumeration	04	
enumeration	05	
enumeration	06	
enumeration	07	
enumeration	08	
enumeration	09	
enumeration	10	
enumeration	11	
enumeration	12	
enumeration	13	
enumeration	14	
enumeration	15	
enumeration	16	
enumeration	17	
enumeration	18	
enumeration	19	
enumeration	20	
enumeration	21	
enumeration	22	
enumeration	23	
enumeration	24	
enumeration	25	
enumeration	26	
enumeration	27	
enumeration	28	
enumeration	29	
enumeration	30	
enumeration	31	
enumeration	32	
enumeration	33	
enumeration	34	
enumeration	35	
enumeration	36	
enumeration	37	
enumeration	38	
enumeration	39	
enumeration	40	
enumeration	41	
enumeration	42	
enumeration	43	
enumeration	44	

	enumeration 45 enumeration 46 enumeration 47 enumeration 48 enumeration 49 enumeration 50 enumeration 51 enumeration 52 enumeration 53 enumeration 54
annotation	documentation Identifies the command control system of the train in coded values.

source	`<xs:element name="TrainCC_System" type="TrainCC_SystemCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the command control system of the train in coded values.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **TrainCompositionJourneySection**

diagram	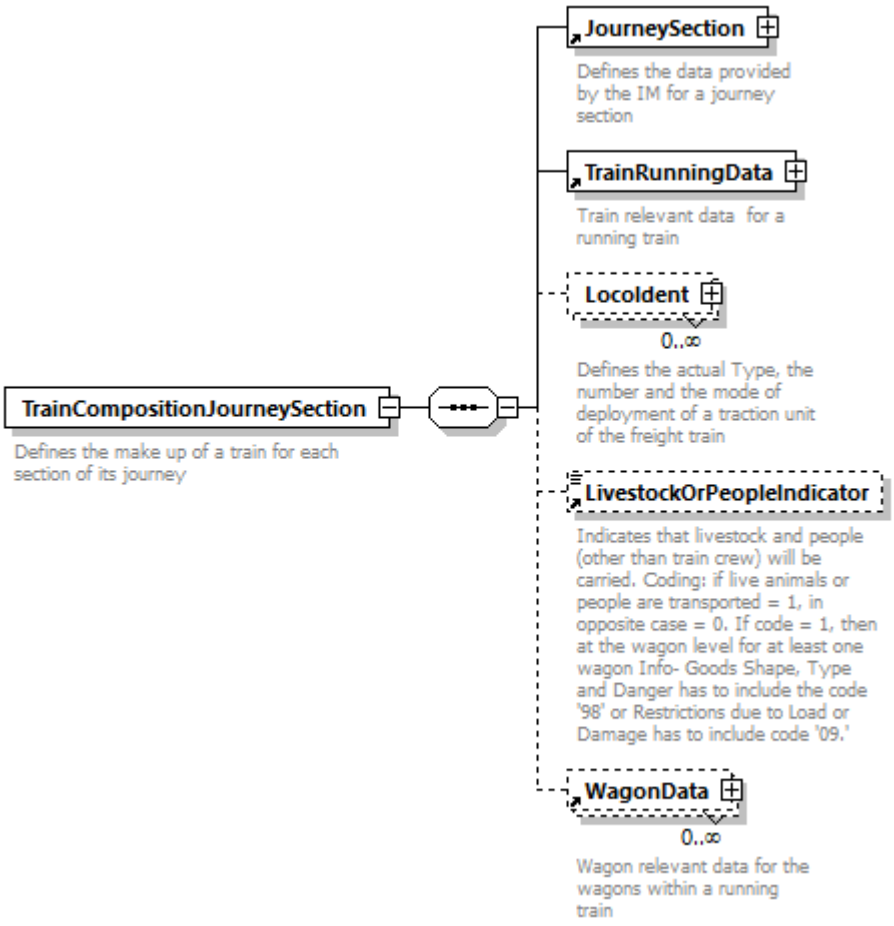
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	JourneySection TrainRunningData LocoIdent LivestockOrPeopleIndicator WagonData
used by	element TrainCompositionMessage

annotation	documentation Defines the make up of a train for each section of its journey

source

```
<xs:element name="TrainCompositionJourneySection">
  <xs:annotation>
    <xs:documentation>Defines the make up of a train for each section of its
journey</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="JourneySection"/>
      <xs:element ref="TrainRunningData"/>
      <xs:element name="LocoIdent" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>Defines the actual Type, the number and the mode of
deployment of a traction unit of the freight train</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="TractionType"/>
            <xs:element ref="TypeOfUsedHybridPowerunit" minOccurs="0"/>
            <xs:element ref="LocoTypeNumber" minOccurs="0"/>
            <xs:element ref="LocoNumber" minOccurs="0"/>
            <xs:element ref="TractionMode" minOccurs="0"/>
            <xs:element ref="RegenerativeBrake" minOccurs="0"/>
            <xs:element name="DriverIndication" minOccurs="0">
              <xs:annotation>
                <xs:documentation>0 - no driver present in Loco, 1 - driver(s) is
/are) present in Loco</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:integer">
                  <xs:enumeration value="0"/>
                  <xs:enumeration value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="TractionPositionInTrain" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="LivestockOrPeopleIndicator" minOccurs="0" maxOccurs="1"/>
      <xs:element ref="WagonData" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainCompositionJourneySection/LocoIdent**

diagram

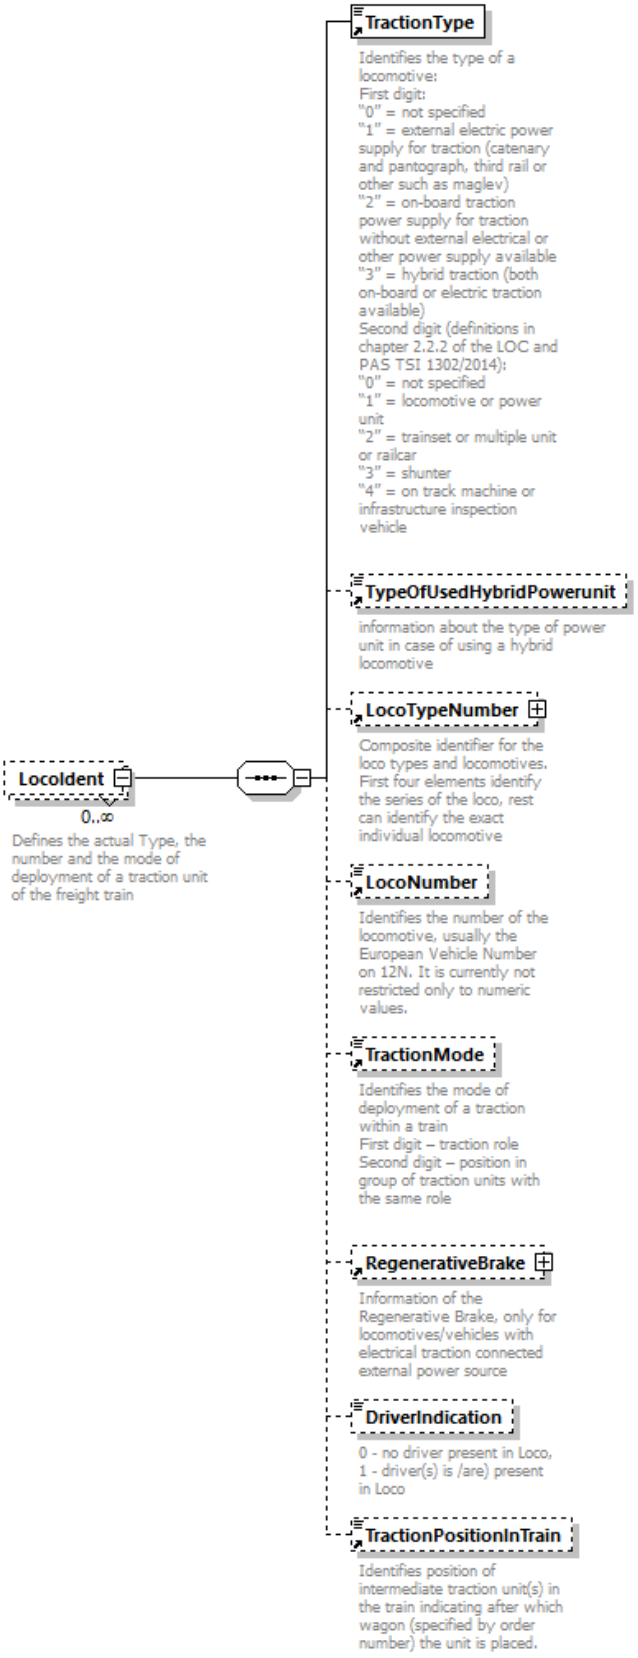

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc unbounded

	content complex
children	**TractionType TypeOfUsedHybridPowerunit LocoTypeNumber LocoNumber TractionMode RegenerativeBrake DriverIndication TractionPositionInTrain**
annotation	documentation Defines the actual Type, the number and the mode of deployment of a traction unit of the freight train

source

```
<xs:element name="LocoIdent" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>Defines the actual Type, the number and the mode of deployment
of a traction unit of the freight train</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="TractionType"/>
      <xs:element ref="TypeOfUsedHybridPowerunit" minOccurs="0"/>
      <xs:element ref="LocoTypeNumber" minOccurs="0"/>
      <xs:element ref="LocoNumber" minOccurs="0"/>
      <xs:element ref="TractionMode" minOccurs="0"/>
      <xs:element ref="RegenerativeBrake" minOccurs="0"/>
      <xs:element name="DriverIndication" minOccurs="0">
        <xs:annotation>
          <xs:documentation>0 - no driver present in Loco, 1 - driver(s) is /are)
present in Loco</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:enumeration value="0"/>
            <xs:enumeration value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="TractionPositionInTrain" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainCompositionJourneySection/LocoIdent/DriverIndication**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration 0 enumeration 1
annotation	documentation 0 - no driver present in Loco, 1 - driver(s) is /are) present in Loco

source

```
<xs:element name="DriverIndication" minOccurs="0">
  <xs:annotation>
    <xs:documentation>0 - no driver present in Loco, 1 - driver(s) is /are) present
in Loco</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:integer">
      <xs:enumeration value="0"/>
      <xs:enumeration value="1"/>
```

```
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **TrainCompositionMessage**

diagram

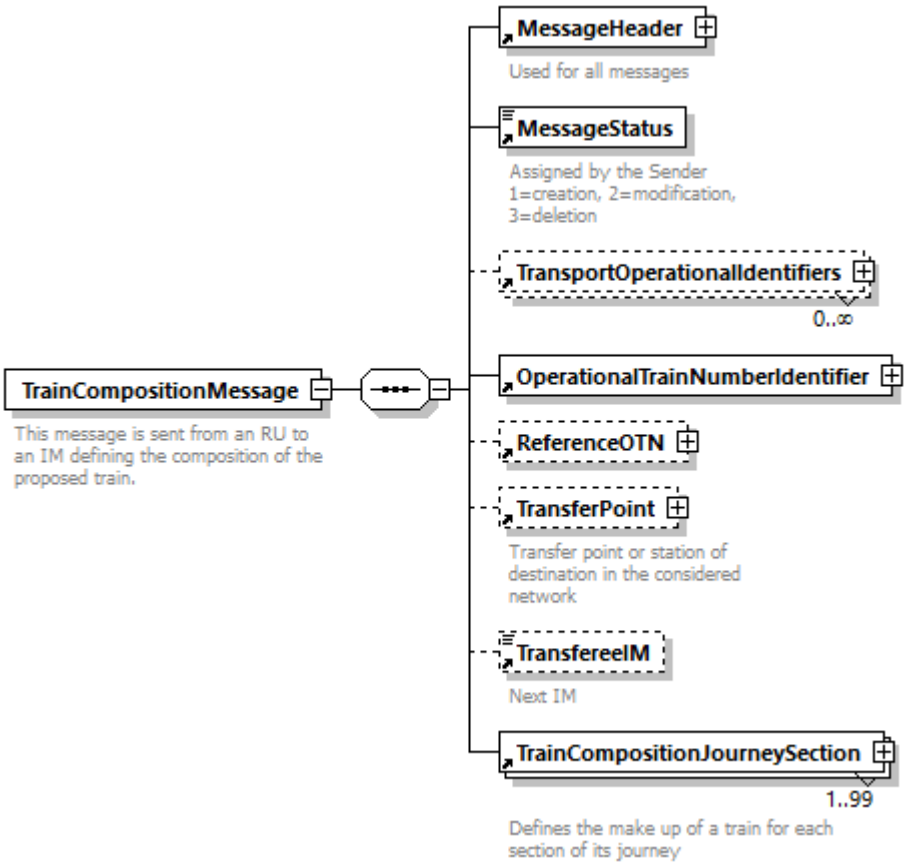

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	MessageHeader MessageStatus TransportOperationalIdentifiers OperationalTrainNumberIdentifier ReferenceOTN TransferPoint TransfereeIM TrainCompositionJourneySection
annotation	documentation This message is sent from an RU to an IM defining the composition of the proposed train.

source

```
<xs:element name="TrainCompositionMessage">
  <xs:annotation>
    <xs:documentation>This message is sent from an RU to an IM defining the
composition of the proposed train.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus"/>
      <xs:element ref="TransportOperationalIdentifiers" minOccurs="0"
maxOccurs="unbounded"/>
      <xs:element ref="OperationalTrainNumberIdentifier"/>
      <xs:element ref="ReferenceOTN" minOccurs="0"/>
      <xs:element ref="TransferPoint" minOccurs="0"/>
      <xs:element ref="TransfereeIM" minOccurs="0"/>
      <xs:element ref="TrainCompositionJourneySection" maxOccurs="99"/>
    </xs:sequence>
  </xs:complexType>
```

	</xs:element>

element **TrainContactDetails**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	CommunicationRefID
properties	content simple
used by	element TrainReadyMessage
facets	Kind Value Annotation minLength 1 maxLength 70
annotation	documentation Contact to driver of leading traction unit. This contact can be mobile phone number, GSM-R call number or e.g. details for an analogue radio call.
source	<xs:element name="TrainContactDetails" type="CommunicationRefID"> <xs:annotation> <xs:documentation>Contact to driver of leading traction unit. This contact can be mobile phone number, GSM-R call number or e.g. details for an analogue radio call.</xs:documentation> </xs:annotation> </xs:element>

element **TrainDelay**

diagram	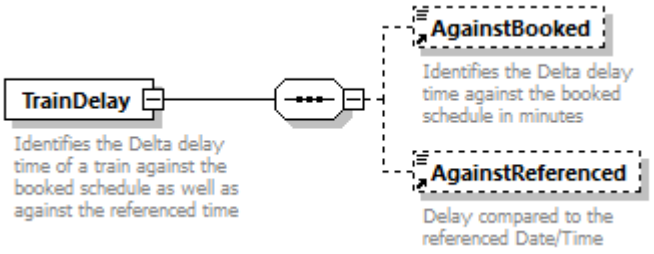
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	AgainstBooked AgainstReferenced
used by	elements TrainAtLocation TrainLocationReport TrainReadyMessage/TrainReadyStatus TrainReadyStatus
annotation	documentation Identifies the Delta delay time of a train against the booked schedule as well as against the referenced time
source	<xs:element name="TrainDelay"> <xs:annotation> <xs:documentation>Identifies the Delta delay time of a train against the booked schedule as well as against the referenced time </xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="AgainstBooked" minOccurs="0"/> <xs:element ref="AgainstReferenced" minOccurs="0">

```
        <xs:annotation>
          <xs:documentation>Delay compared to the referenced
Date/Time</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainDelayCauseMessage**

diagram

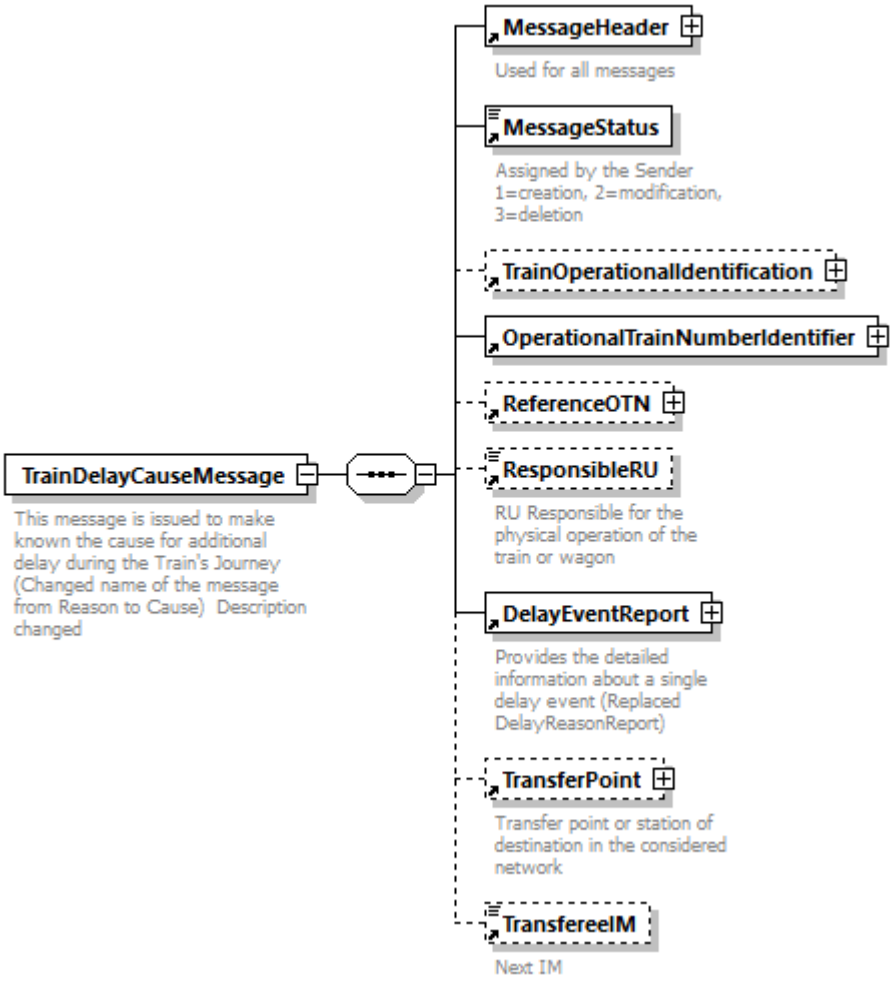

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MessageHeader** **MessageStatus** **TrainOperationalIdentification** **OperationalTrainNumberIdentifier** **ReferenceOTN** **ResponsibleRU** **DelayEventReport** **TransferPoint** **TransfereeIM**
annotation	documentation This message is issued to make known the cause for additional delay during the Train's Journey (Changed name of the message from Reason to Cause) Description changed

source

```
<xs:element name="TrainDelayCauseMessage">
  <xs:annotation>
    <xs:documentation>This message is issued to make known the cause for additional
delay during the Train's Journey (Changed name of the message from Reason to Cause)
Description changed </xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
```

```
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus"/>
      <xs:element ref="TrainOperationalIdentification" minOccurs="0"/>
      <xs:element ref="OperationalTrainNumberIdentifier"/>
      <xs:element ref="ReferenceOTN" minOccurs="0"/>
      <xs:element ref="ResponsibleRU" minOccurs="0"/>
      <xs:element ref="DelayEventReport"/>
      <xs:element ref="TransferPoint" minOccurs="0"/>
      <xs:element ref="TransfereeIM" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainForecastAtReportingLocationMessage**

diagram

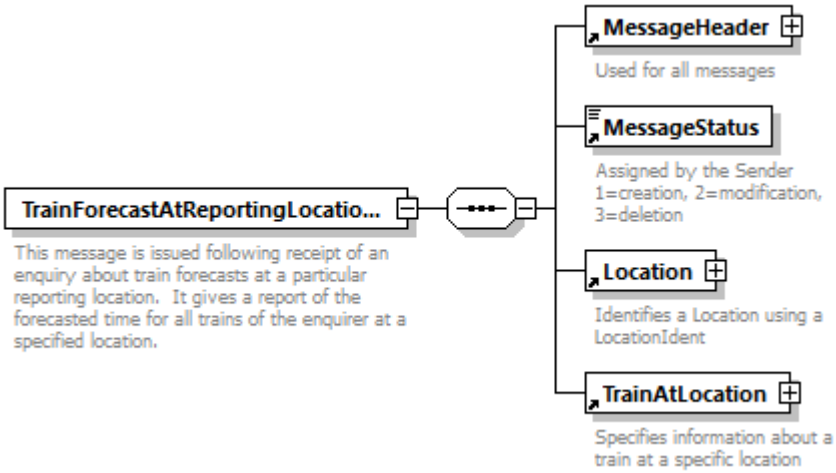

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties: content complex

children: **MessageHeader** **MessageStatus** **Location** **TrainAtLocation**

annotation:
documentation
This message is issued following receipt of an enquiry about train forecasts at a particular reporting location. It gives a report of the forecasted time for all trains of the enquirer at a specified location.

source

```
<xs:element name="TrainForecastAtReportingLocationMessage">
  <xs:annotation>
    <xs:documentation>This message is issued following receipt of an enquiry about
train forecasts at a particular reporting location.  It gives a report of the
forecasted time for all trains of the enquirer at a specified location.
</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus"/>
      <xs:element ref="Location"/>
      <xs:element ref="TrainAtLocation"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainID**

diagram	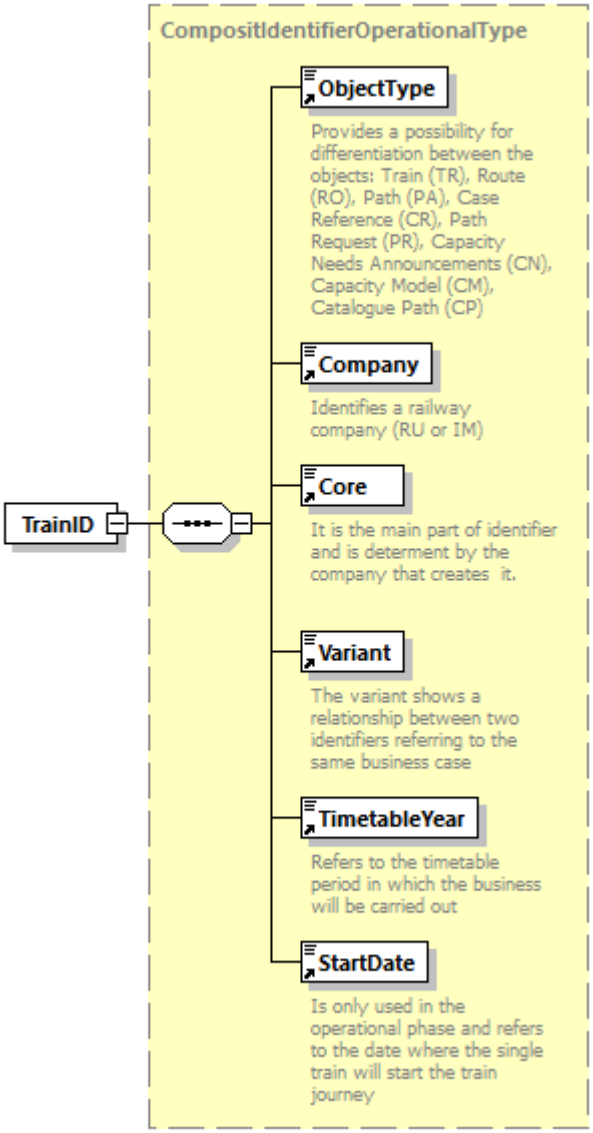
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompositIdentifierOperationalType**
properties	content complex
children	**ObjectType Company Core Variant TimetableYear StartDate**
used by	elements **ArrivalInterchangeReport DepartureInterchangeReport**
source	`<xs:element name="TrainID" type="CompositIdentifierOperationalType"/>`

element **TrainInformation**

diagram	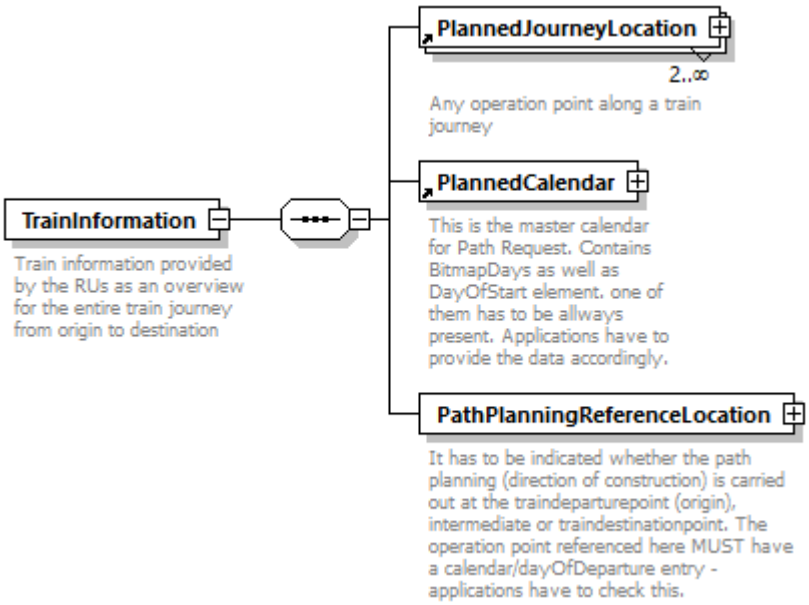
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	PlannedJourneyLocation PlannedCalendar PathPlanningReferenceLocation
used by	element PathRequestMessage
annotation	documentation Train information provided by the RUs as an overview for the entire train journey from origin to destination

source

```
<xs:element name="TrainInformation">
  <xs:annotation>
    <xs:documentation>Train information provided by the RUs as an overview for the
entire train journey from origin to destination</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="PlannedJourneyLocation" minOccurs="2" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>Any operation point along a train
journey</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="PlannedCalendar">
        <xs:annotation>
          <xs:documentation>This is the master calendar for Path Request. Contains
BitmapDays as well as DayOfStart element. one of them has to be allways present.
Applications have to provide the data accordingly. </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="PathPlanningReferenceLocation">
        <xs:annotation>
          <xs:documentation>It has to be indicated whether the path planning
(direction of construction) is carried out at the traindeparturepoint (origin),
intermediate or traindestinationpoint. The operation point referenced here MUST have
a calendar/dayOfDeparture entry - applications have to check this.</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:complexContent>
            <xs:extension base="LocationIdent"/>
          </xs:complexContent>
        </xs:complexType>
```

```
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainInformation/PathPlanningReferenceLocation**

diagram

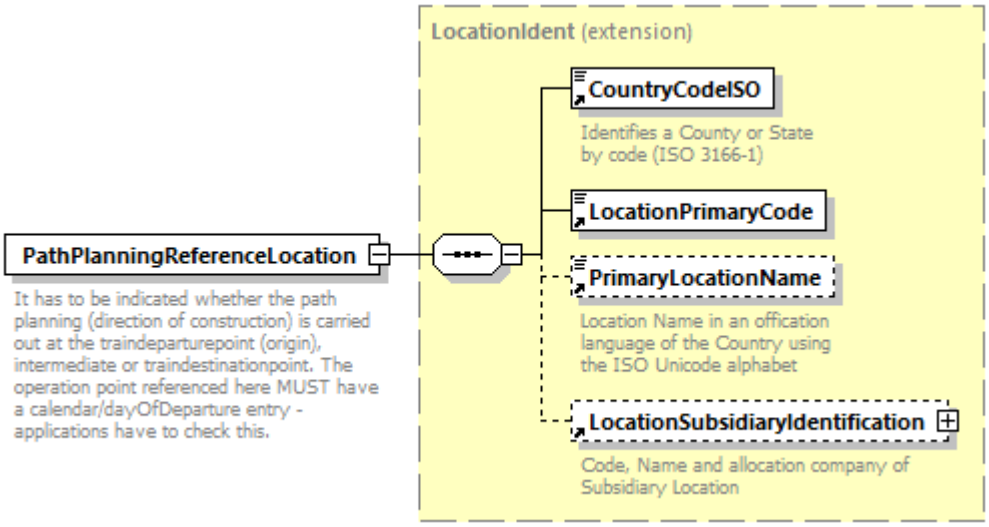

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **LocationIdent**
properties	content complex
children	**CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification**
annotation	documentation It has to be indicated whether the path planning (direction of construction) is carried out at the traindeparturepoint (origin), intermediate or traindestinationpoint. The operation point referenced here MUST have a calendar/dayOfDeparture entry - applications have to check this.

source

```
<xs:element name="PathPlanningReferenceLocation">
  <xs:annotation>
    <xs:documentation>It has to be indicated whether the path planning (direction of
construction) is carried out at the traindeparturepoint (origin), intermediate or
traindestinationpoint. The operation point referenced here MUST have a
calendar/dayOfDeparture entry - applications have to check this.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:complexContent>
      <xs:extension base="LocationIdent"/>
    </xs:complexContent>
  </xs:complexType>
</xs:element>
```

element **TrainJourneyModification**

diagram	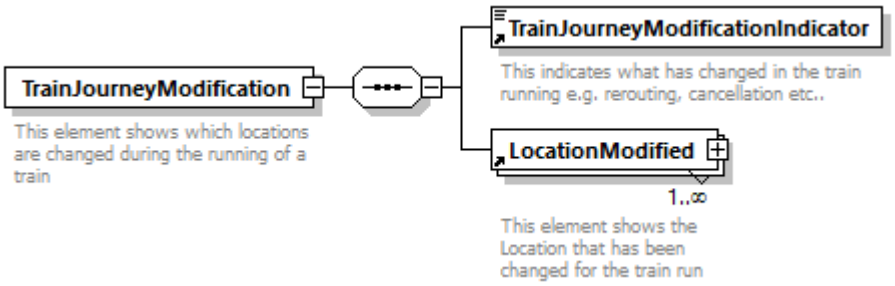
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**TrainJourneyModificationIndicator** **LocationModified**
used by	element **TrainJourneyModificationMessage**
annotation	documentation This element shows which locations are changed during the running of a train
source	<xs:element name="TrainJourneyModification"> <xs:annotation> <xs:documentation>This element shows which locations are changed during the running of a train</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="TrainJourneyModificationIndicator"/> <xs:element ref="LocationModified" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </xs:element>

element **TrainJourneyModificationIndicator**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **TrainJourneyModification**
facets	Kind Value Annotation minInclusive 1 maxInclusive 99
annotation	documentation This indicates what has changed in the train running e.g. rerouting, cancellation etc..
source	<xs:element name="TrainJourneyModificationIndicator"> <xs:annotation> <xs:documentation>This indicates what has changed in the train running e.g. rerouting, cancellation etc..</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType>

	</xs:element>

element **TrainJourneyModificationMessage**

diagram	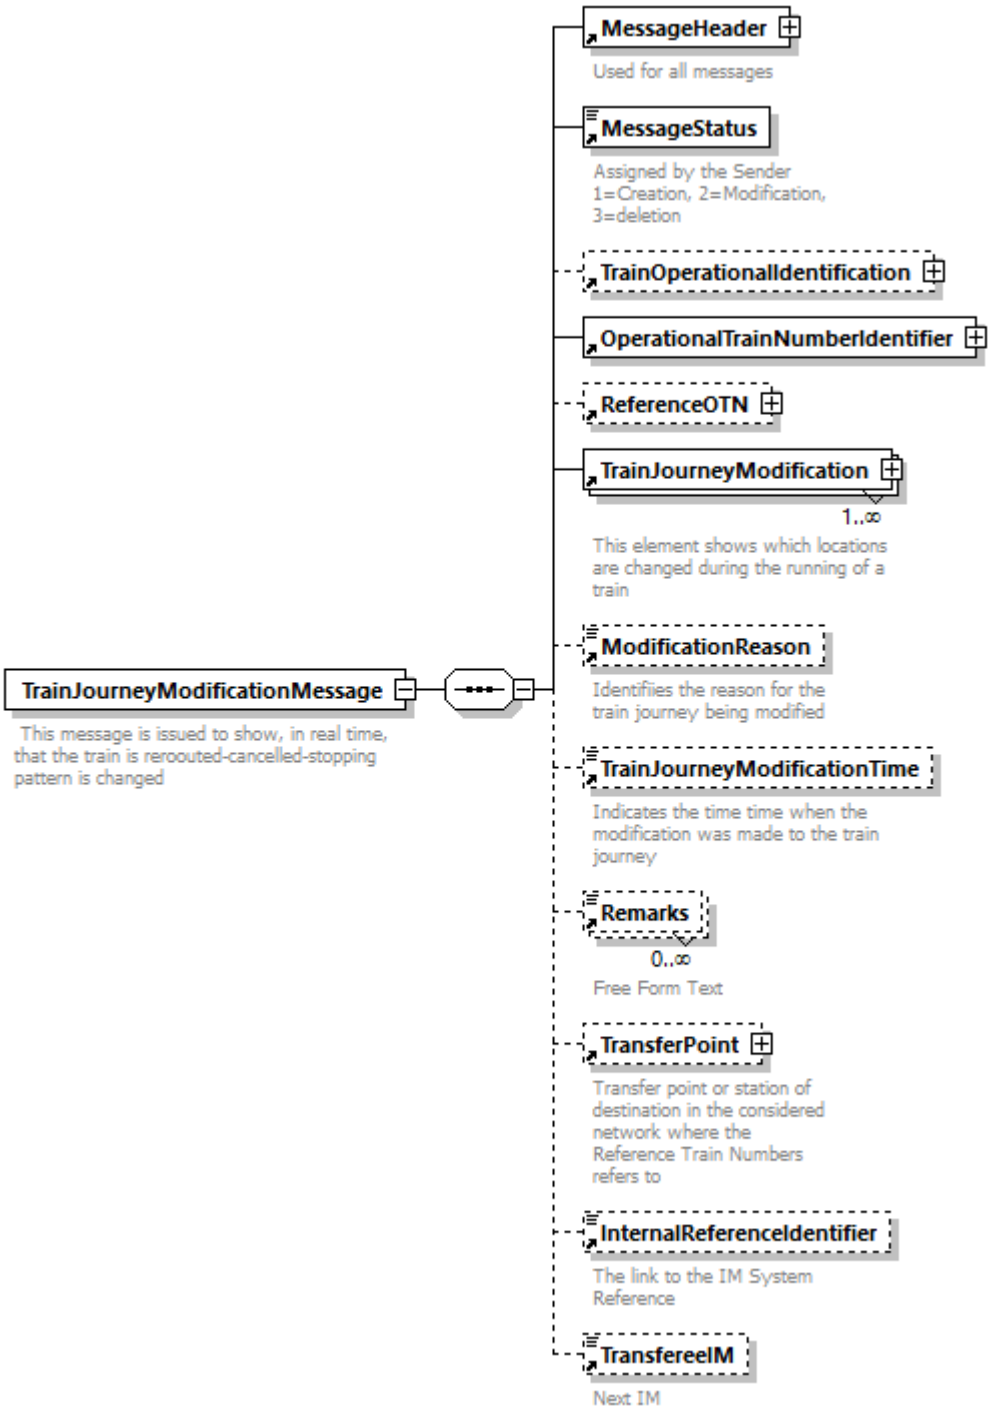
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	MessageHeader MessageStatus TrainOperationalIdentification OperationalTrainNumberIdentifier ReferenceOTN TrainJourneyModification ModificationReason TrainJourneyModificationTime Remarks TransferPoint InternalReferenceIdentifier TransfereeIM
annotation	documentation This message is issued to show, in real time, that the train is reroouted-cancelled-stopping pattern is changed

source

```
<xs:element name="TrainJourneyModificationMessage">
  <xs:annotation>
    <xs:documentation> This message is issued to show, in real time, that the train
is reroouted-cancelled-stopping pattern is changed</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus">
        <xs:annotation>
          <xs:documentation>Assigned by the Sender 1=Creation, 2=Modification,
3=deletion </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="TrainOperationalIdentification" minOccurs="0"/>
      <xs:element ref="OperationalTrainNumberIdentifier"/>
      <xs:element ref="ReferenceOTN" minOccurs="0"/>
      <xs:element ref="TrainJourneyModification" maxOccurs="unbounded"/>
      <xs:element ref="ModificationReason" minOccurs="0"/>
      <xs:element ref="TrainJourneyModificationTime" minOccurs="0"/>
      <xs:element ref="Remarks" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element ref="TransferPoint" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Transfer point or station of destination in the
considered network where the Reference Train Numbers refers to </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="InternalReferenceIdentifier" minOccurs="0"/>
      <xs:element ref="TransfereeIM" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainJourneyModificationTime**

diagram



namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element **TrainJourneyModificationMessage**
annotation	documentation Indicates the time time when the modification was made to the train journey

source

```
<xs:element name="TrainJourneyModificationTime" type="xs:dateTime">
  <xs:annotation>
    <xs:documentation>Indicates the time time when the modification was made to the
train journey</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **TrainJourneyStartTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation The precise time at which the train should present itself on the network

source	`<xs:element name="TrainJourneyStartTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>The precise time at which the train should present itself on the network</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **TrainLength**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric4-4**
properties	content simple
used by	elements **PlannedTrainTechnicalData** **TrainRunningTechData**
facets	Kind Value Annotation minInclusive 0001 maxInclusive 9999
annotation	documentation The calculated Length of a train (sum of all length over buffer of the wagons and traction units). Expressed in Metres

source	`<xs:element name="TrainLength" type="Numeric4-4">`
	`  <xs:annotation>`
	`  <xs:documentation>The calculated Length of a train (sum of all length over buffer of the wagons and traction units). Expressed in Metres</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **TrainLocationReport**

diagram

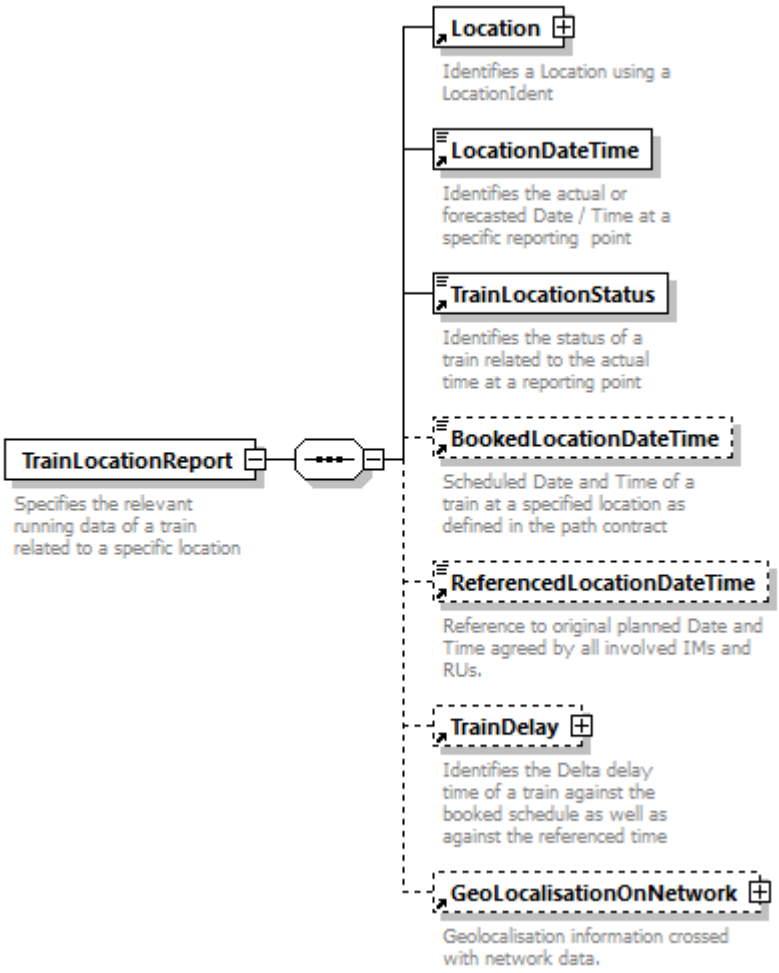

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Location LocationDateTime TrainLocationStatus BookedLocationDateTime ReferencedLocationDateTime TrainDelay GeoLocalisationOnNetwork**
used by	elements **TrainRunningForecastMessage TrainRunningInformationMessage**
annotation	documentation Specifies the relevant running data of a train related to a specific location

source

```
<xs:element name="TrainLocationReport">
  <xs:annotation>
    <xs:documentation>Specifies the relevant running data of a train related to a
specific location</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="Location"/>
      <xs:element ref="LocationDateTime"/>
      <xs:element ref="TrainLocationStatus"/>
      <xs:element ref="BookedLocationDateTime" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Scheduled Date and Time of a train at a specified
location as defined in the path contract</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="ReferencedLocationDateTime" minOccurs="0"/>
      <xs:element ref="TrainDelay" minOccurs="0"/>
```

```
      <xs:element ref="GeoLocalisationOnNetwork" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainLocationStatus**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: RunningStatus

properties: content simple

used by: elements ChangeofTrackMessage DelayEventReport LocationModified TrainAtLocation TrainLocationReport

facets

Kind	Value	Annotation
enumeration	00	documentation: Not specified
enumeration	01	documentation: Arrival at destination
enumeration	02	documentation: Departure at origin
enumeration	03	documentation: Intermediate arrival
enumeration	04	documentation: Intermediate departure
enumeration	05	documentation: Pass through
enumeration	06	documentation: NEW CODES: Some IMs are transmitting these codes (6 - 9)
enumeration	07	
enumeration	08	
enumeration	09	
enumeration	10	documentation: Not specified for wagon
enumeration	11	documentation: Wagon arrival at its destination by train
enumeration	12	documentation: Wagon departure from its station of origin by train
enumeration	13	documentation: Wagon arrival at reporting point by train
enumeration	14	documentation: Wagon departure from reporting point by train (HLR)
enumeration	15	documentation: Wagon run-through at reporting point by train
enumeration	16	documentation: Wagon parked at reporting point (MAD)
enumeration	17	documentation: Wagon shunted at reporting point
enumeration	18	documentation: Wagon arrived at reporting point
enumeration	19	documentation: Wagon departure from reporting point

annotation

documentation
Identifies the status of a train related to the actual time at a reporting point

source

```
<xs:element name="TrainLocationStatus" type="RunningStatus">
  <xs:annotation>
    <xs:documentation>Identifies the status of a train related to the actual time at
a reporting point</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **TrainMaxSpeed**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Speed**
properties	content simple
used by	elements **PlannedTrainTechnicalData** **TrainRunningTechData**
facets	Kind Value Annotation minInclusive 001 maxInclusive 999
annotation	documentation The max. possible speed of a train in km/h

source	`<xs:element name="TrainMaxSpeed" type="Speed">`
	`  <xs:annotation>`
	`  <xs:documentation>The max. possible speed of a train in km/h</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **TrainNotAtInterruptionPoint**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 1
annotation	documentation It is already known that train running might be interrupted in interruption point although the train has not arrived to interruption point yet

source	`<xs:element name="TrainNotAtInterruptionPoint">`
	`  <xs:annotation>`
	`  <xs:documentation>It is already known that train running might be interrupted in interruption point although the train has not arrived to interruption point yet</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **TrainOperationalIdentification**

diagram	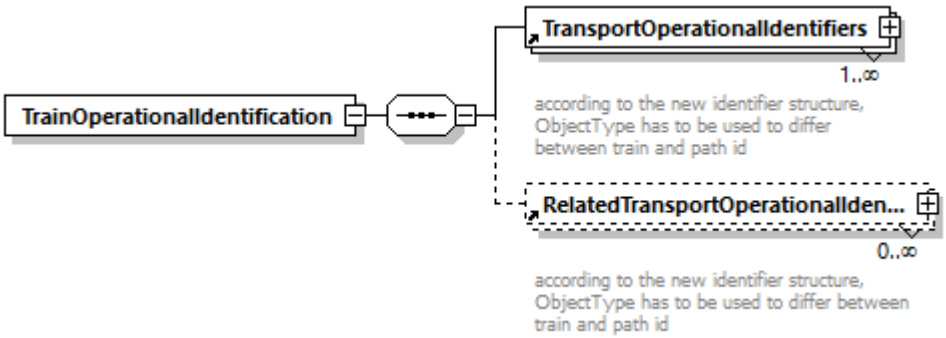
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	TransportOperationalIdentifiers RelatedTransportOperationalIdentifiers
used by	elements ChangeofTrackMessage WagonStatusMessages/WagonStatusMessage/Train TrainAtLocation TrainDelayCauseMessage TrainJourneyModificationMessage TrainRunningForecastMessage TrainRunningInformationMessage TrainRunningInterruptionMessage

source

```
<xs:element name="TrainOperationalIdentification">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="TransportOperationalIdentifiers" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>according to the new identifier structure, ObjectType has
to be used to differ between train and path id</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="RelatedTransportOperationalIdentifiers" minOccurs="0"
maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>according to the new identifier structure, ObjectType has
to be used to differ between train and path id</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainReadyMessage**

diagram

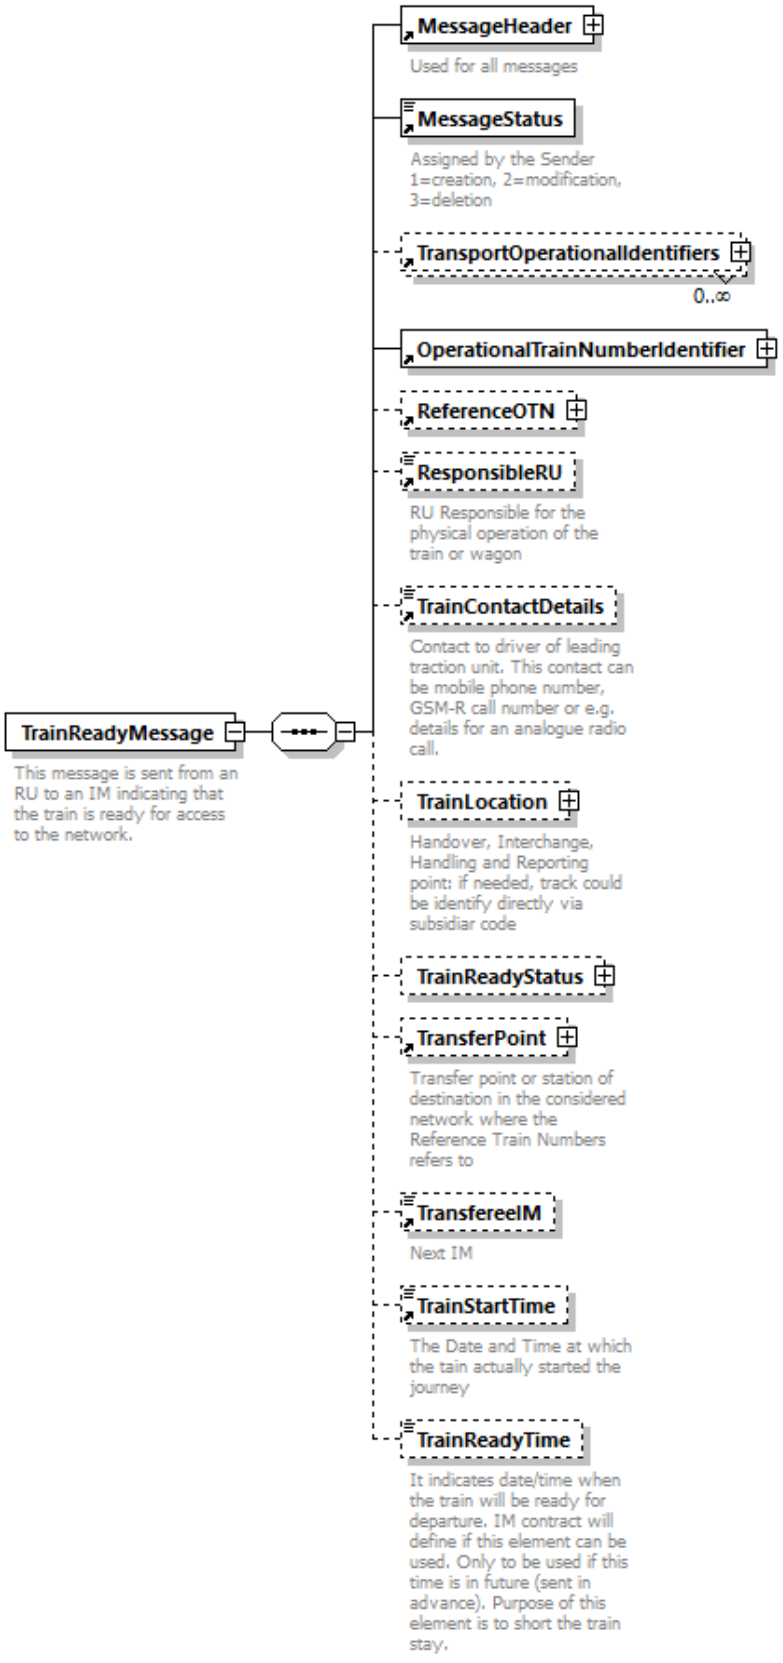

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	MessageHeader MessageStatus TransportOperationalIdentifiers OperationalTrainNumberIdentifier ReferenceOTN ResponsibleRU TrainContactDetails TrainLocation TrainReadyStatus TransferPoint TransfereeIM TrainStartTime TrainReadyTime
annotation	documentation This message is sent from an RU to an IM indicating that the train is ready for access to the network.

source

```
<xs:element name="TrainReadyMessage">
  <xs:annotation>
    <xs:documentation>This message is sent from an RU to an IM indicating that the
train is ready for access to the network.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus"/>
      <xs:element ref="TransportOperationalIdentifiers" minOccurs="0"
maxOccurs="unbounded"/>
      <xs:element ref="OperationalTrainNumberIdentifier"/>
      <xs:element ref="ReferenceOTN" minOccurs="0"/>
      <xs:element ref="ResponsibleRU" minOccurs="0"/>
      <xs:element ref="TrainContactDetails" minOccurs="0"/>
      <xs:element name="TrainLocation" type="LocationIdent" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Handover, Interchange, Handling and Reporting point: if
needed, track could be identify directly via subsidiar code </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="TrainReadyStatus" minOccurs="0">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="TrainReady">
              <xs:annotation>
                <xs:documentation>0=Not Ready 1=Ready</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:integer">
                  <xs:enumeration value="0"/>
                  <xs:enumeration value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element ref="TrainDelay" minOccurs="0"/>
            <xs:element name="TrainNotReadyDescription" type="FreeText"
minOccurs="0">
              <xs:annotation>
                <xs:documentation>Description of the reason why the train is not
ready.</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="DelayCause" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="TransferPoint" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Transfer point or station of destination in the
considered network where the Reference Train Numbers refers to </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="TransfereeIM" minOccurs="0"/>
      <xs:element ref="TrainStartTime" minOccurs="0"/>
      <xs:element name="TrainReadyTime" type="xs:dateTime" minOccurs="0">
        <xs:annotation>
          <xs:documentation>It indicates date/time when the train will be ready for
departure. IM contract will define if this element can be used. Only to be used if
this time is in future (sent in advance). Purpose of this element is to short the
```

```
train stay. </xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainReadyMessage/TrainLocation**

diagram

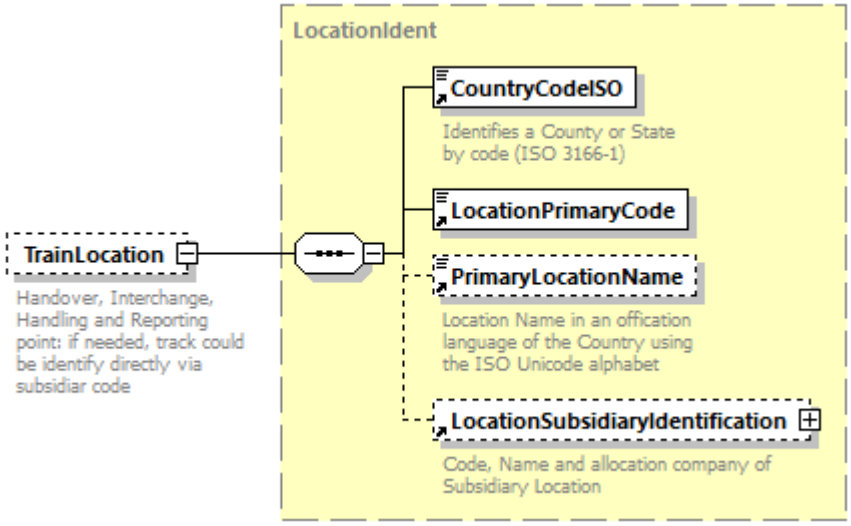

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	minOcc 0 maxOcc 1 content complex
children	**CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification**
annotation	documentation Handover, Interchange, Handling and Reporting point: if needed, track could be identify directly via subsidiar code

source

```
<xs:element name="TrainLocation" type="LocationIdent" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Handover, Interchange, Handling and Reporting point: if needed,
track could be identify directly via subsidiar code </xs:documentation>
  </xs:annotation>
</xs:element>
```

element **TrainReadyMessage/TrainReadyStatus**

diagram	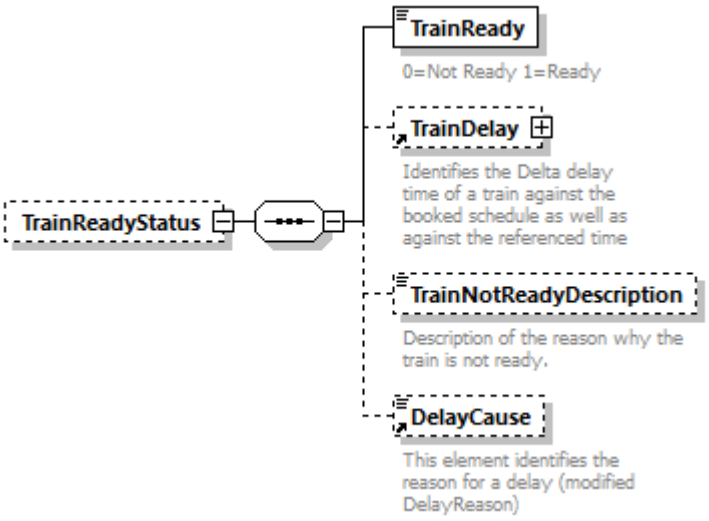
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**TrainReady** **TrainDelay** **TrainNotReadyDescription** **DelayCause**

source	`<xs:element name="TrainReadyStatus" minOccurs="0">`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element name="TrainReady">`
	`<xs:annotation>`
	`<xs:documentation>0=Not Ready 1=Ready</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:integer">`
	`<xs:enumeration value="0"/>`
	`<xs:enumeration value="1"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`
	`<xs:element ref="TrainDelay" minOccurs="0"/>`
	`<xs:element name="TrainNotReadyDescription" type="FreeText" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Description of the reason why the train is not ready.</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`
	`<xs:element ref="DelayCause" minOccurs="0"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **TrainReadyMessage/TrainReadyStatus/TrainReady**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**

properties	content simple
facets	Kind Value Annotation enumeration 0 enumeration 1
annotation	documentation 0=Not Ready 1=Ready
source	<xs:element name="TrainReady"> <xs:annotation> <xs:documentation>0=Not Ready 1=Ready</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:enumeration value="0"/> <xs:enumeration value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **TrainReadyMessage/TrainReadyStatus/TrainNotReadyDescription**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Description of the reason why the train is not ready.
source	<xs:element name="TrainNotReadyDescription" type="FreeText" minOccurs="0"> <xs:annotation> <xs:documentation>Description of the reason why the train is not ready.</xs:documentation> </xs:annotation> </xs:element>

element **TrainReadyMessage/TrainReadyTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	minOcc 0 maxOcc 1 content simple

annotation	documentation It indicates date/time when the train will be ready for departure. IM contract will define if this element can be used. Only to be used if this time is in future (sent in advance). Purpose of this element is to short the train stay.
source	<xs:element name="TrainReadyTime" type="xs:dateTime" minOccurs="0"> <xs:annotation> <xs:documentation>It indicates date/time when the train will be ready for departure. IM contract will define if this element can be used. Only to be used if this time is in future (sent in advance). Purpose of this element is to short the train stay. </xs:documentation> </xs:annotation> </xs:element>

element **TrainReadyStatus**

diagram	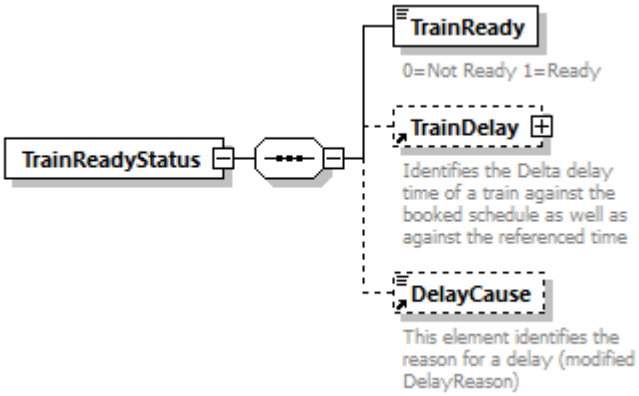
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	TrainReady TrainDelay DelayCause
source	<xs:element name="TrainReadyStatus"> <xs:complexType> <xs:sequence> <xs:element name="TrainReady"> <xs:annotation> <xs:documentation>0=Not Ready 1=Ready</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:enumeration value="0"/> <xs:enumeration value="1"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element ref="TrainDelay" minOccurs="0"/> <xs:element ref="DelayCause" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **TrainReadyStatus/TrainReady**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	restriction of **xs:integer**
properties	content simple
facets	Kind Value Annotation enumeration 0 enumeration 1
annotation	documentation 0=Not Ready 1=Ready
source	<xs:element name="TrainReady"> <xs:annotation> <xs:documentation>0=Not Ready 1=Ready</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:enumeration value="0"/> <xs:enumeration value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **TrainRunningData**

diagram	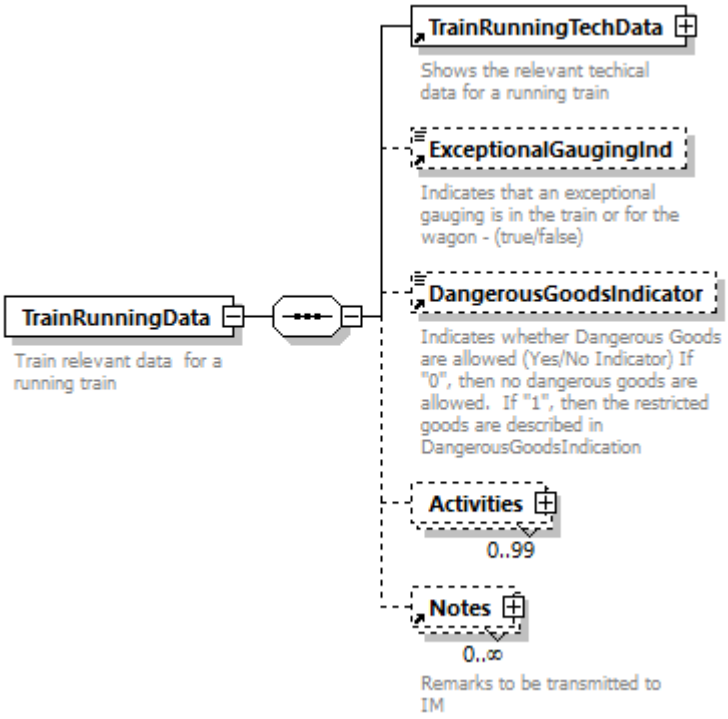
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	TrainRunningTechData ExceptionalGaugingInd DangerousGoodsIndicator Activities Notes
used by	element TrainCompositionJourneySection
annotation	documentation Train relevant data for a running train
source	<xs:element name="TrainRunningData"> <xs:annotation> <xs:documentation>Train relevant data for a running train</xs:documentation> </xs:annotation> <xs:complexType>

```
    <xs:sequence>
      <xs:element ref="TrainRunningTechData"/>
      <xs:element ref="ExceptionalGaugingInd" minOccurs="0"/>
      <xs:element ref="DangerousGoodsIndicator" minOccurs="0"/>
      <xs:element name="Activities" minOccurs="0" maxOccurs="99">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="TrainActivity"/>
            <xs:element name="ActivityLocationIdent" type="LocationIdent"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="Notes" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainRunningData/Activities**

diagram	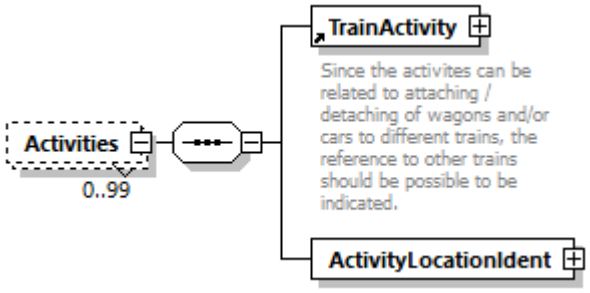
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 99 content complex
children	**TrainActivity** **ActivityLocationIdent**

source	`<xs:element name="Activities" minOccurs="0" maxOccurs="99">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="TrainActivity"/>`
	`  <xs:element name="ActivityLocationIdent" type="LocationIdent"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **TrainRunningData/Activities/ActivityLocationIdent**

diagram	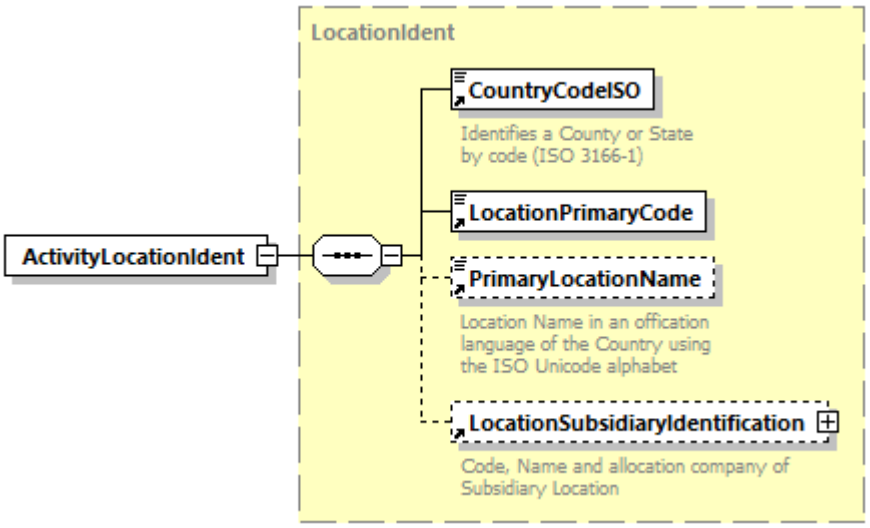
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
source	`<xs:element name="ActivityLocationIdent" type="LocationIdent"/>`

element **TrainRunningForecastMessage**

diagram

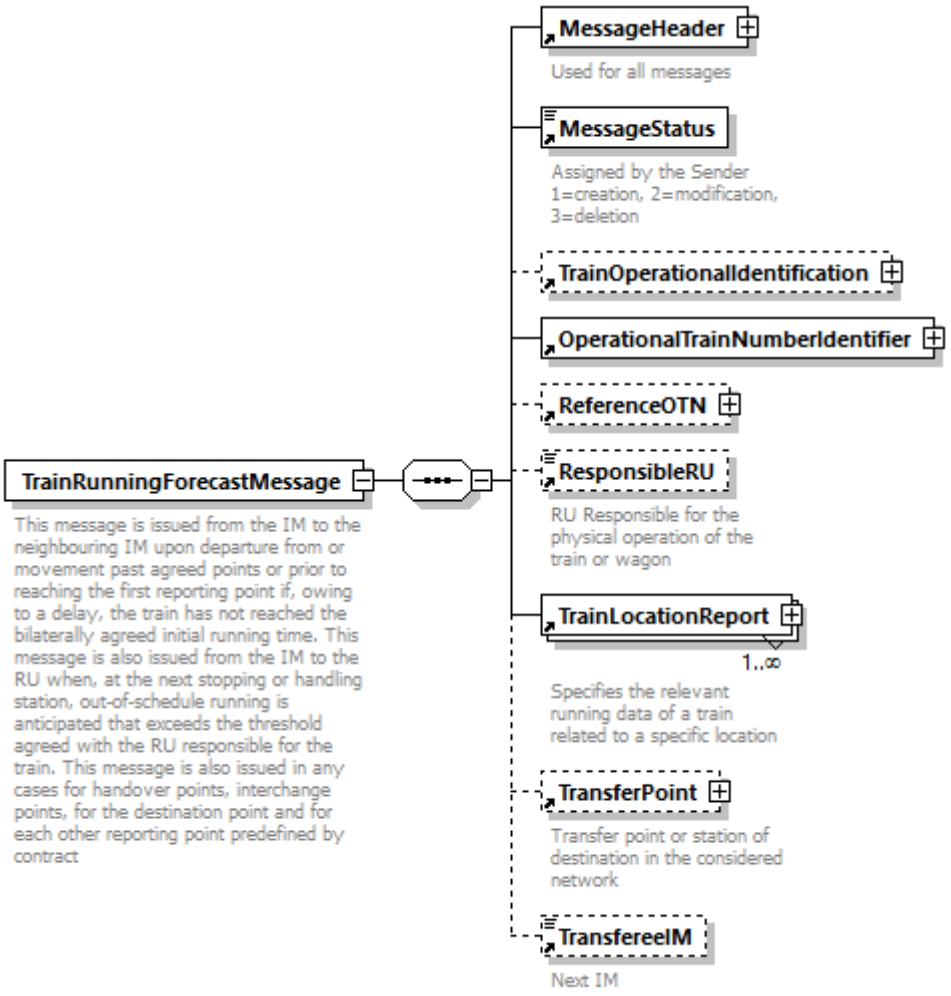

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MessageHeader** **MessageStatus** **TrainOperationalIdentification** **OperationalTrainNumberIdentifier** **ReferenceOTN** **ResponsibleRU** **TrainLocationReport** **TransferPoint** **TransfereeIM**
annotation	documentation This message is issued from the IM to the neighbouring IM upon departure from or movement past agreed points or prior to reaching the first reporting point if, owing to a delay, the train has not reached the bilaterally agreed initial running time. This message is also issued from the IM to the RU when, at the next stopping or handling station, out-of-schedule running is anticipated that exceeds the threshold agreed with the RU responsible for the train. This message is also issued in any cases for handover points, interchange points, for the destination point and for each other reporting point predefined by contract

source

```
<xs:element name="TrainRunningForecastMessage">
  <xs:annotation>
    <xs:documentation>This message is issued from the IM to the neighbouring IM upon
departure from or movement past agreed points or prior to reaching the first
reporting point if, owing to a delay, the train has not reached the bilaterally
agreed initial running time. This message is also issued from the IM to the RU when,
at the next stopping or handling station, out-of-schedule running is anticipated that
exceeds the threshold agreed with the RU responsible for the train. This message is
also issued in any cases for handover points, interchange points, for the destination
point and for each other reporting point predefined by contract</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus"/>
```

```
      <xs:element ref="TrainOperationalIdentification" minOccurs="0"/>
      <xs:element ref="OperationalTrainNumberIdentifier"/>
      <xs:element ref="ReferenceOTN" minOccurs="0"/>
      <xs:element ref="ResponsibleRU" minOccurs="0"/>
      <xs:element ref="TrainLocationReport" maxOccurs="unbounded"/>
      <xs:element ref="TransferPoint" minOccurs="0"/>
      <xs:element ref="TransfereeIM" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainRunningInformationMessage**

diagram

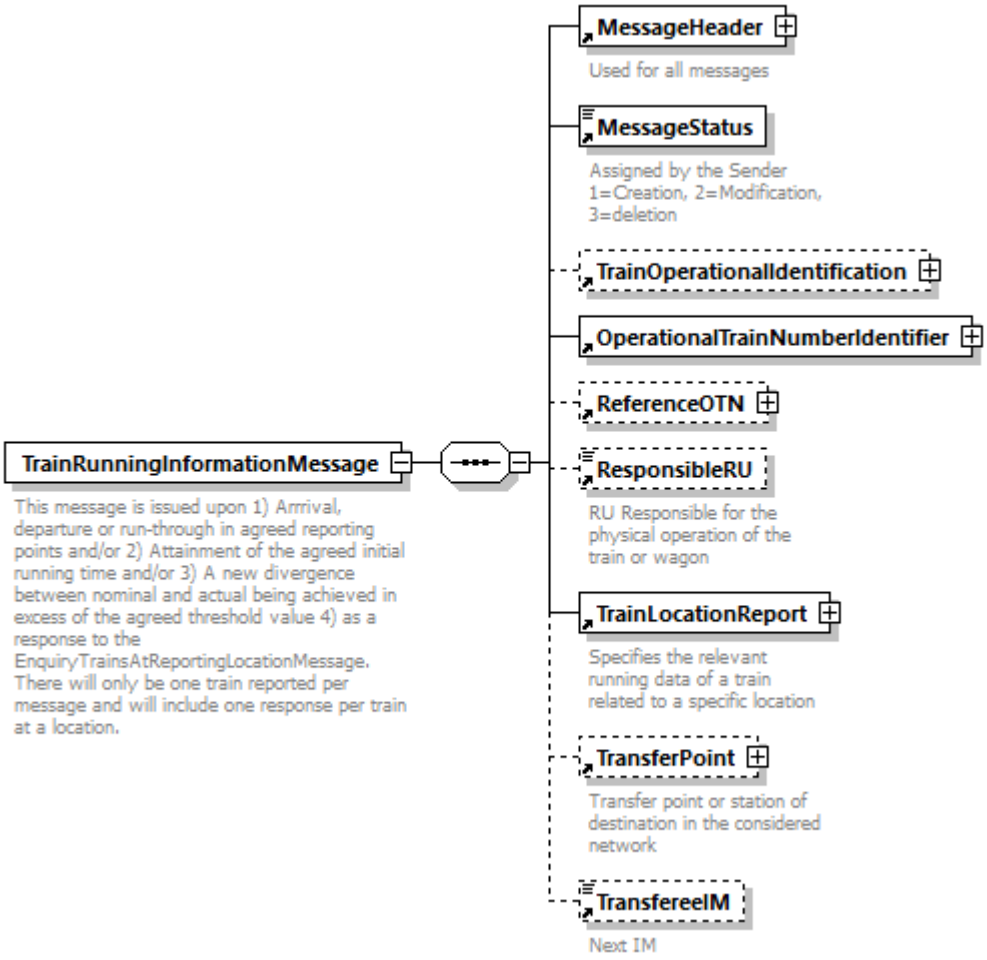

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	MessageHeader MessageStatus TrainOperationalIdentification OperationalTrainNumberIdentifier ReferenceOTN ResponsibleRU TrainLocationReport TransferPoint TransfereeIM
annotation	documentation This message is issued upon 1) Arrrival, departure or run-through in agreed reporting points and/or 2) Attainment of the agreed initial running time and/or 3) A new divergence between nominal and actual being achieved in excess of the agreed threshold value 4) as a response to the EnquiryTrainsAtReportingLocationMessage. There will only be one train reported per message and will include one response per train at a location.

source

```
<xs:element name="TrainRunningInformationMessage">
  <xs:annotation>
    <xs:documentation>This message is issued upon 1) Arrrival, departure or run-
through in agreed reporting points and/or 2) Attainment of the agreed initial running
time and/or 3) A new divergence between nominal and actual being achieved in excess
```

```
of the agreed threshold value 4) as a response to the
EnquiryTrainsAtReportingLocationMessage.  There will only be one train reported per
message and will include one response per train at a location.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus">
        <xs:annotation>
          <xs:documentation>Assigned by the Sender 1=Creation, 2=Modification,
3=deletion </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="TrainOperationalIdentification" minOccurs="0"/>
      <xs:element ref="OperationalTrainNumberIdentifier"/>
      <xs:element ref="ReferenceOTN" minOccurs="0"/>
      <xs:element ref="ResponsibleRU" minOccurs="0"/>
      <xs:element ref="TrainLocationReport"/>
      <xs:element ref="TransferPoint" minOccurs="0"/>
      <xs:element ref="TransfereeIM" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainRunningInterruptionMessage**

diagram

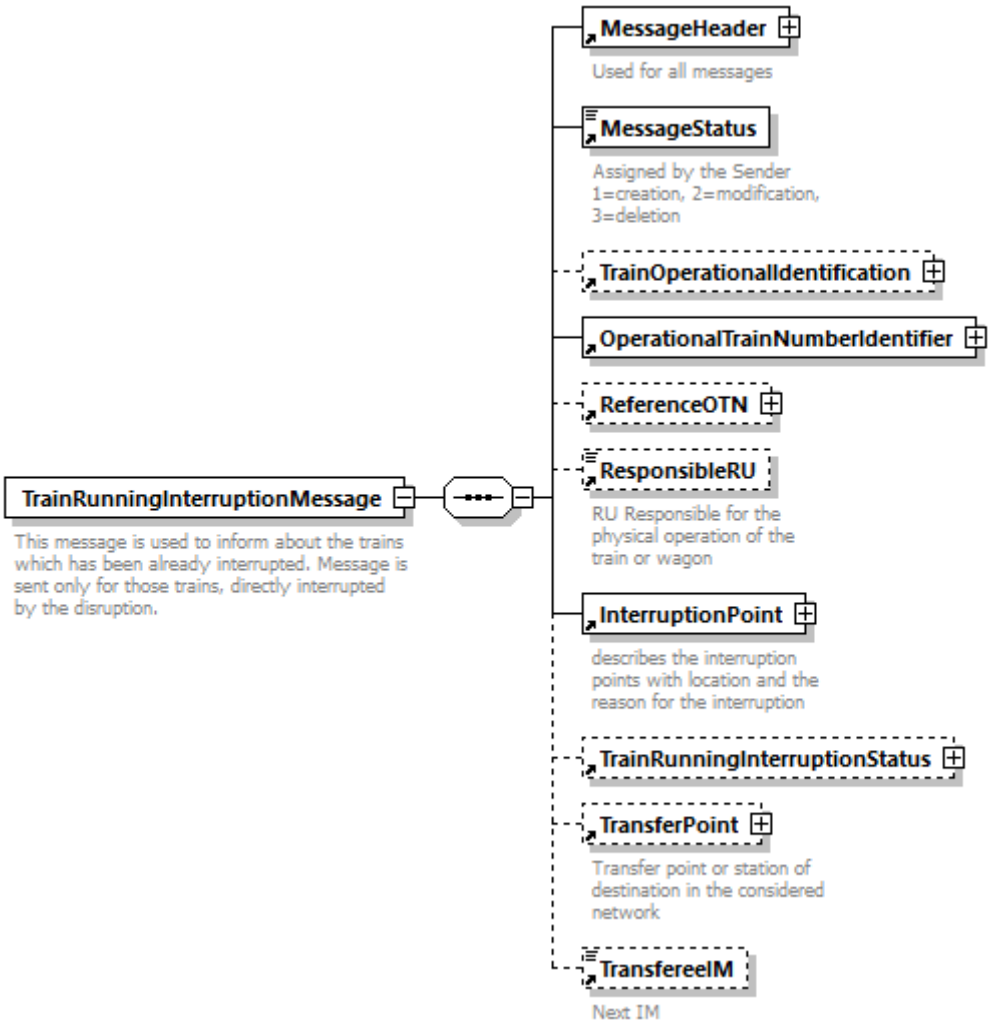

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MessageHeader MessageStatus TrainOperationalIdentification OperationalTrainNumberIdentifier ReferenceOTN ResponsibleRU InterruptionPoint TrainRunningInterruptionStatus TransferPoint TransfereeIM**
annotation	documentation This message is used to inform about the trains which has been already interrupted. Message is sent only for those trains, directly interrupted by the disruption.
source	

```
<xs:element name="TrainRunningInterruptionMessage">
  <xs:annotation>
    <xs:documentation>This message is used to inform about the trains which has been
already interrupted. Message is sent only for those trains, directly interrupted by
the disruption. </xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="MessageStatus"/>
      <xs:element ref="TrainOperationalIdentification" minOccurs="0"/>
      <xs:element ref="OperationalTrainNumberIdentifier"/>
      <xs:element ref="ReferenceOTN" minOccurs="0"/>
      <xs:element ref="ResponsibleRU" minOccurs="0"/>
      <xs:element ref="InterruptionPoint"/>
      <xs:element ref="TrainRunningInterruptionStatus" minOccurs="0"/>
      <xs:element ref="TransferPoint" minOccurs="0"/>
      <xs:element ref="TransfereeIM" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainRunningTechData**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	TrainType TrainWeight TrainLength TrainCC_System TrainRadioSystem TrainMaxSpeed MaxAxleWeight BrakeType BrakingRatio BrakeWeight NumberOfVehicles NumberOfAxles
used by	element TrainRunningData
annotation	documentation Shows the relevant techical data for a running train

source

```
<xs:element name="TrainRunningTechData">
  <xs:annotation>
    <xs:documentation>Shows the relevant techical data for a running
train</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="TrainType"/>
      <xs:element ref="TrainWeight"/>
      <xs:element ref="TrainLength"/>
      <xs:element ref="TrainCC_System" minOccurs="0" maxOccurs="9"/>
      <xs:element ref="TrainRadioSystem" minOccurs="0" maxOccurs="9"/>
      <xs:element ref="TrainMaxSpeed" minOccurs="0"/>
      <xs:element ref="MaxAxleWeight" minOccurs="0"/>
      <xs:element ref="BrakeType" minOccurs="0"/>
      <xs:element ref="BrakingRatio" minOccurs="0"/>
      <xs:element ref="BrakeWeight" minOccurs="0"/>
      <xs:element ref="NumberOfVehicles" minOccurs="0"/>
      <xs:element ref="NumberOfAxles" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainStartTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
used by	element TrainReadyMessage
annotation	documentation The Date and Time at which the tain actually started the journey

source

```
<xs:element name="TrainStartTime" type="xs:dateTime">
  <xs:annotation>
    <xs:documentation>The Date and Time at which the tain actually started the
journey</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **TrainWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of WeightValueTonne

properties	content simple
used by	elements PlannedTrainTechnicalData TrainRunningTechData
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation The sum of all weights of wagons and traction units
source	<xs:element name="TrainWeight"> <xs:annotation> <xs:documentation>The sum of all weights of wagons and traction units</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="WeightValueTonne"> <xs:maxInclusive value="99999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **TransfereeIM**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	CompanyCode
properties	content simple
used by	elements ChangeofTrackMessage TrainCompositionMessage TrainDelayCauseMessage TrainJourneyModificationMessage TrainReadyMessage TrainRunningForecastMessage TrainRunningInformationMessage TrainRunningInterruptionMessage
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Next IM
source	<xs:element name="TransfereeIM" type="CompanyCode"> <xs:annotation> <xs:documentation>Next IM</xs:documentation> </xs:annotation> </xs:element>

element **TransferPoint**

diagram	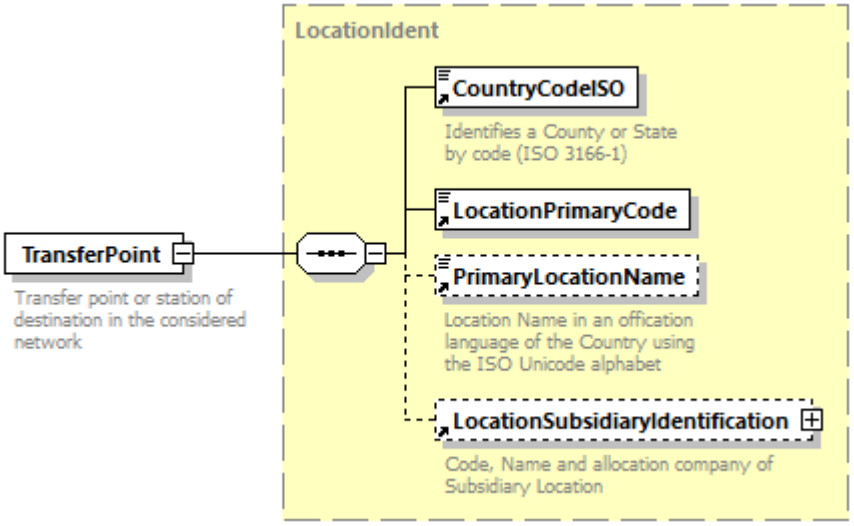
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
used by	elements **ChangeofTrackMessage** **TrainCompositionMessage** **TrainDelayCauseMessage** **TrainJourneyModificationMessage** **TrainReadyMessage** **TrainRunningForecastMessage** **TrainRunningInformationMessage** **TrainRunningInterruptionMessage**
annotation	documentation Transfer point or station of destination in the considered network

source	`<xs:element name="TransferPoint" type="LocationIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>Transfer point or station of destination in the considered network</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **TransportInstruction**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**FreeText**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Special instructions regarding the transportation of the wagon or shipment in free text

source	`<xs:element name="TransportInstruction" type="FreeText">`
	`  <xs:annotation>`
	`  <xs:documentation>Special instructions regarding the transportation of the wagon or shipment in free text</xs:documentation>`
	`  </xs:annotation>`

	</xs:element>

element **TransportOperationalIdentifiers**

diagram	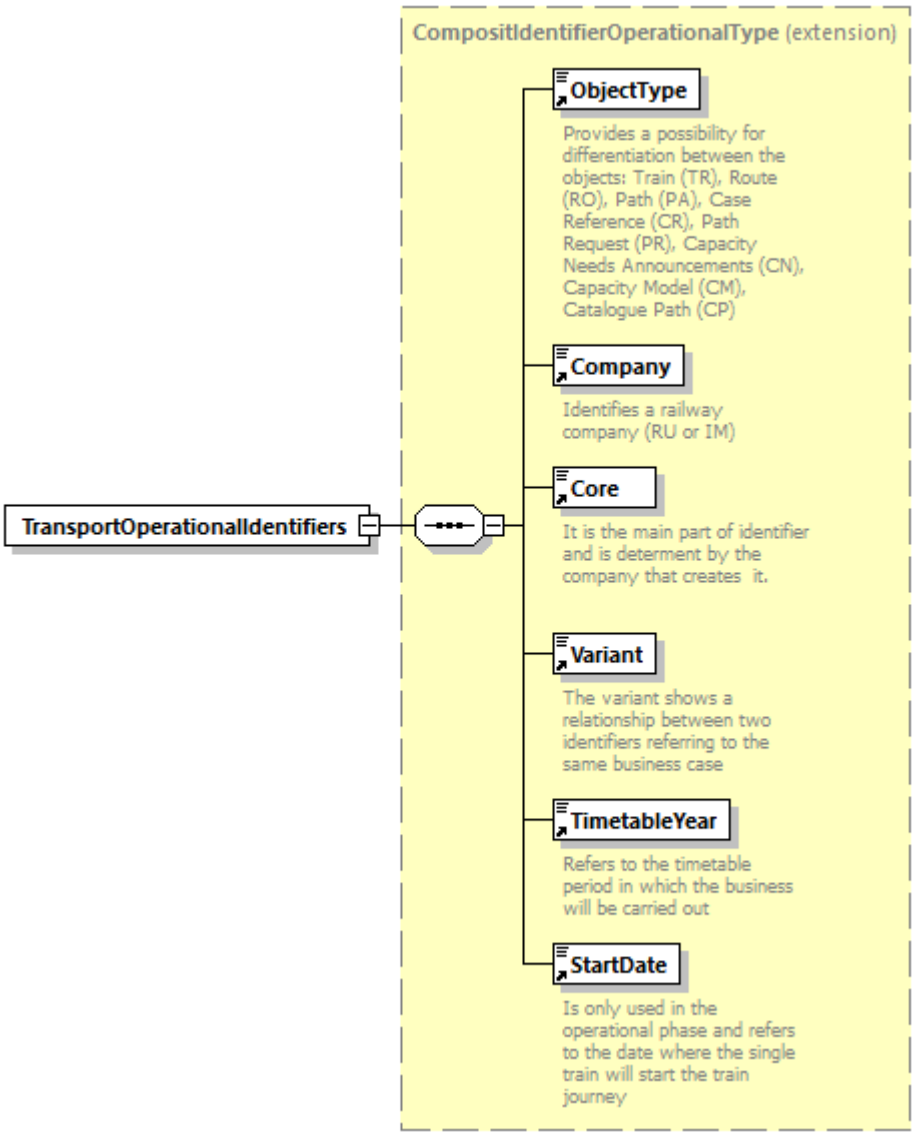
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **CompositIdentifierOperationalType**
properties	content complex
children	**ObjectType Company Core Variant TimetableYear StartDate**
used by	elements **ErrorMessage TrainCompositionMessage TrainOperationalIdentification TrainReadyMessage**
source	<xs:element name="TransportOperationalIdentifiers"> <xs:complexType> <xs:complexContent> <xs:extension base="CompositIdentifierOperationalType"/> </xs:complexContent> </xs:complexType> </xs:element>

element **TypeOfIMHarmonization**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**TypeOfIMHarmonizationCode**
properties	content simple
used by	elements **PathDetailsMessage** **PathRequestMessage**
facets	Kind Value Annotation enumeration Full enumeration Part
annotation	documentation Enumeration of Type of IM harmonization: Full, Part

source	`<xs:element name="TypeOfIMHarmonization" type="TypeOfIMHarmonizationCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Enumeration of Type of IM harmonization: Full, Part`
	`</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **TypeOfInformation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**TypeOfInformationCode**
properties	content simple
used by	elements **PathCanceledMessage** **PathConfirmedMessage** **PathDetailsMessage** **PathDetailsRefusedMessage** **PathNotAvailableMessage** **PathRequestMessage** **ReceiptConfirmationMessage**
facets	Kind Value Annotation minInclusive 0 maxInclusive 99 enumeration 1 documentation: harmonisation - in process enumeration 2 documentation: harmonisation - accepted enumeration 3 documentation: harmonisation - rejected enumeration 4 documentation: Request ready enumeration 5 documentation: path study request enumeration 6 documentation: pre-arranged path/reserve capacity enumeration 7 documentation: create offer enumeration 8 documentation: coordination update enumeration 9 documentation: draft offer

	enumeration	10	documentation draft alternative offer
	enumeration	11	documentation observation - in process
	enumeration	12	documentation observation - complete
	enumeration	13	documentation preparation of final offer - in process
	enumeration	14	documentation preparation of final offer - accepted
	enumeration	15	documentation preparation of final offer - rejected
	enumeration	16	documentation final offer
	enumeration	17	documentation final offer - accepted
	enumeration	18	documentation alternative offer accepted
	enumeration	19	documentation pre-accepted offer
	enumeration	20	documentation Final Offer rejected
	enumeration	21	documentation no alternative available
	enumeration	22	documentation booked
	enumeration	23	documentation preparation of draft alternative offer is in progress
	enumeration	24	documentation alternative offer triggered by IM
	enumeration	25	documentation offer/final offer rejected (without revision)
	enumeration	26	documentation alternative offer rejected (without revision)
	enumeration	27	documentation offer/final offer rejected (revision required)
	enumeration	28	documentation alternative offer rejected (revision required)
	enumeration	29	documentation withdrawal
	enumeration	30	documentation Create Dossier
	enumeration	31	documentation Close Dossier
	enumeration	32	documentation Path canceled full
	enumeration	33	documentation Path canceled partial
	enumeration	40	documentation Fully Assembled Path (FAP, constructed path)
	enumeration	42	documentation Preparation of draft offer – accepted
	enumeration	43	documentation Preparation of draft offer – rejected
	enumeration	44	documentation Draft offer rejected
	enumeration	45	documentation Draft no alternative available
	enumeration	50	documentation activate path (utilisation notification)
	enumeration	51	documentation deactivate path (utilisation notification)
	enumeration	52	documentation confirmation of utilisation notification
	enumeration	53	documentation Path and train cancelled
	enumeration	65	documentation Preparation of alternative offer in progress due to route update (used in PathNotAvailableMessage)
	enumeration	66	documentation Booked after route update (used in PathDetailsMessage)
annotation	documentation Enumeration indicating to which process step / process type in the planning does the message belong: path study; pre-arranged/catalogue path; (draft) offer; final offer; booked; deleted; utilisation notification; confirmation of utilisation confirmation		

source

```
<xs:element name="TypeOfInformation" type="TypeOfInformationCode">
  <xs:annotation>
    <xs:documentation> Enumeration indicating to which process step / process type in
the planning does the message belong: path study; pre-arranged/catalogue path;
(draft) offer; final offer; booked; deleted; utilisation notification; confirmation
of utilisation confirmation</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **TypeOfRequest**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: TypeOfRequestCode

properties: content simple

used by: elements PathCanceledMessage PathConfirmedMessage PathDetailsMessage PathDetailsRefusedMessage PathNotAvailableMessage PathRequestMessage ReceiptConfirmationMessage

facets

Kind	Value	Annotation
minInclusive	1	
enumeration	1	documentation Study
enumeration	2	documentation Request
enumeration	3	documentation Modification

annotation: documentation
Enumeration for the 3 different basic types of the planning processes types in the planning: Study (1), Request (2), Modification (3)

source

```
<xs:element name="TypeOfRequest" type="TypeOfRequestCode">
  <xs:annotation>
    <xs:documentation>Enumeration for the 3 different basic types of the planning
processes types in the planning: Study (1), Request (2), Modification (3)
</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **TypeOfRUHarmonization**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: TypeOfRUHarmonizationCode

properties: content simple

used by: elements PathDetailsMessage PathRequestMessage

facets

Kind	Value	Annotation
enumeration	Full	
enumeration	Part	
enumeration	None	

annotation: documentation
Type of RU harmonization: Full, Part, None.

source	<xs:element name="TypeOfRUHarmonization" type="TypeOfRUHarmonizationCode"> <xs:annotation> <xs:documentation>Type of RU harmonization: Full, Part, None.</xs:documentation> </xs:annotation> </xs:element>

element **TypeofService**

diagram	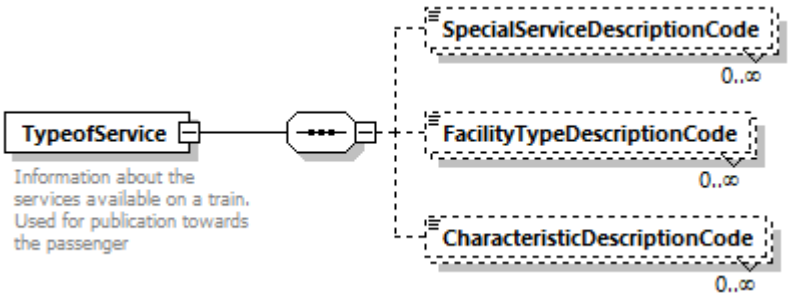
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	SpecialServiceDescriptionCode FacilityTypeDescriptionCode CharacteristicDescriptionCode
used by	element PlannedTrainData
annotation	documentation Information about the services available on a train. Used for publication towards the passenger
source	<xs:element name="TypeofService"> <xs:annotation> <xs:documentation>Information about the services available on a train. Used for publication towards the passenger</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="SpecialServiceDescriptionCode" type="tap:type7161CodeList" minOccurs="0" maxOccurs="unbounded"/> <xs:element name="FacilityTypeDescriptionCode" type="tap:type9039CodeList" minOccurs="0" maxOccurs="unbounded"/> <xs:element name="CharacteristicDescriptionCode" type="tap:type7037CodeList" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </xs:element>

element **TypeofService/SpecialServiceDescriptionCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	type7161CodeList
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind Value Annotation maxLength 3 enumeration 00 documentation Alternative service documentation

			The journey planner algorithm should look for an alternative Service documentation 0
	enumeration	3	documentation Additional loading documentation Additional loading of vehicles on a train of accompanied motorcars documentation 0
	enumeration	4	documentation Additional unloading documentation Additional unloading of vehicles from a train of accompanied motorcars documentation 0
	enumeration	5	documentation Breakfast documentation Breakfast documentation 0
	enumeration	6	documentation Dinner documentation Dinner documentation 0
	enumeration	7	documentation Loading documentation Loading of vehicles on a train of accompanied motorcars documentation 0
	enumeration	8	documentation Lunch documentation Lunch documentation 0
	enumeration	9	documentation Unloading documentation Unloading of vehicles from a train of accompanied motorcars documentation 0
	enumeration	11	documentation Child documentation Services for children documentation 0
	enumeration	21	documentation Cold buffet documentation Cold buffet service documentation 0
	enumeration	22	documentation Restaurant in 1st class only documentation Restaurant service in 1st class only documentation 0
	enumeration	23	documentation Hot buffet documentation Hot buffet service documentation 0
	enumeration	24	documentation Meal included for 1st class passengers documentation Meal service included for 1st class passengers

			documentation
			0
	enumeration	25	documentation
			Trolley
			documentation
			Trolley service (beverage and food cart)
			documentation
			0
	enumeration	26	documentation
			Snack
			documentation
			Snack
			documentation
			0
	enumeration	27	documentation
			Disabled
			documentation
			Services for disabled persons
			documentation
			0
	enumeration	28	documentation
			Movies
			documentation
			Movies
			documentation
			0
	enumeration	29	documentation
			Business
			documentation
			Services for business people
			documentation
			0
	enumeration	30	documentation
			Nursery
			documentation
			Nursery service
			documentation
			0
	enumeration	31	documentation
			Buffet
			documentation
			Buffet
			documentation
			0
	enumeration	32	documentation
			Special services for military
			documentation
			Special services for army families
			documentation
			0
	enumeration	33	documentation
			Boarding possible 2 hours before departure
			documentation
			Boarding is possible 2 hours before departure
			documentation
			0
	enumeration	34	documentation
			Alighting possible until 2 hours after arrival
			documentation
			Alighting is possible up to 2 hours after arrival
			documentation
			0
	enumeration	35	documentation
			Boarding possible 30 minutes before departure
			documentation
			Boarding is possible 30 minutes before departure
			documentation
			0
	enumeration	36	documentation
			Alighting possible until 30 minutes after arrival
			documentation
			Alighting is possible up to 30 minutes after arrival
			documentation

			0
	enumeration	37	documentation Postal services documentation Postal services available documentation 0
	enumeration	38	documentation Meal at the seat documentation Meal is provided at the seat documentation 0
	enumeration	39	documentation Self service documentation Self service meals documentation 0
	enumeration	40	documentation Overnight stay documentation Overnight stay possible on board documentation 0
	enumeration	41	documentation Luggage transport documentation Luggage transport offered documentation 0
	enumeration	42	documentation Luggage transport excluded documentation Luggage transport is not offered documentation 0
	enumeration	43	documentation Music documentation Music documentation 0
	enumeration	44	documentation Check-in documentation Time at which the traveller checks in documentation 0
	enumeration	45	documentation Check-out documentation Time at which the traveller checks out documentation 0
	enumeration	46	documentation Free WiFi on board documentation Free WiFi service on board available documentation 0
	enumeration	47	documentation WiFi on board documentation WiFi service on board available documentation 0
	enumeration	48	documentation Warning! Service may be affected by strike action documentation Warning! Service may be affected by strike action documentation 0

source	<xs:element name="SpecialServiceDescriptionCode" type="tap:type7161CodeList" minOccurs="0" maxOccurs="unbounded"/>

element **TypeofService/FacilityTypeDescriptionCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**type9039CodeList**
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind Value Annotation maxLength 3 enumeration 2 documentation First-class sleepers documentation First-class sleepers documentation 0 enumeration 3 documentation Standard class sleepers documentation Standard class (second class) sleepers documentation 0 enumeration 4 documentation First-class seats documentation First-class seats documentation 0 enumeration 5 documentation Second-class seats documentation Second-class seats documentation Also: standard, etc. documentation 0 enumeration 6 documentation First-class couchettes documentation First-class couchettes documentation 0 enumeration 7 documentation Second-class couchettes documentation Second-class couchettes documentation 0 enumeration 8 documentation Sleeperette documentation Sleeperette or reclining seat documentation 0 enumeration 9 documentation Restaurant documentation Restaurant facility documentation 0 enumeration 11 documentation First-class sleeper, single

			documentation
			First-class sleeper, single
			documentation
			0
	enumeration	12	documentation
			First-class sleeper, special
			documentation
			First-class sleeper, special
			documentation
			0
	enumeration	13	documentation
			First-class sleeper, double
			documentation
			First-class sleeper, double
			documentation
			0
	enumeration	14	documentation
			Vehicle transport
			documentation
			Facilities for vehicle transport etc. Not bicycles.
			documentation
			Cars, boats, trailers, motorbikes,
			documentation
			0
	enumeration	15	documentation
			Second-class, sleeper, T2
			documentation
			Second-class sleeper, T2 (two-bed compartment)
			documentation
			0
	enumeration	16	documentation
			Second-class sleeper, T3
			documentation
			Second-class sleeper, T3 (three-bed compartment)
			documentation
			0
	enumeration	17	documentation
			Second-class sleeper T4
			documentation
			Second-class sleeper, T4 (four-bed compartment)
			documentation
			0
	enumeration	18	documentation
			First-class sleeper, single, shower
			documentation
			First-class sleeper, single with shower
			documentation
			0
	enumeration	19	documentation
			First-class sleeper, double, shower
			documentation
			First-class sleeper, double with shower
			documentation
			0
	enumeration	20	documentation
			Non-smoker service
			documentation
			The travel service is non-smoking
			documentation
			0
	enumeration	21	documentation
			Heavily disabled
			documentation
			Facilities for heavily disabled persons available
			documentation
			0
	enumeration	24	documentation
			Baby room
			documentation
			Baby care facilities available
			documentation
			0
	enumeration	26	documentation

			Bicycle transport
			documentation
			Facility for bicycle transport available
			documentation
			0
	enumeration	28	documentation
			Wheelchair access
			documentation
			Access for wheelchairs possible
			documentation
			0
	enumeration	33	documentation
			Video coach
			documentation
			Video coach available
			documentation
			0
	enumeration	34	documentation
			Mini-bar
			documentation
			Mini-bar available
			documentation
			0
	enumeration	36	documentation
			Panorama coach
			documentation
			Panorama coach available
			documentation
			0
	enumeration	44	documentation
			Telephone
			documentation
			Telephone service is available
			documentation
			0
	enumeration	45	documentation
			Power supply
			documentation
			Service provides power supply sockets
			documentation
			0
	enumeration	46	documentation
			Pullmann coach
			documentation
			Pullman car seats
			documentation
			0
	enumeration	47	documentation
			Bar
			documentation
			A bar is available
			documentation
			0
	enumeration	48	documentation
			Family compartment
			documentation
			Family compartment(s) available
			documentation
			0
	enumeration	50	documentation
			Buffet machine
			documentation
			Buffet machine available
			documentation
			0
	enumeration	54	documentation
			Premium class
			documentation
			A class with comfort level higher than first class Business, etc
			documentation
			Includes Comfort, Club, Pullman,
			documentation
			0

	enumeration	55	documentation Preferente documentation Spanish first class on long distance trains documentation RENFE documentation 0
	enumeration	56	documentation Turista documentation Spanish second class on long distance trains documentation RENFE documentation 0
	enumeration	57	documentation First-class sleeper, single, shower, WC documentation First-class sleeper, single with shower and WC documentation RENFE documentation 0
	enumeration	58	documentation First-class sleeper, double shower, WC documentation First-class sleeper, double with shower and WC documentation RENFE documentation 0
	enumeration	59	documentation Second class sleeper, T3, shower, WC documentation Second class sleeper, T3, shower, WC documentation 0
	enumeration	60	documentation Second class sleeper double documentation Second class sleeper for two documentation 0
	enumeration	61	documentation Second class sleeper double shower/toilets documentation Second class sleeper for two with shower and toilets documentation 0
	enumeration	62	documentation Second-class, couchette, two-bed, C2 documentation Second class compartment with 2 couchettes documentation 0
	enumeration	63	documentation Second-class, couchette, four-bed, C4 documentation Second class compartment with 4 couchettes documentation 0
	enumeration	64	documentation Second-class, couchette, six-bed, C6 documentation Second class compartment with 6 couchettes documentation 0
	enumeration	65	documentation Second class couchette wheelchair documentation Second class couchette with wheelchair space documentation

			0
	enumeration	66	documentation Executive class documentation A class with comfort level higher than first class documentation Trenitalia documentation 0
	enumeration	67	documentation Business class documentation First class documentation Trenitalia documentation 0
	enumeration	68	documentation Premium class documentation A second class with comfort level higher than normal second class documentation Trenitalia documentation 0
	enumeration	69	documentation Standard class documentation Trenitalia's normal second class documentation Trenitalia documentation 0
	enumeration	70	documentation Unified class documentation For services with no class differentiation. A service with only one class documentation UIC documentation 0
	enumeration	71	documentation Medical-grade masks documentation Medical-grade masks must be worn documentation 0
	enumeration	72	documentation Mask obligation according to legal regulation documentation Mask obligation according to legal regulation documentation 0
	enumeration	101	documentation Metro connection documentation Metro, subway, underground connection documentation Only used in TSDUPD documentation 0
	enumeration	102	documentation Taxi connection documentation Taxi connection documentation Only used in TSDUPD documentation 0
	enumeration	103	documentation Bus connection documentation Bus connections available

			documentation
			Used only in TSDUPD
			documentation
			0
	enumeration	104	documentation
			Tram connection
			documentation
			Tram connections available
			documentation
			Used only in TSDUPD
			documentation
			0
	enumeration	105	documentation
			2nd Class couchette five beds C5
			documentation
			2nd Class couchette five beds C5
			documentation
			DB Nachtzug
			documentation
			0
	enumeration	106	documentation
			Vaccinated, tested, recovered rule applied
			documentation
			Vaccinated, tested, recovered rule applied
			documentation
			Vaccinated, tested, recovered rule applies on trains, valid proof must be presented
			documentation
			0
	enumeration	107	documentation
			Dedicated toilet and place for wheelchair
			documentation
			Dedicated toilet and place for wheelchair
			documentation
			Dedicated toilet together with dedicated space for wheelchair
			documentation
			0
source	<xs:element name="FacilityTypeDescriptionCode" type="tap:type9039CodeList" minOccurs="0" maxOccurs="unbounded"/>		

element **TypeofService/CharacteristicDescriptionCode**

diagram			
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0		
type	**type7037CodeList**		
properties	minOcc 0 maxOcc unbounded content simple		
facets	Kind	Value	Annotation
	maxLength	17	
	enumeration	6	documentation
			First class
			documentation
			First class accommodation
			documentation
			0
	enumeration	7	documentation
			Second class
			documentation
			Second class accommodation
			documentation
			0
	enumeration	11	documentation
			Reservation possible
			documentation
			Reservation is possible

			documentation
			0
	enumeration	12	documentation
			With supplement
			documentation
			A supplement is charged
			documentation
			0
	enumeration	13	documentation
			Reservation compulsory
			documentation
			Reservation is compulsory
			documentation
			0
	enumeration	14	documentation
			Reservation advised
			documentation
			Reservation is recommended
			documentation
			0
	enumeration	15	documentation
			Reservation compulsory for parties
			documentation
			Reservation is compulsory for parties
			documentation
			0
	enumeration	16	documentation
			Reservation compulsory in first-class
			documentation
			Reservation is compulsory in first-class
			documentation
			0
	enumeration	17	documentation
			Group booking restricted
			documentation
			Booking by groups restricted
			documentation
			0
	enumeration	18	documentation
			Groups not allowed
			documentation
			Groups of travellers are not allowed
			documentation
			0
	enumeration	19	documentation
			No reservation
			documentation
			Reservation is not possible
			documentation
			0
	enumeration	20	documentation
			Reservation in first class only
			documentation
			Reservation is only possible in first
			documentation
			0
	enumeration	21	documentation
			Reservation compulsory from origin station
			documentation
			Reservation compulsory from origin station
			documentation
			0
	enumeration	22	documentation
			Reservation allowed for certain classes/products
			documentation
			Reservation possible for some booking classes/products
			documentation
			0
	enumeration	23	documentation
			Reservation in second class only
			documentation
			Reservation is only possible in second class.
			documentation

	0 enumeration 24 documentation Not available documentation The product is not available documentation 0 enumeration 25 documentation Non-bookable documentation The product is not bookable documentation 0 enumeration 26 documentation Bookable through an international reservation system documentation Bookable through an international reservation system documentation 0 enumeration 27 documentation Bookable through a national reservation system documentation Bookable through a national reservation system documentation 0 enumeration 28 documentation Bookable manually on the RU selling point documentation Bookable manually on the RU selling point documentation 0
source	`<xs:element name="CharacteristicDescriptionCode" type="tap:type7037CodeList" minOccurs="0" maxOccurs="unbounded"/>`

element **UltimateDestinationCountry**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CountryIdentISO**
properties	content simple
used by	elements **ILU_Details** **ITU_Details**
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation Country of Ultimate Destination

source	`<xs:element name="UltimateDestinationCountry" type="CountryIdentISO">`
	`  <xs:annotation>`
	`  <xs:documentation>Country of Ultimate Destination</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **UN_Number**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	element **SummaryOFGoodsWithSameRID**
facets	Kind Value Annotation length 4 pattern \d*[1-9]\d*
annotation	documentation The UNNumber of the dangerous good according to the RID chapter 3.2, table A, column 1. Mandatory, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE <=1000L", "EMPTY IBC" or "EMPTY LARGE PACKAGING" .

source	`<xs:element name="UN_Number">`
	`<xs:annotation>`
	`<xs:documentation>`The UNNumber of the dangerous good according to the RID chapter 3.2, table A, column 1. Mandatory, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE <=1000L", "EMPTY IBC" or "EMPTY LARGE PACKAGING" .`</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:length value="4"/>`
	`<xs:pattern value="\d*[1-9]\d*"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **ValidityPeriod**

diagram	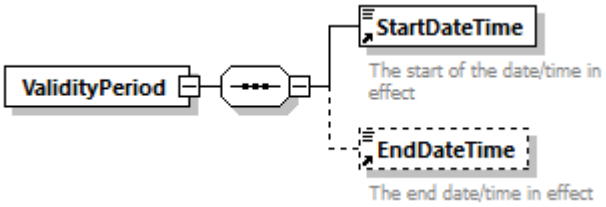
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**StartDateTime** **EndDateTime**
used by	elements **LocationPrimaryInformation** **LocationSubsidiaryInformation** **PlannedCalendar** **ReferenceTrainIDSubCalendar** **RequestedCalendar**

source	`<xs:element name="ValidityPeriod">`
	`<xs:complexType>`
	`<xs:sequence>`

```
      <xs:element ref="StartDateTime"/>
      <xs:element ref="EndDateTime" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Value**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	content simple
used by	elements **Height Length Width**
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9999999999 fractionDigits 1

source	`<xs:element name="Value">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:decimal">`
	`  <xs:minInclusive value="0"/>`
	`  <xs:fractionDigits value="1"/>`
	`  <xs:maxInclusive value="9999999999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Variant**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	complexTypes **CompositIdentifierOperationalType CompositIdentifierPlannedType**
facets	Kind / Value / Annotation minLength 2 maxLength 2 pattern [0-9A-Z]{2}
annotation	documentation The variant shows a relationship between two identifiers referring to the same business case

source	`<xs:element name="Variant">`
	`  <xs:annotation>`
	`  <xs:documentation>The variant shows a relationship between two identifiers referring to the same business case</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="2"/>`
	`  <xs:maxLength value="2"/>`

```
      <xs:pattern value="[0-9A-Z]{2}"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **VesselIndication**

diagram	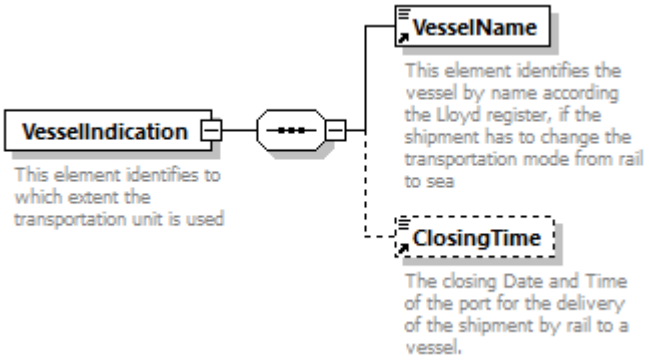
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**VesselName** **ClosingTime**
used by	elements **WIMO_Dataset/EventLevelData** **Ship**
annotation	documentation This element identifies to which extent the transportation unit is used

source	`<xs:element name="VesselIndication">`
	`  <xs:annotation>`
	`  <xs:documentation>This element identifies to which extent the transportation unit is used</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="VesselName"/>`
	`  <xs:element ref="ClosingTime" minOccurs="0"/>`
	`  </xs:sequence>`
	`  </xs:complexType>`
	`</xs:element>`

element **VesselName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Name**
properties	content simple
used by	element **VesselIndication**
facets	Kind Value Annotation maxLength 254
annotation	documentation

	This element identifies the vessel by name according the Lloyd register, if the shipment has to change the transportation mode from rail to sea
source	<xs:element name="VesselName" type="Name"> <xs:annotation> <xs:documentation>This element identifies the vessel by name according the Lloyd register, if the shipment has to change the transportation mode from rail to sea</xs:documentation> </xs:annotation> </xs:element>

element **Volume**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	VolumeValue
properties	content simple
annotation	documentation Identifies the volume of a shipment, expressed in cubic metres
source	<xs:element name="Volume" type="VolumeValue"> <xs:annotation> <xs:documentation>Identifies the volume of a shipment, expressed in cubic metres</xs:documentation> </xs:annotation> </xs:element>

element **WagonAtDeparture**

diagram	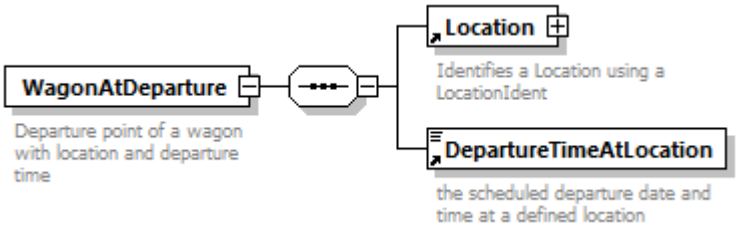
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	Location DepartureTimeAtLocation
annotation	documentation Departure point of a wagon with location and departure time
source	<xs:element name="WagonAtDeparture"> <xs:annotation> <xs:documentation>Departure point of a wagon with location and departure time</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Location"/> <xs:element ref="DepartureTimeAtLocation"/> </xs:sequence> </xs:complexType> </xs:element>

element **WagonData**

diagram	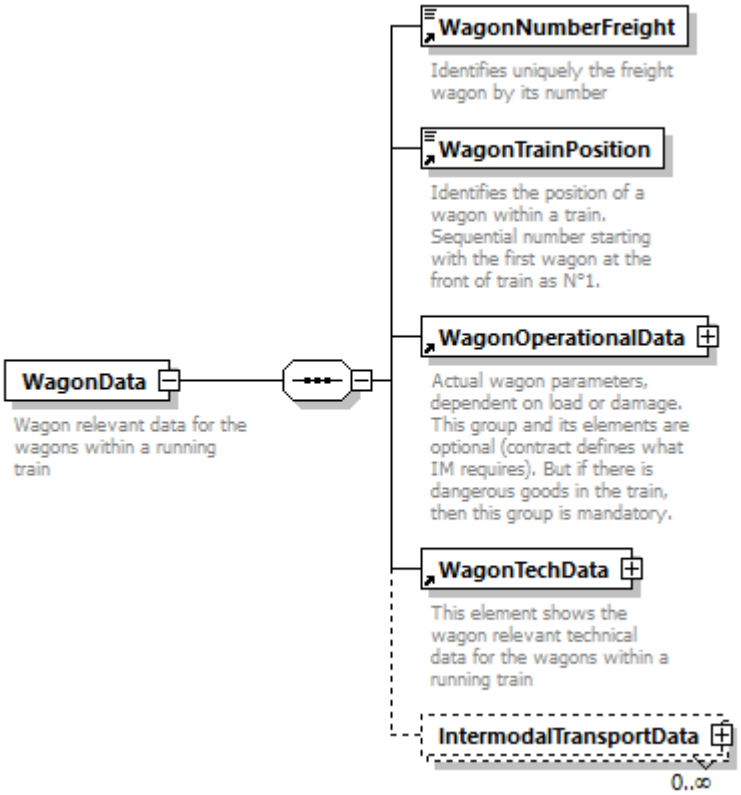
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	WagonNumberFreight WagonTrainPosition WagonOperationalData WagonTechData IntermodalTransportData
used by	element TrainCompositionJourneySection
annotation	documentation Wagon relevant data for the wagons within a running train

source	`<xs:element name="WagonData">`
	`<xs:annotation>`
	`<xs:documentation>Wagon relevant data for the wagons within a running train</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="WagonNumberFreight"/>`
	`<xs:element ref="WagonTrainPosition"/>`
	`<xs:element ref="WagonOperationalData"/>`
	`<xs:element ref="WagonTechData"/>`
	`<xs:element name="IntermodalTransportData" type="IntermodalTransportDataType" minOccurs="0" maxOccurs="unbounded"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **WagonData/IntermodalTransportData**

diagram	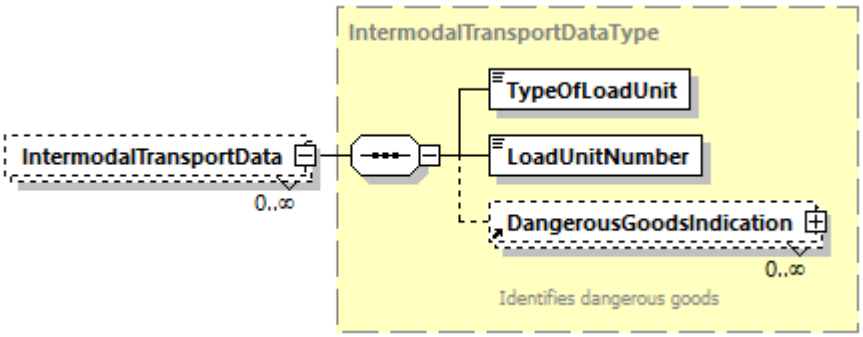
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**IntermodalTransportDataType**
properties	minOcc 0 maxOcc unbounded content complex
children	**TypeOfLoadUnit LoadUnitNumber DangerousGoodsIndication**
source	`<xs:element name="IntermodalTransportData" type="IntermodalTransportDataType" minOccurs="0" maxOccurs="unbounded"/>`

element **WagonETI_ETA_Message**

diagram	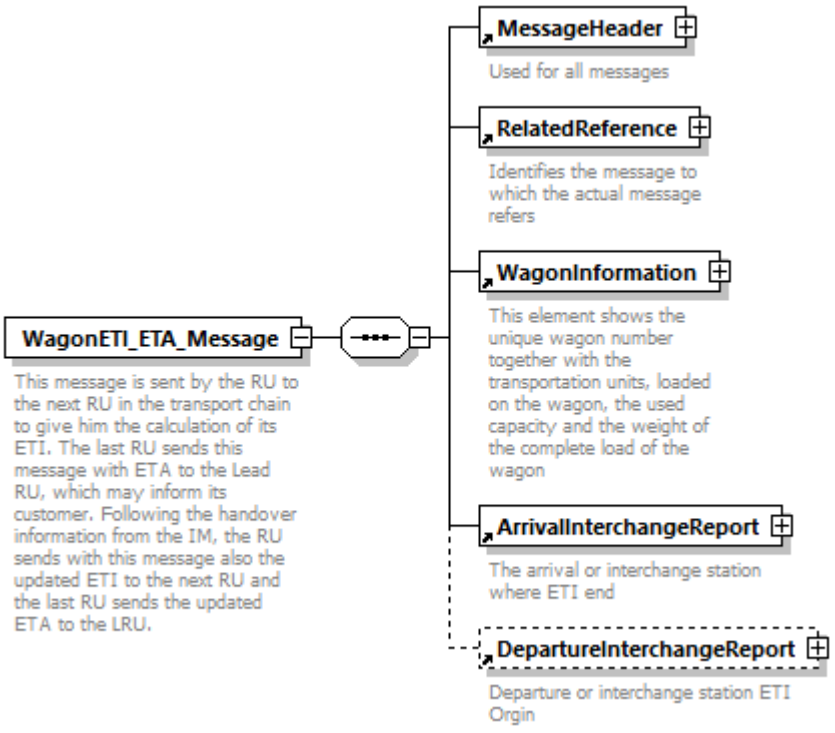
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MessageHeader RelatedReference WagonInformation ArrivalInterchangeReport DepartureInterchangeReport**
annotation	documentation This message is sent by the RU to the next RU in the transport chain to give him the calculation of its ETI. The last RU sends this message with ETA to the Lead RU, which may inform its customer. Following the handover information from the IM, the RU sends with this message also the updated ETI to the next RU and the last RU sends the updated ETA to the LRU.

source

```
<xs:element name="WagonETI_ETA_Message">
  <xs:annotation>
    <xs:documentation>This message is sent by the RU to the next RU in the transport
chain to give him the calculation of its ETI. The last RU sends this message with ETA
to the Lead RU, which may inform its customer. Following the handover information
from the IM, the RU sends with this message also the updated ETI to the next RU and
the last RU sends the updated ETA to the LRU.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element ref="RelatedReference"/>
      <xs:element ref="WagonInformation"/>
      <xs:element ref="ArrivalInterchangeReport"/>
      <xs:element ref="DepartureInterchangeReport" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonEventInformation**

diagram

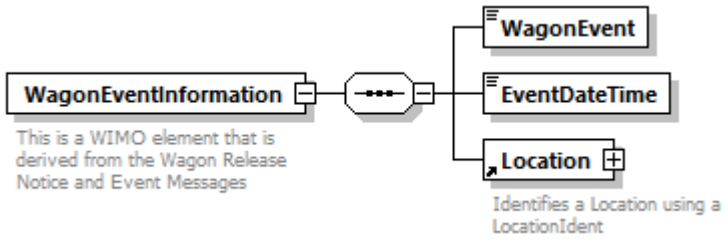

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties: content complex

children: **WagonEvent** **EventDateTime** **Location**

used by: element **WIMO_Dataset/EventLevelData**

annotation: documentation
This is a WIMO element that is derived from the Wagon Release Notice and Event Messages

source

```
<xs:element name="WagonEventInformation">
  <xs:annotation>
    <xs:documentation>This is a WIMO element that is derived from the Wagon Release
Notice and Event Messages</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="WagonEvent">
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="Release"/>
            <xs:enumeration value="Arrival"/>
            <xs:enumeration value="Departure"/>
            <xs:enumeration value="Exception"/>
            <xs:enumeration value="Delivery"/>
            <xs:enumeration value="InterchangeDelivery"/>
            <xs:enumeration value="InterchangeReceipt"/>
            <xs:enumeration value="YardDeparture"/>
            <xs:enumeration value="YardArrival"/>
            <xs:enumeration value="DeliveryConfirmation"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="EventDateTime" type="xs:dateTime"/>
```

```
      <xs:element ref="Location"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonEventInformation/WagonEvent**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple

facets

Kind	Value	Annotation
enumeration	Release	
enumeration	Arrival	
enumeration	Departure	
enumeration	Exception	
enumeration	Delivery	
enumeration	InterchangeDelivery	
enumeration	InterchangeReceipt	
enumeration	YardDeparture	
enumeration	YardArrival	
enumeration	DeliveryConfirmation	

source

```
<xs:element name="WagonEvent">
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="Release"/>
      <xs:enumeration value="Arrival"/>
      <xs:enumeration value="Departure"/>
      <xs:enumeration value="Exception"/>
      <xs:enumeration value="Delivery"/>
      <xs:enumeration value="InterchangeDelivery"/>
      <xs:enumeration value="InterchangeReceipt"/>
      <xs:enumeration value="YardDeparture"/>
      <xs:enumeration value="YardArrival"/>
      <xs:enumeration value="DeliveryConfirmation"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **WagonEventInformation/EventDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
source	`<xs:element name="EventDateTime" type="xs:dateTime"/>`

element **WagonInformation**

diagram	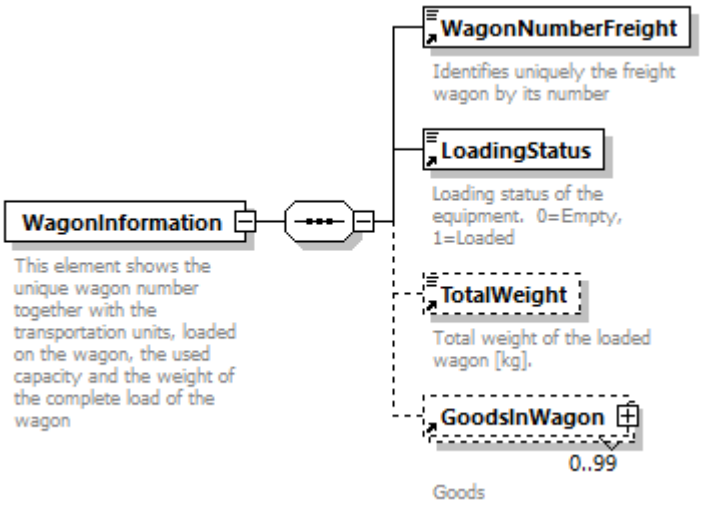
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**WagonNumberFreight** **LoadingStatus** **TotalWeight** **GoodsInWagon**
used by	elements **WIMO_Dataset/ConsignmentLevelData** **WagonETI_ETA_Message**
annotation	documentation This element shows the unique wagon number together with the transportation units, loaded on the wagon, the used capacity and the weight of the complete load of the wagon

source	`<xs:element name="WagonInformation">`
	`<xs:annotation>`
	`<xs:documentation>This element shows the unique wagon number together with the transportation units, loaded on the wagon, the used capacity and the weight of the complete load of the wagon</xs:documentation>`
	`</xs:annotation>`
	`<xs:complexType>`
	`<xs:sequence>`
	`<xs:element ref="WagonNumberFreight"/>`
	`<xs:element ref="LoadingStatus"/>`
	`<xs:element ref="TotalWeight" minOccurs="0"/>`
	`<xs:element ref="GoodsInWagon" minOccurs="0" maxOccurs="99"/>`
	`</xs:sequence>`
	`</xs:complexType>`
	`</xs:element>`

element **WagonLength**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
used by	element **Wagons/WagonDetails/WagonTypeDetails**
facets	Kind Value Annotation minInclusive 1 maxInclusive 999999
annotation	documentation Length over buffers in cms

source

```
<xs:element name="WagonLength">
  <xs:annotation>
    <xs:documentation>Length over buffers in cms</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="1"/>
      <xs:maxInclusive value="999999"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **WagonLocationStatus**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: **RunningStatus**

properties: content simple

used by: element **ExceptionPoint**

facets

Kind	Value	Annotation
enumeration	00	documentation Not specified
enumeration	01	documentation Arrival at destination
enumeration	02	documentation Departure at origin
enumeration	03	documentation Intermediate arrival
enumeration	04	documentation Intermediate departure
enumeration	05	documentation Pass through
enumeration	06	documentation NEW CODES: Some IMs are transmitting these codes (6 - 9)
enumeration	07	
enumeration	08	
enumeration	09	
enumeration	10	documentation Not specified for wagon
enumeration	11	documentation Wagon arrival at its destination by train
enumeration	12	documentation Wagon departure from its station of origin by train
enumeration	13	documentation Wagon arrival at reporting point by train
enumeration	14	documentation Wagon departure from reporting point by train (HLR)
enumeration	15	documentation Wagon run-through at reporting point by train
enumeration	16	documentation Wagon parked at reporting point (MAD)
enumeration	17	documentation Wagon shunted at reporting point
enumeration	18	documentation Wagon arrived at reporting point
enumeration	19	documentation Wagon departure from reporting point

annotation

documentation
identifies the status of a wagon, related to the actual time at a reporting point

source	<xs:element name="WagonLocationStatus" type="RunningStatus"> <xs:annotation> <xs:documentation>identifies the status of a wagon, related to the actual time at a reporting point</xs:documentation> </xs:annotation> </xs:element>

element **WagonMaxSpeed**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
used by	element **WagonOperationalData**
facets	Kind Value Annotation minInclusive 001 maxInclusive 999
annotation	documentation Maximum allowed speed of the wagon according to the load and entry in the Rolling Stock Databases. In kmh
source	<xs:element name="WagonMaxSpeed"> <xs:annotation> <xs:documentation>Maximum allowed speed of the wagon according to the load and entry in the Rolling Stock Databases. In kmh</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="001"/> <xs:maxInclusive value="999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **WagonNumberFreight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WagonIdent**
properties	content simple
used by	elements **RollingStockDataset/AdministrativeDataSet** **AlertMessage** **RollingStockDatasetMessage/RefusedWagonNumbers** **RollingStockDatasetQueryMessage** **WagonData** **WagonInformation** **Wagons** **WagonStatusMessages/WagonStatusMessage**
facets	Kind Value Annotation maxLength 12 pattern [0-9]{12}
annotation	documentation Identifies uniquely the freight wagon by its number
source	<xs:element name="WagonNumberFreight" type="WagonIdent"> <xs:annotation>

```
    <xs:documentation>Identifies uniquely the freight wagon by its
number</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **WagonNumberOfAxles**

diagram

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:int**

properties: content simple

used by: elements **RollingStockDataset/DesignDataSet** **WagonTechData** **Wagons/WagonDetails/WagonTypeDetails**

facets

Kind	Value	Annotation
minInclusive	2	
maxInclusive	99	

annotation: documentation
Number of Axels for a wagon

source

```
<xs:element name="WagonNumberOfAxles">
  <xs:annotation>
    <xs:documentation>Number of Axels for a wagon</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="2"/>
      <xs:maxInclusive value="99"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **WagonOperationalData**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**BrakeType BrakeWeight WagonMaxSpeed ExceptionalGaugingProfile ExceptionalGaugingIdent DangerousGoodsIndication InfoOnGoodsShapeTypeDanger RestrictionsDueToLoadOrDamage TotalLoadWeight**
used by	element **WagonData**

annotation	documentation Actual wagon parameters, dependent on load or damage. This group and its elements are optional (contract defines what IM requires). But if there is dangerous goods in the train, then this group is mandatory.
source	<xs:element name="WagonOperationalData"> <xs:annotation> <xs:documentation>Actual wagon parameters, dependent on load or damage. This group and its elements are optional (contract defines what IM requires). But if there is dangerous goods in the train, then this group is mandatory.</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="BrakeType" minOccurs="0"/> <xs:element ref="BrakeWeight" minOccurs="0"/> <xs:element ref="WagonMaxSpeed" minOccurs="0"/> <xs:element ref="ExceptionalGaugingProfile" minOccurs="0"/> <xs:element ref="ExceptionalGaugingIdent" minOccurs="0"/> <xs:element ref="DangerousGoodsIndication" minOccurs="0" maxOccurs="unbounded"/> <xs:element ref="InfoOnGoodsShapeTypeDanger" minOccurs="0" maxOccurs="9"/> <xs:element ref="RestrictionsDueToLoadOrDamage" minOccurs="0" maxOccurs="9"/> <xs:element ref="TotalLoadWeight" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **WagonPickupAtOrigin**

diagram	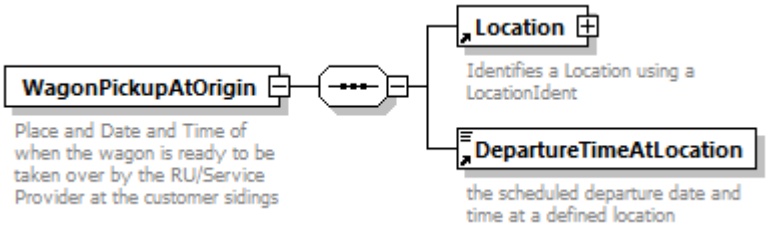
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Location DepartureTimeAtLocation**
annotation	documentation Place and Date and Time of when the wagon is ready to be taken over by the RU/Service Provider at the customer sidings
source	<xs:element name="WagonPickupAtOrigin"> <xs:annotation> <xs:documentation>Place and Date and Time of when the wagon is ready to be taken over by the RU/Service Provider at the customer sidings</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Location"/> <xs:element ref="DepartureTimeAtLocation"/> </xs:sequence> </xs:complexType> </xs:element>

element **Wagons**

diagram	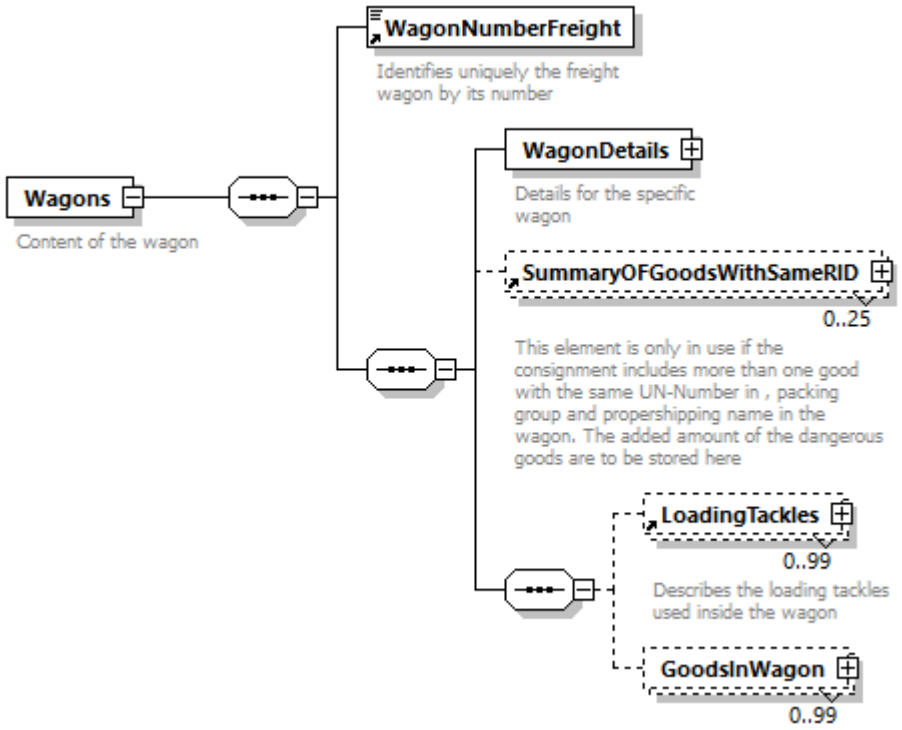
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	WagonNumberFreight WagonDetails SummaryOFGoodsWithSameRID LoadingTackles GoodsInWagon
used by	element ConsignmentOrderMessage/COMS/COM
annotation	documentation Content of the wagon

source

```
<xs:element name="Wagons">
  <xs:annotation>
    <xs:documentation>Content of the wagon</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="WagonNumberFreight"/>
      <xs:sequence>
        <xs:element name="WagonDetails">
          <xs:annotation>
            <xs:documentation>Details for the specific wagon</xs:documentation>
          </xs:annotation>
          <xs:complexType>
            <xs:sequence>
              <xs:element ref="LoadingStatus"/>
              <xs:element name="WagonInfo" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Additional information, concerning the goods of
the whole wagon. </xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:maxLength value="2000"/>
                    <xs:minLength value="1"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
```

```
                <xs:element name="WagonTypeDetails" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>These elements are only needed, if the wagon has
to be treated as CUV (empty wagon).</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element ref="WagonWeightEmpty"/>
                      <xs:element ref="WagonNumberOfAxles"/>
                      <xs:element ref="WagonLength"/>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element ref="TotalWeight" minOccurs="0"/>
                <xs:element name="LoadLimit" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Load limit from table of load limits in
[t].</xs:documentation>
                  </xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:decimal">
                      <xs:minInclusive value="0"/>
                      <xs:totalDigits value="4"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:element>
                <xs:element ref="Seals" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Describes the seals used for the
consignment</xs:documentation>
                  </xs:annotation>
                </xs:element>
                <xs:element ref="Ship" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Additional information for transports, which
shall be handed over to a ship.</xs:documentation>
                  </xs:annotation>
                </xs:element>
                <xs:element ref="DeliveryReference" minOccurs="0"/>
                <xs:element ref="OriginCountry" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Code of origin country of the
Goods</xs:documentation>
                  </xs:annotation>
                </xs:element>
                <xs:element name="ExceptionalConsignment" minOccurs="0" maxOccurs="10">
                  <xs:annotation>
                    <xs:documentation>Exceptional Consignment</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element ref="IM_Partner"/>
                      <xs:element name="PermissionNumber">
                        <xs:annotation>
                          <xs:documentation>Reference/permission number of the
exceptional consignment.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="24"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
```

```
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="Examination" minOccurs="0" maxOccurs="10">
                  <xs:annotation>
                    <xs:documentation>Examination</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="CarrierCode" type="CompanyCode">
                        <xs:annotation>
                          <xs:documentation>Code of the carrier undertaking the
examination (see CIM Article 11 sections 2 and 3). </xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="Result">
                        <xs:annotation>
                          <xs:documentation>Details of the results of any examination
(see CIM Article 11 sections 2 and 3).</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="180"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="FormalReports" minOccurs="0" maxOccurs="15">
                  <xs:annotation>
                    <xs:documentation>Formal report</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="CreationDate" type="xs:date">
                        <xs:annotation>
                          <xs:documentation>Date when the report was made
out.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element name="Number" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Number of the report
form.</xs:documentation>
                        </xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:maxLength value="13"/>
                            <xs:minLength value="1"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="CarrierCode" type="CompanyCode">
                        <xs:annotation>
                          <xs:documentation>Code of the carrier who made it
out.</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="ShuntingModalLabel" minOccurs="0">
```

```
                <xs:annotation>
                  <xs:documentation>Shunting modal label  according to chapter 5.3.4
RID</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:token">
                    <xs:enumeration value="13"/>
                    <xs:enumeration value="15"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="CustomerReference" minOccurs="0" maxOccurs="5">
                <xs:annotation>
                  <xs:documentation>Supplied by the customer. Reference number to
link the ECN and delivery note to the same consignment on the customer
side.</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:maxLength value="30"/>
                    <xs:minLength value="1"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="BookingNumber" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>XrailBooking number for the
consignment</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:minLength value="24"/>
                    <xs:maxLength value="64"/>
                    <xs:pattern value="[0-9]{4}:[0-9]{17}:[a-f0-9-]+"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element ref="SummaryOFGoodsWithSameRID" minOccurs="0" maxOccurs="25"/>
        <xs:sequence>
          <xs:element ref="LoadingTackles" minOccurs="0" maxOccurs="99"/>
          <xs:element name="GoodsInWagon" minOccurs="0" maxOccurs="99">
            <xs:complexType>
              <xs:sequence>
                <xs:element name="NoGoodsOfClassX" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Element has to be filled with the class of the
dangerous goods which are mentioned in Table 3.2 RID but are not dangerous according
to chapter 2 (5.4.1.5 RID)</xs:documentation>
                  </xs:annotation>
                </xs:element>
                <xs:element ref="RID" minOccurs="0" maxOccurs="50"/>
                <xs:element name="Packing" minOccurs="0">
                  <xs:annotation>
                    <xs:documentation>Packing information</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="NatureOfPacking" minOccurs="0">
                        <xs:annotation>
                          <xs:documentation>Nature of packing according to the UN/ECE
Recommandation No 21</xs:documentation>
```

```
                        <xs:documentation>CODE: UN/ECE-Recommendation No.
21</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:maxLength value="2"/>
                          <xs:minLength value="1"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="NumberOfPackages" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Number of packages.</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:int">
                          <xs:minInclusive value="1"/>
                          <xs:maxInclusive value="99999"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="PackageIdentification" minOccurs="0"
maxOccurs="99">
                      <xs:annotation>
                        <xs:documentation>Particular marks and numbers to identify
less than wagon load assignments.</xs:documentation>
                      </xs:annotation>
                      <xs:simpleType>
                        <xs:restriction base="xs:string">
                          <xs:maxLength value="35"/>
                          <xs:minLength value="1"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element ref="NHM_Code"/>
              <xs:element name="PreviousLoadedGood" type="NHMCodeType"
minOccurs="0"/>
              <xs:element ref="GoodsDescription" minOccurs="0"/>
              <xs:element name="AdditionalGoodInformation" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Additional information regarding the loaded
good, given by the customer.</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:minLength value="1"/>
                    <xs:maxLength value="1000"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element ref="GrossWeight" minOccurs="0"/>
              <xs:element name="HS_Code" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>HS-Code for sensible goods (appendix 44c of
ccip) 10 digits are needed, if a good code was already assigned for 'Zollanmeldung'.
In this case this good code has to be taken. These good codes may have more than 6
digits.</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:string">
                    <xs:minLength value="6"/>
```

```
                        <xs:maxLength value="10"/>
                        <xs:pattern value="\d*[1-9]\d*"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="EWC_Key" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Numeric key according to the European Waste
Catalogue</xs:documentation>
                      <xs:documentation>CODE: European waste catalogue (EWC)
2000/532/EC</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="2"/>
                        <xs:maxLength value="6"/>
                        <xs:pattern value="\d*"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element ref="ReferenceNumbers" minOccurs="0" maxOccurs="99"/>
                  <xs:element ref="ILU" minOccurs="0"/>
                  <xs:element ref="RollingRoadUnit" minOccurs="0"/>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:sequence>
      </xs:sequence>
    </xs:complexType>
</xs:element>
```

element **Wagons/WagonDetails**

diagram	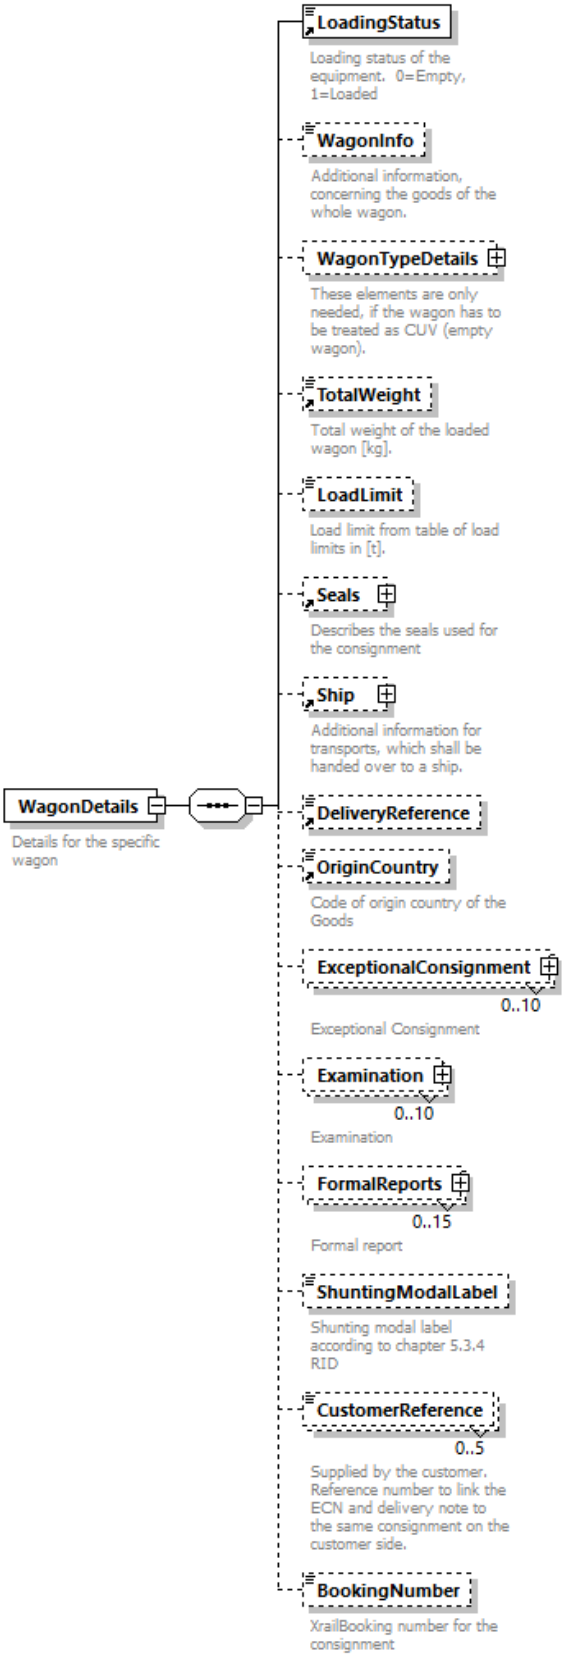
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	LoadingStatus WagonInfo WagonTypeDetails TotalWeight LoadLimit Seals Ship DeliveryReference OriginCountry ExceptionalConsignment Examination FormalReports ShuntingModalLabel CustomerReference BookingNumber
annotation	documentation Details for the specific wagon

source

```
<xs:element name="WagonDetails">
  <xs:annotation>
    <xs:documentation>Details for the specific wagon</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="LoadingStatus"/>
      <xs:element name="WagonInfo" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Additional information, concerning the goods of the whole
wagon. </xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="2000"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="WagonTypeDetails" minOccurs="0">
        <xs:annotation>
          <xs:documentation>These elements are only needed, if the wagon has to be
treated as CUV (empty wagon).</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="WagonWeightEmpty"/>
            <xs:element ref="WagonNumberOfAxles"/>
            <xs:element ref="WagonLength"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="TotalWeight" minOccurs="0"/>
      <xs:element name="LoadLimit" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Load limit from table of load limits in
[t].</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:decimal">
            <xs:minInclusive value="0"/>
            <xs:totalDigits value="4"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="Seals" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Describes the seals used for the
consignment</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="Ship" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Additional information for transports, which shall be
handed over to a ship.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="DeliveryReference" minOccurs="0"/>
      <xs:element ref="OriginCountry" minOccurs="0">
        <xs:annotation>
```

```
          <xs:documentation>Code of origin country of the Goods</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ExceptionalConsignment" minOccurs="0" maxOccurs="10">
        <xs:annotation>
          <xs:documentation>Exceptional Consignment</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="IM_Partner"/>
            <xs:element name="PermissionNumber">
              <xs:annotation>
                <xs:documentation>Reference/permission number of the exceptional
consignment.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="24"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="Examination" minOccurs="0" maxOccurs="10">
        <xs:annotation>
          <xs:documentation>Examination</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="CarrierCode" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Code of the carrier undertaking the examination
(see CIM Article 11 sections 2 and 3). </xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="Result">
              <xs:annotation>
                <xs:documentation>Details of the results of any examination (see CIM
Article 11 sections 2 and 3).</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="180"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="FormalReports" minOccurs="0" maxOccurs="15">
        <xs:annotation>
          <xs:documentation>Formal report</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="CreationDate" type="xs:date">
              <xs:annotation>
                <xs:documentation>Date when the report was made
out.</xs:documentation>
              </xs:annotation>
            </xs:element>
```

```
            <xs:element name="Number" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Number of the report form.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="13"/>
                  <xs:minLength value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="CarrierCode" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Code of the carrier who made it
out.</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="ShuntingModalLabel" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Shunting modal label  according to chapter 5.3.4
RID</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="13"/>
            <xs:enumeration value="15"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CustomerReference" minOccurs="0" maxOccurs="5">
        <xs:annotation>
          <xs:documentation>Supplied by the customer. Reference number to link the
ECN and delivery note to the same consignment on the customer
side.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="30"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="BookingNumber" minOccurs="0">
        <xs:annotation>
          <xs:documentation>XrailBooking number for the
consignment</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="24"/>
            <xs:maxLength value="64"/>
            <xs:pattern value="[0-9]{4}:[0-9]{17}:[a-f0-9-]+"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Wagons/WagonDetails/WagonInfo**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 2000
annotation	documentation Additional information, concerning the goods of the whole wagon.

source	`<xs:element name="WagonInfo" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Additional information, concerning the goods of the whole wagon. </xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="2000"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Wagons/WagonDetails/WagonTypeDetails**

diagram	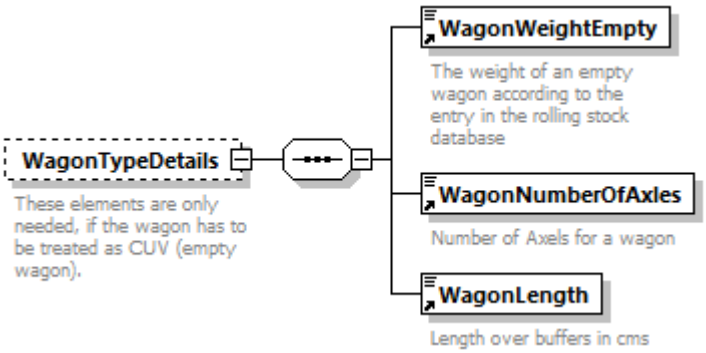
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**WagonWeightEmpty** **WagonNumberOfAxles** **WagonLength**
annotation	documentation These elements are only needed, if the wagon has to be treated as CUV (empty wagon).

source	`<xs:element name="WagonTypeDetails" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>These elements are only needed, if the wagon has to be treated as CUV (empty wagon).</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="WagonWeightEmpty"/>`
	`  <xs:element ref="WagonNumberOfAxles"/>`

```
      <xs:element ref="WagonLength"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Wagons/WagonDetails/LoadLimit**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 0 totalDigits 4
annotation	documentation Load limit from table of load limits in [t].
source	<xs:element name="LoadLimit" minOccurs="0"> <xs:annotation> <xs:documentation>Load limit from table of load limits in [t].</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:decimal"> <xs:minInclusive value="0"/> <xs:totalDigits value="4"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Wagons/WagonDetails/ExceptionalConsignment**

diagram	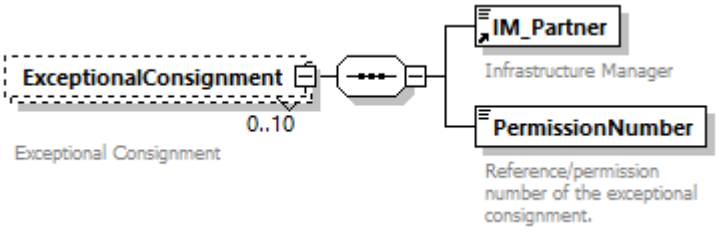
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 10 content complex
children	**IM_Partner PermissionNumber**
annotation	documentation Exceptional Consignment
source	<xs:element name="ExceptionalConsignment" minOccurs="0" maxOccurs="10"> <xs:annotation> <xs:documentation>Exceptional Consignment</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="IM_Partner"/> <xs:element name="PermissionNumber">

```
        <xs:annotation>
          <xs:documentation>Reference/permission number of the exceptional
consignment.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="24"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Wagons/WagonDetails/ExceptionalConsignment/PermissionNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 24
annotation	documentation Reference/permission number of the exceptional consignment.

source	`<xs:element name="PermissionNumber">`
	`  <xs:annotation>`
	`  <xs:documentation>Reference/permission number of the exceptional consignment.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="24"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Wagons/WagonDetails/Examination**

diagram	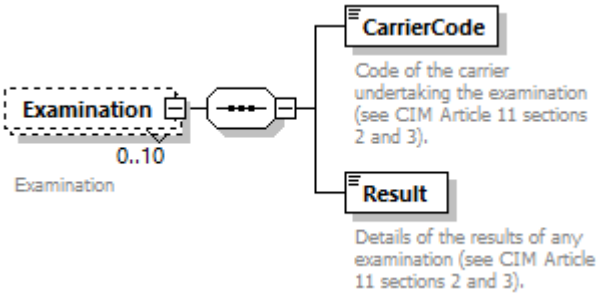
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 10

	content complex
children	**CarrierCode** **Result**
annotation	documentation Examination
source	<xs:element name="Examination" minOccurs="0" maxOccurs="10"> <xs:annotation> <xs:documentation>Examination</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="CarrierCode" type="CompanyCode"> <xs:annotation> <xs:documentation>Code of the carrier undertaking the examination (see CIM Article 11 sections 2 and 3). </xs:documentation> </xs:annotation> </xs:element> <xs:element name="Result"> <xs:annotation> <xs:documentation>Details of the results of any examination (see CIM Article 11 sections 2 and 3).</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="180"/> </xs:restriction> </xs:simpleType> </xs:element> </xs:sequence> </xs:complexType> </xs:element>

element **Wagons/WagonDetails/Examination/CarrierCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Code of the carrier undertaking the examination (see CIM Article 11 sections 2 and 3).
source	<xs:element name="CarrierCode" type="CompanyCode"> <xs:annotation> <xs:documentation>Code of the carrier undertaking the examination (see CIM Article 11 sections 2 and 3). </xs:documentation> </xs:annotation> </xs:element>

element **Wagons/WagonDetails/Examination/Result**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 180
annotation	documentation Details of the results of any examination (see CIM Article 11 sections 2 and 3).
source	<xs:element name="Result"> <xs:annotation> <xs:documentation>Details of the results of any examination (see CIM Article 11 sections 2 and 3).</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="180"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Wagons/WagonDetails/FormalReports**

diagram	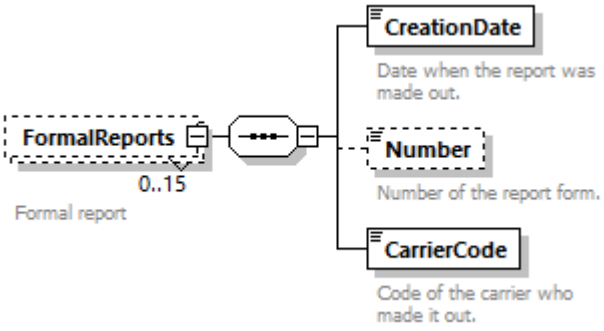
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 15 content complex
children	**CreationDate Number CarrierCode**
annotation	documentation Formal report
source	<xs:element name="FormalReports" minOccurs="0" maxOccurs="15"> <xs:annotation> <xs:documentation>Formal report</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="CreationDate" type="xs:date"> <xs:annotation> <xs:documentation>Date when the report was made out.</xs:documentation> </xs:annotation>

```
      </xs:element>
      <xs:element name="Number" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Number of the report form.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="13"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CarrierCode" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>Code of the carrier who made it out.</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Wagons/WagonDetails/FormalReports/CreationDate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	content simple
annotation	documentation Date when the report was made out.

source	`<xs:element name="CreationDate" type="xs:date">`
	`  <xs:annotation>`
	`  <xs:documentation>Date when the report was made out.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Wagons/WagonDetails/FormalReports/Number**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 13
annotation	documentation Number of the report form.

source	`<xs:element name="Number" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Number of the report form.</xs:documentation>`
	`  </xs:annotation>`

```
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:maxLength value="13"/>
      <xs:minLength value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **Wagons/WagonDetails/FormalReports/CarrierCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Code of the carrier who made it out.

source	`<xs:element name="CarrierCode" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Code of the carrier who made it out.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Wagons/WagonDetails/ShuntingModalLabel**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration 13 enumeration 15
annotation	documentation Shunting modal label according to chapter 5.3.4 RID

source	`<xs:element name="ShuntingModalLabel" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Shunting modal label  according to chapter 5.3.4 RID</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:token">`
	`  <xs:enumeration value="13"/>`
	`  <xs:enumeration value="15"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`

	`</xs:element>`

element **Wagons/WagonDetails/CustomerReference**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 5 content simple
facets	Kind Value Annotation minLength 1 maxLength 30
annotation	documentation Supplied by the customer. Reference number to link the ECN and delivery note to the same consignment on the customer side.

source	`<xs:element name="CustomerReference" minOccurs="0" maxOccurs="5">`
	`  <xs:annotation>`
	`  <xs:documentation>Supplied by the customer. Reference number to link the ECN and delivery note to the same consignment on the customer side.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="30"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Wagons/WagonDetails/BookingNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 24 maxLength 64 pattern [0-9]{4}:[0-9]{17}:[a-f0-9-]+
annotation	documentation XrailBooking number for the consignment

source	`<xs:element name="BookingNumber" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>XrailBooking number for the consignment</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="24"/>`

```
      <xs:maxLength value="64"/>
      <xs:pattern value="[0-9]{4}:[0-9]{17}:[a-f0-9-]+"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **Wagons/GoodsInWagon**

diagram	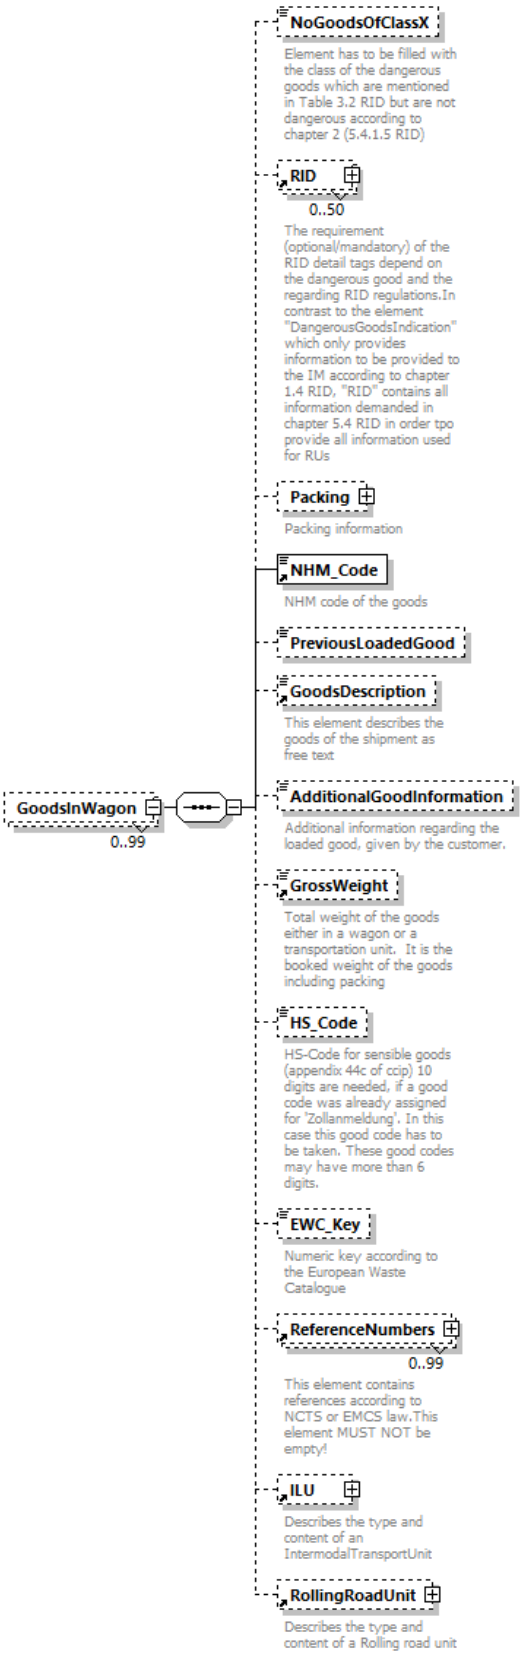
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 99

	content complex
children	NoGoodsOfClassX RID Packing NHM_Code PreviousLoadedGood GoodsDescription AdditionalGoodInformation GrossWeight HS_Code EWC_Key ReferenceNumbers ILU RollingRoadUnit
used by	element WagonInformation

source

```
<xs:element name="GoodsInWagon" minOccurs="0" maxOccurs="99">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="NoGoodsOfClassX" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Element has to be filled with the class of the dangerous
goods which are mentioned in Table 3.2 RID but are not dangerous according to chapter
2 (5.4.1.5 RID)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="RID" minOccurs="0" maxOccurs="50"/>
      <xs:element name="Packing" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Packing information</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="NatureOfPacking" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Nature of packing according to the UN/ECE
Recommandation No 21</xs:documentation>
                <xs:documentation>CODE: UN/ECE-Recommendation No.
21</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="2"/>
                  <xs:minLength value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="NumberOfPackages" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Number of packages.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:int">
                  <xs:minInclusive value="1"/>
                  <xs:maxInclusive value="99999"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="PackageIdentification" minOccurs="0" maxOccurs="99">
              <xs:annotation>
                <xs:documentation>Particular marks and numbers to identify less than
wagon load assignments.</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:maxLength value="35"/>
                  <xs:minLength value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="NHM_Code"/>
      <xs:element name="PreviousLoadedGood" type="NHMCodeType" minOccurs="0"/>
```

```
      <xs:element ref="GoodsDescription" minOccurs="0"/>
      <xs:element name="AdditionalGoodInformation" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Additional information regarding the loaded good, given
by the customer.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="1000"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="GrossWeight" minOccurs="0"/>
      <xs:element name="HS_Code" minOccurs="0">
        <xs:annotation>
          <xs:documentation>HS-Code for sensible goods (appendix 44c of ccip) 10
digits are needed, if a good code was already assigned for 'Zollanmeldung'. In this
case this good code has to be taken. These good codes may have more than 6
digits.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="6"/>
            <xs:maxLength value="10"/>
            <xs:pattern value="\d*[1-9]\d*"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="EWC_Key" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Numeric key according to the European Waste
Catalogue</xs:documentation>
          <xs:documentation>CODE: European waste catalogue (EWC)
2000/532/EC</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="2"/>
            <xs:maxLength value="6"/>
            <xs:pattern value="\d*"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="ReferenceNumbers" minOccurs="0" maxOccurs="99"/>
      <xs:element ref="ILU" minOccurs="0"/>
      <xs:element ref="RollingRoadUnit" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Wagons/GoodsInWagon/NoGoodsOfClassX**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

properties	minOcc 0 maxOcc 1
annotation	documentation Element has to be filled with the class of the dangerous goods which are mentioned in Table 3.2 RID but are not dangerous according to chapter 2 (5.4.1.5 RID)

source	`<xs:element name="NoGoodsOfClassX" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Element has to be filled with the class of the dangerous goods which are mentioned in Table 3.2 RID but are not dangerous according to chapter 2 (5.4.1.5 RID)</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **Wagons/GoodsInWagon/Packing**

diagram	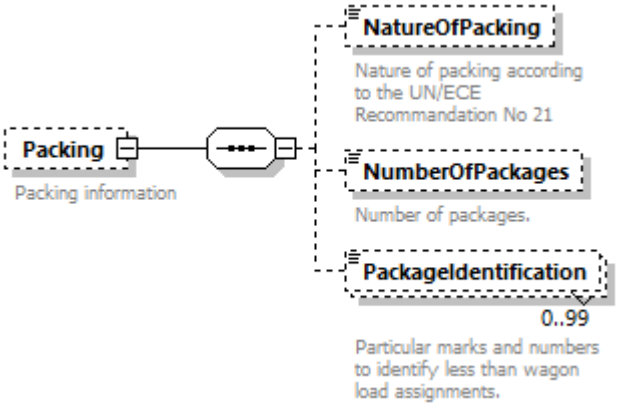
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**NatureOfPacking NumberOfPackages PackageIdentification**
annotation	documentation Packing information

source	`<xs:element name="Packing" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Packing information</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="NatureOfPacking" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Nature of packing according to the UN/ECE Recommandation No 21</xs:documentation>`
	`  <xs:documentation>CODE: UN/ECE-Recommendation No. 21</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="2"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`  </xs:element>`
	`  <xs:element name="NumberOfPackages" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Number of packages.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:int">`

```
            <xs:minInclusive value="1"/>
            <xs:maxInclusive value="99999"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="PackageIdentification" minOccurs="0" maxOccurs="99">
        <xs:annotation>
          <xs:documentation>Particular marks and numbers to identify less than wagon
load assignments.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="35"/>
            <xs:minLength value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **Wagons/GoodsInWagon/Packing/NatureOfPacking**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 2
annotation	documentation Nature of packing according to the UN/ECE Recommandation No 21 documentation CODE: UN/ECE-Recommendation No. 21

source	`<xs:element name="NatureOfPacking" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Nature of packing according to the UN/ECE Recommandation No 21</xs:documentation>`
	`  <xs:documentation>CODE: UN/ECE-Recommendation No. 21</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="2"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Wagons/GoodsInWagon/Packing/NumberOfPackages**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation Number of packages.
source	<xs:element name="NumberOfPackages" minOccurs="0"> <xs:annotation> <xs:documentation>Number of packages.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Wagons/GoodsInWagon/Packing/PackageIdentification**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 99 content simple
facets	Kind Value Annotation minLength 1 maxLength 35
annotation	documentation Particular marks and numbers to identify less than wagon load assignments.
source	<xs:element name="PackageIdentification" minOccurs="0" maxOccurs="99"> <xs:annotation> <xs:documentation>Particular marks and numbers to identify less than wagon load assignments.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:maxLength value="35"/> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Wagons/GoodsInWagon/PreviousLoadedGood**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**NHMCodeType**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation length 6 pattern \d*[1-9]\d*
source	`<xs:element name="PreviousLoadedGood" type="NHMCodeType" minOccurs="0"/>`

element **Wagons/GoodsInWagon/AdditionalGoodInformation**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 1000
annotation	documentation Additional information regarding the loaded good, given by the customer.

source	`<xs:element name="AdditionalGoodInformation" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Additional information regarding the loaded good, given by the customer.</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:minLength value="1"/>`
	`<xs:maxLength value="1000"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **Wagons/GoodsInWagon/HS_Code**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 6

	maxLength 10 pattern \d*[1-9]\d*
annotation	documentation HS-Code for sensible goods (appendix 44c of ccip) 10 digits are needed, if a good code was already assigned for 'Zollanmeldung'. In this case this good code has to be taken. These good codes may have more than 6 digits.
source	<xs:element name="HS_Code" minOccurs="0"> <xs:annotation> <xs:documentation>HS-Code for sensible goods (appendix 44c of ccip) 10 digits are needed, if a good code was already assigned for 'Zollanmeldung'. In this case this good code has to be taken. These good codes may have more than 6 digits.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="6"/> <xs:maxLength value="10"/> <xs:pattern value="\d*[1-9]\d*"/> </xs:restriction> </xs:simpleType> </xs:element>

element **Wagons/GoodsInWagon/EWC_Key**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 2 maxLength 6 pattern \d*
annotation	documentation Numeric key according to the European Waste Catalogue documentation CODE: European waste catalogue (EWC) 2000/532/EC
source	<xs:element name="EWC_Key" minOccurs="0"> <xs:annotation> <xs:documentation>Numeric key according to the European Waste Catalogue</xs:documentation> <xs:documentation>CODE: European waste catalogue (EWC) 2000/532/EC</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="2"/> <xs:maxLength value="6"/> <xs:pattern value="\d*"/> </xs:restriction> </xs:simpleType> </xs:element>

element **WagonStatusMessages**

diagram	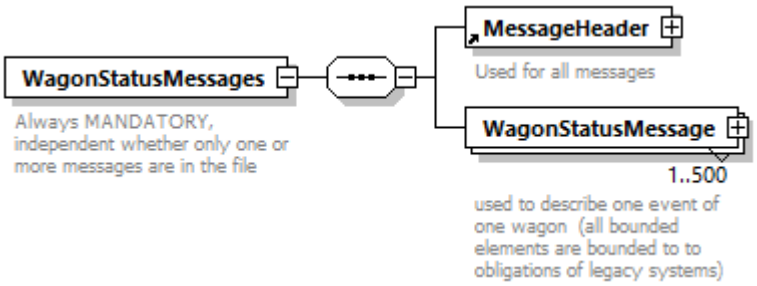
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**MessageHeader** **WagonStatusMessage**
annotation	documentation Always MANDATORY, independent whether only one or more messages are in the file

source

```
<xs:element name="WagonStatusMessages">
  <xs:annotation>
    <xs:documentation>Always MANDATORY, independent whether only one or more messages
are in the file </xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="MessageHeader"/>
      <xs:element name="WagonStatusMessage" maxOccurs="500">
        <xs:annotation>
          <xs:documentation>used to describe one event of one wagon  (all bounded
elements are bounded to to obligations of legacy systems)</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:annotation>
              <xs:documentation>Wagon Status Message</xs:documentation>
            </xs:annotation>
            <xs:element name="ReportingRU" type="CompanyCode">
              <xs:annotation>
                <xs:documentation>Company (RICS) Code of the RU who is reporting the
event</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="MessageCreationDateTime" type="xs:dateTime">
              <xs:annotation>
                <xs:documentation>Timestamp of Creation of Message</xs:documentation>
                <xs:documentation>the timestamp is created by the originally sending
RU, it remains unchanged, when forwarded by the central ISR
application</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element ref="WagonNumberFreight"/>
            <xs:element name="Event">
              <xs:annotation>
                <xs:documentation>Information belonging to the
event</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element ref="EventType"/>
                  <xs:element name="EventDateTime" type="xs:dateTime">
                    <xs:annotation>
                      <xs:documentation>Event Time Stamp </xs:documentation>
                    </xs:annotation>
```

```
                    </xs:element>
                    <xs:element name="EventLocationInformation" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Information concerning the event location.
Optional for event types 06 and 16, these events may not have a location. But for all
remaining event types, at least one of the elements EventLocation or Position should
be sent</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:sequence>
                          <xs:element name="EventLocation" type="LocationIdent"
minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>Location where the event
happend</xs:documentation>
                            </xs:annotation>
                          </xs:element>
                          <xs:element name="Position" minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>Geo coordinates of the wagon  event
location in WGS84 as used in the CRD</xs:documentation>
                            </xs:annotation>
                            <xs:complexType>
                              <xs:sequence>
                                <xs:element name="Latitude" type="xs:decimal"/>
                                <xs:element name="Longitude" type="xs:decimal"/>
                              </xs:sequence>
                            </xs:complexType>
                          </xs:element>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element name="LoadingStatus" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Loading status of the equipment.  0=Empty,
1=Loaded</xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                  <xs:restriction base="xs:integer">
                    <xs:enumeration value="0"/>
                    <xs:enumeration value="1"/>
                  </xs:restriction>
                </xs:simpleType>
              </xs:element>
              <xs:element name="ShippingLocation" type="LocationIdent" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Shipping Station ( TAF location code with optional
SLC type 42 or 36)</xs:documentation>
                  <xs:documentation>use here the station code of the station the wagon
has started its transport run</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="DestinationLocation" type="LocationIdent"
minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Destination Station  ( TAF location code with
optional SLC type 42 or 36)</xs:documentation>
                  <xs:documentation>use here the station code of the station the wagon
shall terminate its transport run </xs:documentation>
                </xs:annotation>
              </xs:element>
```

```
            <xs:element name="Train" minOccurs="0">
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="OperationalTrainNumberIdentifier">
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element ref="OperationalTrainNumber"/>
                        <xs:element ref="ScheduledTimeAtHandover" minOccurs="0"/>
                        <xs:element ref="ScheduledDateTimeAtTransfer" minOccurs="0"/>
                      </xs:sequence>
                    </xs:complexType>
                  </xs:element>
                  <xs:element name="TrainOperatingRU" type="CompanyCode"
minOccurs="0"/>
                  <xs:element ref="TrainOperationalIdentification" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>TAF TrainID of the related
train</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="TrainDepartureDate" type="xs:date" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Out only: Departure Date of the Train
</xs:documentation>
                      <xs:documentation>use here the date the train left origin using
this train number</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="ConsignmentIdentification" minOccurs="0"
maxOccurs="unbounded">
              <xs:annotation>
                <xs:documentation>List of Identifications for the consignment In
order to identify the consignment(s) on the wagon, the ControlLabel and or
DossierNumber for each consignment must be present if the wagon is loaded and the
Consignment Note is already available</xs:documentation>
                <xs:documentation>consignment note number (without carrier (due to
history))</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="ControlLabel" minOccurs="0">
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="ShippingCountry">
                          <xs:annotation>
                            <xs:documentation>Forwarding UIC Country
Code</xs:documentation>
                          </xs:annotation>
                          <xs:simpleType>
                            <xs:restriction base="xs:string">
                              <xs:length value="2">
                                <xs:annotation>
                                  <xs:documentation>= 2N = UIC country code according
to UIC leaflet 920-14</xs:documentation>
                                </xs:annotation>
                              </xs:length>
                              <xs:pattern value="\d*[1-9]\d*"/>
                            </xs:restriction>
                          </xs:simpleType>
                        </xs:element>
                        <xs:element name="ShippingStationCode">
```

```
                            <xs:annotation>
                              <xs:documentation>UIC Code of the shipping
station</xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:string">
                                <xs:minLength value="1"/>
                                <xs:maxLength value="5"/>
                              </xs:restriction>
                            </xs:simpleType>
                          </xs:element>
                          <xs:element name="ShippingStationName" minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>Name of the shipping
station</xs:documentation>
                            </xs:annotation>
                            <xs:simpleType>
                              <xs:restriction base="xs:string">
                                <xs:minLength value="1"/>
                                <xs:maxLength value="24"/>
                              </xs:restriction>
                            </xs:simpleType>
                          </xs:element>
                          <xs:element name="ShippingCarrier" type="CompanyCode"
minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>RICS Code of the RU who created the
consignment identification (not necessarily the first carrier in the transport
chain)</xs:documentation>
                            </xs:annotation>
                          </xs:element>
                          <xs:element name="AcceptanceDate" type="xs:date"
minOccurs="0">
                            <xs:annotation>
                              <xs:documentation>Forwarding Date</xs:documentation>
                            </xs:annotation>
                          </xs:element>
                          <xs:element name="ConsignmentNumber"
type="ConsignmentIdent"/>
                        </xs:sequence>
                      </xs:complexType>
                    </xs:element>
                    <xs:element name="DossierNumber" type="xs:string" minOccurs="0"/>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element ref="Routing" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>Route information. Keep the sequence of each part
of the route!</xs:documentation>
                </xs:annotation>
              </xs:element>
              <xs:element name="CarriersInvolved" minOccurs="0">
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="Carrier" maxOccurs="20">
                      <xs:annotation>
                        <xs:documentation>Carrier(s) involved</xs:documentation>
                      </xs:annotation>
                      <xs:complexType>
                        <xs:sequence>
                          <xs:element name="RU" type="CompanyCode">
                            <xs:annotation>
                              <xs:documentation>Carrier (Railway
```

```
Code)</xs:documentation>
                        </xs:annotation>
                      </xs:element>
                      <xs:element ref="CarrierStatus" minOccurs="0"/>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
              </xs:sequence>
            </xs:complexType>
          </xs:element>
          <xs:element name="WagonJourneyIrregularity" minOccurs="0">
            <xs:complexType>
              <xs:sequence>
                <xs:element name="DamageCodes" minOccurs="0" maxOccurs="unbounded">
                  <xs:annotation>
                    <xs:documentation>List of Damage Codes according to description
in GCU Appendix 9 Annex 1</xs:documentation>
                  </xs:annotation>
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element name="DamageCodePosition1">
                        <xs:simpleType>
                          <xs:restriction base="xs:short">
                            <xs:minInclusive value="1"/>
                            <xs:maxInclusive value="99"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="DamageCodePosition2" minOccurs="0">
                        <xs:simpleType>
                          <xs:restriction base="xs:short">
                            <xs:minInclusive value="1"/>
                            <xs:maxInclusive value="99"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="DamageCodePosition3" minOccurs="0">
                        <xs:simpleType>
                          <xs:restriction base="xs:short">
                            <xs:minInclusive value="1"/>
                            <xs:maxInclusive value="99"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="DamageCodePosition4" minOccurs="0">
                        <xs:simpleType>
                          <xs:restriction base="xs:short">
                            <xs:minInclusive value="1"/>
                            <xs:maxInclusive value="99"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                      <xs:element name="DamageOldOrNew" minOccurs="0">
                        <xs:simpleType>
                          <xs:restriction base="xs:short">
                            <xs:enumeration value="0"/>
                            <xs:enumeration value="1"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:element>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="IsAbleToRun" type="xs:boolean" minOccurs="0">
```

```
                    <xs:annotation>
                      <xs:documentation>True if the damage does not cause an
interruption of the transport run. False otherwise: The damage causes an interruption
of the transport run (the wagon has to be repaired,  the loading of the good has to
be bettered, . . .</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage**

diagram	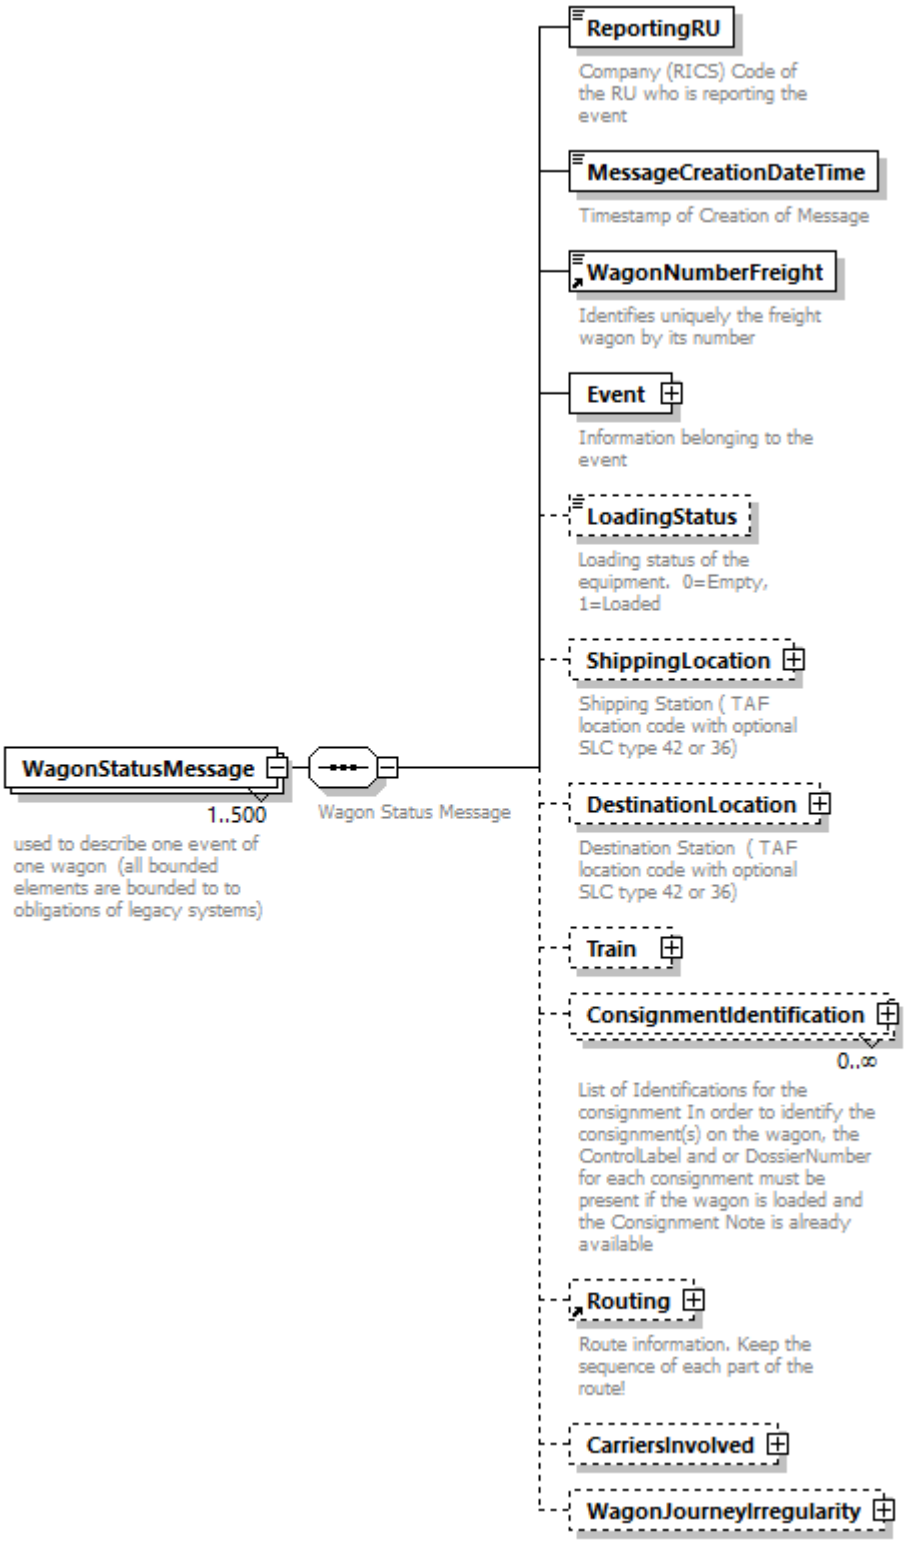
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 1 maxOcc 500 content complex
children	ReportingRU MessageCreationDateTime WagonNumberFreight Event LoadingStatus ShippingLocation DestinationLocation Train ConsignmentIdentification Routing CarriersInvolved WagonJourneyIrregularity

annotation	documentation used to describe one event of one wagon (all bounded elements are bounded to to obligations of legacy systems)

source

```
<xs:element name="WagonStatusMessage" maxOccurs="500">
  <xs:annotation>
    <xs:documentation>used to describe one event of one wagon  (all bounded elements
are bounded to to obligations of legacy systems)</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:annotation>
        <xs:documentation>Wagon Status Message</xs:documentation>
      </xs:annotation>
      <xs:element name="ReportingRU" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>Company (RICS) Code of the RU who is reporting the
event</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="MessageCreationDateTime" type="xs:dateTime">
        <xs:annotation>
          <xs:documentation>Timestamp of Creation of Message</xs:documentation>
          <xs:documentation>the timestamp is created by the originally sending RU, it
remains unchanged, when forwarded by the central ISR application</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="WagonNumberFreight"/>
      <xs:element name="Event">
        <xs:annotation>
          <xs:documentation>Information belonging to the event</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="EventType"/>
            <xs:element name="EventDateTime" type="xs:dateTime">
              <xs:annotation>
                <xs:documentation>Event Time Stamp </xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="EventLocationInformation" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Information concerning the event location. Optional
for event types 06 and 16, these events may not have a location. But for all
remaining event types, at least one of the elements EventLocation or Position should
be sent</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="EventLocation" type="LocationIdent"
minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Location where the event
happend</xs:documentation>
                    </xs:annotation>
                  </xs:element>
                  <xs:element name="Position" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Geo coordinates of the wagon  event location
in WGS84 as used in the CRD</xs:documentation>
                    </xs:annotation>
                    <xs:complexType>
                      <xs:sequence>
                        <xs:element name="Latitude" type="xs:decimal"/>
                        <xs:element name="Longitude" type="xs:decimal"/>
                      </xs:sequence>
```

```
                    </xs:complexType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="LoadingStatus" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Loading status of the equipment.  0=Empty,
1=Loaded</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:enumeration value="0"/>
            <xs:enumeration value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ShippingLocation" type="LocationIdent" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Shipping Station ( TAF location code with optional SLC
type 42 or 36)</xs:documentation>
          <xs:documentation>use here the station code of the station the wagon has
started its transport run</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="DestinationLocation" type="LocationIdent" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Destination Station  ( TAF location code with optional
SLC type 42 or 36)</xs:documentation>
          <xs:documentation>use here the station code of the station the wagon shall
terminate its transport run </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="Train" minOccurs="0">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="OperationalTrainNumberIdentifier">
              <xs:complexType>
                <xs:sequence>
                  <xs:element ref="OperationalTrainNumber"/>
                  <xs:element ref="ScheduledTimeAtHandover" minOccurs="0"/>
                  <xs:element ref="ScheduledDateTimeAtTransfer" minOccurs="0"/>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="TrainOperatingRU" type="CompanyCode" minOccurs="0"/>
            <xs:element ref="TrainOperationalIdentification" minOccurs="0">
              <xs:annotation>
                <xs:documentation>TAF TrainID of the related train</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="TrainDepartureDate" type="xs:date" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Out only: Departure Date of the Train
</xs:documentation>
                <xs:documentation>use here the date the train left origin using this
train number</xs:documentation>
              </xs:annotation>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
```

```
      </xs:element>
      <xs:element name="ConsignmentIdentification" minOccurs="0"
maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>List of Identifications for the consignment In order to
identify the consignment(s) on the wagon, the ControlLabel and or DossierNumber for
each consignment must be present if the wagon is loaded and the Consignment Note is
already available</xs:documentation>
          <xs:documentation>consignment note number (without carrier (due to
history))</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ControlLabel" minOccurs="0">
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="ShippingCountry">
                    <xs:annotation>
                      <xs:documentation>Forwarding UIC Country
Code</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:length value="2">
                          <xs:annotation>
                            <xs:documentation>= 2N = UIC country code according to
UIC leaflet 920-14</xs:documentation>
                          </xs:annotation>
                        </xs:length>
                        <xs:pattern value="\d*[1-9]\d*"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="ShippingStationCode">
                    <xs:annotation>
                      <xs:documentation>UIC Code of the shipping
station</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="5"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="ShippingStationName" minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>Name of the shipping
station</xs:documentation>
                    </xs:annotation>
                    <xs:simpleType>
                      <xs:restriction base="xs:string">
                        <xs:minLength value="1"/>
                        <xs:maxLength value="24"/>
                      </xs:restriction>
                    </xs:simpleType>
                  </xs:element>
                  <xs:element name="ShippingCarrier" type="CompanyCode"
minOccurs="0">
                    <xs:annotation>
                      <xs:documentation>RICS Code of the RU who created the
consignment identification (not necessarily the first carrier in the transport
chain)</xs:documentation>
                    </xs:annotation>
```

```
                    </xs:element>
                    <xs:element name="AcceptanceDate" type="xs:date" minOccurs="0">
                      <xs:annotation>
                        <xs:documentation>Forwarding Date</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element name="ConsignmentNumber" type="ConsignmentIdent"/>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element name="DossierNumber" type="xs:string" minOccurs="0"/>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element ref="Routing" minOccurs="0">
          <xs:annotation>
            <xs:documentation>Route information. Keep the sequence of each part of the
route!</xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="CarriersInvolved" minOccurs="0">
          <xs:complexType>
            <xs:sequence>
              <xs:element name="Carrier" maxOccurs="20">
                <xs:annotation>
                  <xs:documentation>Carrier(s) involved</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="RU" type="CompanyCode">
                      <xs:annotation>
                        <xs:documentation>Carrier (Railway Code)</xs:documentation>
                      </xs:annotation>
                    </xs:element>
                    <xs:element ref="CarrierStatus" minOccurs="0"/>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element name="WagonJourneyIrregularity" minOccurs="0">
          <xs:complexType>
            <xs:sequence>
              <xs:element name="DamageCodes" minOccurs="0" maxOccurs="unbounded">
                <xs:annotation>
                  <xs:documentation>List of Damage Codes according to description in
GCU Appendix 9 Annex 1</xs:documentation>
                </xs:annotation>
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="DamageCodePosition1">
                      <xs:simpleType>
                        <xs:restriction base="xs:short">
                          <xs:minInclusive value="1"/>
                          <xs:maxInclusive value="99"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="DamageCodePosition2" minOccurs="0">
                      <xs:simpleType>
                        <xs:restriction base="xs:short">
                          <xs:minInclusive value="1"/>
                          <xs:maxInclusive value="99"/>
```

```
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="DamageCodePosition3" minOccurs="0">
                      <xs:simpleType>
                        <xs:restriction base="xs:short">
                          <xs:minInclusive value="1"/>
                          <xs:maxInclusive value="99"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="DamageCodePosition4" minOccurs="0">
                      <xs:simpleType>
                        <xs:restriction base="xs:short">
                          <xs:minInclusive value="1"/>
                          <xs:maxInclusive value="99"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                    <xs:element name="DamageOldOrNew" minOccurs="0">
                      <xs:simpleType>
                        <xs:restriction base="xs:short">
                          <xs:enumeration value="0"/>
                          <xs:enumeration value="1"/>
                        </xs:restriction>
                      </xs:simpleType>
                    </xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
              <xs:element name="IsAbleToRun" type="xs:boolean" minOccurs="0">
                <xs:annotation>
                  <xs:documentation>True if the damage does not cause an interruption
of the transport run. False otherwise: The damage causes an interruption of the
transport run (the wagon has to be repaired,  the loading of the good has to be
bettered, . . .</xs:documentation>
                </xs:annotation>
              </xs:element>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
      </xs:sequence>
    </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/ReportingRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Company (RICS) Code of the RU who is reporting the event

source	<xs:element name="ReportingRU" type="CompanyCode"> <xs:annotation> <xs:documentation>Company (RICS) Code of the RU who is reporting the event</xs:documentation> </xs:annotation> </xs:element>

element **WagonStatusMessages/WagonStatusMessage/MessageCreationDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation Timestamp of Creation of Message documentation the timestamp is created by the originally sending RU, it remains unchanged, when forwarded by the central ISR application
source	<xs:element name="MessageCreationDateTime" type="xs:dateTime"> <xs:annotation> <xs:documentation>Timestamp of Creation of Message</xs:documentation> <xs:documentation>the timestamp is created by the originally sending RU, it remains unchanged, when forwarded by the central ISR application</xs:documentation> </xs:annotation> </xs:element>

element **WagonStatusMessages/WagonStatusMessage/Event**

diagram	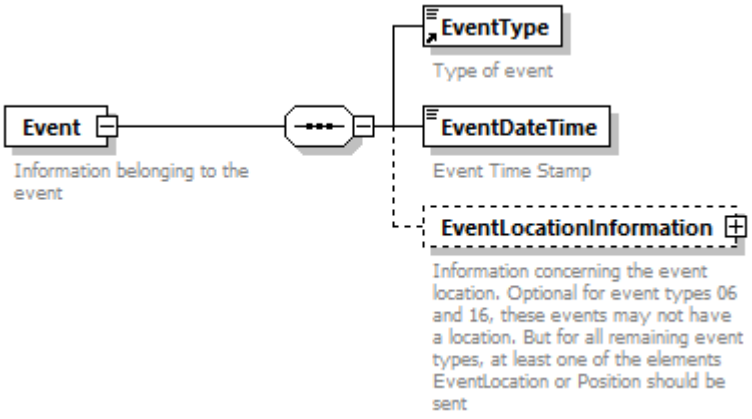
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**EventType EventDateTime EventLocationInformation**
annotation	documentation Information belonging to the event
source	<xs:element name="Event"> <xs:annotation> <xs:documentation>Information belonging to the event</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="EventType"/>

```
      <xs:element name="EventDateTime" type="xs:dateTime">
        <xs:annotation>
          <xs:documentation>Event Time Stamp </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="EventLocationInformation" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Information concerning the event location. Optional for
event types 06 and 16, these events may not have a location. But for all remaining
event types, at least one of the elements EventLocation or Position should be
sent</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="EventLocation" type="LocationIdent" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Location where the event happend</xs:documentation>
              </xs:annotation>
            </xs:element>
            <xs:element name="Position" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Geo coordinates of the wagon  event location in
WGS84 as used in the CRD</xs:documentation>
              </xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="Latitude" type="xs:decimal"/>
                  <xs:element name="Longitude" type="xs:decimal"/>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/Event/EventDateTime**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:dateTime**
properties	content simple
annotation	documentation Event Time Stamp

source	`<xs:element name="EventDateTime" type="xs:dateTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Event Time Stamp </xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **WagonStatusMessages/WagonStatusMessage/Event/EventLocationInformation**

diagram	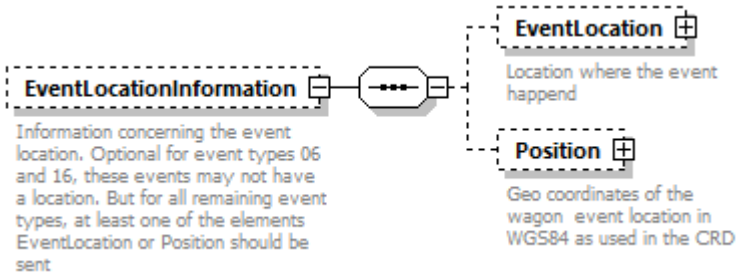
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**EventLocation** **Position**
annotation	documentation Information concerning the event location. Optional for event types 06 and 16, these events may not have a location. But for all remaining event types, at least one of the elements EventLocation or Position should be sent

source

```
<xs:element name="EventLocationInformation" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Information concerning the event location. Optional for event
types 06 and 16, these events may not have a location. But for all remaining event
types, at least one of the elements EventLocation or Position should be
sent</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="EventLocation" type="LocationIdent" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Location where the event happend</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="Position" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Geo coordinates of the wagon  event location in WGS84 as
used in the CRD</xs:documentation>
        </xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Latitude" type="xs:decimal"/>
            <xs:element name="Longitude" type="xs:decimal"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/Event/EventLocationInformation/EventLocation**

diagram	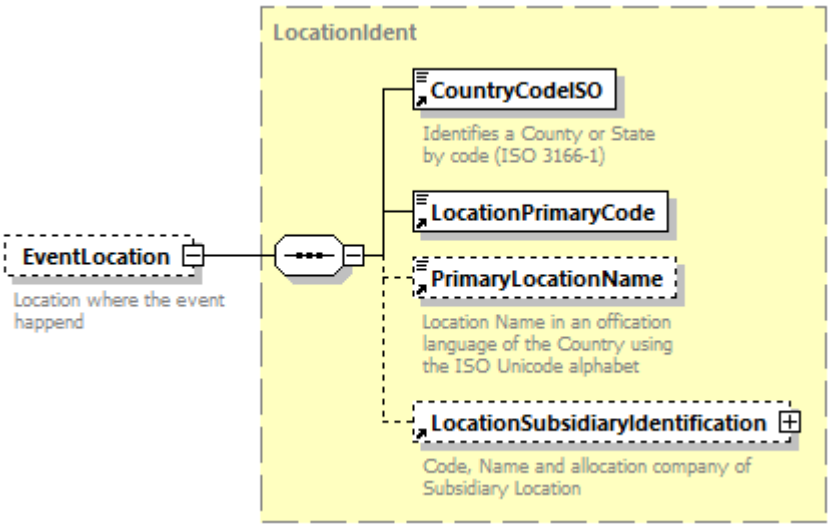
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	minOcc 0 maxOcc 1 content complex
children	**CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification**
annotation	documentation Location where the event happend

source	`<xs:element name="EventLocation" type="LocationIdent" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Location where the event happend</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **WagonStatusMessages/WagonStatusMessage/Event/EventLocationInformation/Position**

diagram	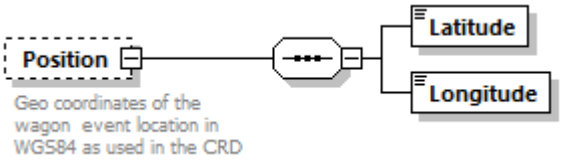
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**Latitude Longitude**
annotation	documentation Geo coordinates of the wagon event location in WGS84 as used in the CRD

source	`<xs:element name="Position" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Geo coordinates of the wagon event location in WGS84 as used in the CRD</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="Latitude" type="xs:decimal"/>`
	`  <xs:element name="Longitude" type="xs:decimal"/>`
	`  </xs:sequence>`

```
  </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/Event/EventLocationInformation/Position/Latitude**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:decimal**
properties	content simple
used by	element **GeographicCoordinates**
source	`<xs:element name="Latitude" type="xs:decimal"/>`

element **WagonStatusMessages/WagonStatusMessage/Event/EventLocationInformation/Position/Longitude**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:decimal**
properties	content simple
used by	element **GeographicCoordinates**
source	`<xs:element name="Longitude" type="xs:decimal"/>`

element **WagonStatusMessages/WagonStatusMessage/LoadingStatus**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	minOcc 0 maxOcc 1 content simple
used by	elements **ILU_Details** **ITU_Details** **RollingRoadUnit/RollingRoadUnitDetails** **Wagons/WagonDetails** **WagonInformation**
facets	Kind Value Annotation enumeration 0 enumeration 1
annotation	documentation Loading status of the equipment. 0=Empty, 1=Loaded

source	`<xs:element name="LoadingStatus" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Loading status of the equipment. 0=Empty, 1=Loaded</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:enumeration value="0"/>`
	`  <xs:enumeration value="1"/>`
	`  </xs:restriction>`

```
  </xs:simpleType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/ShippingLocation**

diagram

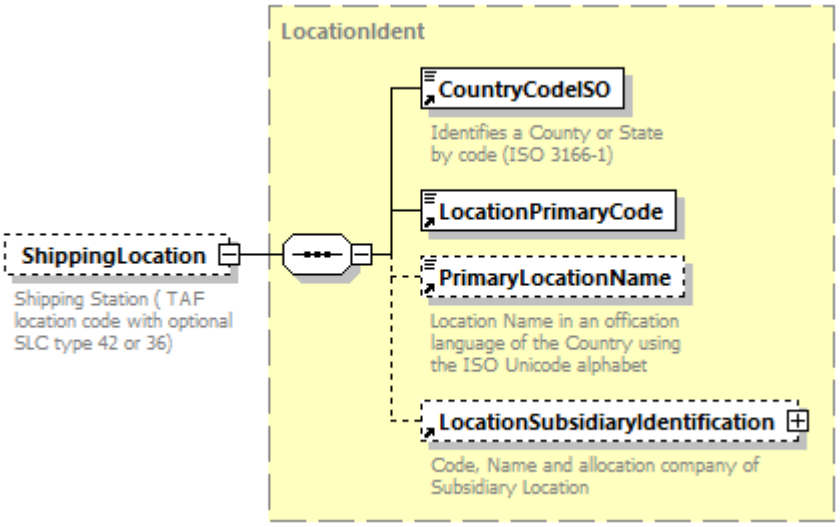

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	minOcc 0 maxOcc 1 content complex
children	**CountryCodeISO** **LocationPrimaryCode** **PrimaryLocationName** **LocationSubsidiaryIdentification**
annotation	documentation Shipping Station (TAF location code with optional SLC type 42 or 36) documentation use here the station code of the station the wagon has started its transport run

source

```
<xs:element name="ShippingLocation" type="LocationIdent" minOccurs="0">
  <xs:annotation>
    <xs:documentation>Shipping Station ( TAF location code with optional SLC type 42 or 36)</xs:documentation>
    <xs:documentation>use here the station code of the station the wagon has started its transport run</xs:documentation>
  </xs:annotation>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/DestinationLocation**

diagram	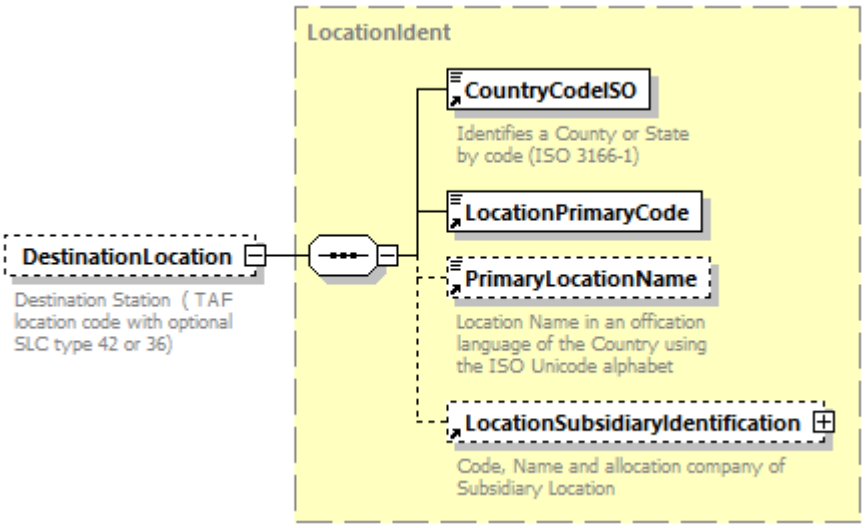
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**LocationIdent**
properties	minOcc 0 maxOcc 1 content complex
children	**CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification**
annotation	documentation Destination Station (TAF location code with optional SLC type 42 or 36) documentation use here the station code of the station the wagon shall terminate its transport run

source	`<xs:element name="DestinationLocation" type="LocationIdent" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>Destination Station ( TAF location code with optional SLC type 42 or 36)</xs:documentation>`
	`<xs:documentation>use here the station code of the station the wagon shall terminate its transport run </xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **WagonStatusMessages/WagonStatusMessage/Train**

diagram	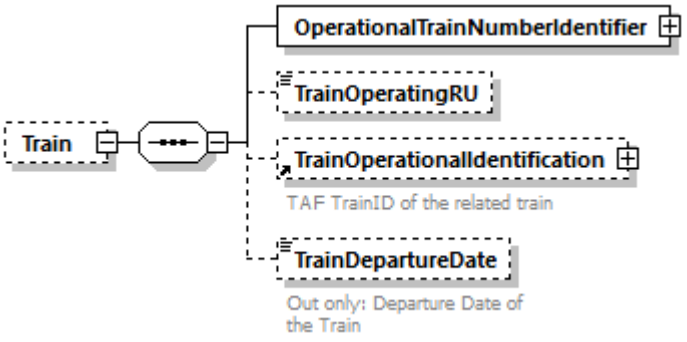
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**OperationalTrainNumberIdentifier TrainOperatingRU TrainOperationalIdentification TrainDepartureDate**

source

```
<xs:element name="Train" minOccurs="0">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="OperationalTrainNumberIdentifier">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="OperationalTrainNumber"/>
            <xs:element ref="ScheduledTimeAtHandover" minOccurs="0"/>
            <xs:element ref="ScheduledDateTimeAtTransfer" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="TrainOperatingRU" type="CompanyCode" minOccurs="0"/>
      <xs:element ref="TrainOperationalIdentification" minOccurs="0">
        <xs:annotation>
          <xs:documentation>TAF TrainID of the related train</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="TrainDepartureDate" type="xs:date" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Out only: Departure Date of the Train </xs:documentation>
          <xs:documentation>use here the date the train left origin using this train
number</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/Train/OperationalTrainNumberIdentifier**

diagram

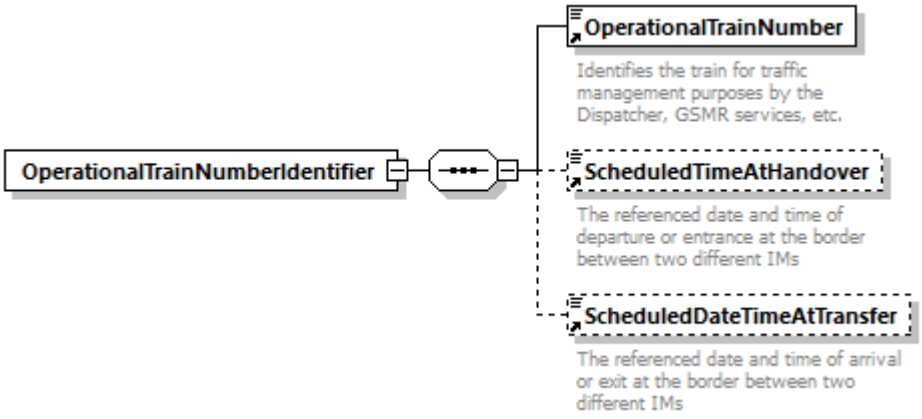

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties: content complex

children: OperationalTrainNumber ScheduledTimeAtHandover ScheduledDateTimeAtTransfer

used by (elements): AffectedLocation AffectedSection ChangeofTrackMessage ReferenceOTN TrainAtLocation TrainCompositionMessage TrainDelayCauseMessage TrainJourneyModificationMessage TrainReadyMessage TrainRunningForecastMessage TrainRunningInformationMessage TrainRunningInterruptionMessage

source

```
<xs:element name="OperationalTrainNumberIdentifier">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="OperationalTrainNumber"/>
      <xs:element ref="ScheduledTimeAtHandover" minOccurs="0"/>
      <xs:element ref="ScheduledDateTimeAtTransfer" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
```

	</xs:element>

element **WagonStatusMessages/WagonStatusMessage/Train/TrainOperatingRU**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
source	<xs:element name="TrainOperatingRU" type="CompanyCode" minOccurs="0"/>

element **WagonStatusMessages/WagonStatusMessage/Train/TrainDepartureDate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Out only: Departure Date of the Train documentation use here the date the train left origin using this train number
source	<xs:element name="TrainDepartureDate" type="xs:date" minOccurs="0"> <xs:annotation> <xs:documentation>Out only: Departure Date of the Train </xs:documentation> <xs:documentation>use here the date the train left origin using this train number</xs:documentation> </xs:annotation> </xs:element>

element **WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification**

diagram	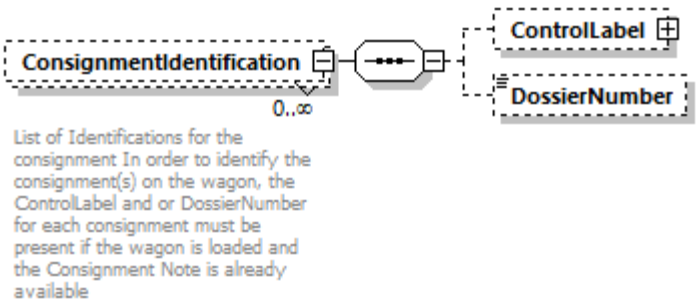
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc unbounded

	content complex
children	**ControlLabel DossierNumber**
annotation	documentation List of Identifications for the consignment In order to identify the consignment(s) on the wagon, the ControlLabel and or DossierNumber for each consignment must be present if the wagon is loaded and the Consignment Note is already available documentation consignment note number (without carrier (due to history))

source

```
<xs:element name="ConsignmentIdentification" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>List of Identifications for the consignment In order to
identify the consignment(s) on the wagon, the ControlLabel and or DossierNumber for
each consignment must be present if the wagon is loaded and the Consignment Note is
already available</xs:documentation>
    <xs:documentation>consignment note number (without carrier (due to
history))</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ControlLabel" minOccurs="0">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ShippingCountry">
              <xs:annotation>
                <xs:documentation>Forwarding UIC Country Code</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:length value="2">
                    <xs:annotation>
                      <xs:documentation>= 2N = UIC country code according to UIC
leaflet 920-14</xs:documentation>
                    </xs:annotation>
                  </xs:length>
                  <xs:pattern value="\d*[1-9]\d*"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="ShippingStationCode">
              <xs:annotation>
                <xs:documentation>UIC Code of the shipping station</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="5"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="ShippingStationName" minOccurs="0">
              <xs:annotation>
                <xs:documentation>Name of the shipping station</xs:documentation>
              </xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="24"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="ShippingCarrier" type="CompanyCode" minOccurs="0">
              <xs:annotation>
                <xs:documentation>RICS Code of the RU who created the consignment
identification (not necessarily the first carrier in the transport
chain)</xs:documentation>
```

```
            </xs:annotation>
          </xs:element>
          <xs:element name="AcceptanceDate" type="xs:date" minOccurs="0">
            <xs:annotation>
              <xs:documentation>Forwarding Date</xs:documentation>
            </xs:annotation>
          </xs:element>
          <xs:element name="ConsignmentNumber" type="ConsignmentIdent"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="DossierNumber" type="xs:string" minOccurs="0"/>
  </xs:sequence>
 </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/ControlLabel**

diagram

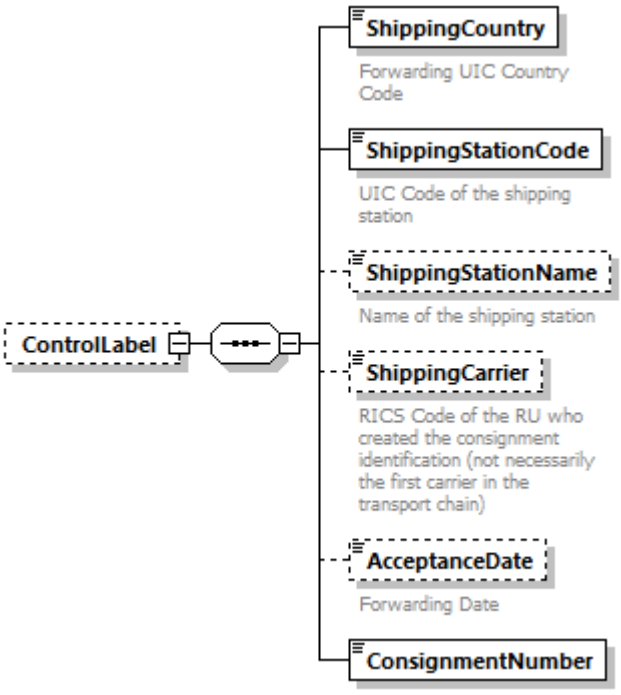

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties:

minOcc	0
maxOcc	1
content	complex

children: ShippingCountry ShippingStationCode ShippingStationName ShippingCarrier AcceptanceDate ConsignmentNumber

source

```
<xs:element name="ControlLabel" minOccurs="0">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ShippingCountry">
        <xs:annotation>
          <xs:documentation>Forwarding UIC Country Code</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:length value="2">
              <xs:annotation>
                <xs:documentation>= 2N = UIC country code according to UIC leaflet
920-14</xs:documentation>
```

```
              </xs:annotation>
            </xs:length>
            <xs:pattern value="\d*[1-9]\d*"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ShippingStationCode">
        <xs:annotation>
          <xs:documentation>UIC Code of the shipping station</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="5"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ShippingStationName" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Name of the shipping station</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="1"/>
            <xs:maxLength value="24"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ShippingCarrier" type="CompanyCode" minOccurs="0">
        <xs:annotation>
          <xs:documentation>RICS Code of the RU who created the consignment
identification (not necessarily the first carrier in the transport
chain)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="AcceptanceDate" type="xs:date" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Forwarding Date</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ConsignmentNumber" type="ConsignmentIdent"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/ControlLabel/ShippingCountry**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation length 2 documentation = 2N = UIC country code according to UIC leaflet 920-14 pattern \d*[1-9]\d*
annotation	documentation Forwarding UIC Country Code

source

```
<xs:element name="ShippingCountry">
  <xs:annotation>
    <xs:documentation>Forwarding UIC Country Code</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:length value="2">
        <xs:annotation>
          <xs:documentation>= 2N = UIC country code according to UIC leaflet 920-
14</xs:documentation>
        </xs:annotation>
      </xs:length>
      <xs:pattern value="\d*[1-9]\d*"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element
WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/ControlLabel/ShippingStationCode

diagram



namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 5
annotation	documentation UIC Code of the shipping station

source

```
<xs:element name="ShippingStationCode">
  <xs:annotation>
    <xs:documentation>UIC Code of the shipping station</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="5"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element
WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/ControlLabel/ShippingStationName

diagram



namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1

	maxLength 24
annotation	documentation Name of the shipping station
source	<xs:element name="ShippingStationName" minOccurs="0"> <xs:annotation> <xs:documentation>Name of the shipping station</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="24"/> </xs:restriction> </xs:simpleType> </xs:element>

element **WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/ControlLabel/ShippingCarrier**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation RICS Code of the RU who created the consignment identification (not necessarily the first carrier in the transport chain)
source	<xs:element name="ShippingCarrier" type="CompanyCode" minOccurs="0"> <xs:annotation> <xs:documentation>RICS Code of the RU who created the consignment identification (not necessarily the first carrier in the transport chain)</xs:documentation> </xs:annotation> </xs:element>

element **WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/ControlLabel/AcceptanceDate**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:date**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Forwarding Date
source	<xs:element name="AcceptanceDate" type="xs:date" minOccurs="0"> <xs:annotation> <xs:documentation>Forwarding Date</xs:documentation> </xs:annotation>

	</xs:element>

element
WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/ControlLabel/ConsignmentNumber

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**ConsignmentIdent**
properties	content complex
used by	element **WIMO_Dataset/ConsignmentLevelData**
source	<xs:element name="ConsignmentNumber" type="ConsignmentIdent"/>

element **WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/DossierNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:string**
properties	minOcc 0 maxOcc 1 content simple
source	<xs:element name="DossierNumber" type="xs:string" minOccurs="0"/>

element **WagonStatusMessages/WagonStatusMessage/CarriersInvolved**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**Carrier**
source	<xs:element name="CarriersInvolved" minOccurs="0"> <xs:complexType> <xs:sequence> <xs:element name="Carrier" maxOccurs="20"> <xs:annotation> <xs:documentation>Carrier(s) involved</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="RU" type="CompanyCode"> <xs:annotation> <xs:documentation>Carrier (Railway Code)</xs:documentation> </xs:annotation> </xs:element> <xs:element ref="CarrierStatus" minOccurs="0"/> </xs:sequence> </xs:complexType>

```
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/CarriersInvolved/Carrier**

diagram

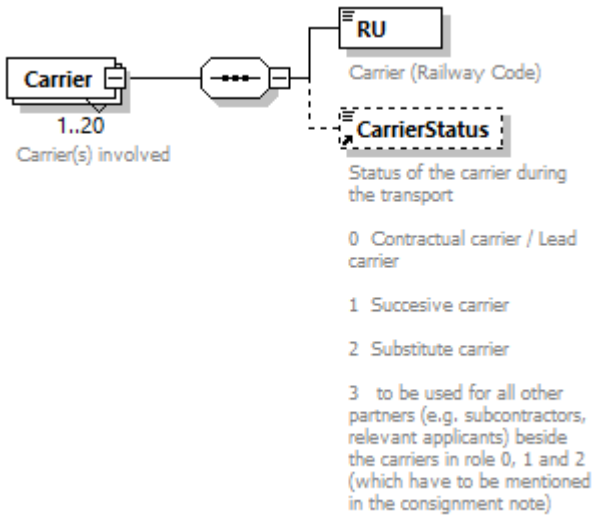

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 1 maxOcc 20 content complex
children	**RU CarrierStatus**
annotation	documentation Carrier(s) involved

source

```
<xs:element name="Carrier" maxOccurs="20">
  <xs:annotation>
    <xs:documentation>Carrier(s) involved</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="RU" type="CompanyCode">
        <xs:annotation>
          <xs:documentation>Carrier (Railway Code)</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element ref="CarrierStatus" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/CarriersInvolved/Carrier/RU**

diagram

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**CompanyCode**
properties	content simple

facets	Kind / Value / Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Carrier (Railway Code)

source	`<xs:element name="RU" type="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Carrier (Railway Code)</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **WagonStatusMessages/WagonStatusMessage/WagonJourneyIrregularity**

diagram	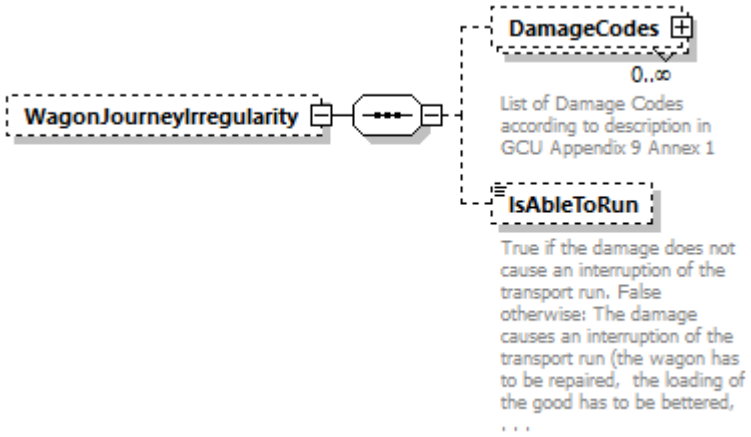
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc 1 content complex
children	**DamageCodes IsAbleToRun**

source	`<xs:element name="WagonJourneyIrregularity" minOccurs="0">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="DamageCodes" minOccurs="0" maxOccurs="unbounded">`
	`  <xs:annotation>`
	`  <xs:documentation>List of Damage Codes according to description in GCU Appendix 9 Annex 1</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="DamageCodePosition1">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:short">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="99"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`  </xs:element>`
	`  <xs:element name="DamageCodePosition2" minOccurs="0">`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:short">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="99"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`  </xs:element>`

```
            <xs:element name="DamageCodePosition3" minOccurs="0">
              <xs:simpleType>
                <xs:restriction base="xs:short">
                  <xs:minInclusive value="1"/>
                  <xs:maxInclusive value="99"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="DamageCodePosition4" minOccurs="0">
              <xs:simpleType>
                <xs:restriction base="xs:short">
                  <xs:minInclusive value="1"/>
                  <xs:maxInclusive value="99"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
            <xs:element name="DamageOldOrNew" minOccurs="0">
              <xs:simpleType>
                <xs:restriction base="xs:short">
                  <xs:enumeration value="0"/>
                  <xs:enumeration value="1"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="IsAbleToRun" type="xs:boolean" minOccurs="0">
        <xs:annotation>
          <xs:documentation>True if the damage does not cause an interruption of the
transport run. False otherwise: The damage causes an interruption of the transport
run (the wagon has to be repaired,  the loading of the good has to be bettered, . .
.</xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonStatusMessages/WagonStatusMessage/WagonJourneyIrregularity/DamageCodes**

diagram	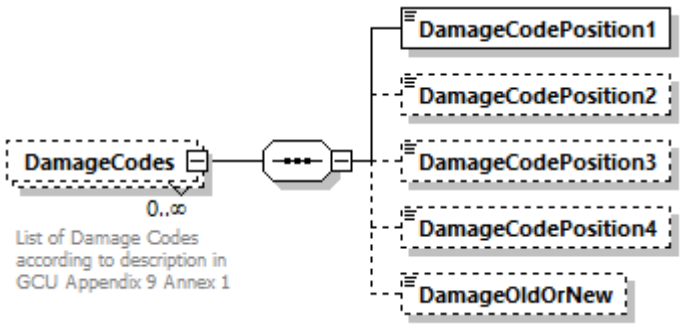
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc unbounded content complex
children	DamageCodePosition1 DamageCodePosition2 DamageCodePosition3 DamageCodePosition4 DamageOldOrNew
annotation	documentation List of Damage Codes according to description in GCU Appendix 9 Annex 1
source	`<xs:element name="DamageCodes" minOccurs="0" maxOccurs="unbounded">` `  <xs:annotation>`

```
    <xs:documentation>List of Damage Codes according to description in GCU Appendix 9
Annex 1</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="DamageCodePosition1">
        <xs:simpleType>
          <xs:restriction base="xs:short">
            <xs:minInclusive value="1"/>
            <xs:maxInclusive value="99"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="DamageCodePosition2" minOccurs="0">
        <xs:simpleType>
          <xs:restriction base="xs:short">
            <xs:minInclusive value="1"/>
            <xs:maxInclusive value="99"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="DamageCodePosition3" minOccurs="0">
        <xs:simpleType>
          <xs:restriction base="xs:short">
            <xs:minInclusive value="1"/>
            <xs:maxInclusive value="99"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="DamageCodePosition4" minOccurs="0">
        <xs:simpleType>
          <xs:restriction base="xs:short">
            <xs:minInclusive value="1"/>
            <xs:maxInclusive value="99"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="DamageOldOrNew" minOccurs="0">
        <xs:simpleType>
          <xs:restriction base="xs:short">
            <xs:enumeration value="0"/>
            <xs:enumeration value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element
WagonStatusMessages/WagonStatusMessage/WagonJourneyIrregularity/DamageCodes/DamageCodePosition1

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:short**
properties	content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99

source	<xs:element name="DamageCodePosition1"> <xs:simpleType> <xs:restriction base="xs:short"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType> </xs:element>

element
WagonStatusMessages/WagonStatusMessage/WagonJourneyIrregularity/DamageCodes/DamageCodePosition2

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:short**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99
source	<xs:element name="DamageCodePosition2" minOccurs="0"> <xs:simpleType> <xs:restriction base="xs:short"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType> </xs:element>

element
WagonStatusMessages/WagonStatusMessage/WagonJourneyIrregularity/DamageCodes/DamageCodePosition3

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:short**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99
source	<xs:element name="DamageCodePosition3" minOccurs="0"> <xs:simpleType> <xs:restriction base="xs:short"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType> </xs:element>

element

WagonStatusMessages/WagonStatusMessage/WagonJourneyIrregularity/DamageCodes/DamageCodePosition4

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:short**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 1 maxInclusive 99

source	`<xs:element name="DamageCodePosition4" minOccurs="0">`
	`<xs:simpleType>`
	`<xs:restriction base="xs:short">`
	`<xs:minInclusive value="1"/>`
	`<xs:maxInclusive value="99"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **WagonStatusMessages/WagonStatusMessage/WagonJourneyIrregularity/DamageCodes/DamageOldOrNew**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:short**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation enumeration 0 enumeration 1

source	`<xs:element name="DamageOldOrNew" minOccurs="0">`
	`<xs:simpleType>`
	`<xs:restriction base="xs:short">`
	`<xs:enumeration value="0"/>`
	`<xs:enumeration value="1"/>`
	`</xs:restriction>`
	`</xs:simpleType>`
	`</xs:element>`

element **WagonStatusMessages/WagonStatusMessage/WagonJourneyIrregularity/IsAbleToRun**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	**xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation True if the damage does not cause an interruption of the transport run. False otherwise: The damage causes an interruption of the transport run (the wagon has to be repaired, the loading of the good has to be bettered, . . .

source	`<xs:element name="IsAbleToRun" type="xs:boolean" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>True if the damage does not cause an interruption of the transport run. False otherwise: The damage causes an interruption of the transport run (the wagon has to be repaired, the loading of the good has to be bettered, . . .</xs:documentation>`
	`</xs:annotation>`
	`</xs:element>`

element **WagonTechData**

diagram

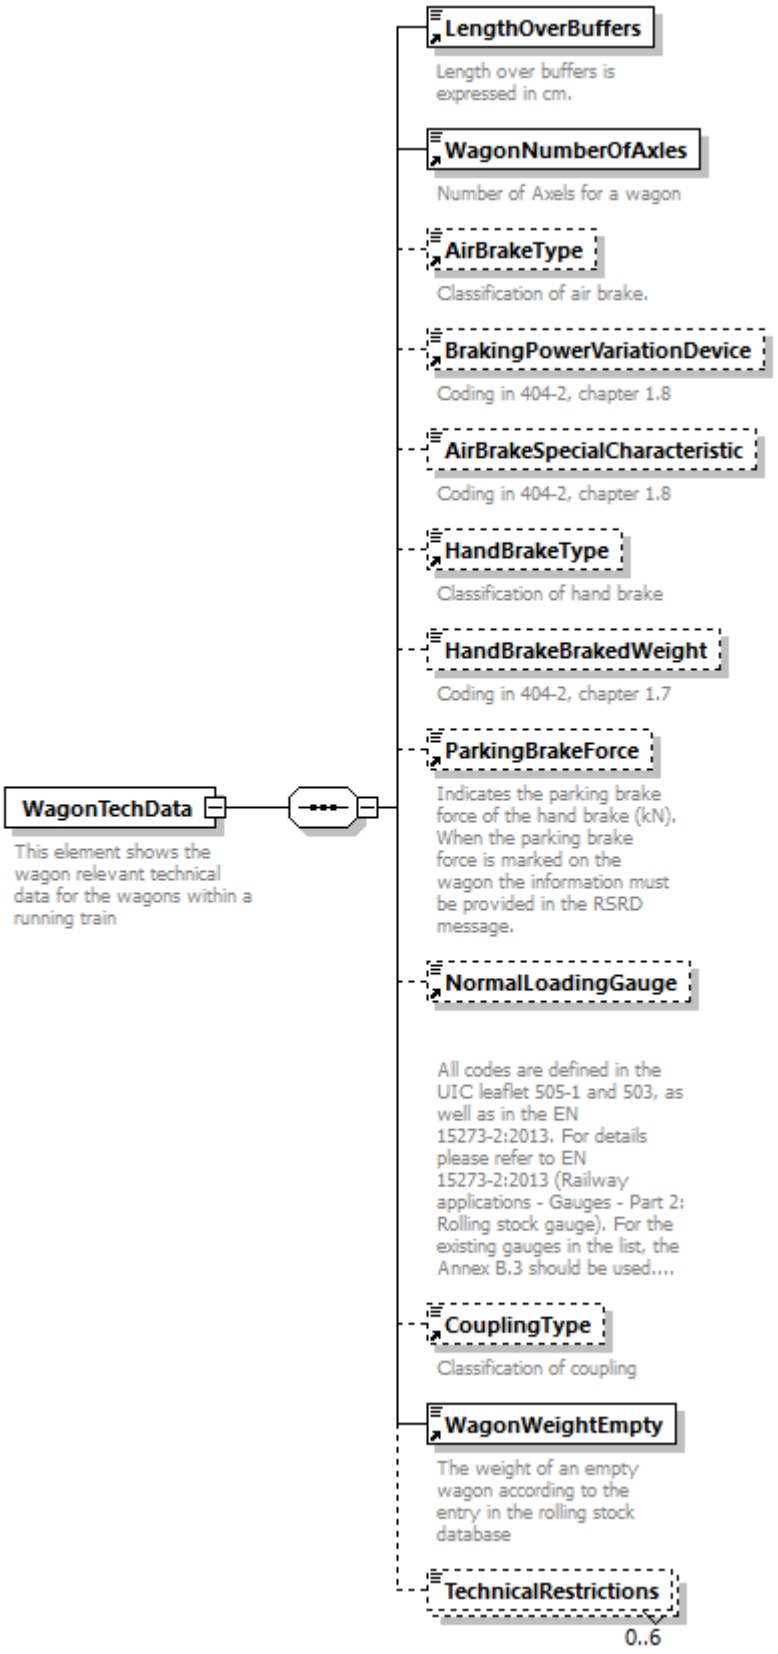

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	LengthOverBuffers WagonNumberOfAxles AirBrakeType BrakingPowerVariationDevice AirBrakeSpecialCharacteristic HandBrakeType HandBrakeBrakedWeight ParkingBrakeForce NormalLoadingGauge CouplingType WagonWeightEmpty TechnicalRestrictions
used by	element WagonData
annotation	documentation This element shows the wagon relevant technical data for the wagons within a running train

source

```
<xs:element name="WagonTechData">
  <xs:annotation>
    <xs:documentation>This element shows the wagon relevant technical data for the
wagons within a running train</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="LengthOverBuffers"/>
      <xs:element ref="WagonNumberOfAxles"/>
      <xs:element ref="AirBrakeType" minOccurs="0"/>
      <xs:element ref="BrakingPowerVariationDevice" minOccurs="0"/>
      <xs:element name="AirBrakeSpecialCharacteristic" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Coding in 404-2, chapter 1.8</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:minInclusive value="0"/>
            <xs:maxInclusive value="9"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="HandBrakeType" minOccurs="0"/>
      <xs:element name="HandBrakeBrakedWeight" minOccurs="0">
        <xs:annotation>
          <xs:documentation>Coding in 404-2, chapter 1.7 </xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:minInclusive value="000"/>
            <xs:maxInclusive value="999"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element ref="ParkingBrakeForce" minOccurs="0"/>
      <xs:element ref="NormalLoadingGauge" minOccurs="0"/>
      <xs:element ref="CouplingType" minOccurs="0"/>
      <xs:element ref="WagonWeightEmpty"/>
      <xs:element name="TechnicalRestrictions" type="Numeric2-2" minOccurs="0"
maxOccurs="6"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonTechData/AirBrakeSpecialCharacteristic**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	minOcc 0 maxOcc 1 content simple

facets	Kind Value Annotation minInclusive 0 maxInclusive 9
annotation	documentation Coding in 404-2, chapter 1.8
source	<xs:element name="AirBrakeSpecialCharacteristic" minOccurs="0"> <xs:annotation> <xs:documentation>Coding in 404-2, chapter 1.8</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="0"/> <xs:maxInclusive value="9"/> </xs:restriction> </xs:simpleType> </xs:element>

element **WagonTechData/HandBrakeBrakedWeight**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minInclusive 000 maxInclusive 999
annotation	documentation Coding in 404-2, chapter 1.7
source	<xs:element name="HandBrakeBrakedWeight" minOccurs="0"> <xs:annotation> <xs:documentation>Coding in 404-2, chapter 1.7 </xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:minInclusive value="000"/> <xs:maxInclusive value="999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **WagonTechData/TechnicalRestrictions**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric2-2**
properties	minOcc 0 maxOcc 6 content simple
facets	Kind Value Annotation minInclusive 01 maxInclusive 99

source	<xs:element name="TechnicalRestrictions" type="Numeric2-2" minOccurs="0" maxOccurs="6"/>

element **WagonTrainPosition**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	content simple
used by	element **WagonData**
facets	Kind Value Annotation minInclusive 1 maxInclusive 999
annotation	documentation Identifies the position of a wagon within a train. Sequential number starting with the first wagon at the front of train as N°1.
source	<xs:element name="WagonTrainPosition"> <xs:annotation> <xs:documentation>Identifies the position of a wagon within a train. Sequential number starting with the first wagon at the front of train as N°1.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> <xs:maxInclusive value="999"/> </xs:restriction> </xs:simpleType> </xs:element>

element **WagonWeightEmpty**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueKilo**
properties	content simple
used by	elements **RollingStockDataset/DesignDataSet** **WagonTechData** **Wagons/WagonDetails/WagonTypeDetails**
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation The weight of an empty wagon according to the entry in the rolling stock database
source	<xs:element name="WagonWeightEmpty" type="WeightValueKilo"> <xs:annotation> <xs:documentation>The weight of an empty wagon according to the entry in the rolling stock database</xs:documentation>

```
  </xs:annotation>
</xs:element>
```

element **WeightOfSetOfCarriages**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WeightValueTonne**
properties	content simple
used by	element **PlannedTrainTechnicalData**
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation The calculated maximum weight of all carriages without the traction

source	`<xs:element name="WeightOfSetOfCarriages" type="WeightValueTonne">`
	`  <xs:annotation>`
	`  <xs:documentation>The calculated maximum weight of all carriages without the traction</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **WheelDiameter**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 1 maxInclusive 9999
annotation	documentation Diameter of wheels meausured in mm. Reference wheel diameter at maximum.

source	`<xs:element name="WheelDiameter">`
	`  <xs:annotation>`
	`  <xs:documentation>Diameter of wheels meausured in mm. Reference wheel diameter at maximum.`
	`  </xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="9999"/>`
	`  </xs:restriction>`

```
  </xs:simpleType>
</xs:element>
```

element **WheelsetGauge**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet**
facets	Kind Value Annotation minInclusive 1 maxInclusive 9999
annotation	documentation Track Gauge measured in mm; multi-entry for wagons with changeable wheel set gauge

source	`<xs:element name="WheelsetGauge">`
	`  <xs:annotation>`
	`  <xs:documentation>Track Gauge measured in mm; multi-entry for wagons with changeable wheel set gauge</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="9999"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **Width**

diagram	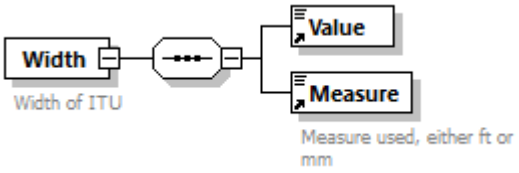
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Value** **Measure**
used by	element **Dimensions** complexType **DimensionValue**
annotation	documentation Width of ITU

source	`<xs:element name="Width">`
	`  <xs:annotation>`
	`  <xs:documentation>Width of ITU</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element ref="Value"/>`
	`  <xs:element ref="Measure"/>`

```
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WIMO_Dataset**

diagram

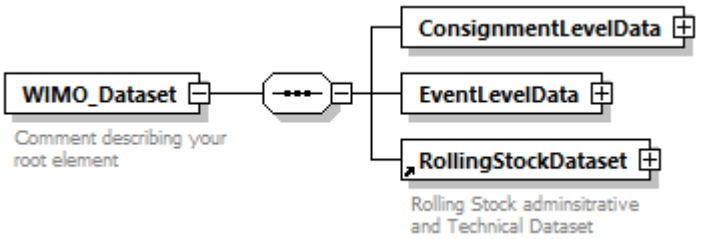

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

properties: content complex

children: ConsignmentLevelData EventLevelData RollingStockDataset

annotation: documentation
Comment describing your root element

source

```
<xs:element name="WIMO_Dataset">
  <xs:annotation>
    <xs:documentation>Comment describing your root element</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ConsignmentLevelData">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="Customer" maxOccurs="2"/>
            <xs:element ref="ConsignmentNumber"/>
            <xs:element ref="Goods"/>
            <xs:element ref="AgreedTimeOfDelivery"/>
            <xs:element ref="Destination"/>
            <xs:element ref="WagonInformation"/>
            <xs:element ref="ContractNumber" minOccurs="0"/>
            <xs:element ref="DangerousGoodsIndication" minOccurs="0"/>
            <xs:element ref="SpecialTreatments" minOccurs="0"/>
            <xs:element name="PreviousWagonNumber" type="WagonIdent" minOccurs="0"/>
            <xs:element ref="PreviousConsignmentNumber" minOccurs="0"/>
            <xs:sequence minOccurs="0">
              <xs:element ref="NextIntermediateDestination"/>
              <xs:element ref="PreviousResponsibleRU"/>
              <xs:element ref="NextResponsibleRU"/>
            </xs:sequence>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="EventLevelData">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="WagonEventInformation"/>
            <xs:element ref="VesselIndication" minOccurs="0"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element ref="RollingStockDataset"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WIMO_Dataset/ConsignmentLevelData**

diagram

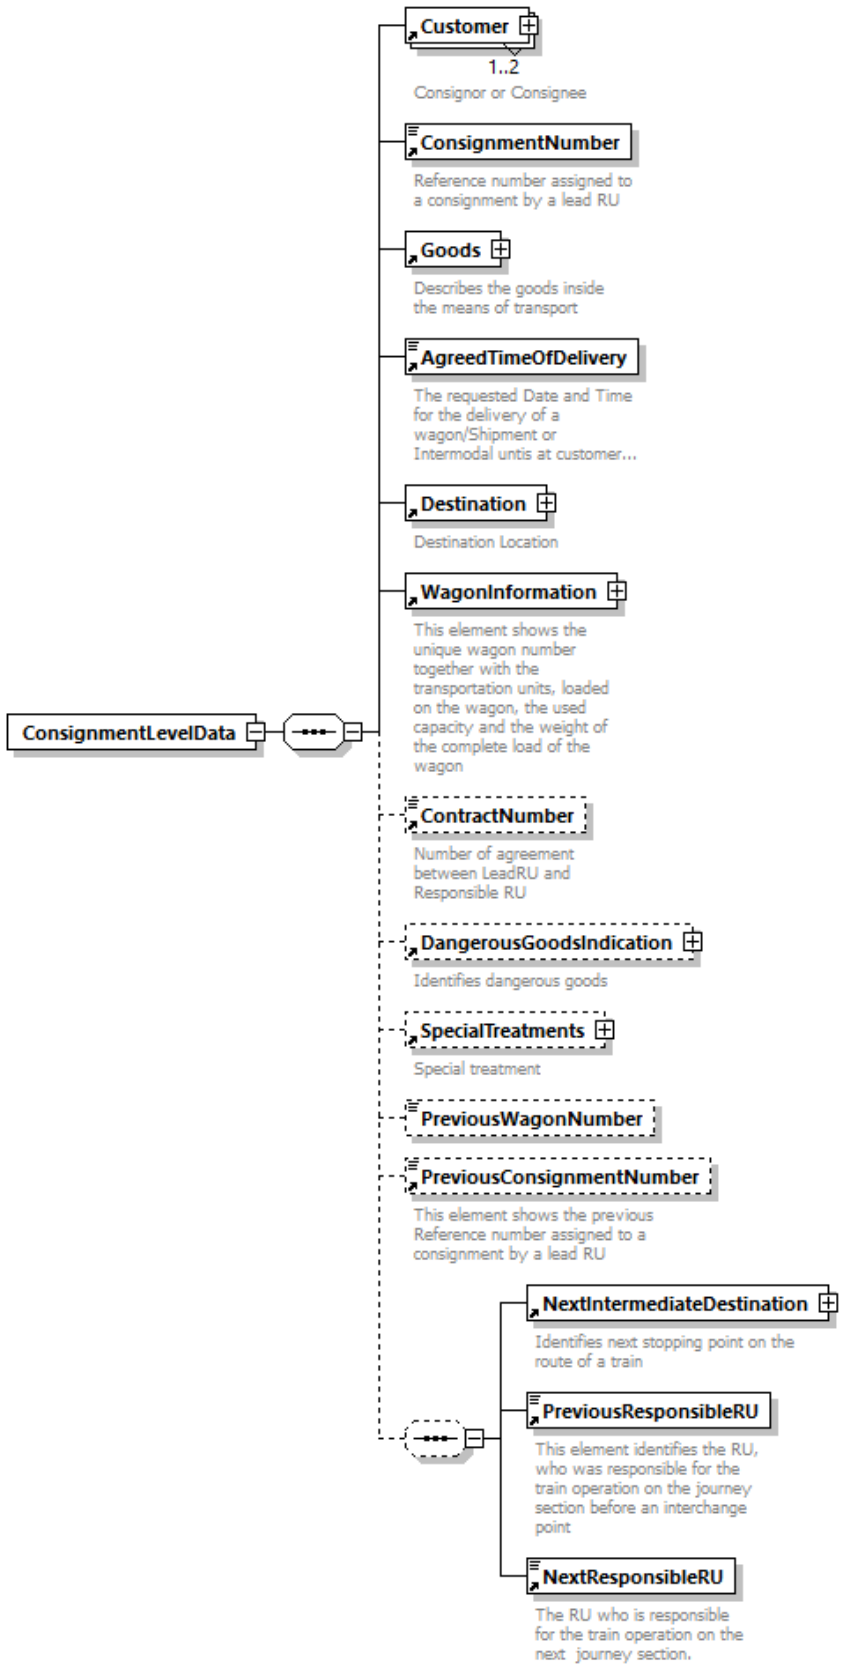

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Customer ConsignmentNumber Goods AgreedTimeOfDelivery Destination WagonInformation ContractNumber DangerousGoodsIndication SpecialTreatments PreviousWagonNumber PreviousConsignmentNumber NextIntermediateDestination PreviousResponsibleRU NextResponsibleRU**

source

```
<xs:element name="ConsignmentLevelData">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="Customer" maxOccurs="2"/>
      <xs:element ref="ConsignmentNumber"/>
      <xs:element ref="Goods"/>
      <xs:element ref="AgreedTimeOfDelivery"/>
      <xs:element ref="Destination"/>
      <xs:element ref="WagonInformation"/>
      <xs:element ref="ContractNumber" minOccurs="0"/>
      <xs:element ref="DangerousGoodsIndication" minOccurs="0"/>
      <xs:element ref="SpecialTreatments" minOccurs="0"/>
      <xs:element name="PreviousWagonNumber" type="WagonIdent" minOccurs="0"/>
      <xs:element ref="PreviousConsignmentNumber" minOccurs="0"/>
      <xs:sequence minOccurs="0">
        <xs:element ref="NextIntermediateDestination"/>
        <xs:element ref="PreviousResponsibleRU"/>
        <xs:element ref="NextResponsibleRU"/>
      </xs:sequence>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WIMO_Dataset/ConsignmentLevelData/PreviousWagonNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**WagonIdent**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation maxLength 12 pattern [0-9]{12}

source

```
<xs:element name="PreviousWagonNumber" type="WagonIdent" minOccurs="0"/>
```

element **WIMO_Dataset/EventLevelData**

diagram	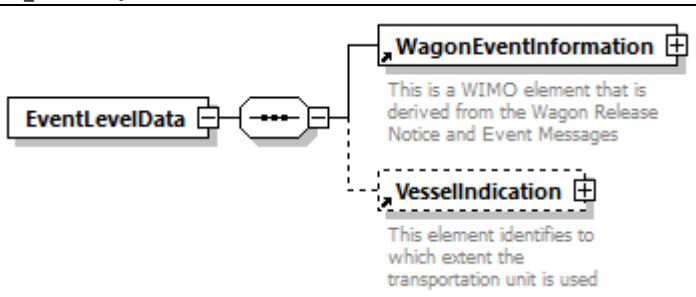
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex

children	**WagonEventInformation VesselIndication**
source	<xs:element name="EventLevelData"> <xs:complexType> <xs:sequence> <xs:element ref="WagonEventInformation"/> <xs:element ref="VesselIndication" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element>

element **YardArrival**

diagram	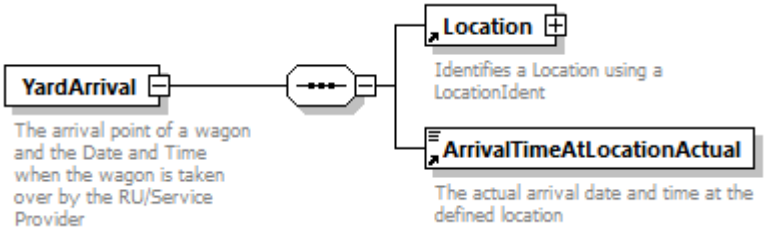
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Location ArrivalTimeAtLocationActual**
annotation	documentation The arrival point of a wagon and the Date and Time when the wagon is taken over by the RU/Service Provider
source	<xs:element name="YardArrival"> <xs:annotation> <xs:documentation>The arrival point of a wagon and the Date and Time when the wagon is taken over by the RU/Service Provider</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element ref="Location"/> <xs:element ref="ArrivalTimeAtLocationActual"/> </xs:sequence> </xs:complexType> </xs:element>

element **YardDeparture**

diagram	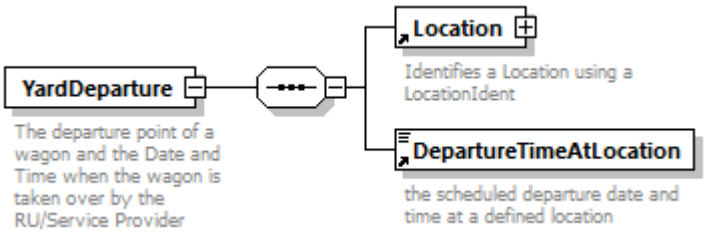
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**Location DepartureTimeAtLocation**
annotation	documentation The departure point of a wagon and the Date and Time when the wagon is taken over by the RU/Service Provider
source	<xs:element name="YardDeparture"> <xs:annotation>

```
    <xs:documentation>The departure point of a wagon and the Date and Time when the
wagon is taken over by the RU/Service Provider</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="Location"/>
      <xs:element ref="DepartureTimeAtLocation"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

complexType **CargoCodeType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **FreeText**
properties	base FreeText
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Identification of the Cargo and the nomiclature used

source	`<xs:complexType name="CargoCodeType">`
	`  <xs:annotation>`
	`  <xs:documentation>Identification of the Cargo and the nomiclature used</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleContent>`
	`  <xs:extension base="FreeText"/>`
	`  </xs:simpleContent>`
	`</xs:complexType>`

complexType **CompositIdentifierOperationalType**

diagram

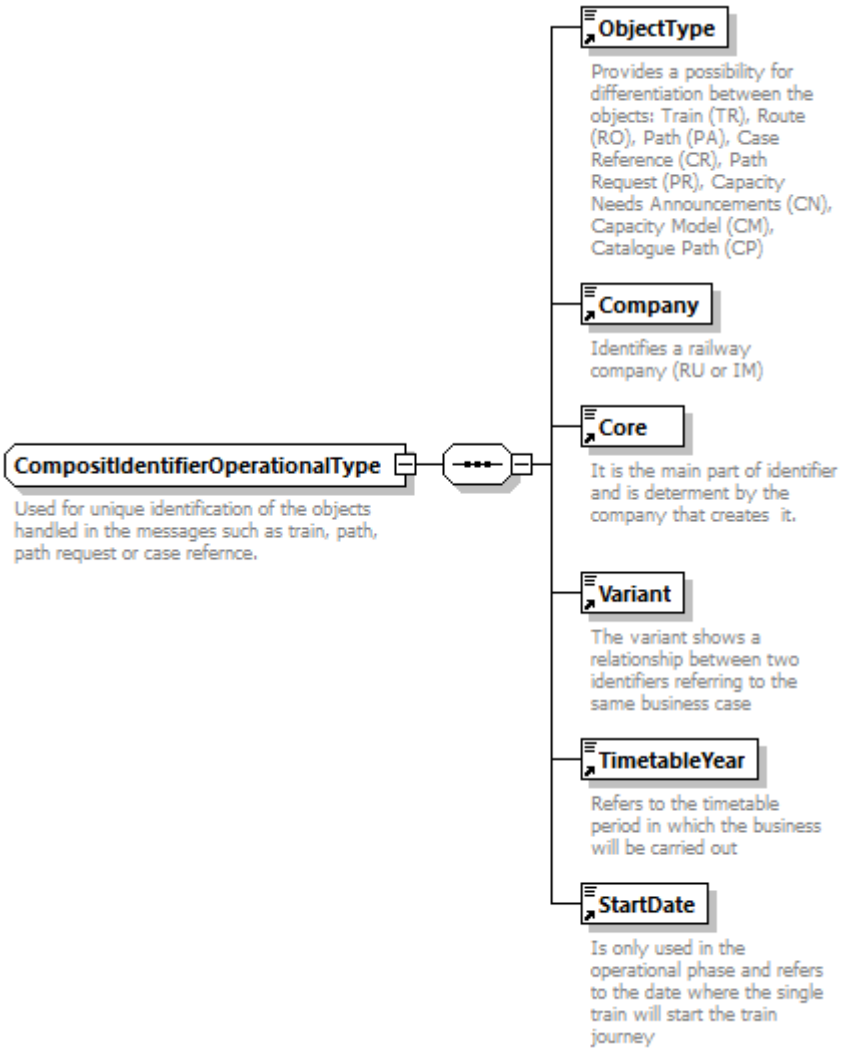

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
children	**ObjectType Company Core Variant TimetableYear StartDate**
used by	elements **RelatedTransportOperationalIdentifiers TrainID TransportOperationalIdentifiers**
annotation	documentation Used for unique identification of the objects handled in the messages such as train, path, path request or case refernce.

source

```
<xs:complexType name="CompositIdentifierOperationalType">
  <xs:annotation>
    <xs:documentation>Used for unique identification of the objects handled in the
messages such as train, path, path request or case refernce.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element ref="ObjectType"/>
    <xs:element ref="Company"/>
    <xs:element ref="Core"/>
    <xs:element ref="Variant"/>
    <xs:element ref="TimetableYear"/>
    <xs:element ref="StartDate">
      <xs:annotation>
        <xs:documentation>Is only used in the operational phase and refers to the
date where the single train will start the train journey</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
```

	</xs:complexType>

complexType **CompositIdentifierPlannedType**

diagram	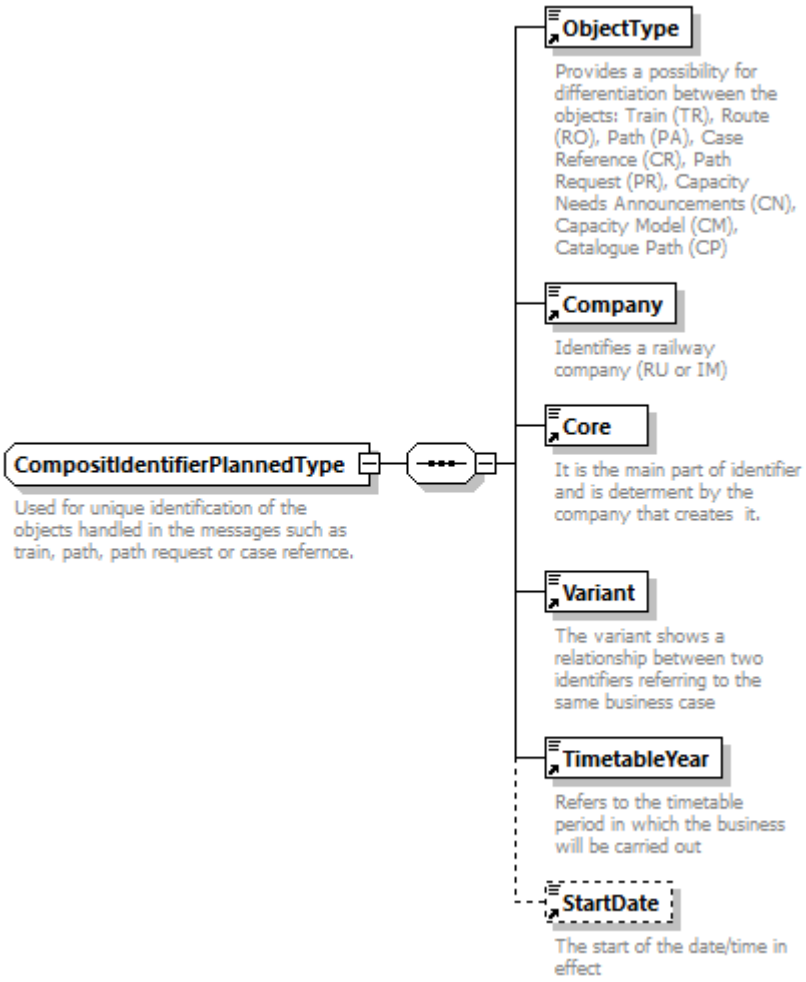
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
children	**ObjectType Company Core Variant TimetableYear StartDate**
used by	elements **AssociatedAttachedTrainID PlannedTransportIdentifiers RelatedPlannedTransportIdentifiers**
annotation	documentation Used for unique identification of the objects handled in the messages such as train, path, path request or case refernce.
source	<xs:complexType name="CompositIdentifierPlannedType"> <xs:annotation> <xs:documentation>Used for unique identification of the objects handled in the messages such as train, path, path request or case refernce.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element ref="ObjectType"/> <xs:element ref="Company"/> <xs:element ref="Core"/> <xs:element ref="Variant"/> <xs:element ref="TimetableYear"/> <xs:element ref="StartDate" minOccurs="0"/> </xs:sequence> </xs:complexType>

complexType **ConsignmentIdent**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	extension of **xs:string**
properties	base xs:string
used by	elements **ConsignmentNumber** **WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/ControlLabel/ConsignmentNumber** **PreviousConsignmentNumber**
annotation	documentation Identifies a waybill by its number and type

source	`<xs:complexType name="ConsignmentIdent">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies a waybill by its number and type</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleContent>`
	`  <xs:extension base="xs:string"/>`
	`  </xs:simpleContent>`
	`</xs:complexType>`

complexType **CustomerCode**

diagram	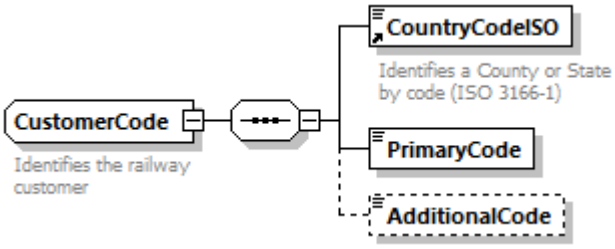
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
children	**CountryCodeISO** **PrimaryCode** **AdditionalCode**
used by	element **Customer**
annotation	documentation Identifies the railway customer

source	`<xs:complexType name="CustomerCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the railway customer</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`  <xs:element ref="CountryCodeISO"/>`
	`  <xs:element name="PrimaryCode" type="String1-14"/>`
	`  <xs:element name="AdditionalCode" type="String1-7" minOccurs="0"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **CustomerCode/PrimaryCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	**String1-14**
properties	content simple
facets	Kind Value Annotation minLength 1 maxLength 14
source	`<xs:element name="PrimaryCode" type="String1-14"/>`

element **CustomerCode/AdditionalCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**String1-7**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 1 maxLength 7
source	`<xs:element name="AdditionalCode" type="String1-7" minOccurs="0"/>`

complexType **DanGoodsType**

diagram

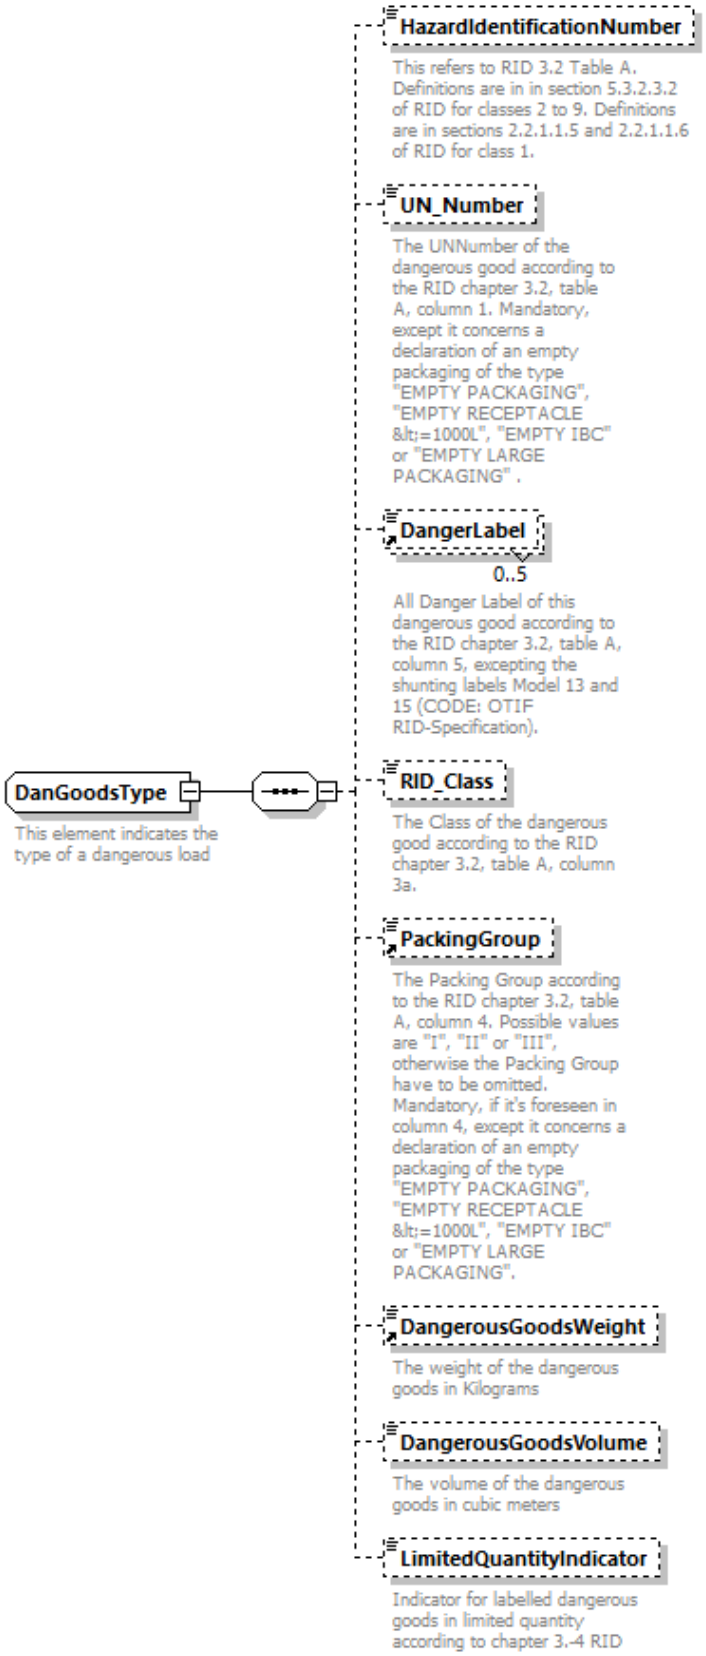

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
children	HazardIdentificationNumber UN_Number DangerLabel RID_Class PackingGroup DangerousGoodsWeight

	DangerousGoodsVolume LimitedQuantityIndicator
used by	element **DangerousGoodsIndication**
annotation	documentation This element indicates the type of a dangerous load

source

```
<xs:complexType name="DanGoodsType">
  <xs:annotation>
    <xs:documentation>This element indicates the type of a dangerous
load</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="HazardIdentificationNumber" minOccurs="0">
      <xs:annotation>
        <xs:documentation>This refers to RID 3.2 Table A. Definitions are in in
section 5.3.2.3.2 of RID for classes 2 to 9. Definitions are in sections 2.2.1.1.5
and 2.2.1.1.6 of RID for class 1.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:minLength value="2"/>
          <xs:maxLength value="4"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="UN_Number" minOccurs="0">
      <xs:annotation>
        <xs:documentation>The UNNumber of the dangerous good according to the RID
chapter 3.2, table A, column 1. Mandatory, except it concerns a declaration of an
empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE &lt;=1000L", "EMPTY
IBC" or "EMPTY LARGE PACKAGING" .</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:length value="4"/>
          <xs:pattern value="\d*[1-9]\d*"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element ref="DangerLabel" minOccurs="0" maxOccurs="5"/>
    <xs:element name="RID_Class" minOccurs="0">
      <xs:annotation>
        <xs:documentation>The Class of the dangerous good according to the RID
chapter 3.2, table A, column 3a.</xs:documentation>
      </xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:minLength value="1"/>
          <xs:maxLength value="4"/>
          <xs:enumeration value="1">
            <xs:annotation>
              <xs:documentation>Explosive materials, divisions 1.1, 1.2 and
1.3</xs:documentation>
            </xs:annotation>
          </xs:enumeration>
          <xs:enumeration value="1.4">
            <xs:annotation>
              <xs:documentation>Explosive materials, division 1.4</xs:documentation>
            </xs:annotation>
          </xs:enumeration>
          <xs:enumeration value="1.5">
            <xs:annotation>
              <xs:documentation>Explosive materials, division 1.5</xs:documentation>
            </xs:annotation>
          </xs:enumeration>
```

```
            <xs:enumeration value="1.6">
              <xs:annotation>
                <xs:documentation>Explosive materials, division 1.6</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="2.1">
              <xs:annotation>
                <xs:documentation>Flammable gases</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="2.2">
              <xs:annotation>
                <xs:documentation>Non-flammable, non-toxic gases</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="2.3">
              <xs:annotation>
                <xs:documentation>Toxic gases</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="3">
              <xs:annotation>
                <xs:documentation>Flammable liquids</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="4.1">
              <xs:annotation>
                <xs:documentation>Flammable  solids , self-reactive substances and
solid desensitized explosives</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="4.2">
              <xs:annotation>
                <xs:documentation>Substances liable to spontaneous
combustion</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="4.3">
              <xs:annotation>
                <xs:documentation>Substances which, in contact with water, emit
flammable gases</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="5.1">
              <xs:annotation>
                <xs:documentation>Oxidizing substances</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="5.2">
              <xs:annotation>
                <xs:documentation>Organic peroxides</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="6.1">
              <xs:annotation>
                <xs:documentation>Toxic substances</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="6.2">
              <xs:annotation>
                <xs:documentation>Infectious substances</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="7">
```

```
            <xs:annotation>
              <xs:documentation>Radioactive material</xs:documentation>
            </xs:annotation>
          </xs:enumeration>
          <xs:enumeration value="8">
            <xs:annotation>
              <xs:documentation>Corrosive substances</xs:documentation>
            </xs:annotation>
          </xs:enumeration>
          <xs:enumeration value="9">
            <xs:annotation>
              <xs:documentation>Miscellaneous dangerous substances and
articles</xs:documentation>
            </xs:annotation>
          </xs:enumeration>
          <xs:enumeration value="9A">
            <xs:annotation>
              <xs:documentation>Same as 9 but for Battery Group.</xs:documentation>
            </xs:annotation>
          </xs:enumeration>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element ref="PackingGroup" minOccurs="0"/>
    <xs:element ref="DangerousGoodsWeight" minOccurs="0">
      <xs:annotation>
        <xs:documentation>The weight of the dangerous goods in
Kilograms</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="DangerousGoodsVolume" type="VolumeValue" minOccurs="0">
      <xs:annotation>
        <xs:documentation>The volume of the dangerous goods in cubic
meters</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="LimitedQuantityIndicator" type="xs:boolean" minOccurs="0">
      <xs:annotation>
        <xs:documentation>Indicator for labelled dangerous goods in limited quantity
according to chapter 3.-4 RID</xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

element **DanGoodsType/HazardIdentificationNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation minLength 2 maxLength 4

annotation	documentation This refers to RID 3.2 Table A. Definitions are in in section 5.3.2.3.2 of RID for classes 2 to 9. Definitions are in sections 2.2.1.1.5 and 2.2.1.1.6 of RID for class 1.
source	<xs:element name="HazardIdentificationNumber" minOccurs="0"> <xs:annotation> <xs:documentation>This refers to RID 3.2 Table A. Definitions are in in section 5.3.2.3.2 of RID for classes 2 to 9. Definitions are in sections 2.2.1.1.5 and 2.2.1.1.6 of RID for class 1.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:minLength value="2"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType> </xs:element>

element **DanGoodsType/UN_Number**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
used by	element **SummaryOFGoodsWithSameRID**
facets	Kind Value Annotation length 4 pattern \d*[1-9]\d*
annotation	documentation The UNNumber of the dangerous good according to the RID chapter 3.2, table A, column 1. Mandatory, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE <=1000L", "EMPTY IBC" or "EMPTY LARGE PACKAGING" .
source	<xs:element name="UN_Number" minOccurs="0"> <xs:annotation> <xs:documentation>The UNNumber of the dangerous good according to the RID chapter 3.2, table A, column 1. Mandatory, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE <=1000L", "EMPTY IBC" or "EMPTY LARGE PACKAGING" .</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:length value="4"/> <xs:pattern value="\d*[1-9]\d*"/> </xs:restriction> </xs:simpleType> </xs:element>

element **DanGoodsType/RID_Class**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation minLength 1 maxLength 4 enumeration 1 — documentation: Explosive materials, divisions 1.1, 1.2 and 1.3 enumeration 1.4 — documentation: Explosive materials, division 1.4 enumeration 1.5 — documentation: Explosive materials, division 1.5 enumeration 1.6 — documentation: Explosive materials, division 1.6 enumeration 2.1 — documentation: Flammable gases enumeration 2.2 — documentation: Non-flammable, non-toxic gases enumeration 2.3 — documentation: Toxic gases enumeration 3 — documentation: Flammable liquids enumeration 4.1 — documentation: Flammable solids , self-reactive substances and solid desensitized explosives enumeration 4.2 — documentation: Substances liable to spontaneous combustion enumeration 4.3 — documentation: Substances which, in contact with water, emit flammable gases enumeration 5.1 — documentation: Oxidizing substances enumeration 5.2 — documentation: Organic peroxides enumeration 6.1 — documentation: Toxic substances enumeration 6.2 — documentation: Infectious substances enumeration 7 — documentation: Radioactive material enumeration 8 — documentation: Corrosive substances enumeration 9 — documentation: Miscellaneous dangerous substances and articles enumeration 9A — documentation: Same as 9 but for Battery Group.
annotation	documentation The Class of the dangerous good according to the RID chapter 3.2, table A, column 3a.

source	`<xs:element name="RID_Class" minOccurs="0">`
	`<xs:annotation>`
	`<xs:documentation>The Class of the dangerous good according to the RID chapter 3.2, table A, column 3a.</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:string">`
	`<xs:minLength value="1"/>`
	`<xs:maxLength value="4"/>`
	`<xs:enumeration value="1">`
	`<xs:annotation>`
	`<xs:documentation>Explosive materials, divisions 1.1, 1.2 and`

```
1.3</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1.4">
        <xs:annotation>
          <xs:documentation>Explosive materials, division 1.4</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1.5">
        <xs:annotation>
          <xs:documentation>Explosive materials, division 1.5</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1.6">
        <xs:annotation>
          <xs:documentation>Explosive materials, division 1.6</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2.1">
        <xs:annotation>
          <xs:documentation>Flammable gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2.2">
        <xs:annotation>
          <xs:documentation>Non-flammable, non-toxic gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2.3">
        <xs:annotation>
          <xs:documentation>Toxic gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>Flammable liquids</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4.1">
        <xs:annotation>
          <xs:documentation>Flammable  solids , self-reactive substances and solid
desensitized explosives</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4.2">
        <xs:annotation>
          <xs:documentation>Substances liable to spontaneous
combustion</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4.3">
        <xs:annotation>
          <xs:documentation>Substances which, in contact with water, emit flammable
gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5.1">
        <xs:annotation>
          <xs:documentation>Oxidizing substances</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5.2">
        <xs:annotation>
          <xs:documentation>Organic peroxides</xs:documentation>
```

```
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6.1">
        <xs:annotation>
          <xs:documentation>Toxic substances</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6.2">
        <xs:annotation>
          <xs:documentation>Infectious substances</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="7">
        <xs:annotation>
          <xs:documentation>Radioactive material</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="8">
        <xs:annotation>
          <xs:documentation>Corrosive substances</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="9">
        <xs:annotation>
          <xs:documentation>Miscellaneous dangerous substances and
articles</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="9A">
        <xs:annotation>
          <xs:documentation>Same as 9 but for Battery Group.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **DanGoodsType/DangerousGoodsVolume**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**VolumeValue**
properties	minOcc 0 maxOcc 1 content simple
used by	element **SummaryOFGoodsWithSameRID**
annotation	documentation The volume of the dangerous goods in cubic meters

source	`<xs:element name="DangerousGoodsVolume" type="VolumeValue" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>The volume of the dangerous goods in cubic meters</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **DanGoodsType/LimitedQuantityIndicator**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Indicator for labelled dangerous goods in limited quantity according to chapter 3.-4 RID

source	`<xs:element name="LimitedQuantityIndicator" type="xs:boolean" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation>Indicator for labelled dangerous goods in limited quantity according to chapter 3.-4 RID</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

complexType **DimensionValue**

diagram	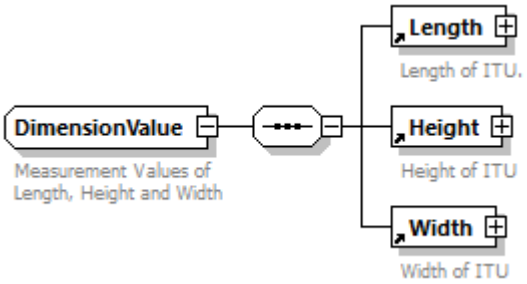
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
children	**Length Height Width**
annotation	documentation Measurement Values of Length, Height and Width

source	`<xs:complexType name="DimensionValue">`
	`  <xs:annotation>`
	`  <xs:documentation>Measurement Values of Length, Height and Width</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`  <xs:element ref="Length"/>`
	`  <xs:element ref="Height"/>`
	`  <xs:element ref="Width"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

complexType **IntermodalTransportDataType**

diagram	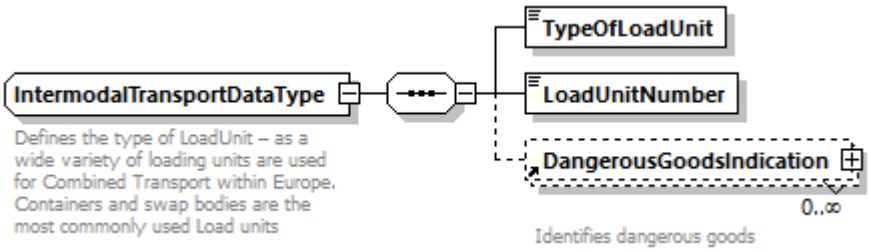
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
children	TypeOfLoadUnit LoadUnitNumber DangerousGoodsIndication
used by	element WagonData/IntermodalTransportData
annotation	documentation Defines the type of LoadUnit – as a wide variety of loading units are used for Combined Transport within Europe. Containers and swap bodies are the most commonly used Load units

source	`<xs:complexType name="IntermodalTransportDataType">`
	`  <xs:annotation>`
	`  <xs:documentation>Defines the type of LoadUnit – as a wide variety of loading units are used for Combined Transport within Europe. Containers and swap bodies are the most commonly used Load units</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`  <xs:element name="TypeOfLoadUnit" type="TypeOfLoadUnitType"/>`
	`  <xs:element name="LoadUnitNumber" type="LoadUnitNumberType"/>`
	`  <xs:element ref="DangerousGoodsIndication" minOccurs="0" maxOccurs="unbounded"/>`
	`  </xs:sequence>`
	`</xs:complexType>`

element **IntermodalTransportDataType/TypeOfLoadUnit**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	TypeOfLoadUnitType
properties	content simple
facets	Kind / Value / Annotation enumeration 00 documentation unknown enumeration 01 documentation Container enumeration 02 documentation swap bodies enumeration 03 documentation semitrailers enumeration 04 documentation truck
source	`<xs:element name="TypeOfLoadUnit" type="TypeOfLoadUnitType"/>`

element **IntermodalTransportDataType/LoadUnitNumber**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	LoadUnitNumberType

properties	content simple
facets	Kind: whiteSpace, Value: replace; Kind: pattern, Value: [A-Za-z0-9]{11}
source	`<xs:element name="LoadUnitNumber" type="LoadUnitNumberType"/>`

complexType **LocationIdent**

diagram	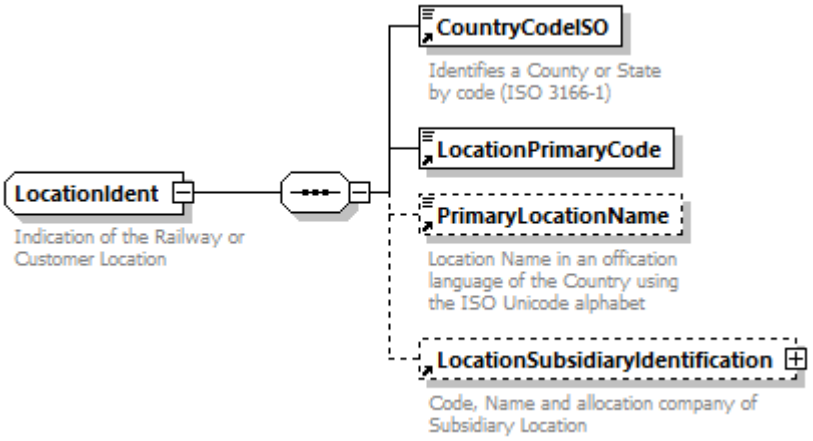
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
children	CountryCodeISO LocationPrimaryCode PrimaryLocationName LocationSubsidiaryIdentification
used by	elements: TrainRunningData/Activities/ActivityLocationIdent ArrivalTrackAtLocation AssociatedAttachedLocationIdent RID_Checking/CheckingLocation DelayLocation DepartureJourneyTrack DepartureTrackAtLocation Destination WagonStatusMessages/WagonStatusMessage/DestinationLocation ConsignmentOrderMessage/COMS/COM/RU_Declarations/DifferentAcceptance/DifferentAcceptancePoint ConsignmentOrderMessage/COMS/COM/ChargingSections/End EndLocation AffectedSection/EndOfSection WagonStatusMessages/WagonStatusMessage/Event/EventLocationInformation/EventLocation IntermediateDestination JourneySectionDestination JourneySectionOrigin Location LocationActualTrack LocationPlannedTrack NetworkProjectedLocation/NextLocation Notes/NoteLocationIdent ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions/PaidUpTo TrainInformation/PathPlanningReferenceLocation PlannedJourneyLocation ConsignmentOrderMessage/COMS/COM/Carriers/SectionFrom ConsignmentOrderMessage/COMS/COM/Carriers/SectionTo WagonStatusMessages/WagonStatusMessage/ShippingLocation ConsignmentOrderMessage/COMS/COM/ChargingSections/Start StartLocation AffectedSection/StartOfSection Station TrainReadyMessage/TrainLocation TransferPoint
annotation	documentation: Indication of the Railway or Customer Location
source	see below

```
<xs:complexType name="LocationIdent">
  <xs:annotation>
    <xs:documentation>Indication of the Railway or Customer
Location</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element ref="CountryCodeISO"/>
    <xs:element ref="LocationPrimaryCode"/>
    <xs:element ref="PrimaryLocationName" minOccurs="0"/>
    <xs:element ref="LocationSubsidiaryIdentification" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

complexType **TrainActivityType**

diagram	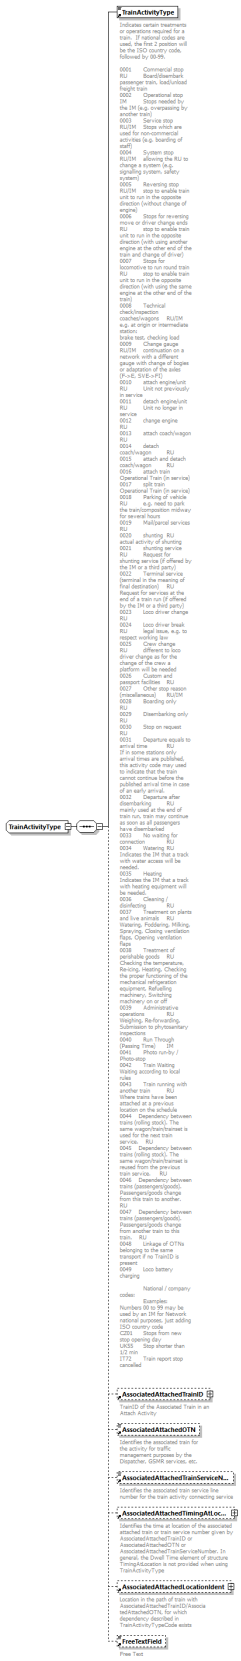
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
children	**TrainActivityType** **AssociatedAttachedTrainID** **AssociatedAttachedOTN** **AssociatedAttachedTrainServiceNumber**

	AssociatedAttachedTimingAtLocation AssociatedAttachedLocationIdent FreeTextField
used by	element TrainActivity
source	<xs:complexType name="TrainActivityType"> <xs:sequence> <xs:element ref="TrainActivityType"/> <xs:element ref="AssociatedAttachedTrainID" minOccurs="0"/> <xs:element ref="AssociatedAttachedOTN" minOccurs="0"/> <xs:element ref="AssociatedAttachedTrainServiceNumber" minOccurs="0"/> <xs:element ref="AssociatedAttachedTimingAtLocation" minOccurs="0"/> <xs:element ref="AssociatedAttachedLocationIdent" minOccurs="0"/> <xs:element ref="FreeTextField" minOccurs="0"/> </xs:sequence> </xs:complexType>

complexType **WagonTelematics**

diagram	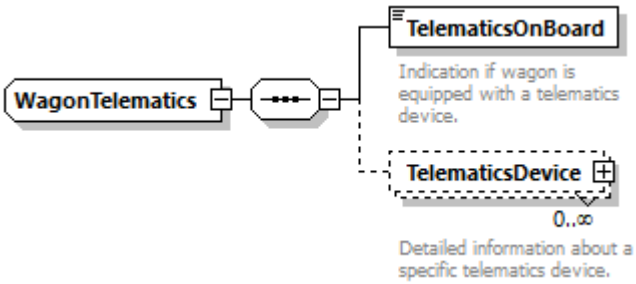
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
children	TelematicsOnBoard TelematicsDevice
used by	element RollingStockDataset/DesignDataSet/WagonTelematics
source	<xs:complexType name="WagonTelematics"> <xs:sequence> <xs:element name="TelematicsOnBoard" type="xs:boolean"> <xs:annotation> <xs:documentation xml:lang="en">Indication if wagon is equipped with a telematics device.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="TelematicsDevice" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation xml:lang="en">Detailed information about a specific telematics device.</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="DeviceType"> <xs:annotation> <xs:documentation xml:lang="en">Specification of type of telematics device.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="Telematics Unit"/> <xs:enumeration value="Sensor"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="ComponentMounted" minOccurs="0"> <xs:annotation> <xs:documentation xml:lang="en">Indication of the component to which

```
the telematics unit is attached.</xs:documentation>
            </xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:enumeration value="Superstructure"/>
                <xs:enumeration value="Tank"/>
                <xs:enumeration value="End wall"/>
                <xs:enumeration value="Side wall"/>
                <xs:enumeration value="Marking plate"/>
                <xs:enumeration value="Frame"/>
                <xs:enumeration value="Headstock"/>
                <xs:enumeration value="Saddle plate"/>
                <xs:enumeration value="Longitudinal beam"/>
                <xs:enumeration value="Latitudinal beam"/>
                <xs:enumeration value="Hitch"/>
                <xs:enumeration value="Bogie"/>
                <xs:enumeration value="Axle"/>
                <xs:enumeration value="Axle box"/>
                <xs:enumeration value="Lift off protection"/>
                <xs:enumeration value="Brake system"/>
                <xs:enumeration value="Brake blocks"/>
                <xs:enumeration value="Air pipes"/>
                <xs:enumeration value="Brake valves"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:element>
          <xs:element name="MountedPosition" minOccurs="0" maxOccurs="unbounded">
            <xs:annotation>
              <xs:documentation xml:lang="en">Indication of where the telematics unit
is located on the component.</xs:documentation>
            </xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:enumeration value="Side"/>
                <xs:enumeration value="Top"/>
                <xs:enumeration value="Bottom"/>
                <xs:enumeration value="Inside"/>
                <xs:enumeration value="Left"/>
                <xs:enumeration value="Right"/>
                <xs:enumeration value="Center"/>
                <xs:enumeration value="Below isolation"/>
                <xs:enumeration value="Hand brake end"/>
                <xs:enumeration value="Non brake end"/>
                <xs:enumeration value="1"/>
                <xs:enumeration value="2"/>
                <xs:enumeration value="3"/>
                <xs:enumeration value="4"/>
                <xs:enumeration value="5"/>
                <xs:enumeration value="6"/>
                <xs:enumeration value="7"/>
                <xs:enumeration value="8"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:element>
          <xs:element name="ManufacturerName" minOccurs="0">
            <xs:annotation>
              <xs:documentation xml:lang="en">Name of the manufacturer of the
telematics device.</xs:documentation>
            </xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:maxLength value="255"/>
              </xs:restriction>
            </xs:simpleType>
```

```
          </xs:element>
          <xs:element name="ATEXCertified" type="xs:boolean" minOccurs="0">
            <xs:annotation>
              <xs:documentation xml:lang="en">Indication if the telematics device is
ATEX certified.</xs:documentation>
            </xs:annotation>
          </xs:element>
          <xs:element name="ATEXLevel" minOccurs="0" maxOccurs="2">
            <xs:annotation>
              <xs:documentation xml:lang="en">Indication of ATEX level (gas and dust
if applicable) based on ATEX/IECEx standard; e.g.: II 2G Ex ib IIB T4 Gb or II 2D Ex
ib IIIC T135°C Db.</xs:documentation>
            </xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:maxLength value="50"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:element>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

element **WagonTelematics/TelematicsOnBoard**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	content simple
annotation	documentation Indication if wagon is equipped with a telematics device.

source	`<xs:element name="TelematicsOnBoard" type="xs:boolean">`
	`  <xs:annotation>`
	`  <xs:documentation xml:lang="en">Indication if wagon is equipped with a telematics device.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **WagonTelematics/TelematicsDevice**

diagram	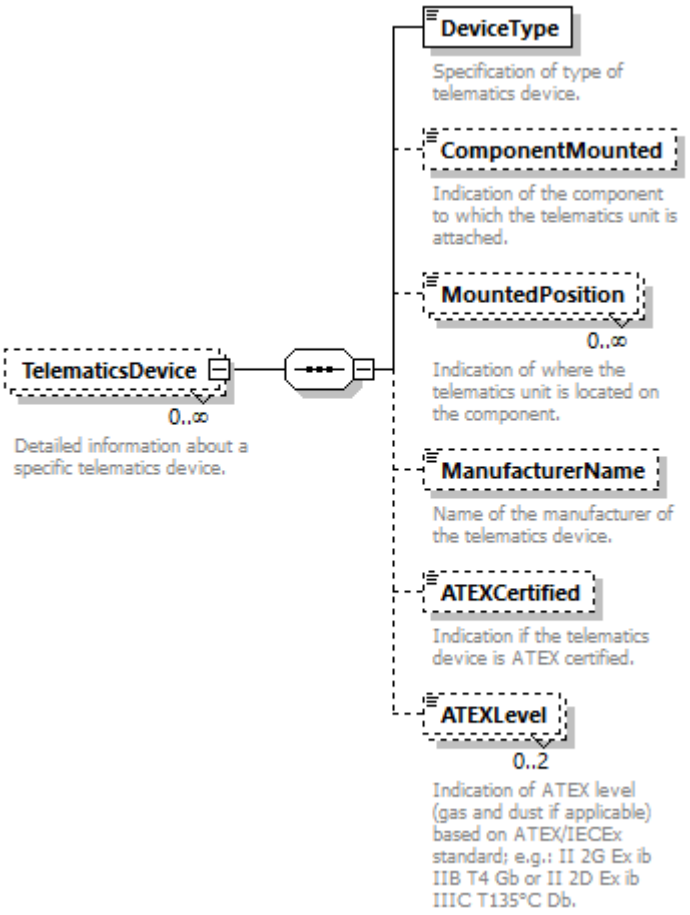
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	minOcc 0 maxOcc unbounded content complex
children	DeviceType ComponentMounted MountedPosition ManufacturerName ATEXCertified ATEXLevel
annotation	documentation Detailed information about a specific telematics device.

source

```
<xs:element name="TelematicsDevice" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation xml:lang="en">Detailed information about a specific telematics
device.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="DeviceType">
        <xs:annotation>
          <xs:documentation xml:lang="en">Specification of type of telematics
device.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:enumeration value="Telematics Unit"/>
            <xs:enumeration value="Sensor"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ComponentMounted" minOccurs="0">
        <xs:annotation>
```

```
          <xs:documentation xml:lang="en">Indication of the component to which the
telematics unit is attached.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:enumeration value="Superstructure"/>
            <xs:enumeration value="Tank"/>
            <xs:enumeration value="End wall"/>
            <xs:enumeration value="Side wall"/>
            <xs:enumeration value="Marking plate"/>
            <xs:enumeration value="Frame"/>
            <xs:enumeration value="Headstock"/>
            <xs:enumeration value="Saddle plate"/>
            <xs:enumeration value="Longitudinal beam"/>
            <xs:enumeration value="Latitudinal beam"/>
            <xs:enumeration value="Hitch"/>
            <xs:enumeration value="Bogie"/>
            <xs:enumeration value="Axle"/>
            <xs:enumeration value="Axle box"/>
            <xs:enumeration value="Lift off protection"/>
            <xs:enumeration value="Brake system"/>
            <xs:enumeration value="Brake blocks"/>
            <xs:enumeration value="Air pipes"/>
            <xs:enumeration value="Brake valves"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="MountedPosition" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation xml:lang="en">Indication of where the telematics unit is
located on the component.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:enumeration value="Side"/>
            <xs:enumeration value="Top"/>
            <xs:enumeration value="Bottom"/>
            <xs:enumeration value="Inside"/>
            <xs:enumeration value="Left"/>
            <xs:enumeration value="Right"/>
            <xs:enumeration value="Center"/>
            <xs:enumeration value="Below isolation"/>
            <xs:enumeration value="Hand brake end"/>
            <xs:enumeration value="Non brake end"/>
            <xs:enumeration value="1"/>
            <xs:enumeration value="2"/>
            <xs:enumeration value="3"/>
            <xs:enumeration value="4"/>
            <xs:enumeration value="5"/>
            <xs:enumeration value="6"/>
            <xs:enumeration value="7"/>
            <xs:enumeration value="8"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ManufacturerName" minOccurs="0">
        <xs:annotation>
          <xs:documentation xml:lang="en">Name of the manufacturer of the telematics
device.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="255"/>
          </xs:restriction>
```

```
        </xs:simpleType>
      </xs:element>
      <xs:element name="ATEXCertified" type="xs:boolean" minOccurs="0">
        <xs:annotation>
          <xs:documentation xml:lang="en">Indication if the telematics device is ATEX
certified.</xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ATEXLevel" minOccurs="0" maxOccurs="2">
        <xs:annotation>
          <xs:documentation xml:lang="en">Indication of ATEX level (gas and dust if
applicable) based on ATEX/IECEx standard; e.g.: II 2G Ex ib IIB T4 Gb or II 2D Ex ib
IIIC T135°C Db.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="50"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **WagonTelematics/TelematicsDevice/DeviceType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
facets	Kind / Value / Annotation enumeration Telematics Unit enumeration Sensor
annotation	documentation Specification of type of telematics device.

source	`<xs:element name="DeviceType">`
	`  <xs:annotation>`
	`  <xs:documentation xml:lang="en">Specification of type of telematics device.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="Telematics Unit"/>`
	`  <xs:enumeration value="Sensor"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **WagonTelematics/TelematicsDevice/ComponentMounted**

diagram	

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind / Value / Annotation enumeration Superstructure enumeration Tank enumeration End wall enumeration Side wall enumeration Marking plate enumeration Frame enumeration Headstock enumeration Saddle plate enumeration Longitudinal beam enumeration Latitudinal beam enumeration Hitch enumeration Bogie enumeration Axle enumeration Axle box enumeration Lift off protection enumeration Brake system enumeration Brake blocks enumeration Air pipes enumeration Brake valves
annotation	documentation Indication of the component to which the telematics unit is attached.
source	<xs:element name="ComponentMounted" minOccurs="0"> <xs:annotation> <xs:documentation xml:lang="en">Indication of the component to which the telematics unit is attached.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="Superstructure"/> <xs:enumeration value="Tank"/> <xs:enumeration value="End wall"/> <xs:enumeration value="Side wall"/> <xs:enumeration value="Marking plate"/> <xs:enumeration value="Frame"/> <xs:enumeration value="Headstock"/> <xs:enumeration value="Saddle plate"/> <xs:enumeration value="Longitudinal beam"/> <xs:enumeration value="Latitudinal beam"/> <xs:enumeration value="Hitch"/> <xs:enumeration value="Bogie"/> <xs:enumeration value="Axle"/> <xs:enumeration value="Axle box"/> <xs:enumeration value="Lift off protection"/> <xs:enumeration value="Brake system"/> <xs:enumeration value="Brake blocks"/> <xs:enumeration value="Air pipes"/> <xs:enumeration value="Brake valves"/> </xs:restriction> </xs:simpleType> </xs:element>

element **WagonTelematics/TelematicsDevice/MountedPosition**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc unbounded content simple
facets	Kind / Value / Annotation enumeration Side enumeration Top enumeration Bottom enumeration Inside enumeration Left enumeration Right enumeration Center enumeration Below isolation enumeration Hand brake end enumeration Non brake end enumeration 1 enumeration 2 enumeration 3 enumeration 4 enumeration 5 enumeration 6 enumeration 7 enumeration 8
annotation	documentation Indication of where the telematics unit is located on the component.

source

```
<xs:element name="MountedPosition" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation xml:lang="en">Indication of where the telematics unit is
located on the component.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:enumeration value="Side"/>
      <xs:enumeration value="Top"/>
      <xs:enumeration value="Bottom"/>
      <xs:enumeration value="Inside"/>
      <xs:enumeration value="Left"/>
      <xs:enumeration value="Right"/>
      <xs:enumeration value="Center"/>
      <xs:enumeration value="Below isolation"/>
      <xs:enumeration value="Hand brake end"/>
      <xs:enumeration value="Non brake end"/>
      <xs:enumeration value="1"/>
      <xs:enumeration value="2"/>
      <xs:enumeration value="3"/>
      <xs:enumeration value="4"/>
      <xs:enumeration value="5"/>
      <xs:enumeration value="6"/>
      <xs:enumeration value="7"/>
      <xs:enumeration value="8"/>
    </xs:restriction>
  </xs:simpleType>
```

	`</xs:element>`

element **WagonTelematics/TelematicsDevice/ManufacturerName**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation maxLength 255
annotation	documentation Name of the manufacturer of the telematics device.

source	`<xs:element name="ManufacturerName" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation xml:lang="en">Name of the manufacturer of the telematics device.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="255"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **WagonTelematics/TelematicsDevice/ATEXCertified**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:boolean**
properties	minOcc 0 maxOcc 1 content simple
annotation	documentation Indication if the telematics device is ATEX certified.

source	`<xs:element name="ATEXCertified" type="xs:boolean" minOccurs="0">`
	`  <xs:annotation>`
	`  <xs:documentation xml:lang="en">Indication if the telematics device is ATEX certified.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

element **WagonTelematics/TelematicsDevice/ATEXLevel**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 2 content simple
facets	Kind Value Annotation maxLength 50
annotation	documentation Indication of ATEX level (gas and dust if applicable) based on ATEX/IECEx standard; e.g.: II 2G Ex ib IIB T4 Gb or II 2D Ex ib IIIC T135°C Db.

source	`<xs:element name="ATEXLevel" minOccurs="0" maxOccurs="2">`
	`  <xs:annotation>`
	`  <xs:documentation xml:lang="en">Indication of ATEX level (gas and dust if applicable) based on ATEX/IECEx standard; e.g.: II 2G Ex ib IIB T4 Gb or II 2D Ex ib IIIC T135°C Db.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="50"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

simpleType **CommunicationRefID**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **eMail FaxNumber PhoneNumber TrainContactDetails**
facets	Kind Value Annotation minLength 1 maxLength 70
annotation	documentation Identifier for communications contact reference (i.e. fax number, phone number, e-mail, URL)

source	`<xs:simpleType name="CommunicationRefID">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifier for communications contact reference (i.e. fax number, phone number, e-mail, URL)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`
	`  <xs:maxLength value="70"/>`
	`  <xs:minLength value="1"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **CompanyCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0

type	restriction of **String4-4**
properties	base String4-4
used by	elements **AllocationCompany** **RID_Checking/CheckingBody/BodyID** **ConsignmentOrderMessage/COMS/COM/AcceptancePoint/CarrierCode** **ConsignmentOrderMessage/COMS/COM/CommercialSpecifications/CarrierCode** **Wagons/WagonDetails/FormalReports/CarrierCode** **Wagons/WagonDetails/Examination/CarrierCode** **ConsignmentOrderMessage/COMS/COM/Carriers/CarrierCode** **ConsignmentOrderMessage/COMS/COM/LeadCarrier/CarrierCode** **Company** **CoordinatingIM** **ConsignmentOrderMessage/COMS/COM/RU_Declarations/RU_Declaration/DeclaringRU** **IM_Partner** **ImpactedRU** **ConsignmentOrderMessage/COMS/COM/SectionalInvoicing/Section/InvoicingCarrierCode** **LeadRU** **NextResponsibleRU** **PreviousResponsibleRU** **ConsignmentOrderMessage/COMS/COM/CustomsData/PrincipalRU** **ConsignmentOrderMessage/COMS/COM_Header/ReceivingRU** **Recipient** **WagonStatusMessages/WagonStatusMessage/ReportingRU** **ResponsibleApplicant** **ConsignmentOrderMessage/COMS/COM/Carriers/ResponsibleCarrierCode** **ResponsibleIM** **ResponsibleRU** **WagonStatusMessages/WagonStatusMessage/CarriersInvolved/Carrier/RU** **RU_Partner** **ConsignmentOrderMessage/COMS/COM/SectionalInvoicing/Section/InvoicedSection/SectionCarrierCode** **Sender** **ConsignmentOrderMessage/COMS/COM_Header/SendingRU** **WagonStatusMessages/WagonStatusMessage/ConsignmentIdentification/ControlLabel/ShippingCarrier** **TrafficType/TrafficTypeNetwork** **WagonStatusMessages/WagonStatusMessage/Train/TrainOperatingRU** **TransfereeIM**
facets	Kind Value Annotation minLength 4 maxLength 4 pattern [0-9A-Z]{4}
annotation	documentation Identifies the RU, IM or other company involved in the Rail Transport Chain

source	`<xs:simpleType name="CompanyCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the RU, IM or other company involved in the Rail Transport Chain</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="String4-4">`
	`  <xs:pattern value="[0-9A-Z]{4}"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **CountryIdentISO**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **Customers/Country** **ConsignmentOrderMessage/COMS/COM/SectionalInvoicing/Section/InvoicedSection/CountryCode** **ConsignmentOrderMessage/COMS/COM/Carriers/CountryCode** **ConsignmentOrderMessage/COMS/COM/LeadCarrier/CountryCode** **CountryCodeISO** **ILU_Details/DepartureCountry** **ITU_Details/DepartureCountry** **RollingStockDataset/DesignDataSet/LoadTable/LoadTableCountry** **RollingStockDataset/AdministrativeDataSet/MultilateralAuthorisationCountries** **OriginCountry** **RollingStockDataset/AdministrativeDataSet/QuieterRoutesExemptionCountry** **RollingStockDataset/AdministrativeDataSet/RegistrationCountry** **UltimateDestinationCountry**
facets	Kind Value Annotation minLength 2 maxLength 2
annotation	documentation ISO 3166-1 alpha code (2 positions)

source	`<xs:simpleType name="CountryIdentISO">`
	`  <xs:annotation>`
	`  <xs:documentation>ISO 3166-1 alpha code (2 positions)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="2"/>`
	`  <xs:maxLength value="2"/>`
	`  </xs:restriction>`

	`</xs:simpleType>`

simpleType **CurrencyCode_Type**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **ConsignmentOrderMessage/COMS/COM/DeclarationOfValue/CurrencyCode** **ConsignmentOrderMessage/COMS/COM/InterestInDelivery/CurrencyCode** **ConsignmentOrderMessage/COMS/COM/CashOnDelivery/CurrencyCode** **ConsignmentOrderMessage/COMS/COM/ChargingSections/CurrencyCode**
facets	Kind Value Annotation pattern [A-Z][A-Z][A-Z]
annotation	documentation CODE: ISO Currency code (ISO-4217)

source	`<xs:simpleType name="CurrencyCode_Type">`
	`  <xs:annotation>`
	`  <xs:documentation>CODE: ISO Currency code (ISO-4217)</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`
	`  <xs:pattern value="[A-Z][A-Z][A-Z]"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **DeltaTime**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **AgainstBooked** **AgainstReferenced**
facets	Kind Value Annotation length 5
annotation	documentation Time difference delay (+) or ahead of schedule (-) this shall be 1character + 4 Numeric

source	`<xs:simpleType name="DeltaTime">`
	`  <xs:annotation>`
	`  <xs:documentation>Time difference delay (+) or ahead of schedule (-) this shall be 1character + 4 Numeric</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`
	`  <xs:length value="5"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **DerailmentDetectionDevice**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	element **RollingStockDataset/DesignDataSet/DerailmentDetectionDevice**
facets	Kind Value Annotation enumeration EDT 101 enumeration MDV 100 enumeration Non coded device

annotation	documentation Identification of derailment detection device equipped on the wagon. Element is mandatory if wagon is equipped with such device. The following values are defined: EDT 101 MDV 100 Non coded device
source	<xs:simpleType name="DerailmentDetectionDevice"> <xs:annotation> <xs:documentation>Identification of derailment detection device equipped on the wagon. Element is mandatory if wagon is equipped with such device. The following values are defined: EDT 101 MDV 100 Non coded device </xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="EDT 101"/> <xs:enumeration value="MDV 100"/> <xs:enumeration value="Non coded device"/> </xs:restriction> </xs:simpleType>

simpleType **EquipmentNumberType**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **GoodsInWagon/ContainerNumber** **ITU_Details/Number**
facets	Kind Value Annotation minLength 1 maxLength 13
annotation	documentation Number of ITU
source	<xs:simpleType name="EquipmentNumberType"> <xs:annotation> <xs:documentation>Number of ITU</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="13"/> </xs:restriction> </xs:simpleType>

simpleType **EquipmentTypeType**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	base xs:token
used by	element **ITU_Type**
facets	Kind Value Annotation enumeration cn documentation Container enumeration sw documentation swap body enumeration te documentation Trailer (RollingRoad)

annotation	documentation Type of equipment
source	<xs:simpleType name="EquipmentTypeType"> <xs:annotation> <xs:documentation>Type of equipment</xs:documentation> </xs:annotation> <xs:restriction base="xs:token"> <xs:enumeration value="cn"> <xs:annotation> <xs:documentation>Container</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="sw"> <xs:annotation> <xs:documentation>swap body</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="te"> <xs:annotation> <xs:documentation>Trailer (RollingRoad)</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **ForwardingRestrictionType**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	base xs:token
facets	Kind Value Annotation enumeration 07 enumeration 08 enumeration 09 enumeration 11 enumeration 12 enumeration 13 enumeration 15 enumeration 16 enumeration 41 enumeration 42 enumeration 61 enumeration 62 enumeration 63 enumeration 70 enumeration 71 enumeration 92 enumeration 94 enumeration
annotation	documentation Code List Candidate: This code is designed to identify any special aspects or restrictions which might be relevant to wagon handling operations in train formation yards or in trains because of technical feature of the wagon or its load
source	<xs:simpleType name="ForwardingRestrictionType"> <xs:annotation> <xs:documentation>Code List Candidate: This code is designed to identify any special aspects or restrictions which might be relevant to wagon handling operations in train formation yards or in trains because of technical feature of the wagon or its load</xs:documentation> </xs:annotation>

```
  <xs:restriction base="xs:token">
    <xs:enumeration value="07"/>
    <xs:enumeration value="08"/>
    <xs:enumeration value="09"/>
    <xs:enumeration value="11"/>
    <xs:enumeration value="12"/>
    <xs:enumeration value="13"/>
    <xs:enumeration value="15"/>
    <xs:enumeration value="16"/>
    <xs:enumeration value="41"/>
    <xs:enumeration value="42"/>
    <xs:enumeration value="61"/>
    <xs:enumeration value="62"/>
    <xs:enumeration value="63"/>
    <xs:enumeration value="70"/>
    <xs:enumeration value="71"/>
    <xs:enumeration value="92"/>
    <xs:enumeration value="94"/>
    <xs:enumeration value=""/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **FreeText**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **AdditionalInstruction Address Comments ContractNumberMovement InterruptionPoint/DetailedDescriptionOfLocation FreeTextField GoodsDescription HandlingInstruction InternalReferenceIdentifier InterruptionDescription LocationSubsidiaryName MessageIdentifier ErrorMessage/ErrorCauseReference/MessageSenderReference Name Notes/Note PrimaryLocationName RelatedIdentifier RelatedSenderReference Remarks RouteInformation SenderReference TrainReadyMessage/TrainReadyStatus/TrainNotReadyDescription TransportInstruction NetworkSpecificParameter/Value** complexType **CargoCodeType**
facets	Kind Value Annotation minLength 1 maxLength 255
annotation	documentation Clear Text in ISO Unicode character set

```
<xs:simpleType name="FreeText">
  <xs:annotation>
    <xs:documentation>Clear Text in ISO Unicode character set</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="255"/>
    <xs:minLength value="1"/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **LoadUnitNumberType**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **ILU_Details/LoadUnitNumber IntermodalTransportDataType/LoadUnitNumber**
facets	Kind Value Annotation whiteSpace replace pattern [A-Za-z0-9]{11}

annotation	documentation The Type consists of three parts, first 4A the owner key, second 6N registration number, third 1N control digit
source	<xs:simpleType name="LoadUnitNumberType"> <xs:annotation> <xs:documentation>The Type consists of three parts, first 4A the owner key, second 6N registration number, third 1N control digit</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:whiteSpace value="replace"/> <xs:pattern value="[A-Za-z0-9]{11}"/> </xs:restriction> </xs:simpleType>

simpleType **Money_Type**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:decimal**
properties	base xs:decimal
used by	elements **ConsignmentOrderMessage/COMS/COM/DeclarationOfValue/Amount** **ConsignmentOrderMessage/COMS/COM/InterestInDelivery/Amount** **ConsignmentOrderMessage/COMS/COM/CashOnDelivery/Amount** **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/FreightCharges/Prepaid** **ConsignmentOrderMessage/COMS/COM/ChargingSections/AdditionalCharges/Prepaid** **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/FreightCharges/Transferred** **ConsignmentOrderMessage/COMS/COM/ChargingSections/AdditionalCharges/Transferred**
facets	Kind Value Annotation totalDigits 18 fractionDigits 2
annotation	documentation Type for all payments
source	<xs:simpleType name="Money_Type"> <xs:annotation> <xs:documentation>Type for all payments</xs:documentation> </xs:annotation> <xs:restriction base="xs:decimal"> <xs:totalDigits value="18"/> <xs:fractionDigits value="2"/> </xs:restriction> </xs:simpleType>

simpleType **Name**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	element **VesselName**
facets	Kind Value Annotation maxLength 254
annotation	documentation Name in Free Text
source	<xs:simpleType name="Name"> <xs:annotation> <xs:documentation>Name in Free Text</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="254"/> </xs:restriction> </xs:simpleType>

simpleType **NHMCodeType**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **NHM_Code** **ConsignmentOrderMessage/COMS/COM/ChargingSections/Tariff/NHMCode** **Goods/PreviousLoadedGood** **Wagons/GoodsInWagon/PreviousLoadedGood**
facets	Kind Value Annotation length 6 pattern \d*[1-9]\d*
annotation	documentation NHM Code
source	<xs:simpleType name="NHMCodeType"> <xs:annotation> <xs:documentation>NHM Code</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="6"/> <xs:pattern value="\d*[1-9]\d*"/> </xs:restriction> </xs:simpleType>

simpleType **Numeric0-2**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	base xs:integer
used by	element **RollingStockDataset/AdministrativeDataSet/ECMCertificate/EINNumber/CounterAcreditedRecognizedBody**
facets	Kind Value Annotation minInclusive 00 maxInclusive 99
source	<xs:simpleType name="Numeric0-2"> <xs:restriction base="xs:integer"> <xs:minInclusive value="00"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType>

simpleType **Numeric1-5**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:positiveInteger**
properties	base xs:positiveInteger
used by	elements **RollingStockDataset/DesignDataSet/BogiePivotPitch** **RollingStockDataset/DesignDataSet/HeightOfLoadingPlaneUnladen** **RollingStockDataset/DesignDataSet/InnerWheelbase** **LocationPrimaryCode** **RollingStockDataset/DesignDataSet/LoadTable/SpeedCategory**
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
source	<xs:simpleType name="Numeric1-5"> <xs:restriction base="xs:positiveInteger"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99999"/>

```
  </xs:restriction>
</xs:simpleType>
```

simpleType **Numeric1-6**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	base xs:int
facets	Kind / Value / Annotation minInclusive 1 maxInclusive 999999

source

```
<xs:simpleType name="Numeric1-6">
  <xs:restriction base="xs:int">
    <xs:minInclusive value="1"/>
    <xs:maxInclusive value="999999"/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **Numeric2-2**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	base xs:integer
used by	elements RollingStockDataset/AdministrativeDataSet/ECMCertificate/EINNumber/EINYear MessageRoutingID RollingStockDataset/DesignDataSet/RemovableAccessories/NumberOfAccessorOfSpecType AirBrake/NumberOfBrakes WagonTechData/TechnicalRestrictions RollingStockDataset/AdministrativeDataSet/ECMCertificate/EINNumber/TypeDocumentEIN attribute CI_InstanceNumber
facets	Kind / Value / Annotation minInclusive 01 maxInclusive 99

source

```
<xs:simpleType name="Numeric2-2">
  <xs:restriction base="xs:integer">
    <xs:minInclusive value="01"/>
    <xs:maxInclusive value="99"/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **Numeric3-3**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	base xs:integer
used by	elements AirBrake/LoadChangeDevice/AirBrakedMassLoaded AirBrake/LoadChangeDevice/ChangeOverWeight simpleType Speed
facets	Kind / Value / Annotation minInclusive 001 maxInclusive 999

source

```
<xs:simpleType name="Numeric3-3">
  <xs:restriction base="xs:integer">
    <xs:minInclusive value="001"/>
    <xs:maxInclusive value="999"/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **Numeric4-4**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	base xs:integer
used by	elements **LengthOfSetOfCarriages** **RollingStockDataset/DesignDataSet/LoadTable/LoadTableProduct/ProductUNCode** **TrainLength**
facets	Kind Value Annotation minInclusive 0001 maxInclusive 9999

source	`<xs:simpleType name="Numeric4-4">`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="0001"/>`
	`  <xs:maxInclusive value="9999"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **Percentage**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:float**
properties	base xs:float
used by	element **NetworkProjectedLocation/ProportionOfDistanceBetweenLocations**
facets	Kind Value Annotation minInclusive 0 maxInclusive 100
annotation	documentation decimal value between 0 and 100

source	`<xs:simpleType name="Percentage">`
	`  <xs:annotation>`
	`  <xs:documentation>decimal value between 0 and 100</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:float">`
	`  <xs:minInclusive value="0"/>`
	`  <xs:maxInclusive value="100"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **Speed**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**Numeric3-3**
properties	base Numeric3-3
used by	elements **GNSS_DynamicPosition/CurrentSpeed** **HighestPlannedSpeed** **PlannedSpeed** **TrainMaxSpeed**
facets	Kind Value Annotation minInclusive 001 maxInclusive 999
annotation	documentation Shown in Km/h

source	`<xs:simpleType name="Speed">`
	`  <xs:annotation>`
	`  <xs:documentation>Shown in Km/h</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="Numeric3-3"/>`

	`</xs:simpleType>`

simpleType **String1-10**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	element **LocationSubsidiaryCode**
facets	Kind Value Annotation minLength 1 maxLength 10

source	`<xs:simpleType name="String1-10">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="10" fixed="false"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **String1-14**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	element **CustomerCode/PrimaryCode**
facets	Kind Value Annotation minLength 1 maxLength 14

source	`<xs:simpleType name="String1-14">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="14"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **String1-5**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	element **DelayMinutes**
facets	Kind Value Annotation minLength 1 maxLength 5

source	`<xs:simpleType name="String1-5">`
	`  <xs:restriction base="xs:string">`
	`  <xs:minLength value="1"/>`
	`  <xs:maxLength value="5"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **String1-7**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	element **CustomerCode/AdditionalCode**
facets	Kind Value Annotation minLength 1 maxLength 7
source	<xs:simpleType name="String1-7"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="7"/> </xs:restriction> </xs:simpleType>

simpleType **String1-8**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **AssociatedAttachedOTN** **AssociatedAttachedTrainServiceNumber** **OperationalTrainNumber**
facets	Kind Value Annotation minLength 1 maxLength 8
source	<xs:simpleType name="String1-8"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="8"/> </xs:restriction> </xs:simpleType>

simpleType **String4-4**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	simpleType **CompanyCode**
facets	Kind Value Annotation minLength 4 maxLength 4
source	<xs:simpleType name="String4-4"> <xs:restriction base="xs:string"> <xs:minLength value="4"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType>

simpleType **String5-5**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	base xs:string
facets	Kind Value Annotation minLength 5 maxLength 5
source	<xs:simpleType name="String5-5"> <xs:restriction base="xs:string"> <xs:minLength value="5"/> <xs:maxLength value="5"/> </xs:restriction> </xs:simpleType>

simpleType **String5-8**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation minLength 5 maxLength 8
source	<xs:simpleType name="String5-8"> <xs:restriction base="xs:string"> <xs:minLength value="5"/> <xs:maxLength value="8"/> </xs:restriction> </xs:simpleType>

simpleType **Time**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:time**
properties	base xs:time
annotation	documentation Time expressed in HH:MM:SS
source	<xs:simpleType name="Time"> <xs:annotation> <xs:documentation>Time expressed in HH:MM:SS</xs:documentation> </xs:annotation> <xs:restriction base="xs:time"/> </xs:simpleType>

simpleType **VolumeValue**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	**xs:float**
properties	base xs:float
used by	elements DangerousGoodsVolume DanGoodsType/DangerousGoodsVolume RID/DangerousGoodsVolumeCubicMeters Volume
annotation	documentation Volume value of the load units by cbm
source	<xs:simpleType name="VolumeValue"> <xs:annotation> <xs:documentation>Volume value of the load units by cbm</xs:documentation> </xs:annotation> <xs:restriction base="xs:float"/>

	</xs:simpleType>

simpleType **VolumeValueLiter**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	base xs:integer
used by	element **RID/DangerousGoodsVolumeLiters**
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999
annotation	documentation Volume value of the load units by liters
source	<xs:simpleType name="VolumeValueLiter"> <xs:annotation> <xs:documentation>Volume value of the load units by liters</xs:documentation> </xs:annotation> <xs:restriction base="xs:integer"> <xs:minInclusive value="0"/> <xs:maxInclusive value="999999"/> </xs:restriction> </xs:simpleType>

simpleType **WagonIdent**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	elements **WIMO_Dataset/ConsignmentLevelData/PreviousWagonNumber** **RollingStockDataset/AdministrativeDataSet/PreviousWagonNumberFreight** **WagonNumberFreight** **ConsignmentOrderMessage/COMS/COM/WagonPreviousNumberFreight**
facets	Kind Value Annotation maxLength 12 pattern [0-9]{12}
annotation	documentation Identification code of a freight wagon based on the TSI OPE and CEN Recommendations and CIS wagons coded according to OSJD-UIC leaflet 402, which allows the conversion from 8 digits to 12 digits and viceversa.
source	<xs:simpleType name="WagonIdent"> <xs:annotation> <xs:documentation>Identification code of a freight wagon based on the TSI OPE and CEN Recommendations and CIS wagons coded according to OSJD-UIC leaflet 402, which allows the conversion from 8 digits to 12 digits and viceversa.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="12"/> <xs:pattern value="[0-9]{12}"/> </xs:restriction> </xs:simpleType>

simpleType **WeightValueKilo**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	base xs:integer
used by	elements **DangerousGoodsWeight** **GrossWeight** **MaxGrossWeight** **ILU_Details/TareWeight** **ITU_Details/TareWeight**

	RollingRoadUnit/RollingRoadUnitDetails/TareWeightVehicle TotalLoadWeight TotalWeight LoadingTackles/TotalWeightLoadingTackles WagonWeightEmpty RID/WeightNettoExplosiveMass
facets	Kind Value Annotation minInclusive 0 maxInclusive 999999 whiteSpace collapse
annotation	documentation In Kilograms
source	<xs:simpleType name="WeightValueKilo"> <xs:annotation> <xs:documentation>In Kilograms</xs:documentation> </xs:annotation> <xs:restriction base="xs:integer"> <xs:minInclusive value="0"/> <xs:maxInclusive value="999999"/> <xs:whiteSpace value="collapse"/> </xs:restriction> </xs:simpleType>

simpleType **WeightValueTonne**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:int**
properties	base xs:int
used by	elements TractionWeight TrainWeight WeightOfSetOfCarriages
facets	Kind Value Annotation minInclusive 1 maxInclusive 99999
annotation	documentation In Tonnes
source	<xs:simpleType name="WeightValueTonne"> <xs:annotation> <xs:documentation>In Tonnes</xs:documentation> </xs:annotation> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99999"/> </xs:restriction> </xs:simpleType>

attribute **CI_InstanceNumber**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	Numeric2-2
used by	elements Recipient Sender
facets	Kind Value Annotation minInclusive 01 maxInclusive 99
annotation	documentation Number of a Common Interface Instance for the same Company
source	<xs:attribute name="CI_InstanceNumber" type="Numeric2-2"> <xs:annotation> <xs:documentation>Number of a Common Interface Instance for the same Company</xs:documentation> </xs:annotation> </xs:attribute>

element **AirBrakeType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	elements **AirBrake** **WagonTechData**
facets	Kind / Value / Annotation enumeration 0 documentation: Through pipe enumeration 1 documentation: G system only enumeration 2 documentation: P system only enumeration 3 documentation: G/P combined system enumeration 8 documentation: No air brake or brake pipe enumeration 9 documentation: Non coded system
annotation	documentation Classification of air brake.

source

```
<xs:element name="AirBrakeType">
  <xs:annotation>
    <xs:documentation>Classification of air brake.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="0">
        <xs:annotation>
          <xs:documentation>Through pipe</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>G system only</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>P system only</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>G/P combined system</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="8">
        <xs:annotation>
          <xs:documentation>No air brake or brake pipe</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="9">
        <xs:annotation>
          <xs:documentation>Non coded system</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

	</xs:element>

element **BrakeSpecialCharacteristics**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **AirBrake**
facets	Kind / Value / Annotation enumeration 0 — documentation: Cast Iron Brake Blocks enumeration 1 — documentation: Disc Brake enumeration 2 — documentation: K-Brake Blocks enumeration 3 — documentation: Cast Iron Brake Blocks, single release brake enumeration 4 — documentation: Composite Brake Blocks, single release brake enumeration 5 — documentation: L-Brake Blocks enumeration 6 — documentation: LL-Brake Blocks enumeration 9 — documentation: Unknown or non-coded information
annotation	documentation General brake characteristics. The values refer to UIC leaflet 920-13.

source

```
<xs:element name="BrakeSpecialCharacteristics">
  <xs:annotation>
    <xs:documentation>
General brake characteristics. The values refer to UIC leaflet 920-13.
                    </xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="0">
        <xs:annotation>
          <xs:documentation>Cast Iron Brake Blocks</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>Disc Brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>K-Brake Blocks</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>Cast Iron Brake Blocks, single release
brake</xs:documentation>
```

```
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4">
        <xs:annotation>
          <xs:documentation>Composite Brake Blocks, single release
brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5">
        <xs:annotation>
          <xs:documentation>L-Brake Blocks</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6">
        <xs:annotation>
          <xs:documentation>LL-Brake Blocks</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="9">
        <xs:annotation>
          <xs:documentation>Unknown or non-coded information</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **BrakeType**

diagram	BrakeType Type of braking system.
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	elements **PlannedTrainTechnicalData** **TrainRunningTechData** **WagonOperationalData**

facets

Kind	Value	Annotation
enumeration	0	documentation G: "Goods" for freight services with slow application and release times
enumeration	1	documentation P: "Passenger" for passenger and freight services with quick application and release times.
enumeration	2	documentation X: an indication that brake system of the freight wagon out of order (actually / current). Additionally, X cannot be used in Planning.
enumeration	3	documentation R: a subdivision brake position of brake mode "P", for rapid (express) services with high brake performances
enumeration	4	documentation G+E: brake position G with additional brake=electro-dynamic brake
enumeration	5	documentation G+H: brake position G with additional brake=hydro-dynamic brake
enumeration	6	documentation P+E: brake position P with additional brake=electro-dynamic brake
enumeration	7	documentation P+H: brake position P with additional brake=hydro-dynamic brake
enumeration	8	documentation P+Mg: brake position P with additional brake=magnetic track brake
enumeration	9	documentation R+E: brake position R with additional brake=electro-dynamic brake
enumeration	10	documentation R+H: brake position R with additional brake=hydro-dynamic brake
enumeration	11	documentation R+Mg: brake position R with additional brake=magnetic track brake

	enumeration 12 documentation R+WB: brake position R with additional brake=eddy current brake (German: Wirbelstrombremse) enumeration 13 documentation R+E+Mg: brake position R with additional brake=electro-dynamic brake and magnetic track brake enumeration 14 documentation R+E+WB: brake position R with additional brake=electro-dynamic brake and eddy current brake
annotation	documentation Type of braking system.
source	

```
<xs:element name="BrakeType">
  <xs:annotation>
    <xs:documentation>Type of braking system.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="0">
        <xs:annotation>
          <xs:documentation>G: "Goods" for freight services with slow application and
release times</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>P: "Passenger" for passenger and freight services with
quick application and release times.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>X: an indication that brake system of the freight wagon
out of order (actually / current). Additionally, X cannot be used in
Planning.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>R: a subdivision brake position of brake mode "P", for
rapid (express) services with high brake performances</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4">
        <xs:annotation>
          <xs:documentation>G+E: brake position G with additional brake=electro-
dynamic brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5">
        <xs:annotation>
          <xs:documentation>G+H: brake position G with additional brake=hydro-dynamic
brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6">
        <xs:annotation>
          <xs:documentation>P+E: brake position P with additional brake=electro-
dynamic brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="7">
        <xs:annotation>
          <xs:documentation>P+H: brake position P with additional brake=hydro-dynamic
brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="8">
        <xs:annotation>
```

```
          <xs:documentation>P+Mg: brake position P with additional brake=magnetic
track brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="9">
        <xs:annotation>
          <xs:documentation>R+E: brake position R with additional brake=electro-
dynamic brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="10">
        <xs:annotation>
          <xs:documentation>R+H: brake position R with additional brake=hydro-dynamic
brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="11">
        <xs:annotation>
          <xs:documentation>R+Mg: brake position R with additional brake=magnetic
track brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="12">
        <xs:annotation>
          <xs:documentation>R+WB: brake position R with additional brake=eddy current
brake (German: Wirbelstrombremse)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="13">
        <xs:annotation>
          <xs:documentation>R+E+Mg: brake position R with additional brake=electro-
dynamic brake and magnetic track brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="14">
        <xs:annotation>
          <xs:documentation>R+E+WB: brake position R with additional brake=electro-
dynamic brake and eddy current brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **BrakingPowerVariationDevice**

diagram	BrakingPowerVariationDevice Coding in 404-2, chapter 1.8
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	elements **AirBrake WagonTechData**
facets	Kind / Value / Annotation enumeration 0 — documentation: no braked weight variation device enumeration 1 — documentation: empty/loaded manual or automatic device with one changeover weight enumeration 2 — documentation: empty/loaded manual or automatic device with two or three changeover weights enumeration 8 — documentation

	enumeration 9 — linear auto continuous device with indication of maximum braked weight documentation non-codable variation device
annotation	documentation Coding in 404-2, chapter 1.8
source	<xs:element name="BrakingPowerVariationDevice"> <xs:annotation> <xs:documentation>Coding in 404-2, chapter 1.8</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>no braked weight variation device</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>empty/loaded manual or automatic device with one changeover weight</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>empty/loaded manual or automatic device with two or three changeover weights</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>linear auto continuous device with indication of maximum braked weight</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>non-codable variation device</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </xs:element>

element **CodeOfCause**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **ConsignmentOrderMessage/COMS/COM/TransitPeriodExtensions**
facets	Kind Value Annotation enumeration 1 documentation Completion of formalities required by customs or other administrative authorities (CIM Article 15) enumeration 2 documentation Examination of the consignment (CIM Article11) enumeration 3 documentation Amendment of the contract of carriage (CIM Article 18) enumeration 4 documentation Circumstances preventing carriage (CIM Article 20)

	enumeration 5 documentation Circumstances preventing delivery (CIM Article21) enumeration 6 documentation Attention to be given to the consignment enumeration 7 documentation Rectification of the load following unsatisfactory loading by the consignor enumeration 8 documentation Transhipment following unsatisfactory loading by the consignor enumeration 9 documentation Other causes: ...
annotation	documentation Code of reason for extension
source	<xs:element name="CodeOfCause"> <xs:annotation> <xs:documentation>Code of reason for extension</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:token"> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Completion of formalities required by customs or other administrative authorities (CIM Article 15)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Examination of the consignment (CIM Article11)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Amendment of the contract of carriage (CIM Article 18)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Circumstances preventing carriage (CIM Article 20)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Circumstances preventing delivery (CIM Article21)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>Attention to be given to the consignment</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>Rectification of the load following unsatisfactory loading by the consignor</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>Transhipment following unsatisfactory loading by the consignor</xs:documentation> </xs:annotation>

```
      </xs:enumeration>
      <xs:enumeration value="9">
        <xs:annotation>
          <xs:documentation>Other causes: ...</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **CombinedTrafficLoadProfile**

diagram

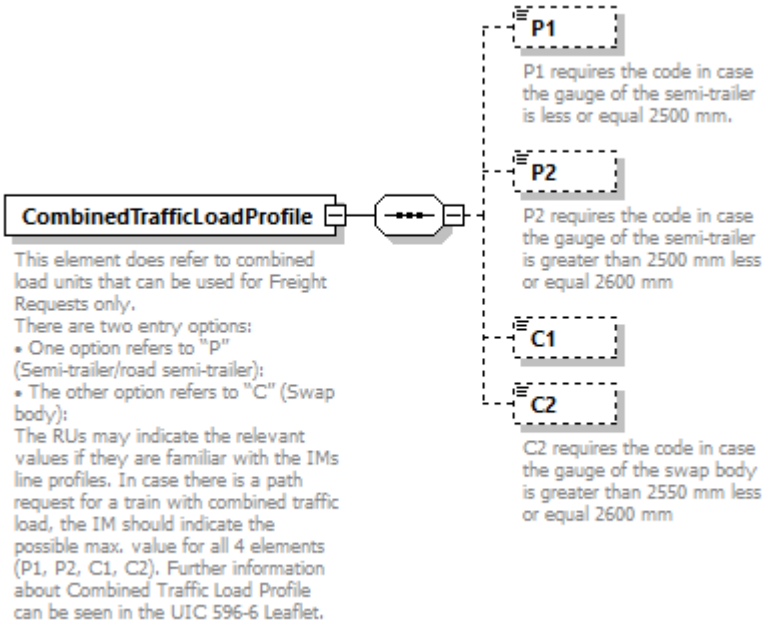

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**P1** **P2** **C1** **C2**
used by	element **PlannedTrainData**
annotation	documentation This element does refer to combined load units that can be used for Freight Requests only. There are two entry options: • One option refers to "P" (Semi-trailer/road semi-trailer): • The other option refers to "C" (Swap body): The RUs may indicate the relevant values if they are familiar with the IMs line profiles. In case there is a path request for a train with combined traffic load, the IM should indicate the possible max. value for all 4 elements (P1, P2, C1, C2). Further information about Combined Traffic Load Profile can be seen in the UIC 596-6 Leaflet.

source

```
<xs:element name="CombinedTrafficLoadProfile">
  <xs:annotation>
    <xs:documentation>This element does refer to combined load units that can be used
for Freight Requests only.
There are two entry options:
• One option refers to "P" (Semi-trailer/road semi-trailer):
• The other option refers to "C" (Swap body):
The RUs may indicate the relevant values if they are familiar with the IMs line
profiles. In case there is a path request for a train with combined traffic load, the
IM should indicate the possible max. value for all 4 elements (P1, P2, C1, C2).
Further information about Combined Traffic Load Profile can be seen in the UIC 596-6
Leaflet.
```

```
</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="P1" minOccurs="0">
        <xs:annotation>
          <xs:documentation>P1 requires the code in case the gauge of the semi-
trailer is less or equal 2500 mm.</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:pattern value="\d{3}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="P2" minOccurs="0">
        <xs:annotation>
          <xs:documentation>P2 requires the code in case the gauge of the semi-
trailer is greater than 2500 mm less or equal 2600 mm</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:pattern value="\d{3}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="C1" minOccurs="0">
        <xs:simpleType>
          <xs:annotation>
            <xs:documentation>C1 requires the code in case the gauge of the swap body
is less or equal 2550 mm.</xs:documentation>
          </xs:annotation>
          <xs:restriction base="xs:string">
            <xs:pattern value="\d{3}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="C2" minOccurs="0">
        <xs:annotation>
          <xs:documentation>C2 requires the code in case the gauge of the swap body
is greater than 2550 mm less or equal 2600 mm</xs:documentation>
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:pattern value="\d{3}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **CombinedTrafficLoadProfile/P1**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern \d{3}
annotation	documentation P1 requires the code in case the gauge of the semi-trailer is less or equal 2500 mm.
source	<xs:element name="P1" minOccurs="0"> <xs:annotation> <xs:documentation>P1 requires the code in case the gauge of the semi-trailer is less or equal 2500 mm.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:pattern value="\d{3}"/> </xs:restriction> </xs:simpleType> </xs:element>

element **CombinedTrafficLoadProfile/P2**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern \d{3}
annotation	documentation P2 requires the code in case the gauge of the semi-trailer is greater than 2500 mm less or equal 2600 mm
source	<xs:element name="P2" minOccurs="0"> <xs:annotation> <xs:documentation>P2 requires the code in case the gauge of the semi-trailer is greater than 2500 mm less or equal 2600 mm</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:pattern value="\d{3}"/> </xs:restriction> </xs:simpleType> </xs:element>

element **CombinedTrafficLoadProfile/C1**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	minOcc 0 maxOcc 1 content simple
facets	Kind Value Annotation pattern \d{3}

source

```
<xs:element name="C1" minOccurs="0">
  <xs:simpleType>
    <xs:annotation>
      <xs:documentation>C1 requires the code in case the gauge of the swap body is
less or equal 2550 mm.</xs:documentation>
    </xs:annotation>
    <xs:restriction base="xs:string">
      <xs:pattern value="\d{3}"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **CombinedTrafficLoadProfile/C2**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:string**

properties

minOcc	0
maxOcc	1
content	simple

facets

Kind	Value	Annotation
pattern	\d{3}	

annotation

documentation
C2 requires the code in case the gauge of the swap body is greater than 2550 mm less or equal 2600 mm

source

```
<xs:element name="C2" minOccurs="0">
  <xs:annotation>
    <xs:documentation>C2 requires the code in case the gauge of the swap body is
greater than 2550 mm less or equal 2600 mm</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:pattern value="\d{3}"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **CommercialSpecificationCode**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties

content	simple

used by

element	**ConsignmentOrderMessage/COMS/COM/CommercialSpecifications**

facets

Kind	Value	Annotation
enumeration	1	documentation Route ...
enumeration	2	documentation Traffic flow ...
enumeration	3	documentation Carriers mandated to perform the carriage, section, status
enumeration	4	documentation

	enumeration 5 Defined frontier stations..... (for exceptional consignments) documentation Other conditions requested....(for example: EDI contract number if an electronic consignment note is used.)
annotation	documentation Commercial specifications code
source	<xs:element name="CommercialSpecificationCode"> <xs:annotation> <xs:documentation>Commercial specifications code</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:token"> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Route ...</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Traffic flow ...</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Carriers mandated to perform the carriage, section, status</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Defined frontier stations..... (for exceptional consignments)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Other conditions requested....(for example: EDI contract number if an electronic consignment note is used.)</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </xs:element>

element **ConsignmentOrderType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **ConsignmentOrderMessage/COMS/COM_Header**

facets

Kind	Value	Annotation
enumeration	ECN	documentation ECN: Electronic consignment note. MessageType will be sent up to the interchange point where the transport is handed over to the next carrier involved in the transport (being ECN capable).
enumeration	NACK	documentation NotAcknowledged. Message is only sent out by the CDS, in case an ECN is received and the next carrier who is to receive this ECN is not ECN-capable
enumeration	PRN	documentation At the beginning of an ECN transport the shipping carrier sends the prior notification as preannouncement to all participating carriers (as far as they are able to process an ECN)
enumeration	INFE	documentation Information ECN: This MessageType has only informative character and can be used to inform other participating carriers about changes before hand-over of the ECN.
enumeration	INFP	documentation Information PCN: This MessageType has only informative character and may only be used to inform other participating carriers about the change from electronic transport to paper accompanied transport.
enumeration	CANCEL	documentation The CANCEL message can only be send by the lead/contractual or the shipping carrier BEFORE the first hand-over of the ECN. By doing so, all participating carriers will receive a DEL message to inform them about the cancellation of their part of the transport.
enumeration	DEL	documentation This message is being created by the central application, only. The receiving carrier is being informed, that his part of the transport has been cancelled.
enumeration	ECTD	documentation Basic message type for transports accompanied by a paper consignment note message.
enumeration	EUTD	documentation Basic update message type for transports accompanied by a paper consignment note message
enumeration	EDTD	documentation Basic deletion message type for transports accompanied by a paper consignment note message.
enumeration	ECOM	documentation Electronic consignment order message for carriers in role 3.Used for paperless transport only.
enumeration	ECOU	documentation Update message for ECOM
enumeration	ECOD	documentation Deletion message for ECOM

annotation

documentation
Preliminary list of messages, by now restricted on different types of consignment orders.
Message types PRN, NACK, ECN, DEL, INFE, INFP, ECOM, ECOD and ECOU are only used in communication within Raildata ECN members.

source

```
<xs:element name="ConsignmentOrderType">
  <xs:annotation>
    <xs:documentation>Preliminary list of messages, by now restricted on different
types of consignment orders.
                      Message types PRN, NACK, ECN, DEL, INFE, INFP, ECOM, ECOD and
ECOU are only used in communication within Raildata ECN members.
                      </xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="ECN">
        <xs:annotation>
          <xs:documentation>ECN: Electronic consignment note. MessageType will be
sent up to the interchange point where the transport is handed over to the next
carrier involved in the transport (being ECN capable). </xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="NACK">
        <xs:annotation>
          <xs:documentation>NotAcknowledged. Message is only sent out by the CDS, in
case an ECN is received and the next carrier who is to receive this ECN is not ECN-
capable</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="PRN">
        <xs:annotation>
          <xs:documentation>At the beginning of an ECN transport the shipping carrier
```

```
sends the prior notification as preannouncement to all participating carriers (as far as they are able to process an ECN)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="INFE">
        <xs:annotation>
          <xs:documentation>Information ECN: This MessageType has only informative character and can be used to inform other participating carriers about changes before hand-over of the ECN.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="INFP">
        <xs:annotation>
          <xs:documentation>Information PCN: This MessageType has only informative character and may only be used to inform other participating carriers about the change from electronic transport to paper accompanied transport.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="CANCEL">
        <xs:annotation>
          <xs:documentation>The CANCEL message can only be send by the lead/contractual or the shipping carrier BEFORE the first hand-over of the ECN. By doing so, all participating carriers will receive a DEL message to inform them about the cancellation of their part of the transport.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DEL">
        <xs:annotation>
          <xs:documentation>This message is being created by the central application, only. The receiving carrier is being informed, that his part of the transport has been cancelled.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="ECTD">
        <xs:annotation>
          <xs:documentation>Basic message type for transports accompanied by a paper consignment note message.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="EUTD">
        <xs:annotation>
          <xs:documentation>Basic update  message type for transports accompanied by a paper consignment note message</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="EDTD">
        <xs:annotation>
          <xs:documentation>Basic deletion message type for transports accompanied by a paper consignment note message.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="ECOM">
        <xs:annotation>
          <xs:documentation>Electronic consignment order message for carriers in role 3.Used for paperless transport only.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="ECOU">
        <xs:annotation>
          <xs:documentation>Update message for ECOM</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="ECOD">
        <xs:annotation>
```

```
            <xs:documentation>Deletion message for ECOM</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **ConsignorDeclarationCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **ConsignmentOrderMessage/COMS/COM/ConsignorDeclarations**

facets

Kind	Value	Annotation
enumeration	1	documentation Consignee not-authorised to take control of the goods
enumeration	2	documentation Authorised consignee (within the meaning of customs law)
enumeration	3	documentation Escort(s) ... [name(s), first name(s)]
enumeration	4	documentation Filled mass [weight]: ... (for tank-wagons refilled without having been cleaned - see RID section 5.4.1.2.2c)
enumeration	5	documentation Emergency telephone number for irregularities or accidents with dangerous goods
enumeration	6	documentation Not to be passed to a substitute carrier
enumeration	7	documentation Loading by the carrier
enumeration	8	documentation Unloading by the carrier
enumeration	9	documentation Agreed transit period: ...
enumeration	10	documentation Completion of administrative formalities: ... (see CIM Article 15)
enumeration	11	documentation Exceptional consignment: ... (reference number for each of the rail carriers/infrastructure managers involved)
enumeration	12	documentation Number of flat pallets marked "EUR" and exchangeable in the European Pallet Pool
enumeration	13	documentation Number of box-pallets marked "EUR" and exchangeable in the European Box-Pallet Pool
enumeration	14	documentation If the carrier's wagon sheets are used: number of sheets, abbreviation for the carrier and wagon sheet number(s)
enumeration	15	documentation If the carrier's straps are used: number of straps and abbreviation for the carrier
enumeration	16	documentation Other declarations: ... (designation of a representative, designation of a substitute carrier, request for attention to be given to the consignment en route, etc.)
enumeration	17	documentation Shipment details for port traffic: ...
enumeration	18	documentation Used for CUV transports, only. Restrictions on the operation of the wagon known to the consignor (e.g. limited speed, etc.)
enumeration	24	documentation Dangerous goods packed in limited quantities the total gross mass of which exceeds eight tonnes per transport unit.
enumeration	25	documentation Wagon keeper according to article 17 AVV (Name)
enumeration	26	documentation Declaration for the transport of waste ...
enumeration	31	documentation

	enumeration 32 CH import declaration by DB Cargo documentation enumeration 33 CH import declaration by SBB Cargo documentation enumeration 42 CH import declaration by third parties documentation Presentation of goods subject to an NCTS procedure to customs by ... (Railway Undertaking name / code) at ... (place name / destination customs office / station code)
annotation	documentation Carrier declaration code.

source	`<xs:element name="ConsignorDeclarationCode">`
	`<xs:annotation>`
	`<xs:documentation>Carrier declaration code.</xs:documentation>`
	`</xs:annotation>`
	`<xs:simpleType>`
	`<xs:restriction base="xs:token">`
	`<xs:enumeration value="1">`
	`<xs:annotation>`
	`<xs:documentation>Consignee not-authorised to take control of the goods</xs:documentation>`
	`</xs:annotation>`
	`</xs:enumeration>`
	`<xs:enumeration value="2">`
	`<xs:annotation>`
	`<xs:documentation>Authorised consignee (within the meaning of customs law)</xs:documentation>`
	`</xs:annotation>`
	`</xs:enumeration>`
	`<xs:enumeration value="3">`
	`<xs:annotation>`
	`<xs:documentation>Escort(s) ... [name(s), first name(s)]</xs:documentation>`
	`</xs:annotation>`
	`</xs:enumeration>`
	`<xs:enumeration value="4">`
	`<xs:annotation>`
	`<xs:documentation>Filled mass [weight]: ... (for tank-wagons refilled without having been cleaned - see RID section 5.4.1.2.2c)</xs:documentation>`
	`</xs:annotation>`
	`</xs:enumeration>`
	`<xs:enumeration value="5">`
	`<xs:annotation>`
	`<xs:documentation>Emergency telephone number for irregularities or accidents with dangerous goods</xs:documentation>`
	`</xs:annotation>`
	`</xs:enumeration>`
	`<xs:enumeration value="6">`
	`<xs:annotation>`
	`<xs:documentation>Not to be passed to a substitute carrier</xs:documentation>`
	`</xs:annotation>`
	`</xs:enumeration>`
	`<xs:enumeration value="7">`
	`<xs:annotation>`
	`<xs:documentation>Loading by the carrier</xs:documentation>`
	`</xs:annotation>`
	`</xs:enumeration>`
	`<xs:enumeration value="8">`
	`<xs:annotation>`
	`<xs:documentation>Unloading by the carrier</xs:documentation>`
	`</xs:annotation>`
	`</xs:enumeration>`
	`<xs:enumeration value="9">`
	`<xs:annotation>`
	`<xs:documentation>Agreed transit period: ...</xs:documentation>`
	`</xs:annotation>`

```
      </xs:enumeration>
      <xs:enumeration value="10">
        <xs:annotation>
          <xs:documentation>Completion of administrative formalities: ... (see CIM
Article 15)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="11">
        <xs:annotation>
          <xs:documentation>Exceptional consignment: ... (reference number for each
of the rail carriers/infrastructure managers involved)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="12">
        <xs:annotation>
          <xs:documentation>Number of flat pallets marked "EUR" and exchangeable in
the European Pallet Pool</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="13">
        <xs:annotation>
          <xs:documentation>Number of box-pallets marked "EUR" and exchangeable in
the European Box-Pallet Pool</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="14">
        <xs:annotation>
          <xs:documentation>If the carrier's wagon sheets are used: number of sheets,
abbreviation for the carrier and wagon sheet number(s)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="15">
        <xs:annotation>
          <xs:documentation>If the carrier's straps are used: number of straps and
abbreviation for the carrier</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="16">
        <xs:annotation>
          <xs:documentation>Other declarations: ... (designation of a representative,
designation of a substitute carrier, request for attention to be given to the
consignment en route, etc.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="17">
        <xs:annotation>
          <xs:documentation>Shipment details for port traffic: ...</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="18">
        <xs:annotation>
          <xs:documentation>Used for CUV transports, only. Restrictions on the
operation of the wagon known to the consignor (e.g. limited speed,
etc.)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="24">
        <xs:annotation>
          <xs:documentation>Dangerous goods packed in limited quantities the total
gross mass of which exceeds eight tonnes per transport unit.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="25">
        <xs:annotation>
```

```
          <xs:documentation>Wagon keeper according to article 17 AVV
(Name)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="26">
        <xs:annotation>
          <xs:documentation>Declaration for the transport of waste
...</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="31">
        <xs:annotation>
          <xs:documentation>CH import declaration by DB Cargo</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="32">
        <xs:annotation>
          <xs:documentation>CH import declaration by SBB Cargo</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="33">
        <xs:annotation>
          <xs:documentation>CH import declaration by third parties</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="42">
        <xs:annotation>
          <xs:documentation>Presentation of goods subject to an NCTS procedure to
customs by ... (Railway Undertaking name / code)  at ... (place name / destination
customs office / station code)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **CouplingType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	elements **RollingStockDataset/DesignDataSet** **WagonTechData**
facets	Kind / Value / Annotation enumeration 0 documentation: without coupler enumeration 1 documentation: non-reinforced coupler less than 85t enumeration 2 documentation: reinforced coupler equals to 85t enumeration 3 documentation: ultra-reinforced coupler greater than 85t enumeration 4 documentation: automatic coupling
annotation	documentation Classification of coupling

source	`<xs:element name="CouplingType">`
	`<xs:annotation>`
	`<xs:documentation>Classification of coupling</xs:documentation>`

```
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="0">
        <xs:annotation>
          <xs:documentation>without coupler</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>non-reinforced coupler less than 85t</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>reinforced coupler equals to 85t</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>ultra-reinforced coupler greater than
85t</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4">
        <xs:annotation>
          <xs:documentation>automatic coupling</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **CustomerType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **Customers**
facets	Kind / Value / Annotation enumeration CR — documentation: Consignor enumeration CE — documentation: Consignee enumeration FPCR — documentation: Freight payer enumeration FPCE — documentation: Freight payer CE
annotation	documentation Type of participation

source	`<xs:element name="CustomerType">`
	`  <xs:annotation>`
	`  <xs:documentation>Type of participation</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:token">`
	`  <xs:enumeration value="CR">`
	`  <xs:annotation>`

```
            <xs:documentation>Consignor</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="CE">
          <xs:annotation>
            <xs:documentation>Consignee</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="FPCR">
          <xs:annotation>
            <xs:documentation>Freight payer</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="FPCE">
          <xs:annotation>
            <xs:documentation>Freight  payer CE</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **DangerLabel**

diagram	**DangerLabel** All Danger Label of this dangerous good according to the RID chapter 3.2, table A, column 5, excepting the shunting labels Model 13 and 15 (CODE: OTIF RID-Specification).
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **RID** complexType **DanGoodsType**

facets

Kind	Value	Annotation
enumeration	1	documentation Explosive materials, divisions 1.1, 1.2 and 1.3
enumeration	1.4	documentation Explosive materials, division 1.4
enumeration	1.5	documentation Explosive materials, division 1.5
enumeration	1.6	documentation Explosive materials, division 1.6
enumeration	2.1	documentation Flammable gases
enumeration	2.2	documentation Non-flammable, non-toxic gases
enumeration	2.3	documentation Toxic gases
enumeration	3	documentation Flammable liquids
enumeration	4.1	documentation Flammable solids , self-reactive substances and solid desensitized explosives
enumeration	4.2	documentation Substances liable to spontaneous combustion
enumeration	4.3	documentation Substances which, in contact with water, emit flammable gases
enumeration	5.1	documentation Oxidizing substances
enumeration	5.2	documentation Organic peroxides

	enumeration	6.1	documentation Toxic substances
	enumeration	6.2	documentation Infectious substances
	enumeration	7A	documentation Radioactive material, category I
	enumeration	7B	documentation Radioactive material, category II
	enumeration	7C	documentation Radioactive material, category III
	enumeration	7D	documentation (obsolete) should be used for general information about class 7
	enumeration	7E	documentation Fissile radioactive material
	enumeration	8	documentation Corrosive substances
	enumeration	9	documentation Miscellaneous dangerous substances and articles
	enumeration	9A	
	enumeration	1 (+13)	
	enumeration	1 (+15)	
	enumeration	1.4+6.1	
	enumeration	1.4+6.1+8	
	enumeration	1.4+8	
	enumeration	1+6.1	
	enumeration	1+6.1 (+13)	
	enumeration	1+6.1 (+15)	
	enumeration	1+6.1+8	
	enumeration	1+8	
	enumeration	2.1 (+13)	
	enumeration	2.1+6.1	
	enumeration	2.1+6.1+8	
	enumeration	2.1+6.1	
	enumeration	2.1+8	
	enumeration	2.2 (+13)	
	enumeration	2.2+5.1+6.1	
	enumeration	2.2+5.1+6.1+8	
	enumeration	2.2+5.1+8	
	enumeration	2.2+6.1	
	enumeration	2.2+6.1+8	
	enumeration	2.2+5.1	
	enumeration	2.2+5.1 (+13)	
	enumeration	2.2+6.1	
	enumeration	2.2+8	
	enumeration	2.3 (+13)	
	enumeration	2.3+2.1	
	enumeration	2.3+2.1 (+13)	
	enumeration	2.3+2.1+8	
	enumeration	2.3+2.1+8 (+13)	
	enumeration	2.3+5.1	
	enumeration	2.3+5.1 (+13)	
	enumeration	2.3+5.1+8	
	enumeration	2.3+5.1+8 (+13)	
	enumeration	2.3+8	
	enumeration	2.3+8 (+13)	
	enumeration	4.1+1	
	enumeration	5.2+1	
	enumeration	6.1+4.1	
	enumeration	6.1+8	
	enumeration	6.2+2.2	
	enumeration	7X	
	enumeration	7X+7E	

	enumeration 8+6.1 enumeration 9+2.2
annotation	documentation All Danger Label of this dangerous good according to the RID chapter 3.2, table A, column 5, excepting the shunting labels Model 13 and 15 (CODE: OTIF RID-Specification).
source	

```
<xs:element name="DangerLabel">
  <xs:annotation>
    <xs:documentation>All Danger Label of this dangerous good according to the RID
chapter 3.2, table A, column 5, excepting the shunting labels Model 13 and 15 (CODE:
OTIF RID-Specification).</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>Explosive materials, divisions 1.1, 1.2 and
1.3</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1.4">
        <xs:annotation>
          <xs:documentation>Explosive materials, division 1.4</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1.5">
        <xs:annotation>
          <xs:documentation>Explosive materials, division 1.5</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1.6">
        <xs:annotation>
          <xs:documentation>Explosive materials, division 1.6</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2.1">
        <xs:annotation>
          <xs:documentation>Flammable gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2.2">
        <xs:annotation>
          <xs:documentation>Non-flammable, non-toxic gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2.3">
        <xs:annotation>
          <xs:documentation>Toxic gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>Flammable liquids</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4.1">
        <xs:annotation>
          <xs:documentation>Flammable solids , self-reactive substances and solid
desensitized explosives</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4.2">
        <xs:annotation>
          <xs:documentation>Substances liable to spontaneous
combustion</xs:documentation>
```

```
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4.3">
        <xs:annotation>
          <xs:documentation>Substances which, in contact with water, emit flammable
gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5.1">
        <xs:annotation>
          <xs:documentation>Oxidizing substances</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5.2">
        <xs:annotation>
          <xs:documentation>Organic peroxides</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6.1">
        <xs:annotation>
          <xs:documentation>Toxic substances</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6.2">
        <xs:annotation>
          <xs:documentation>Infectious substances</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="7A">
        <xs:annotation>
          <xs:documentation>Radioactive material, category I</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="7B">
        <xs:annotation>
          <xs:documentation>Radioactive material, category II</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="7C">
        <xs:annotation>
          <xs:documentation>Radioactive material, category III</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="7D">
        <xs:annotation>
          <xs:documentation>(obsolete) should be used for general information about
class 7</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="7E">
        <xs:annotation>
          <xs:documentation>Fissile radioactive material</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="8">
        <xs:annotation>
          <xs:documentation>Corrosive substances</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="9">
        <xs:annotation>
          <xs:documentation>Miscellaneous dangerous substances and
articles</xs:documentation>
        </xs:annotation>
```

```
        </xs:enumeration>
        <xs:enumeration value="9A"/>
        <xs:enumeration value="1 (+13)"/>
        <xs:enumeration value="1 (+15)"/>
        <xs:enumeration value="1.4+6.1"/>
        <xs:enumeration value="1.4+6.1+8"/>
        <xs:enumeration value="1.4+8"/>
        <xs:enumeration value="1+6.1"/>
        <xs:enumeration value="1+6.1 (+13)"/>
        <xs:enumeration value="1+6.1 (+15)"/>
        <xs:enumeration value="1+6.1+8"/>
        <xs:enumeration value="1+8"/>
        <xs:enumeration value="2.1 (+13)"/>
        <xs:enumeration value="2.1+6.1"/>
        <xs:enumeration value="2.1+6.1+8"/>
        <xs:enumeration value="2.1+6.1"/>
        <xs:enumeration value="2.1+8"/>
        <xs:enumeration value="2.2 (+13)"/>
        <xs:enumeration value="2.2+5.1+6.1"/>
        <xs:enumeration value="2.2+5.1+6.1+8"/>
        <xs:enumeration value="2.2+5.1+8"/>
        <xs:enumeration value="2.2+6.1"/>
        <xs:enumeration value="2.2+6.1+8"/>
        <xs:enumeration value="2.2+5.1"/>
        <xs:enumeration value="2.2+5.1 (+13)"/>
        <xs:enumeration value="2.2+6.1"/>
        <xs:enumeration value="2.2+8"/>
        <xs:enumeration value="2.3 (+13)"/>
        <xs:enumeration value="2.3+2.1"/>
        <xs:enumeration value="2.3+2.1 (+13)"/>
        <xs:enumeration value="2.3+2.1+8"/>
        <xs:enumeration value="2.3+2.1+8 (+13)"/>
        <xs:enumeration value="2.3+5.1"/>
        <xs:enumeration value="2.3+5.1 (+13)"/>
        <xs:enumeration value="2.3+5.1+8"/>
        <xs:enumeration value="2.3+5.1+8 (+13)"/>
        <xs:enumeration value="2.3+8"/>
        <xs:enumeration value="2.3+8 (+13)"/>
        <xs:enumeration value="4.1+1"/>
        <xs:enumeration value="5.2+1"/>
        <xs:enumeration value="6.1+4.1"/>
        <xs:enumeration value="6.1+8"/>
        <xs:enumeration value="6.2+2.2"/>
        <xs:enumeration value="7X"/>
        <xs:enumeration value="7X+7E"/>
        <xs:enumeration value="8+6.1"/>
        <xs:enumeration value="9+2.2"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **EmptyPackingCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple

facets

Kind	Value	Annotation
enumeration	01	documentation EMPTY PACKAGING
enumeration	02	documentation EMPTY CONTAINER
enumeration	03	documentation EMPTY IBC
enumeration	04	documentation EMPTY LARGE PACKAGING
enumeration	05	documentation EMPTY TANK-VEHICLE
enumeration	06	documentation EMPTY TANK-WAGON
enumeration	07	documentation EMPTY DETACHABLE TANK
enumeration	08	documentation EMPTY DEMOUNTABLE TANK
enumeration	09	documentation EMPTY TANK-CONTAINER
enumeration	10	documentation EMPTY PORTABLE TANK
enumeration	11	documentation EMPTY BATTERY-VEHICLE
enumeration	12	documentation EMPTY BATTERY-WAGON
enumeration	13	documentation EMPTY LARGE CONTAINER WITH MULTIPLE LINKED ELEMENTS
enumeration	14	documentation EMPTY VEHICLE
enumeration	15	documentation EMPTY WAGON
enumeration	16	documentation EMPTY RECEPTACLE le 1000L
enumeration	17	documentation EMPTY RECEPTACLE gt 1000L
enumeration	18	documentation EMPTY

annotation

documentation
Code of empty packing as described in RID 5.4.1.1.6.2
documentation
CODE: OTIF RID-Specification, element EMPTY has been added as 'dummy' until the code list has been finished and approved.

source

```
<xs:element name="EmptyPackingCode">
  <xs:annotation>
    <xs:documentation>Code of empty packing as described in RID
5.4.1.1.6.2</xs:documentation>
    <xs:documentation>CODE: OTIF RID-Specification, element EMPTY has been added as
'dummy' until the code list has been finished and approved. </xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="01">
        <xs:annotation>
          <xs:documentation>EMPTY PACKAGING</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="02">
        <xs:annotation>
          <xs:documentation>EMPTY CONTAINER</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="03">
        <xs:annotation>
          <xs:documentation>EMPTY IBC</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="04">
        <xs:annotation>
          <xs:documentation>EMPTY LARGE PACKAGING</xs:documentation>
        </xs:annotation>
```

```
      </xs:enumeration>
      <xs:enumeration value="05">
        <xs:annotation>
          <xs:documentation>EMPTY TANK-VEHICLE</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="06">
        <xs:annotation>
          <xs:documentation>EMPTY TANK-WAGON</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="07">
        <xs:annotation>
          <xs:documentation>EMPTY DETACHABLE TANK</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="08">
        <xs:annotation>
          <xs:documentation>EMPTY DEMOUNTABLE TANK</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="09">
        <xs:annotation>
          <xs:documentation>EMPTY TANK-CONTAINER</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="10">
        <xs:annotation>
          <xs:documentation>EMPTY PORTABLE TANK</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="11">
        <xs:annotation>
          <xs:documentation>EMPTY BATTERY-VEHICLE</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="12">
        <xs:annotation>
          <xs:documentation>EMPTY BATTERY-WAGON</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="13">
        <xs:annotation>
          <xs:documentation>EMPTY LARGE CONTAINER WITH MULTIPLE LINKED
ELEMENTS</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="14">
        <xs:annotation>
          <xs:documentation>EMPTY VEHICLE</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="15">
        <xs:annotation>
          <xs:documentation>EMPTY WAGON</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="16">
        <xs:annotation>
          <xs:documentation>EMPTY RECEPTACLE le 1000L</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="17">
        <xs:annotation>
```

```
            <xs:documentation>EMPTY RECEPTACLE gt 1000L</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="18">
          <xs:annotation>
            <xs:documentation>EMPTY</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **HandBrakeType**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties: content simple

used by: elements **HandBrake** **WagonTechData**

facets

Kind	Value	Annotation
enumeration	0	documentation: No hand brake
enumeration	1	documentation: Ground-operated hand brake
enumeration	2	documentation: Platform-operated hand brake

annotation: documentation
Classification of hand brake

source

```
<xs:element name="HandBrakeType">
  <xs:annotation>
    <xs:documentation>Classification of hand brake</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="0">
        <xs:annotation>
          <xs:documentation>No hand brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>Ground-operated hand brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>Platform-operated hand brake</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **ILU_TypeDetail**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **ILU_Details**
facets	Kind Value Annotation enumeration BX enumeration BK enumeration FL enumeration HT enumeration HC enumeration IN enumeration OT enumeration HH enumeration PW enumeration OS enumeration RF enumeration SD enumeration SL enumeration VE enumeration TC enumeration RH
source	<xs:element name="ILU_TypeDetail"> <xs:simpleType> <xs:restriction base="xs:token"> <xs:enumeration value="BX"/> <xs:enumeration value="BK"/> <xs:enumeration value="FL"/> <xs:enumeration value="HT"/> <xs:enumeration value="HC"/> <xs:enumeration value="IN"/> <xs:enumeration value="OT"/> <xs:enumeration value="HH"/> <xs:enumeration value="PW"/> <xs:enumeration value="OS"/> <xs:enumeration value="RF"/> <xs:enumeration value="SD"/> <xs:enumeration value="SL"/> <xs:enumeration value="VE"/> <xs:enumeration value="TC"/> <xs:enumeration value="RH"/> </xs:restriction> </xs:simpleType> </xs:element>

element **IncotermCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**

properties	content simple
used by	element **ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions/PrepaymentCustomer**
facets	Kind / Value / Annotation enumeration CIP documentation: Carriage Insurance Paid enumeration CPT documentation: Carriage Paid To enumeration DAF documentation: Delivered At Frontier (deprecated in 2011-01-01) enumeration DDP documentation: Delivered Duty Paid enumeration DDU documentation: Delivered Duty Unpaid (deprecated in 2011-01-01) enumeration EXW documentation: EX Works enumeration FCA documentation: Free Carrier enumeration DAP documentation: Delivered At Place enumeration DAT documentation: Delivered At Terminal
annotation	documentation Incoterm (given by the client)

source

```
<xs:element name="IncotermCode">
  <xs:annotation>
    <xs:documentation>Incoterm (given by the client)</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="CIP">
        <xs:annotation>
          <xs:documentation>Carriage Insurance Paid</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="CPT">
        <xs:annotation>
          <xs:documentation>Carriage Paid To</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DAF">
        <xs:annotation>
          <xs:documentation>Delivered At Frontier (deprecated in 2011-01-
01)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DDP">
        <xs:annotation>
          <xs:documentation>Delivered Duty Paid</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DDU">
        <xs:annotation>
          <xs:documentation>Delivered Duty Unpaid (deprecated in 2011-01-
01)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="EXW">
        <xs:annotation>
          <xs:documentation>EX Works</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="FCA">
        <xs:annotation>
          <xs:documentation>Free Carrier</xs:documentation>
        </xs:annotation>
```

```
      </xs:enumeration>
      <xs:enumeration value="DAP">
        <xs:annotation>
          <xs:documentation>Delivered At Place</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DAT">
        <xs:annotation>
          <xs:documentation>Delivered At Terminal</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **InfoOnGoodsShapeTypeDanger**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **WagonOperationalData**

facets

Kind	Value	Annotation
enumeration	01	documentation Container
enumeration	02	documentation Other intermodal traffic
enumeration	03	documentation Rolling road (RR)
enumeration	06	documentation Semi-Trailer on bogies
enumeration	10	documentation 1 - danger of explosion (subclass 1.1, 1.2, 1.3)
enumeration	14	documentation 1.4 - danger of explosion (subclass 1.4)
enumeration	15	documentation 1.5 - danger of explosion (subclass 1.5)
enumeration	16	documentation 1.6 - danger of explosion (subclass 1.6)
enumeration	21	documentation 2.1 - inflammable gases
enumeration	22	documentation 2.2 - non inflammable,non-toxic gases
enumeration	23	documentation 2.3 - toxic gases
enumeration	30	documentation 3 - fire hazard (inflammable liquids)
enumeration	41	documentation 4.1 - fire hazard (inflammable solids)
enumeration	42	documentation 4.2 - spontaneoulsy inflammable
enumeration	43	documentation 4.3 - gives off inflammable gas on contact with water
enumeration	51	documentation 5.1 - combustible substance
enumeration	52	documentation 5.2 - organic peroxide
enumeration	61	documentation 6.1 - toxic substance
enumeration	62	documentation 6.2 - infectious substance

	enumeration 71 documentation 7A - radioactive substance in category I packing WHITE enumeration 72 documentation 7B - radioactive substance in category II packing YELLOW enumeration 73 documentation 7C - radioactive substance in category III packing YELLOW enumeration 74 documentation 7D - Common label for radioactive substances included under 7A, 7B + 7C enumeration 75 documentation 7E - fissible substance enumeration 80 documentation 8 - corrosive substance enumeration 90 documentation Various dangerouse substance and objects not covered by the other classes enumeration 96 documentation Environmentally hazardous substance (RID 5.2.1.8) enumeration 97 documentation More than 8 tons of dangerous goods packaged in limited quantities (LQ) enumeration 98 documentation Livestock enumeration 99 documentation Perishables
annotation	documentation Additional codified information on the load. Coding Structures as defined in 404-2 chapter 4.1

source

```
<xs:element name="InfoOnGoodsShapeTypeDanger">
  <xs:annotation>
    <xs:documentation>Additional codified information on the load.  Coding Structures
as defined in 404-2  chapter 4.1</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="01">
        <xs:annotation>
          <xs:documentation>Container</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="02">
        <xs:annotation>
          <xs:documentation>Other intermodal traffic</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="03">
        <xs:annotation>
          <xs:documentation>Rolling road (RR)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="06">
        <xs:annotation>
          <xs:documentation>Semi-Trailer on bogies</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="10">
        <xs:annotation>
          <xs:documentation>1 - danger of explosion (subclass 1.1, 1.2,
1.3)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="14">
        <xs:annotation>
          <xs:documentation>1.4 - danger of explosion (subclass
1.4)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="15">
        <xs:annotation>
          <xs:documentation>1.5 - danger of explosion (subclass
1.5)</xs:documentation>
```

```
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="16">
        <xs:annotation>
          <xs:documentation>1.6 - danger of explosion (subclass
1.6)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="21">
        <xs:annotation>
          <xs:documentation>2.1 - inflammable gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="22">
        <xs:annotation>
          <xs:documentation>2.2 - non inflammable,non-toxic gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="23">
        <xs:annotation>
          <xs:documentation>2.3 - toxic gases</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="30">
        <xs:annotation>
          <xs:documentation>3 - fire hazard (inflammable liquids)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="41">
        <xs:annotation>
          <xs:documentation>4.1 - fire hazard (inflammable solids)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="42">
        <xs:annotation>
          <xs:documentation>4.2 - spontaneoulsy inflammable</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="43">
        <xs:annotation>
          <xs:documentation>4.3 - gives off inflammable gas on contact with
water</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="51">
        <xs:annotation>
          <xs:documentation>5.1 - combustible substance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="52">
        <xs:annotation>
          <xs:documentation>5.2 - organic peroxide</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="61">
        <xs:annotation>
          <xs:documentation>6.1 - toxic substance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="62">
        <xs:annotation>
          <xs:documentation>6.2 - infectious substance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
```

```
      <xs:enumeration value="71">
        <xs:annotation>
          <xs:documentation>7A - radioactive substance in category I packing
WHITE</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="72">
        <xs:annotation>
          <xs:documentation>7B - radioactive substance in category II packing
YELLOW</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="73">
        <xs:annotation>
          <xs:documentation>7C - radioactive substance in category III packing
YELLOW</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="74">
        <xs:annotation>
          <xs:documentation>7D - Common label for radioactive substances included
under 7A, 7B + 7C</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="75">
        <xs:annotation>
          <xs:documentation>7E - fissible substance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="80">
        <xs:annotation>
          <xs:documentation>8 - corrosive substance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="90">
        <xs:annotation>
          <xs:documentation>Various dangerouse substance and objects not covered by
the other classes</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="96">
        <xs:annotation>
          <xs:documentation>Environmentally hazardous substance (RID
5.2.1.8)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="97">
        <xs:annotation>
          <xs:documentation>More than 8 tons of dangerous goods packaged in limited
quantities (LQ)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="98">
        <xs:annotation>
          <xs:documentation>Livestock</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="99">
        <xs:annotation>
          <xs:documentation>Perishables</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

	</xs:element>

element **InteropCapability**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/AdministrativeDataSet**
facets	Kind Value Annotation totalDigits 2 enumeration 1 documentation National enumeration 2 documentation Bi-/Multilateral (with agreement or authorisation grid) enumeration 3 documentation RIV enumeration 5 documentation TEN enumeration 6 documentation TEN-GE enumeration 7 documentation TEN-CW enumeration 8 documentation TEN RIV
annotation	documentation Identification of the general interoperability capability of the wagon.

source

```
<xs:element name="InteropCapability">
  <xs:annotation>
    <xs:documentation>Identification of the general interoperability capability of
the wagon.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:integer">
      <xs:totalDigits value="2"/>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>National</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>Bi-/Multilateral (with agreement or authorisation
grid)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>RIV</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5">
        <xs:annotation>
          <xs:documentation>TEN</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6">
        <xs:annotation>
```

```
            <xs:documentation>TEN-GE</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="7">
          <xs:annotation>
            <xs:documentation>TEN-CW</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="8">
          <xs:annotation>
            <xs:documentation>TEN RIV</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **JourneyLocationTypeCode**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties: content simple

used by: element **PlannedJourneyLocation**

facets

Kind	Value	Annotation
enumeration	01	documentation: Origin
enumeration	02	documentation: Intermediate
enumeration	03	documentation: Destination
enumeration	04	documentation: Handover
enumeration	05	documentation: Interchange
enumeration	06	documentation: Handover and Interchange
enumeration	07	documentation: State Border
enumeration	08	documentation: None
enumeration	09	documentation: Network border
enumeration	99	documentation: Mutually Defined

source

```
<xs:element name="JourneyLocationTypeCode">
  <xs:annotation>
    <xs:documentation/>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="01">
        <xs:annotation>
          <xs:documentation>Origin</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="02">
        <xs:annotation>
          <xs:documentation>Intermediate</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
```

```
      <xs:enumeration value="03">
        <xs:annotation>
          <xs:documentation>Destination</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="04">
        <xs:annotation>
          <xs:documentation>Handover</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="05">
        <xs:annotation>
          <xs:documentation>Interchange</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="06">
        <xs:annotation>
          <xs:documentation>Handover and Interchange</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="07">
        <xs:annotation>
          <xs:documentation>State Border</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="08">
        <xs:annotation>
          <xs:documentation>None</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="09">
        <xs:annotation>
          <xs:documentation>Network border</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="99">
        <xs:annotation>
          <xs:documentation>Mutually Defined</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **LivestockOrPeopleIndicator**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **TrainCompositionJourneySection**

facets	Kind / Value / Annotation enumeration 0 enumeration 1
annotation	documentation Indicates that livestock and people (other than train crew) will be carried. Coding: if live animals or people are transported = 1, in opposite case = 0. If code = 1, then at the wagon level for at least one wagon Info- Goods Shape, Type and Danger has to include the code '98' or Restrictions due to Load or Damage has to include code '09.'
source	<xs:element name="LivestockOrPeopleIndicator"> <xs:annotation> <xs:documentation>Indicates that livestock and people (other than train crew) will be carried. Coding: if live animals or people are transported = 1, in opposite case = 0. If code = 1, then at the wagon level for at least one wagon Info- Goods Shape, Type and Danger has to include the code '98' or Restrictions due to Load or Damage has to include code '09.'</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:enumeration value="0"/> <xs:enumeration value="1"/> </xs:restriction> </xs:simpleType> </xs:element>

element **LoadTableStars**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet/LoadTable**
facets	Kind / Value / Annotation totalDigits 1 enumeration 1 documentation: Authorised to run in trains up to 100 km/h with a brake that does not meet all the requirements for S (100 km/h) conditions. enumeration 2 documentation: Authorised to run in trains up to 120 km/h with a brake that does not meet all the requirements for SS (120 km/h) conditions. enumeration 3 documentation: Authorised to run in trains up to 120 km/h with a brake that does not meet all the requirements for SS (120 km/h) conditions. The wagons must be fitted with an automatic load-proportional braking system.
annotation	documentation Number of load table stars.
source	<xs:element name="LoadTableStars"> <xs:annotation> <xs:documentation>Number of load table stars.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:integer"> <xs:totalDigits value="1"/> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Authorised to run in trains up to 100 km/h with a brake that does not meet all the requirements for S (100 km/h) conditions.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2">

```
        <xs:annotation>
          <xs:documentation>Authorised to run in trains up to 120 km/h with a brake
that does not meet all the requirements for SS (120 km/h)
conditions.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>Authorised to run in trains up to 120 km/h with a brake
that does not meet all the requirements for SS (120 km/h) conditions. The wagons must
be fitted with an automatic load-proportional braking system.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **MessageStatus**

diagram

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties: content simple

used by (elements): ChangeofTrackMessage, ErrorMessage, LocationFileDatasetMessage, PathCanceledMessage, PathConfirmedMessage, PathDetailsMessage, PathDetailsRefusedMessage, PathNotAvailableMessage, PathRequestMessage, TrainCompositionMessage, TrainDelayCauseMessage, TrainForecastAtReportingLocationMessage, TrainJourneyModificationMessage, TrainReadyMessage, TrainRunningForecastMessage, TrainRunningInformationMessage, TrainRunningInterruptionMessage

facets

Kind	Value	Annotation
enumeration	1	documentation: creation
enumeration	2	documentation: modification
enumeration	3	documentation: deletion

annotation: documentation
Assigned by the Sender 1=creation, 2=modification, 3=deletion

source

```
<xs:element name="MessageStatus">
  <xs:annotation>
    <xs:documentation>Assigned by the Sender 1=creation, 2=modification,
3=deletion</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>creation</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>modification</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>deletion</xs:documentation>
        </xs:annotation>
```

```
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **MRN_Type**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties: content simple

used by: element **ReferenceNumbers/MovementReferenceNumber**

facets

Kind	Value	Annotation
enumeration	MRN-E	documentation if an EXPORT declaration has been lodged
enumeration	MRN-T	documentation if a TRANSIT declaration has been lodged
enumeration	MRN-TS	documentation if a TRANSIT declaration with SECURITY data has been lodged
enumeration	MRN-EXS	documentation if the EXIT SUMMARY declaration has been made separately by the consignor
enumeration	MRN-ENS	documentation if the ENTRY SUMMARY declaration has been made separately by the consignor

annotation: documentation
Type of MRN given, CODE: CIT GLV-CIM appendix 2

source

```
<xs:element name="MRN_Type">
  <xs:annotation>
    <xs:documentation>Type of MRN given, CODE: CIT GLV-CIM appendix
2</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="MRN-E">
        <xs:annotation>
          <xs:documentation>if an EXPORT declaration has been
lodged</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="MRN-T">
        <xs:annotation>
          <xs:documentation>if a TRANSIT declaration has been
lodged</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="MRN-TS">
        <xs:annotation>
          <xs:documentation>if a TRANSIT declaration with SECURITY data has been
lodged</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="MRN-EXS">
        <xs:annotation>
          <xs:documentation>if the EXIT SUMMARY declaration has been made separately
by the consignor</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="MRN-ENS">
        <xs:annotation>
```

```
            <xs:documentation>if the ENTRY SUMMARY declaration has been made separately
by the consignor</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **NormalLoadingGauge**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties: content simple

used by: elements **RollingStockDataset/DesignDataSet** **WagonTechData**

facets

Kind	Value	Annotation
enumeration	G1	
enumeration	G2	
enumeration	GA	
enumeration	GB	
enumeration	GC	
enumeration	GB1	
enumeration	GB2	
enumeration	GB-M6	
enumeration	GHE16	
enumeration	W6-A	
enumeration	SEa	

annotation

documentation

All codes are defined in the UIC leaflet 505-1 and 503, as well as in the EN 15273-2:2013. For details please refer to EN 15273-2:2013 (Railway applications - Gauges - Part 2: Rolling stock gauge). For the existing gauges in the list, the Annex B.3 should be used.

source

```
<xs:element name="NormalLoadingGauge">
  <xs:annotation>
    <xs:documentation>
                    All codes are defined in the UIC leaflet 505-1 and 503, as well
as in the EN 15273-2:2013. For details please refer to EN 15273-2:2013 (Railway
applications - Gauges - Part 2: Rolling stock gauge). For the existing gauges in the
list, the Annex B.3 should be used.
                    </xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="G1"/>
      <xs:enumeration value="G2"/>
      <xs:enumeration value="GA"/>
      <xs:enumeration value="GB"/>
```

```
      <xs:enumeration value="GC"/>
      <xs:enumeration value="GB1"/>
      <xs:enumeration value="GB2"/>
      <xs:enumeration value="GB-M6"/>
      <xs:enumeration value="GHE16"/>
      <xs:enumeration value="W6-A"/>
      <xs:enumeration value="SEa"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **PackingGroup**

diagram

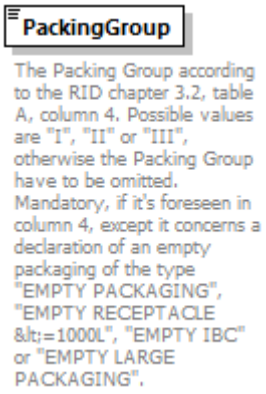

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties: content simple

used by:
elements **RID SummaryOFGoodsWithSameRID**
complexType **DanGoodsType**

facets

Kind	Value	Annotation
enumeration	I	documentation: High danger
enumeration	II	documentation: Medium danger
enumeration	III	documentation: Low danger

annotation

documentation
The Packing Group according to the RID chapter 3.2, table A, column 4. Possible values are "I", "II" or "III", otherwise the Packing Group have to be omitted. Mandatory, if it's foreseen in column 4, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE <=1000L", "EMPTY IBC" or "EMPTY LARGE PACKAGING".

source

```
<xs:element name="PackingGroup">
  <xs:annotation>
    <xs:documentation>The Packing Group according to the RID chapter 3.2, table A, column 4. Possible values are "I", "II" or "III", otherwise the Packing Group have to be omitted. Mandatory, if it's foreseen in column 4, except it concerns a declaration of an empty packaging of the type "EMPTY PACKAGING", "EMPTY RECEPTACLE &lt;=1000L", "EMPTY IBC" or "EMPTY LARGE PACKAGING".</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="I">
        <xs:annotation>
          <xs:documentation>High danger</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="II">
        <xs:annotation>
          <xs:documentation>Medium danger</xs:documentation>
```

```
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="III">
        <xs:annotation>
          <xs:documentation>Low danger</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **PrepaidcodeCarrier**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties: content simple

used by: element **ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions**

facets

Kind	Value	Annotation
enumeration	10	documentation: prepaid freight
enumeration	11	documentation: prepaid freight including...
enumeration	12	documentation: prepaid freight including...up to border of origin country
enumeration	13	documentation: prepaid freight including...up to exit border of last transit country
enumeration	14	documentation: prepaid freight including...up to exit border of other countries
enumeration	15	documentation: prepaid freight up to border of origin country
enumeration	16	documentation: prepaid freight up to exit border of last transit country
enumeration	17	documentation: prepaid freight up to exit border of other countries
enumeration	20	documentation: prepaid all costs
enumeration	42	documentation: Free carrier
enumeration	43	documentation: Carriage paid to...
enumeration	44	documentation: Delivered duty unpaid
enumeration	45	documentation: Carriage insurance paid
enumeration	46	documentation: Delivered at terminal
enumeration	47	documentation: Delivered at place
enumeration	90	documentation: not prepaid

annotation: documentation
Prepaidcode (given by the railway)

source

```
<xs:element name="PrepaidcodeCarrier">
  <xs:annotation>
    <xs:documentation>Prepaidcode (given by the railway)</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="10">
        <xs:annotation>
```

```
            <xs:documentation>prepaid freight</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="11">
          <xs:annotation>
            <xs:documentation>prepaid freight including... </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="12">
          <xs:annotation>
            <xs:documentation>prepaid freight including...up to border of origin
country</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="13">
          <xs:annotation>
            <xs:documentation>prepaid freight including...up to exit border of last
transit country </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="14">
          <xs:annotation>
            <xs:documentation>prepaid freight including...up to exit border of other
countries </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="15">
          <xs:annotation>
            <xs:documentation>prepaid freight up to border of origin country
</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="16">
          <xs:annotation>
            <xs:documentation>prepaid freight up to exit border of last transit
country</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="17">
          <xs:annotation>
            <xs:documentation>prepaid freight up to exit border of other countries
</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="20">
          <xs:annotation>
            <xs:documentation>prepaid all costs</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="42">
          <xs:annotation>
            <xs:documentation>Free carrier </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="43">
          <xs:annotation>
            <xs:documentation>Carriage paid to...</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="44">
          <xs:annotation>
            <xs:documentation>Delivered duty unpaid</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
```

```
      <xs:enumeration value="45">
        <xs:annotation>
          <xs:documentation>Carriage insurance paid </xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="46">
        <xs:annotation>
          <xs:documentation>Delivered at terminal</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="47">
        <xs:annotation>
          <xs:documentation>Delivered at place</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="90">
        <xs:annotation>
          <xs:documentation>not prepaid</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **PrepaidCodeCustomer**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **ConsignmentOrderMessage/COMS/COM/PrepaymentInstructions/PrepaymentCustomer**

facets

Kind	Value	Annotation
enumeration	10	documentation prepaid freight
enumeration	11	documentation prepaid freight including...
enumeration	12	documentation prepaid freight including...up to border of origin country
enumeration	13	documentation prepaid freight including...up to exit border of last transit country
enumeration	14	documentation prepaid freight including...up to exit border of other countries
enumeration	15	documentation prepaid freight up to border of origin country
enumeration	16	documentation prepaid freight up to exit border of last transit country
enumeration	17	documentation prepaid freight up to exit border of other countries
enumeration	20	documentation prepaid all costs
enumeration	42	documentation Free carrier
enumeration	43	documentation Carriage paid to...
enumeration	44	documentation Delivered duty unpaid
enumeration	45	documentation Carriage insurance paid
enumeration	46	documentation Delivered at terminal

	enumeration 47 documentation Delivered at place enumeration 90 documentation not prepaid
annotation	documentation Prepaidcode (given by the customer)
source	<xs:element name="PrepaidCodeCustomer"> <xs:annotation> <xs:documentation>Prepaidcode (given by the customer)</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:token"> <xs:enumeration value="10"> <xs:annotation> <xs:documentation>prepaid freight</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="11"> <xs:annotation> <xs:documentation>prepaid freight including... </xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="12"> <xs:annotation> <xs:documentation>prepaid freight including...up to border of origin country</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="13"> <xs:annotation> <xs:documentation>prepaid freight including...up to exit border of last transit country </xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="14"> <xs:annotation> <xs:documentation>prepaid freight including...up to exit border of other countries </xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="15"> <xs:annotation> <xs:documentation>prepaid freight up to border of origin country </xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="16"> <xs:annotation> <xs:documentation>prepaid freight up to exit border of last transit country</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="17"> <xs:annotation> <xs:documentation>prepaid freight up to exit border of other countries </xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="20"> <xs:annotation> <xs:documentation>prepaid all costs</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="42"> <xs:annotation>

```
            <xs:documentation>Free carrier </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="43">
          <xs:annotation>
            <xs:documentation>Carriage paid to...</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="44">
          <xs:annotation>
            <xs:documentation>Delivered duty unpaid</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="45">
          <xs:annotation>
            <xs:documentation>Carriage insurance paid </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="46">
          <xs:annotation>
            <xs:documentation>Delivered at terminal</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="47">
          <xs:annotation>
            <xs:documentation>Delivered at place</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="90">
          <xs:annotation>
            <xs:documentation>not prepaid</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **ProcessType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	elements PathCanceledMessage PathConfirmedMessage PathDetailsMessage PathDetailsRefusedMessage PathNotAvailableMessage PathRequestMessage

facets

Kind	Value	Annotation
enumeration	0	documentation New Path Request and allocation process for annual timetable
enumeration	1	documentation Late Path Request and allocation process for annual timetable
enumeration	2	documentation Ad hoc path request and allocation process
enumeration	3	documentation Rolling Planning path request and allocation process
enumeration	4	documentation Feasibility Study process
enumeration	5	documentation Path Modification process (triggered by applicant)
enumeration	6	documentation

	enumeration 7 Path Alteration process (triggered by IM) documentation enumeration 8 Pre-arranged Path publication by RFC documentation enumeration 10 Catalogue Path publication by IM documentation enumeration 11 Path Cancellation process documentation Path Utilisation notification process
annotation	documentation Business process type to further distinguish among type of requests.
source	<xs:element name="ProcessType"> <xs:annotation> <xs:documentation>Business process type to further distinguish among type of requests.</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:token"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>New Path Request and allocation process for annual timetable</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Late Path Request and allocation process for annual timetable</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Ad hoc path request and allocation process</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Rolling Planning path request and allocation process</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Feasibility Study process</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Path Modification process (triggered by applicant)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>Path Alteration process (triggered by IM)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>Pre-arranged Path publication by RFC</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8">

```
          <xs:annotation>
            <xs:documentation>Catalogue Path publication by IM</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="10">
          <xs:annotation>
            <xs:documentation>Path Cancellation process</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="11">
          <xs:annotation>
            <xs:documentation>Path Utilisation notification process</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **ReasonOfReference**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**

properties	content simple
used by	element **Identifiers**
facets	Kind / Value / Annotation minLength 4 maxLength 4 enumeration 1000 documentation: Same path offer is desired as for stated PathRequestMessage enumeration 1001 documentation: Same path is desired as for stated train/path enumeration 1002 documentation: Full replacement of stated previous path enumeration 1003 documentation: Partial replacement of stated previous path enumeration 1004 documentation: Reference to sub train of Y-train bundle enumeration 1005 documentation: Reference to main train of Y-train bundle enumeration 1006 documentation: Reference to another PathRequestMessage after interruption train's journey by a foreign infrastructure area enumeration 1007 documentation: Reference to another PathRequestMessage before interruption train's journey by a foreign infrastructure area enumeration 1008 documentation: Reference to further path offer for the PathRequestMessage enumeration 1009 documentation: Reference to booked path before interruption by railway replacement traffic by bus enumeration 1010 documentation: Reference to a PreArrangedPath enumeration 1011 documentation: Only the new train object shall be linked with the existing booked path for the specified validity period; no new path elaboration is needed enumeration 1012 documentation: New final offer to former draft offer enumeration 1013 documentation: Replaced path after modification by ResponsibleApplicant enumeration 1014 documentation: New Route enumeration 1015 documentation: Updated Route enumeration 5001 documentation: Reference to another object on the basis of incident management in operations phase enumeration DE01 documentation: Reference to an associated empty/transfer train enumeration DE02 documentation: Reference to an associated main run enumeration DE03 documentation: Notice stated PathRequestMessage enumeration DE04 documentation: Replacement of stated train enumeration DE05 documentation: Reference to a reserved capacity enumeration DE06 documentation: Use of same OTN as of stated train enumeration DE07 documentation: PathID from a framework contract
annotation	documentation Indicates the reason/purpose of usage of element RelatedPlannedTransportIdentifier. List of codes for element ReasonOfReference: 1000 = Same path offer is desired as for stated PathRequestMessage (Additional information: For a train requested with more than one PathRequestMessage (all with different bitmapdays) the same (or nearly the same) routing and timing at location in path offers for all PathRequestMessages (PathRequestIDs) is desired by Responsible Applicant (if it is possible). RPTID: All others PathRequestIDs). 1001 = Same path is desired as for stated train/path (Additional information: For that path request the same (or nearly the same) routing/path elaboration/offer is desired by Responsible Applicant (if it is possible) as for stated train/path (may be in a previous period). RPTID: TrainID or PathID). 1002 = Full replacement of stated previous path

	(Additional information:The current path given in PathDetailsMessage will replace the stated path fully after confirming the path offer. The code is used to mark an alternative offer after PathNotAvailableMessage/PathCanceledMessage or path alteration by IM. Calendar of previous path and offered path contain the same dates. The previous path doesn't exist anymore. RPTID: PathID). 1003 = Partial replacement of stated previous path (Additional information: The current path given in PathDetailsMessage will replace the stated path partially after confirming the path offer. The code is used to mark an alternative offer after PathNotAvailableMessage/PathCanceledMessage or path alteration by IM only for a part of the previous calendar/traffic days. Calendar of offered path is only part of the calendar of former and changed path. The calendar of the previous path has to changed (less days and shorter validity period) after confirmation of the offered path. RPTID: PathID). 1004 = Reference to sub train of Y-train bundle (Additional information: The current PathRequestMessage contains the main train of a Y-train bundle; the TrainID stated in RPTID is for the sub train which will be joined with or splitted of the main train.) 1005 = Reference to main train of Y-train bundle (Additional information: The current PathRequestMessage contains the sub train of a Y-train bundle. The TrainID stated in RPTID is for the main train with which the sub train will be joined with or splitted of.) 1006 = Reference to another PathRequestMessage after interruption train's journey by a foreign infrastructure area (Additional information: The referencing indicates that another PathRequestMessage (specifying PathRequestID as RPTID) for the same train exists after passing a foreign infrastructure area to continue train's journey.) 1007 = Reference to another PathRequestMessage before interruption train's journey by a foreign infrastructure area (Additional information: The referencing indicates that another PathRequestMessage (specifying PathRequestID as RPTID) for the same train exists before passing a foreign infrastructure area.) 1008 = Reference to further path offer for the PathRequestMessage (Additional information: There are more than one path offers for the PathRequestMessage. RPTID: All other PathID's.) 1009 = Reference to booked path before interruption by railway replacement traffic by bus (Additional information: The stated train/path is continued following a railway replacement traffic with that new requested train/path. RPTID: PathID). 1010 = Reference to a PreArrangedPath (Additional information: Reference to a PathID of existing PAP, which is to be used by an annual train requested with that PRM. RPTID: PathID). 1011 = Only the new train object shall be linked with the existing booked path for the specified validity period; no new path elaboration is needed (Additional information: The code is used, when a new train object has to be linked with an existing booked path for a specified validity period and no new path elaboration is needed. It is used in modification process of planning phase only instead of using UpdateLinkMessage and ObjectInfoMessage. Result: Internal path modification (reduce of validity period of calendar) for previous Path. New path with new PathID for the specified validity period. RPTID: Previous TrainID and PathID). 1012 = New final offer to former draft offer (Additional information: Reference to (old) draft offer in case of IM is making a (different) new offer (TypeOfInformation : Final offer). Code is used only in process PathRequest (annual timetable); RPTID : PathID of draft offer.) 1013 = Replaced path after modification by ResponsibleApplicant (Additional information: Reference to replaced path when IM is making an offer after receiving PathRequestMessage sent by RA for modification of booked path. Code is used only in Path Modification process in PathDetailsMessage. RPTID: PathID.) 1014 = New Route (Additional information: Reference to previous Route replaced by the new Route) 1015 = Updated Route (Additional information: Reference to the Route that is updated) 5001 = Reference to another object on the basis of incident management in operations phase Specific code only for one IM/national codes: DE01 = Reference to an associated empty/transfer train (Additional information: Stated train is a related train without passengers before or behind the current requested path for a train with passengers. RPTID: TrainID.) DE02 = Reference to an associated main run (Additional information: Stated train is a related train with passengers before or behind the current requested path for a train without passengers. RPTID: TrainID.) DE03 = Notice stated PathRequestMessage (Additional information: For path elaboration of current PathRequestMessage the stated PathRequestMessage should be considered. RPTID: PathRequestID.)

	DE04 = Replacement of stated train (Additional information: Full or partial replacement of the named former train; example: Change of passenger trainset (like ICE or TGV) by set of loco and wagons in case of technical problems, delay or other reasons. It is not only change of TrainID. RPTID: TrainID.) DE05 = Reference to a reserved capacity (Additional information: This code can be used to refer to a study offer (with booking option) as a result of the KFB process (internal process for a specific product of DB Netz). RPTID: PathID.) DE06 = Use of same OTN as of stated train (Additional information: Responsible Applicant wants to use same OTN as in stated train because of all trains are part of same family. The trains have only slightly differences on various days. RPTID: TrainID.) DE07 = PathID from a framework contract
source	<xs:element name="ReasonOfReference"> <xs:annotation> <xs:documentation>Indicates the reason/purpose of usage of element RelatedPlannedTransportIdentifier. List of codes for element ReasonOfReference: 1000 = Same path offer is desired as for stated PathRequestMessage (Additional information: For a train requested with more than one PathRequestMessage (all with different bitmapdays) the same (or nearly the same) routing and timing at location in path offers for all PathRequestMessages (PathRequestIDs) is desired by Responsible Applicant (if it is possible). RPTID: All others PathRequestIDs). 1001 = Same path is desired as for stated train/path (Additional information: For that path request the same (or nearly the same) routing/path elaboration/offer is desired by Responsible Applicant (if it is possible) as for stated train/path (may be in a previous period). RPTID: TrainID or PathID). 1002 = Full replacement of stated previous path (Additional information:The current path given in PathDetailsMessage will replace the stated path fully after confirming the path offer. The code is used to mark an alternative offer after PathNotAvailableMessage/PathCanceledMessage or path alteration by IM. Calendar of previous path and offered path contain the same dates. The previous path doesn’t exist anymore. RPTID: PathID). 1003 = Partial replacement of stated previous path (Additional information: The current path given in PathDetailsMessage will replace the stated path partially after confirming the path offer. The code is used to mark an alternative offer after PathNotAvailableMessage/PathCanceledMessage or path alteration by IM only for a part of the previous calendar/traffic days. Calendar of offered path is only part of the calendar of former and changed path. The calendar of the previous path has to changed (less days and shorter validity period) after confirmation of the offered path. RPTID: PathID). 1004 = Reference to sub train of Y-train bundle (Additional information: The current PathRequestMessage contains the main train of a Y-train bundle; the TrainID stated in RPTID is for the sub train which will be joined with or splitted of the main train.) 1005 = Reference to main train of Y-train bundle (Additional information: The current PathRequestMessage contains the sub train of a Y-train bundle. The TrainID stated in RPTID is for the main train with which the sub train will be joined with or splitted of.) 1006 = Reference to another PathRequestMessage after interruption train’s journey by a foreign infrastructure area (Additional information: The referencing indicates that another PathRequestMessage (specifying PathRequestID as RPTID) for the same train exists after passing a foreign infrastructure area to continue train’s journey.) 1007 = Reference to another PathRequestMessage before interruption train’s journey by a foreign infrastructure area (Additional information: The referencing indicates that another PathRequestMessage (specifying PathRequestID as RPTID) for the same train

	exists before passing a foreign infrastructure area.) 1008 = Reference to further path offer for the PathRequestMessage (Additional information: There are more than one path offers for the PathRequestMessage. RPTID: All other PathID's.) 1009 = Reference to booked path before interruption by railway replacement traffic by bus (Additional information: The stated train/path is continued following a railway replacement traffic with that new requested train/path. RPTID: PathID). 1010 = Reference to a PreArrangedPath (Additional information: Reference to a PathID of existing PAP, which is to be used by an annual train requested with that PRM. RPTID: PathID). 1011 = Only the new train object shall be linked with the existing booked path for the specified validity period; no new path elaboration is needed (Additional information: The code is used, when a new train object has to be linked with an existing booked path for a specified validity period and no new path elaboration is needed. It is used in modification process of planning phase only instead of using UpdateLinkMessage and ObjectInfoMessage. Result: Internal path modification (reduce of validity period of calendar) for previous Path. New path with new PathID for the specified validity period. RPTID: Previous TrainID and PathID). 1012 = New final offer to former draft offer (Additional information: Reference to (old) draft offer in case of IM is making a (different) new offer (TypeOfInformation : Final offer). Code is used only in process PathRequest (annual timetable); RPTID : PathID of draft offer.) 1013 = Replaced path after modification by ResponsibleApplicant (Additional information: Reference to replaced path when IM is making an offer after receiving PathRequestMessage sent by RA for modification of booked path. Code is used only in Path Modification process in PathDetailsMessage. RPTID: PathID.) 1014 = New Route (Additional information: Reference to previous Route replaced by the new Route) 1015 = Updated Route (Additional information: Reference to the Route that is updated) 5001 = Reference to another object on the basis of incident management in operations phase Specific code only for one IM/national codes: DE01 = Reference to an associated empty/transfer train (Additional information: Stated train is a related train without passengers before or behind the current requested path for a train with passengers. RPTID: TrainID.) DE02 = Reference to an associated main run (Additional information: Stated train is a related train with passengers before or behind the current requested path for a train without passengers. RPTID: TrainID.) DE03 = Notice stated PathRequestMessage (Additional information: For path elaboration of current PathRequestMessage the stated PathRequestMessage should be considered. RPTID: PathRequestID.) DE04 = Replacement of stated train (Additional information: Full or partial replacement of the named former train; example: Change of passenger trainset (like ICE or TGV) by set of loco and wagons in case of technical problems, delay or other reasons. It is not only change of TrainID. RPTID: TrainID.) DE05 = Reference to a reserved capacity (Additional information: This code can be used to refer to a study offer (with booking option) as a result of the KFB process (internal process for a specific product of DB Netz). RPTID: PathID.) DE06 = Use of same OTN as of stated train (Additional information: Responsible Applicant wants to use same OTN as in stated train because of all trains are part of same family. The trains have only slightly differences on various days. RPTID: TrainID.)

```
DE07 = PathID from a framework contract
</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="4"/>
      <xs:maxLength value="4"/>
      <xs:enumeration value="1000">
        <xs:annotation>
          <xs:documentation>Same path offer is desired as for stated
PathRequestMessage</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1001">
        <xs:annotation>
          <xs:documentation>Same path is desired as for stated
train/path</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1002">
        <xs:annotation>
          <xs:documentation>Full replacement of stated previous
path</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1003">
        <xs:annotation>
          <xs:documentation>Partial replacement of stated previous
path</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1004">
        <xs:annotation>
          <xs:documentation>Reference to sub train of Y-train
bundle</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1005">
        <xs:annotation>
          <xs:documentation>Reference to main train of Y-train
bundle</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1006">
        <xs:annotation>
          <xs:documentation>Reference to another PathRequestMessage after
interruption train’s journey by a foreign infrastructure area</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1007">
        <xs:annotation>
          <xs:documentation>Reference to another PathRequestMessage before
interruption train’s journey by a foreign infrastructure area</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1008">
        <xs:annotation>
          <xs:documentation>Reference to further path offer for the
PathRequestMessage</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1009">
        <xs:annotation>
          <xs:documentation>Reference to booked path before interruption by railway
```

```
replacement traffic by bus</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1010">
        <xs:annotation>
          <xs:documentation>Reference to a PreArrangedPath</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1011">
        <xs:annotation>
          <xs:documentation>Only the new train object shall be linked with the
existing booked path for the specified validity period; no new path elaboration is
needed</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1012">
        <xs:annotation>
          <xs:documentation>New final offer to former draft offer</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1013">
        <xs:annotation>
          <xs:documentation>Replaced path after modification by
ResponsibleApplicant</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1014">
        <xs:annotation>
          <xs:documentation>New Route</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1015">
        <xs:annotation>
          <xs:documentation>Updated Route</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5001">
        <xs:annotation>
          <xs:documentation>Reference to another object on the basis of incident
management in operations phase</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DE01">
        <xs:annotation>
          <xs:documentation>Reference to an associated empty/transfer
train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DE02">
        <xs:annotation>
          <xs:documentation>Reference to an associated main run</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DE03">
        <xs:annotation>
          <xs:documentation>Notice stated PathRequestMessage</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DE04">
        <xs:annotation>
          <xs:documentation>Replacement of stated train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DE05">
```

```
        <xs:annotation>
          <xs:documentation>Reference to a reserved capacity</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DE06">
        <xs:annotation>
          <xs:documentation>Use of same OTN as of stated train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DE07">
        <xs:annotation>
          <xs:documentation>PathID from a framework contract</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RefusalCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
used by	element **RollingStockDatasetMessage/RefusedWagonNumbers**
facets	Kind / Value / Annotation enumeration 1 — documentation: Data not authorised by Wagon Keeper enumeration 2 — documentation: Wagon number freight unknown
annotation	documentation Code List Candidate

source

```
<xs:element name="RefusalCode">
  <xs:annotation>
    <xs:documentation>Code List Candidate</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:integer">
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>Data not authorised by Wagon Keeper</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>Wagon number freight unknown</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RollingRoadUnitType**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
facets	Kind / Value / Annotation enumeration HGZ — documentation: articulated lorry enumeration SAL — documentation: semi-trailer enumeration MW — documentation: motor vehicle enumeration ANH — documentation: trailer
annotation	documentation Type of Rolling Road unit on Wagon
source	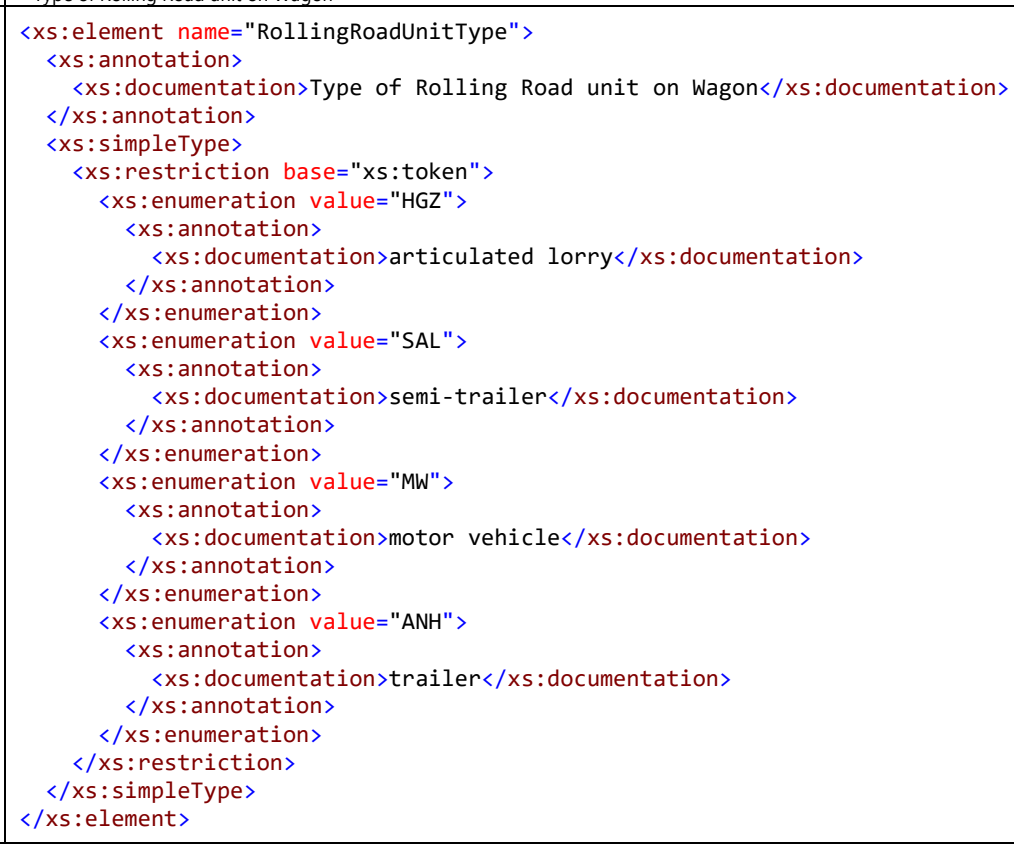

```
<xs:element name="RollingRoadUnitType">
  <xs:annotation>
    <xs:documentation>Type of Rolling Road unit on Wagon</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="HGZ">
        <xs:annotation>
          <xs:documentation>articulated lorry</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="SAL">
        <xs:annotation>
          <xs:documentation>semi-trailer</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="MW">
        <xs:annotation>
          <xs:documentation>motor vehicle</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="ANH">
        <xs:annotation>
          <xs:documentation>trailer</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RouteClass**

diagram	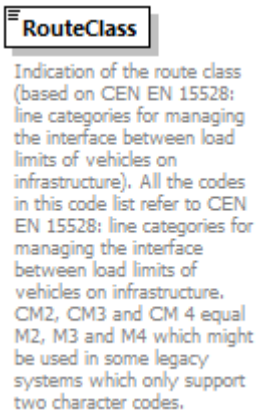
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	content simple
used by	elements **PlannedTrainTechnicalData** **RollingStockDataset/DesignDataSet/LoadTable/RouteClassPayloads**
facets	Kind / Value / Annotation minLength 1 maxLength 3 enumeration A enumeration B enumeration B1 enumeration B2 enumeration C enumeration C2 enumeration C3 enumeration C4 enumeration CM enumeration CM2 enumeration CM3 enumeration CM4 enumeration CE enumeration D enumeration D2 enumeration D3 enumeration D4 enumeration D5 enumeration E enumeration E4 enumeration E5 enumeration E6 enumeration F enumeration G
annotation	documentation Indication of the route class (based on CEN EN 15528: line categories for managing the interface between load limits of vehicles on infrastructure). All the codes in this code list refer to CEN EN 15528: line categories for managing the interface between load limits of vehicles on infrastructure. CM2, CM3 and CM 4 equal M2, M3 and M4 which might be used in some legacy systems which only support two character codes.
source	<xs:element name="RouteClass"> <xs:annotation> <xs:documentation>Indication of the route class (based on CEN EN 15528: line categories for managing the interface between load limits of vehicles on infrastructure). All the codes in this code list refer to CEN EN 15528: line categories for managing the interface between load limits of vehicles on

```
infrastructure.
CM2, CM3 and CM 4 equal M2, M3 and M4 which might be used in some legacy systems
which only support two character codes.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="3"/>
      <xs:enumeration value="A"/>
      <xs:enumeration value="B"/>
      <xs:enumeration value="B1"/>
      <xs:enumeration value="B2"/>
      <xs:enumeration value="C"/>
      <xs:enumeration value="C2"/>
      <xs:enumeration value="C3"/>
      <xs:enumeration value="C4"/>
      <xs:enumeration value="CM"/>
      <xs:enumeration value="CM2"/>
      <xs:enumeration value="CM3"/>
      <xs:enumeration value="CM4"/>
      <xs:enumeration value="CE"/>
      <xs:enumeration value="D"/>
      <xs:enumeration value="D2"/>
      <xs:enumeration value="D3"/>
      <xs:enumeration value="D4"/>
      <xs:enumeration value="D5"/>
      <xs:enumeration value="E"/>
      <xs:enumeration value="E4"/>
      <xs:enumeration value="E5"/>
      <xs:enumeration value="E6"/>
      <xs:enumeration value="F"/>
      <xs:enumeration value="G"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **RU_DeclarationCode**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **ConsignmentOrderMessage/COMS/COM/RU_Declarations/RU_Declaration**

facets

Kind	Value	Annotation
enumeration	1	documentation Without packing
enumeration	2	documentation Unsatisfactory packaging: ...(give details)
enumeration	3	documentation Insufficient packaging: ... (give details)
enumeration	4.1	documentation Goods clearly in poor condition: ... (give details)
enumeration	4.2	documentation Goods damaged:(give details)
enumeration	4.3	documentation Goods wet: ... (give details)
enumeration	4.4	documentation Goods frozen: ... (give details)
enumeration	5	documentation Loaded by the consignor

	enumeration 6 documentation Loaded by the carrier in inclement weather at the request of the consignor enumeration 7 documentation Unloaded by the consignee enumeration 8 documentation Unloaded by the carrier in ... enumeration 9.1 documentation Inclement weather, at the request of the consignee Impossible to make the examination in accordance with CIM Article 11 section 3, because of inclement weather enumeration 9.2 documentation Inclement weather, at the request of the consignee Impossible to make the examination in accordance with CIM Article 11 section 3, because of sealing of the wagon or ITU enumeration 9.3 documentation Inclement weather, at the request of the consignee Impossible to make the examination in accordance with CIM Article 11 section 3, because of load in the wagon or ITU inaccessible enumeration 10 documentation Request for examination in accordance with CIM Article 11 section 3 presented late by the consignor enumeration 11 documentation Examination not made because of a shortage of resources: ... (give details) enumeration 12 documentation Other reserves: ... (give details) enumeration 13 documentation Code used for declarations, which are no reservations. This code is not included in the official CIT code list and is not to be printed on the paper consignment note.
annotation	documentation Carrier declaration code.
source	<xs:element name="RU_DeclarationCode"> <xs:annotation> <xs:documentation>Carrier declaration code. </xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:token"> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Without packing</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Unsatisfactory packaging: ...(give details)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Insufficient packaging: ... (give details)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4.1"> <xs:annotation> <xs:documentation>Goods clearly in poor condition: ... (give details)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4.2"> <xs:annotation> <xs:documentation>Goods damaged:(give details)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4.3"> <xs:annotation> <xs:documentation>Goods wet: ... (give details)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4.4"> <xs:annotation>

```
            <xs:documentation>Goods frozen: ... (give details)</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="5">
          <xs:annotation>
            <xs:documentation>Loaded by the consignor</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="6">
          <xs:annotation>
            <xs:documentation>Loaded by the carrier in inclement weather at the request
of the consignor </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="7">
          <xs:annotation>
            <xs:documentation>Unloaded by the consignee</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="8">
          <xs:annotation>
            <xs:documentation>Unloaded by the carrier in ...</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="9.1">
          <xs:annotation>
            <xs:documentation>Inclement weather, at the request of the consignee
Impossible to make the examination in accordance with CIM Article 11 section 3,
because of inclement weather </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="9.2">
          <xs:annotation>
            <xs:documentation>Inclement weather, at the request of the consignee
Impossible to make the examination in accordance with CIM Article 11 section 3,
because of sealing of the wagon or ITU </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="9.3">
          <xs:annotation>
            <xs:documentation>Inclement weather, at the request of the consignee
Impossible to make the examination in accordance with CIM Article 11 section 3,
because of load in the wagon or ITU inaccessible </xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="10">
          <xs:annotation>
            <xs:documentation>Request for examination in accordance with CIM Article 11
section 3 presented late by the consignor</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="11">
          <xs:annotation>
            <xs:documentation>Examination not made because of a shortage of resources:
... (give details)</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="12">
          <xs:annotation>
            <xs:documentation>Other reserves: ... (give details)</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="13">
          <xs:annotation>
```

```
            <xs:documentation>Code used for declarations, which are no reservations.
This code is not included in the official CIT code list and is not to be printed on
the paper consignment note.</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
```

element **TractionMode**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:integer**

properties: content simple

used by: elements **TrainCompositionJourneySection/LocoIdent** **TractionDetails**

facets

Kind	Value	Annotation
minInclusive	11	
maxInclusive	99	
enumeration	11	documentation Train traction - 1st traction unit in the group
enumeration	21	documentation Intermediate traction - 1st traction unit in the group
enumeration	31	documentation Banking locomotive - 1st traction unit in the group
enumeration	41	documentation Banking locomotive not coupled - 1st traction unit in the group
enumeration	51	documentation No Leading Engine - 1st traction unit in the group
enumeration	12	documentation Train traction - 2nd traction unit in the group
enumeration	22	documentation Intermediate traction - 2nd traction unit in the group
enumeration	32	documentation Banking locomotive - 2nd traction unit in the group
enumeration	42	documentation Banking locomotive not coupled - 2nd traction unit in the group
enumeration	52	documentation No Leading Engine - 2nd traction unit in the group
enumeration	13	documentation Train traction - 3rd traction unit in the group
enumeration	23	documentation Intermediate traction - 3rd traction unit in the group
enumeration	33	documentation Banking locomotive - 3rd traction unit in the group
enumeration	43	documentation Banking locomotive not coupled - 3rd traction unit in the group
enumeration	53	documentation No Leading Engine - 3rd traction unit in the group
enumeration	14	documentation Train traction - 4th traction unit in the group
enumeration	24	documentation Intermediate traction - 4th traction unit in the group
enumeration	34	documentation Banking locomotive - 4th traction unit in the group
enumeration	44	documentation Banking locomotive not coupled - 4th traction unit in the group

	enumeration 54 documentation No Leading Engine - 4th traction unit in the group enumeration 15 documentation Train traction - 5th traction unit in the group enumeration 25 documentation Intermediate traction - 5th traction unit in the group enumeration 35 documentation Banking locomotive - 5th traction unit in the group enumeration 45 documentation Banking locomotive not coupled - 5th traction unit in the group enumeration 55 documentation No Leading Engine - 5th traction unit in the group enumeration 16 documentation Train traction - 6th traction unit in the group enumeration 26 documentation Intermediate traction - 6th traction unit in the group enumeration 36 documentation Banking locomotive - 6th traction unit in the group enumeration 46 documentation Banking locomotive not coupled - 6th traction unit in the group enumeration 56 documentation No Leading Engine - 6th traction unit in the group
annotation	documentation Identifies the mode of deployment of a traction within a train First digit – traction role Second digit – position in group of traction units with the same role

source

```
<xs:element name="TractionMode">
  <xs:annotation>
    <xs:documentation>Identifies the mode of deployment of a traction within a train
First digit – traction role
Second digit – position in group of traction units with the same role
</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:integer">
      <xs:minInclusive value="11"/>
      <xs:maxInclusive value="99"/>
      <xs:enumeration value="11">
        <xs:annotation>
          <xs:documentation>Train traction - 1st traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="21">
        <xs:annotation>
          <xs:documentation>Intermediate traction - 1st traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="31">
        <xs:annotation>
          <xs:documentation>Banking locomotive - 1st traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="41">
        <xs:annotation>
          <xs:documentation>Banking locomotive not coupled - 1st traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="51">
        <xs:annotation>
          <xs:documentation>No Leading Engine - 1st traction unit in the
group</xs:documentation>
        </xs:annotation>
```

```
      </xs:enumeration>
      <xs:enumeration value="12">
        <xs:annotation>
          <xs:documentation>Train traction - 2nd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="22">
        <xs:annotation>
          <xs:documentation>Intermediate traction - 2nd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="32">
        <xs:annotation>
          <xs:documentation>Banking locomotive - 2nd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="42">
        <xs:annotation>
          <xs:documentation>Banking locomotive not coupled - 2nd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="52">
        <xs:annotation>
          <xs:documentation>No Leading Engine - 2nd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="13">
        <xs:annotation>
          <xs:documentation>Train traction - 3rd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="23">
        <xs:annotation>
          <xs:documentation>Intermediate traction - 3rd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="33">
        <xs:annotation>
          <xs:documentation>Banking locomotive - 3rd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="43">
        <xs:annotation>
          <xs:documentation>Banking locomotive not coupled - 3rd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="53">
        <xs:annotation>
          <xs:documentation>No Leading Engine - 3rd traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="14">
        <xs:annotation>
          <xs:documentation>Train traction - 4th traction unit in the
```

```
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="24">
        <xs:annotation>
          <xs:documentation>Intermediate traction - 4th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="34">
        <xs:annotation>
          <xs:documentation>Banking locomotive - 4th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="44">
        <xs:annotation>
          <xs:documentation>Banking locomotive not coupled - 4th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="54">
        <xs:annotation>
          <xs:documentation>No Leading Engine - 4th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="15">
        <xs:annotation>
          <xs:documentation>Train traction - 5th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="25">
        <xs:annotation>
          <xs:documentation>Intermediate traction - 5th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="35">
        <xs:annotation>
          <xs:documentation>Banking locomotive - 5th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="45">
        <xs:annotation>
          <xs:documentation>Banking locomotive not coupled - 5th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="55">
        <xs:annotation>
          <xs:documentation>No Leading Engine - 5th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="16">
        <xs:annotation>
          <xs:documentation>Train traction - 6th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="26">
```

```
        <xs:annotation>
          <xs:documentation>Intermediate traction - 6th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="36">
        <xs:annotation>
          <xs:documentation>Banking locomotive - 6th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="46">
        <xs:annotation>
          <xs:documentation>Banking locomotive not coupled - 6th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="56">
        <xs:annotation>
          <xs:documentation>No Leading Engine - 6th traction unit in the
group</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **TractionType**

diagram	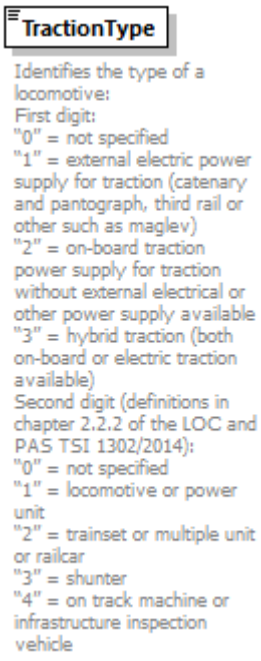
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **TrainCompositionJourneySection/LocoIdent**
facets	Kind / Value / Annotation enumeration 00 enumeration 01

	enumeration 02 enumeration 03 enumeration 04 enumeration 10 enumeration 11 enumeration 12 enumeration 13 enumeration 14 enumeration 20 enumeration 21 enumeration 22 enumeration 23 enumeration 24 enumeration 30 enumeration 31 enumeration 32 enumeration 33 enumeration 34
annotation	documentation Identifies the type of a locomotive: First digit: “0” = not specified “1” = external electric power supply for traction (catenary and pantograph, third rail or other such as maglev) “2” = on-board traction power supply for traction without external electrical or other power supply available “3” = hybrid traction (both on-board or electric traction available) Second digit (definitions in chapter 2.2.2 of the LOC and PAS TSI 1302/2014): “0” = not specified “1” = locomotive or power unit “2” = trainset or multiple unit or railcar “3” = shunter “4” = on track machine or infrastructure inspection vehicle
source	<xs:element name="TractionType"> <xs:annotation> <xs:documentation>Identifies the type of a locomotive: First digit: “0” = not specified “1” = external electric power supply for traction (catenary and pantograph, third rail or other such as maglev) “2” = on-board traction power supply for traction without external electrical or other power supply available “3” = hybrid traction (both on-board or electric traction available) Second digit (definitions in chapter 2.2.2 of the LOC and PAS TSI 1302/2014): “0” = not specified “1” = locomotive or power unit “2” = trainset or multiple unit or railcar “3” = shunter “4” = on track machine or infrastructure inspection vehicle </xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:token"> <xs:enumeration value="00"/> <xs:enumeration value="01"/> <xs:enumeration value="02"/> <xs:enumeration value="03"/> <xs:enumeration value="04"/> <xs:enumeration value="10"/> <xs:enumeration value="11"/> <xs:enumeration value="12"/> <xs:enumeration value="13"/> <xs:enumeration value="14"/> <xs:enumeration value="20"/>

```
      <xs:enumeration value="21"/>
      <xs:enumeration value="22"/>
      <xs:enumeration value="23"/>
      <xs:enumeration value="24"/>
      <xs:enumeration value="30"/>
      <xs:enumeration value="31"/>
      <xs:enumeration value="32"/>
      <xs:enumeration value="33"/>
      <xs:enumeration value="34"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **TrainRadioSystem**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	elements **PlannedTrainTechnicalData** **TrainRunningTechData**
facets	Kind Value Annotation enumeration 1 enumeration 2
annotation	documentation The on board radio system of the train in coded format

source	`<xs:element name="TrainRadioSystem">`
	`  <xs:annotation>`
	`  <xs:documentation>The on board radio system of the train in coded format</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:simpleType>`
	`  <xs:restriction base="xs:token">`
	`  <xs:enumeration value="1"/>`
	`  <xs:enumeration value="2"/>`
	`  </xs:restriction>`
	`  </xs:simpleType>`
	`</xs:element>`

element **TrainRunningInterruptionStatus**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
properties	content complex
children	**TrainInterrupted**
used by	element **TrainRunningInterruptionMessage**

source	`<xs:element name="TrainRunningInterruptionStatus">`
	`  <xs:complexType>`
	`  <xs:sequence>`
	`  <xs:element name="TrainInterrupted">`
	`  <xs:annotation>`
	`  <xs:documentation/>`

```
        </xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:enumeration value="0">
              <xs:annotation>
                <xs:documentation>Not Interrupted</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="1">
              <xs:annotation>
                <xs:documentation>Interrupted at location
(default)</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
            <xs:enumeration value="2">
              <xs:annotation>
                <xs:documentation>Will be interrupted, not yet at
location</xs:documentation>
              </xs:annotation>
            </xs:enumeration>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

element **TrainRunningInterruptionStatus/TrainInterrupted**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	content simple
facets	Kind / Value / Annotation enumeration 0 — documentation: Not Interrupted enumeration 1 — documentation: Interrupted at location (default) enumeration 2 — documentation: Will be interrupted, not yet at location

source

```
<xs:element name="TrainInterrupted">
  <xs:annotation>
    <xs:documentation/>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:integer">
      <xs:enumeration value="0">
        <xs:annotation>
          <xs:documentation>Not Interrupted</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>Interrupted at location (default)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>Will be interrupted, not yet at
location</xs:documentation>
```

```
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **TrainType**

diagram

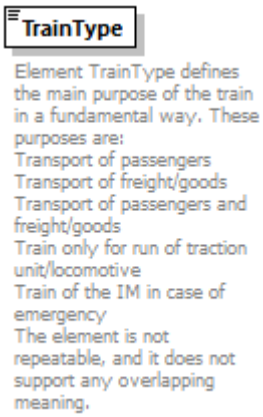

namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:integer**

properties: content simple

used by: elements **PlannedTrainData** **TrainRunningTechData**

facets

Kind	Value	Annotation
enumeration	0	documentation: Other train
enumeration	1	documentation: Passenger train
enumeration	2	documentation: Freight train
enumeration	3	documentation: Light engine (locomotive train)
enumeration	4	documentation: Engineering train
enumeration	5	documentation: Emergency train
enumeration	6	documentation: Mixed train (passenger and freight train in combination)

annotation

documentation
Element TrainType defines the main purpose of the train in a fundamental way. These purposes are:
Transport of passengers
Transport of freight/goods
Transport of passengers and freight/goods
Train only for run of traction unit/locomotive
Train of the IM in case of emergency
The element is not repeatable, and it does not support any overlapping meaning.

source

```
<xs:element name="TrainType">
  <xs:annotation>
    <xs:documentation>Element TrainType defines the main purpose of the train in a
fundamental way. These purposes are:
Transport of passengers
Transport of freight/goods
Transport of passengers and freight/goods
Train only for run of traction unit/locomotive
Train of the IM in case of emergency
The element is not repeatable, and it does not support any overlapping meaning.
```

```
</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:integer">
      <xs:enumeration value="0">
        <xs:annotation>
          <xs:documentation>Other train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>Passenger train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>Freight train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>Light engine (locomotive train)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4">
        <xs:annotation>
          <xs:documentation>Engineering train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5">
        <xs:annotation>
          <xs:documentation>Emergency train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6">
        <xs:annotation>
          <xs:documentation>Mixed train (passenger and freight train in
combination)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **TypeOfRemovableAccessories**

diagram	
namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	content simple
used by	element **RollingStockDataset/DesignDataSet/RemovableAccessories**

facets

Kind	Value	Annotation
enumeration	01	documentation Removable stanchion
enumeration	02	documentation Removable side flap of flat wagon
enumeration	03	documentation

			Removable end flap of flat wagon
	enumeration	04	documentation
			Removable side rail
	enumeration	05	documentation
			Removable intermediate upright for securing the load
	enumeration	06	documentation
			Stanchion chain
	enumeration	07	documentation
			Removable handle and wheel for winch on car-carrying wagon
	enumeration	08	documentation
			Swivelling bolster (with stanchions)
	enumeration	09	documentation
			Coupling rod (rigid coupling)
	enumeration	10	documentation
			Ice bunker
	enumeration	11	documentation
			Ice bunker screen
	enumeration	12	documentation
			Ice bunker frame
	enumeration	13	documentation
			Trestle or bar with hooks for hanging meat
	enumeration	14	documentation
			Movable cross-member of wagon with low loading plane
	enumeration	15	documentation
			Removable support
	enumeration	16	documentation
			Mooring cross-member on wagon for special loads
	enumeration	17	documentation
			Movable floor panel on wagon for special loads
	enumeration	18	documentation
			Scotch
	enumeration	19	documentation
			Skid bar with or without shoes on car-carrying wagon
	enumeration	20	documentation
			Mooring strap on car-carrying wagon
	enumeration	21	documentation
			Beam for movable ramp on car-carrying wagon
	enumeration	22	documentation
			Spare heating half-coupling
	enumeration	23	documentation
			Fire extinguisher
	enumeration	24	documentation
			Wheel scotches (for cars) on car-carrying wagon
	enumeration	25	documentation
			Gangway loading ramp on car-carrying wagon
	enumeration	26	documentation
			Metal cradles for rolls of metal sheeting
	enumeration	27	documentation
			Panel for covering markings
	enumeration	28	documentation
			Loading frame for special types of goods
	enumeration	29	documentation
			Headstock for "rolling roads"
	enumeration	99	documentation
			Other wagon accessories
annotation	documentation Specification of removable accessory. Should be added to Code List. Values refer to UIC Leaflet 920-13		

source

```
<xs:element name="TypeOfRemovableAccessories">
  <xs:annotation>
    <xs:documentation>Specification of removable accessory.
Should be added to Code List. Values refer to UIC Leaflet 920-13</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="01">
        <xs:annotation>
          <xs:documentation>Removable stanchion</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="02">
```

```
          <xs:annotation>
            <xs:documentation>Removable side flap of flat wagon</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="03">
          <xs:annotation>
            <xs:documentation>Removable end flap of flat wagon</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="04">
          <xs:annotation>
            <xs:documentation>Removable side rail</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="05">
          <xs:annotation>
            <xs:documentation>Removable intermediate upright for securing the
load</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="06">
          <xs:annotation>
            <xs:documentation>Stanchion chain</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="07">
          <xs:annotation>
            <xs:documentation>Removable handle and wheel for winch on car-carrying
wagon</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="08">
          <xs:annotation>
            <xs:documentation>Swivelling bolster (with stanchions)</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="09">
          <xs:annotation>
            <xs:documentation>Coupling rod (rigid coupling)</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="10">
          <xs:annotation>
            <xs:documentation>Ice bunker</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="11">
          <xs:annotation>
            <xs:documentation>Ice bunker screen</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="12">
          <xs:annotation>
            <xs:documentation>Ice bunker frame</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="13">
          <xs:annotation>
            <xs:documentation>Trestle or bar with hooks for hanging
meat</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="14">
          <xs:annotation>
```

```
            <xs:documentation>Movable cross-member of wagon with low loading
plane</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="15">
          <xs:annotation>
            <xs:documentation>Removable support</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="16">
          <xs:annotation>
            <xs:documentation>Mooring cross-member on wagon for special
loads</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="17">
          <xs:annotation>
            <xs:documentation>Movable floor panel on wagon for special
loads</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="18">
          <xs:annotation>
            <xs:documentation>Scotch</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="19">
          <xs:annotation>
            <xs:documentation>Skid bar with or without shoes on car-carrying
wagon</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="20">
          <xs:annotation>
            <xs:documentation>Mooring strap on car-carrying wagon</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="21">
          <xs:annotation>
            <xs:documentation>Beam for movable ramp on car-carrying
wagon</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="22">
          <xs:annotation>
            <xs:documentation>Spare heating half-coupling</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="23">
          <xs:annotation>
            <xs:documentation>Fire extinguisher</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="24">
          <xs:annotation>
            <xs:documentation>Wheel scotches (for cars) on car-carrying
wagon</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="25">
          <xs:annotation>
            <xs:documentation>Gangway loading ramp on car-carrying
wagon</xs:documentation>
          </xs:annotation>
```

```
      </xs:enumeration>
      <xs:enumeration value="26">
        <xs:annotation>
          <xs:documentation>Metal cradles for rolls of metal
sheeting</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="27">
        <xs:annotation>
          <xs:documentation>Panel for covering markings</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="28">
        <xs:annotation>
          <xs:documentation>Loading frame for special types of
goods</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="29">
        <xs:annotation>
          <xs:documentation>Headstock for "rolling roads"</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="99">
        <xs:annotation>
          <xs:documentation>Other wagon accessories</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **TypeOfUsedHybridPowerunit**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties: content simple

used by: elements **TrainCompositionJourneySection/LocoIdent** **TractionDetails**

facets

Kind	Value	Annotation
enumeration	1	documentation: electric (pantograph, conductor rail)
enumeration	2	documentation: liquid fuel (benzine, diesel, gasoline)
enumeration	3	documentation: battery
enumeration	4	documentation: hydrogen

annotation: documentation
information about the type of power unit in case of using a hybrid locomotive

source

```
<xs:element name="TypeOfUsedHybridPowerunit">
  <xs:annotation>
    <xs:documentation>information about the type of power unit in case of using a
hybrid locomotive</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
```

```
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>electric (pantograph, conductor rail)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>liquid fuel (benzine, diesel,
gasoline)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>battery</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4">
        <xs:annotation>
          <xs:documentation>hydrogen</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

element **WheelSetTransformationMethod**

diagram



namespace: http://www.era.europa.eu/schemes/TAFTSI/4.0

type: restriction of **xs:token**

properties: content simple

used by: element **RollingStockDataset/DesignDataSet**

facets

Kind	Value	Annotation
enumeration	1	documentation: Automatic
enumeration	2	documentation: Bogie/axle change

annotation

documentation
Description of the wheel set transformation method for wagons with a changeable wheel set gauge.

source

```
<xs:element name="WheelSetTransformationMethod">
  <xs:annotation>
    <xs:documentation>Description of the wheel set transformation method for wagons
with a changeable wheel set gauge.</xs:documentation>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation>Automatic</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation>Bogie/axle change</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
```

```
  </xs:simpleType>
</xs:element>
```

simpleType **ConsignmentTypeCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	base xs:token
facets	Kind Value Annotation enumeration CIM documentation CIM Convention Internationale Marchandises (OTIF) Source: CIM (OTIF) enumeration Other
annotation	documentation Identifies the type of a waybill.
source	<xs:simpleType name="ConsignmentTypeCode"> <xs:annotation> <xs:documentation>Identifies the type of a waybill.</xs:documentation> </xs:annotation> <xs:restriction base="xs:token"> <xs:enumeration value="CIM"> <xs:annotation> <xs:documentation>CIMConvention Internationale Marchandises (OTIF) Source: CIM (OTIF)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="Other"/> </xs:restriction> </xs:simpleType>

simpleType **DelayCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	base xs:token
used by	elements **DelayCause InterruptionReason ModificationReason**
facets	Kind Value Annotation enumeration 11 documentation Formation of trains if managed by infrastructure manager enumeration 10 documentation Timetable compilation enumeration 12 documentation Mistakes in operational procedures enumeration 13 documentation Wrong application of priority rules enumeration 14 enumeration 18 documentation Staff enumeration 19 documentation Other causes related to the operational planning and management enumeration 20 documentation Signalling installations enumeration 21 documentation Signalling installations at level crossings enumeration 22 documentation Telecommunication installations enumeration 23 documentation Power supply equipment enumeration 24 documentation Track enumeration 25 documentation Structures

	enumeration	28	documentation Staff
	enumeration	29	documentation Other causes related to infrastructure installations
	enumeration	31	documentation Irregularities in execution of construction work
	enumeration	30	documentation Planned construction work
	enumeration	32	documentation Speed restrictions due to defective track
	enumeration	39	documentation Other causes related to Civil engineering
	enumeration	40	documentation Delay caused by next IM
	enumeration	41	documentation Delay caused by previous IM
	enumeration	50	documentation exceeding the stop time
	enumeration	51	documentation Request of the RU
	enumeration	52	documentation Loading operations
	enumeration	53	documentation Loading irregularities
	enumeration	54	documentation Commercial preparation of the train
	enumeration	58	documentation Staff
	enumeration	59	documentation Other causes related to commercial causes
	enumeration	60	documentation Roster planning/re-rostering
	enumeration	61	documentation Formation of trains by the RU
	enumeration	62	documentation Problems affecting coaches
	enumeration	63	documentation Problems affecting wagons
	enumeration	64	documentation Problems affecting traction units
	enumeration	68	documentation Staff
	enumeration	69	documentation Other causes related to Rolling Stock
	enumeration	70	documentation Delay caused by next RU
	enumeration	71	documentation Delay caused by previous RU
	enumeration	80	documentation Strike
	enumeration	81	documentation Administrative formalites
	enumeration	82	documentation Outside influence
	enumeration	83	documentation Effects of weather and natural causes
	enumeration	84	documentation Delay caused by external reasons on the next network
	enumeration	89	documentation Other external causes
	enumeration	90	documentation Dangerous incidents, accidents and hazards
	enumeration	91	documentation Track occupation caused by the lateness of the same train
	enumeration	92	documentation Track occupation caused by the lateness of another train
	enumeration	93	documentation Turn round
	enumeration	94	documentation Connection
	enumeration	95	documentation Further investigation needed

annotation	documentation Reason for a delay or interruption. UIC Leaflet 450-2, Appendix C.

source

```
<xs:simpleType name="DelayCode">
  <xs:annotation>
    <xs:documentation>Reason for a delay or interruption.  UIC Leaflet 450-2,
Appendix C.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:token">
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation>Formation of trains if managed by infrastructure
manager</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation>Timetable compilation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation>Mistakes in operational procedures</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation>Wrong application of priority rules</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14"/>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation>Staff</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
      <xs:annotation>
        <xs:documentation>Other causes related to the operational planning and
management</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="20">
      <xs:annotation>
        <xs:documentation>Signalling installations</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation>Signalling installations at level
crossings</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation>Telecommunication installations</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation>Power supply equipment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
```

```
        <xs:documentation>Track</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation>Structures</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation>Staff</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="29">
      <xs:annotation>
        <xs:documentation>Other causes related to infrastructure
installations</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation>Irregularities in execution of construction
work</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation>Planned construction work</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation>Speed restrictions due to defective
track</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="39">
      <xs:annotation>
        <xs:documentation>Other causes related to Civil
engineering</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation>Delay caused by next IM</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="41">
      <xs:annotation>
        <xs:documentation>Delay caused by previous IM</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation>exceeding the stop time</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation>Request of the RU</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="52">
      <xs:annotation>
```

```
        <xs:documentation>Loading operations</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="53">
      <xs:annotation>
        <xs:documentation>Loading irregularities</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="54">
      <xs:annotation>
        <xs:documentation>Commercial preparation of the train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="58">
      <xs:annotation>
        <xs:documentation>Staff</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="59">
      <xs:annotation>
        <xs:documentation>Other causes related to commercial
causes</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="60">
      <xs:annotation>
        <xs:documentation>Roster planning/re-rostering</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="61">
      <xs:annotation>
        <xs:documentation>Formation of trains by the RU</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
      <xs:annotation>
        <xs:documentation>Problems affecting coaches</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="63">
      <xs:annotation>
        <xs:documentation>Problems affecting wagons</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="64">
      <xs:annotation>
        <xs:documentation>Problems affecting traction units</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="68">
      <xs:annotation>
        <xs:documentation>Staff</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="69">
      <xs:annotation>
        <xs:documentation>Other causes related to Rolling Stock</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="70">
      <xs:annotation>
        <xs:documentation>Delay caused by next RU</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
      <xs:enumeration value="71">
        <xs:annotation>
          <xs:documentation>Delay caused by previous RU</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="80">
        <xs:annotation>
          <xs:documentation>Strike</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="81">
        <xs:annotation>
          <xs:documentation>Administrative formalites</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="82">
        <xs:annotation>
          <xs:documentation>Outside influence</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="83">
        <xs:annotation>
          <xs:documentation>Effects of weather and natural causes</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="84">
        <xs:annotation>
          <xs:documentation>Delay caused by external reasons on the next
network</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="89">
        <xs:annotation>
          <xs:documentation>Other external causes</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="90">
        <xs:annotation>
          <xs:documentation>Dangerous incidents, accidents and
hazards</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="91">
        <xs:annotation>
          <xs:documentation>Track occupation caused by the lateness of the same
train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="92">
        <xs:annotation>
          <xs:documentation>Track occupation caused by the lateness of another
train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="93">
        <xs:annotation>
          <xs:documentation>Turn round</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="94">
        <xs:annotation>
          <xs:documentation>Connection</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
```

```
      <xs:enumeration value="95">
        <xs:annotation>
          <xs:documentation>Further investigation needed</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **InfoIndex**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation enumeration 10 enumeration 20 enumeration 30
annotation	documentation indicates additional information

source	`<xs:simpleType name="InfoIndex">`
	`  <xs:annotation>`
	`  <xs:documentation>indicates additional information</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string">`
	`  <xs:enumeration value="10"/>`
	`  <xs:enumeration value="20"/>`
	`  <xs:enumeration value="30"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **MessageCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	base xs:integer
used by	element **RelatedReference/RelatedType**
facets	Kind / Value / Annotation minInclusive 1 maxInclusive 9999
annotation	documentation Identifies the type of message

source	`<xs:simpleType name="MessageCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Identifies the type of message</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:integer">`
	`  <xs:minInclusive value="1"/>`
	`  <xs:maxInclusive value="9999"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

simpleType **RestrictionCodes**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**

properties	base xs:token
used by	elements **RestrictionsDueToLoadOrDamage TechnicalForwardingRestrictions**

facets

Kind	Value	Annotation
enumeration	07	documentation F - Shunt only when hand brake operable with ground staff
enumeration	08	documentation F - Tank wagon loaded with liquid
enumeration	09	documentation F - Wagon loaded with people
enumeration	11	documentation F - Wagon other than bogie wagon with wheelbase of more than 9 metres
enumeration	12	documentation F - Bogie wagon with distance between wheels of more than 14 metres and up to and including a distance of 17,50 metres
enumeration	13	documentation F - Bogie wagon with distance between wheels of more than 17,50 metres
enumeration	15	documentation F - Wagon not allowed over the hump
enumeration	16	documentation F - Do not fly shunt or gravity shunt (3 red triangles)
enumeration	18	documentation F - Must not use active braking equipment
enumeration	25	documentation F - Gas carrying tank wagon with orange side stripe
enumeration	30	documentation P (+F) - CCS fault (see CCS coding list)
enumeration	31	documentation P (+F) - Braking system fault
enumeration	32	documentation P (+F) - Wheelset, bogie fault
enumeration	33	documentation P (+F) - Headlighting or back lighting fault
enumeration	34	documentation P (+F) - Front glass broken
enumeration	35	documentation P (+F) - Horn fault
enumeration	36	documentation P (+F) - Radio fault
enumeration	37	documentation P (+F) - Energy supply fault
enumeration	38	documentation P (+F) - Traction or motor fault
enumeration	39	documentation P - Access door fault
enumeration	41	documentation F - Place this wagon at the front of the train
enumeration	42	documentation F - Place this wagon at the rear of the train
enumeration	50	documentation P (+F) - Speed restriction
enumeration	52	documentation P (+F) - Diesel locomotive instead of electric locomotive
enumeration	61	documentation F - Wagon forming part of a consignment of several wagons
enumeration	62	documentation F - Wagon forming part of a group of wagons from which it must not be separated
enumeration	63	documentation F (+P) - Special consignment or (for Passengers trains) loading/cinematic gauge larger than the planned one
enumeration	68	documentation F - First or last wagon of a wagon group from which it must not be separated
enumeration	70	documentation F - Shunt with care (1 red triangle)
enumeration	71	documentation F - Shunt with special care (2 red triangle)
enumeration	90	documentation P - Train planned with passengers operated without passengers
enumeration	91	documentation P - Train planned without passengers operated with passengers
enumeration	92	documentation P - Train planned with hauled rolling stock and operated without any coaches (light engine)

enumeration 94 documentation
F - Gas carrying wagon without orange side stripe
enumeration 99 documentation
P - Other

annotation documentation

All codes of Transport restrictions for Freight Traffic (cf. UIC 920-13) and Passengers Traffic are in the same list.

F = Freight
P = Passenger
T = Technical
D = Damage
L = Load

Code	F or P	Description	T	D	L
07	F	Shunt only when hand brake operable with ground staff			x
08	F	Tank wagon loaded with liquid		x	x
09	F	Wagon loaded with people	x		
11	F	Wagon other than bogie wagon with wheelbase of more than 9 metres		x	
12	F	Bogie wagon with distance between wheels of more than 14 metres and up to and including a distance of 17,50 metres	x		
13	F	Bogie wagon with distance between wheels of more than 17,50 metres		x	
15	F	Wagon not allowed over the hump		x	
16	F	Do not fly shunt or gravity shunt (3 red triangles)	x	x	x
18	F	Must not use active braking equipment		x	x
25	F	Gas carrying tank wagon with orange side stripe		x	
30	P (+F)	CCS fault (see CCS coding list)			x
31	P (+F)	Braking system fault	x		
32	P (+F)	Wheelset, bogie fault	x		
33	P (+F)	Headlighting or back lighting fault	x		
34	P (+F)	Front glass broken		x	

| | | |

source

```
<xs:simpleType name="RestrictionCodes">
  <xs:annotation>
    <xs:documentation>
                                                                    All codes of
Transport restrictions for Freight Traffic (cf. UIC 920-13) and Passengers Traffic
are in the same list.
                                                                    F = Freight
P = Passenger
T = Technical
D = Damage
L = Load

Code    F or P  Description


                                            T       D       L
07      F       Shunt only when hand brake operable with ground staff

                                                                                x
                x
08      F       Tank wagon loaded with liquid


                                           x
09      F       Wagon loaded with people


                                                   x
11      F       Wagon other than bogie wagon with wheelbase of more than 9 metres

                                           x
12      F       Bogie wagon with distance between wheels of more than 14 metres and up
to and including a distance of 17,50 metres x
13      F       Bogie wagon with distance between wheels of more than 17,50 metres

                                                   x
15      F       Wagon not allowed over the hump


                               x       x       x
16      F       Do not fly shunt or gravity shunt (3 red triangles)


                x       x       x
18      F       Must not use active braking equipment


                       x
25      F       Gas carrying tank wagon with orange side stripe


        x
30      P (+F)  CCS fault (see CCS coding list)


                               x
31      P (+F)  Braking system fault


                                           x
32      P (+F)  Wheelset, bogie fault
```

| | | |

```
                        x       x       x
90      P       Train planned with passengers operated without passengers

                                                                                x
91      P       Train planned without passengers operated with passengers

                                                                                x
92      P       Train planned with hauled rolling stock and operated without any
coaches (light engine)
                                        x       x
94      F       Gas carrying wagon without orange side stripe


                x
99      P       Other



                                                                                x
        x

                                                                    </xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:token">
    <xs:enumeration value="07">
      <xs:annotation>
        <xs:documentation>F - Shunt only when hand brake operable with ground
staff</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="08">
      <xs:annotation>
        <xs:documentation>F - Tank wagon loaded with liquid</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="09">
      <xs:annotation>
        <xs:documentation>F - Wagon loaded with people</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation>F - Wagon other than bogie wagon with wheelbase of more
than 9 metres</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation>F - Bogie wagon with distance between wheels of more than
14 metres and up to and including a distance of 17,50 metres</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation>F - Bogie wagon with distance between wheels of more than
17,50 metres</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation>F - Wagon not allowed over the hump</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
```

```
        <xs:documentation>F - Do not fly shunt or gravity shunt (3 red
triangles)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation>F - Must not use active braking
equipment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation>F - Gas carrying tank wagon with orange side
stripe</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation>P (+F) - CCS fault (see CCS coding list)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation>P (+F) - Braking system fault</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation>P (+F) - Wheelset, bogie fault</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="33">
      <xs:annotation>
        <xs:documentation>P (+F) - Headlighting or back lighting
fault</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation>P (+F) - Front glass broken</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="35">
      <xs:annotation>
        <xs:documentation>P (+F) - Horn fault</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="36">
      <xs:annotation>
        <xs:documentation>P (+F) - Radio fault</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="37">
      <xs:annotation>
        <xs:documentation>P (+F) - Energy supply fault</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="38">
      <xs:annotation>
        <xs:documentation>P (+F) - Traction or motor fault</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="39">
      <xs:annotation>
```

```
        <xs:documentation>P - Access door fault</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="41">
      <xs:annotation>
        <xs:documentation>F - Place this wagon at the front of the
train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="42">
      <xs:annotation>
        <xs:documentation>F - Place this wagon at the rear of the
train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation>P (+F) - Speed restriction</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="52">
      <xs:annotation>
        <xs:documentation>P (+F) - Diesel locomotive instead of electric
locomotive</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="61">
      <xs:annotation>
        <xs:documentation>F - Wagon forming part of a consignment of several
wagons</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
      <xs:annotation>
        <xs:documentation>F - Wagon forming part of a group of wagons from which it
must not be separated</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="63">
      <xs:annotation>
        <xs:documentation>F (+P) - Special consignment or (for Passengers trains)
loading/cinematic gauge larger than the planned one</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="68">
      <xs:annotation>
        <xs:documentation>F - First or last wagon of a wagon group from which it must
not be separated</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="70">
      <xs:annotation>
        <xs:documentation>F - Shunt with care (1 red triangle)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="71">
      <xs:annotation>
        <xs:documentation>F - Shunt with special care (2 red
triangle)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="90">
      <xs:annotation>
        <xs:documentation>P - Train planned with passengers operated without
```

```
passengers</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="91">
      <xs:annotation>
        <xs:documentation>P - Train planned without passengers operated with
passengers</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="92">
      <xs:annotation>
        <xs:documentation>P - Train planned with hauled rolling stock and operated
without any coaches (light engine)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="94">
      <xs:annotation>
        <xs:documentation>F - Gas carrying wagon without orange side
stripe</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="99">
      <xs:annotation>
        <xs:documentation>P - Other</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **RunningStatus**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	base xs:token
used by	elements **TrainLocationStatus** **WagonLocationStatus**

facets

Kind	Value	Annotation
enumeration	00	documentation Not specified
enumeration	01	documentation Arrival at destination
enumeration	02	documentation Departure at origin
enumeration	03	documentation Intermediate arrival
enumeration	04	documentation Intermediate departure
enumeration	05	documentation Pass through
enumeration	06	documentation NEW CODES: Some IMs are transmitting these codes (6 - 9)
enumeration	07	
enumeration	08	
enumeration	09	
enumeration	10	documentation Not specified for wagon
enumeration	11	documentation Wagon arrival at its destination by train
enumeration	12	documentation Wagon departure from its station of origin by train
enumeration	13	documentation Wagon arrival at reporting point by train
enumeration	14	documentation Wagon departure from reporting point by train (HLR)
enumeration	15	documentation

			Wagon run-through at reporting point by train
	enumeration	16	documentation
			Wagon parked at reporting point (MAD)
	enumeration	17	documentation
			Wagon shunted at reporting point
	enumeration	18	documentation
			Wagon arrived at reporting point
	enumeration	19	documentation
			Wagon departure from reporting point
annotation	documentation Identifies the status of a train related to the actual time at the reporting point.		

source

```
<xs:simpleType name="RunningStatus">
  <xs:annotation>
    <xs:documentation>Identifies the status of a train related to the actual time at
the reporting point.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:token">
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation>Not specified</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation>Arrival at destination</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation>Departure at origin</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="03">
      <xs:annotation>
        <xs:documentation>Intermediate arrival</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="04">
      <xs:annotation>
        <xs:documentation>Intermediate departure</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="05">
      <xs:annotation>
        <xs:documentation>Pass through</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="06">
      <xs:annotation>
        <xs:documentation>NEW CODES: Some IMs are transmitting these codes (6 -
9)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="07">
      <xs:annotation>
        <xs:documentation/>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="08">
      <xs:annotation>
        <xs:documentation/>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="09">
      <xs:annotation>
```

```
        <xs:documentation/>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation>Not specified for wagon</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation>Wagon arrival at its destination by
train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation>Wagon departure from its station of origin by
train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation>Wagon arrival at reporting point by
train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation>Wagon departure from reporting point by train
(HLR)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation>Wagon run-through at reporting point by
train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation>Wagon parked at reporting point (MAD)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="17">
      <xs:annotation>
        <xs:documentation>Wagon shunted at reporting point</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation>Wagon arrived at reporting point</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
      <xs:annotation>
        <xs:documentation>Wagon departure from reporting point</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TrainCC_SystemCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	base xs:token
used by	element **TrainCC_System**
facets	Kind Value Annotation enumeration 01 enumeration 02 enumeration 03 enumeration 04 enumeration 05 enumeration 06 enumeration 07 enumeration 08 enumeration 09 enumeration 10 enumeration 11 enumeration 12 enumeration 13 enumeration 14 enumeration 15 enumeration 16 enumeration 17 enumeration 18 enumeration 19 enumeration 20 enumeration 21 enumeration 22 enumeration 23 enumeration 24 enumeration 25 enumeration 26 enumeration 27 enumeration 28 enumeration 29 enumeration 30 enumeration 31 enumeration 32 enumeration 33 enumeration 34 enumeration 35 enumeration 36 enumeration 37 enumeration 38 enumeration 39 enumeration 40 enumeration 41 enumeration 42 enumeration 43 enumeration 44 enumeration 45 enumeration 46 enumeration 47 enumeration 48 enumeration 49 enumeration 50

	enumeration 51 enumeration 52 enumeration 53 enumeration 54
annotation	documentation Type of Train Control System Identifies the command control system of the train in coded values. 1 ALSN 2 ASFA 3 ATB 1st Gen 4 ATB Next Gen 5 ATC 6 ATP 7 CIR 1 (traction unit is equipped with LZB CIR-ELKE I) 8 CIR 1+2 (traction unit is equipped with LZB CIR-ELKE I + II) 9 CIR 2 (traction unit is equipped with LZB CIR-ELKE II) 10 Crocodile 11 DAAT 12 EBICAB 700 13 EBICAB 900 14 EFA (all traction units/driving cabins of the train are equipped with an electronic drivers cab display (EFA)) 15 ETCS L1 LS plus EuroZUB 16 ETCS L1 SRS 2.3.0d (traction unit is equipped with ETCS Level 1 version 2.3.0d) 17 ETCS L2 SRS 2.3.0d (traction unit is equipped with ETCS Level 2 version 2.3.0d) 18 ETCS L2 SRS 3.3.0 (traction unit is equipped with ETCS Level 2 version 3.3.0) 19 ETCS L2 SRS 3.4.0 (traction unit is equipped with ETCS Level 2 version 3.4.0) 20 ETCS L2 SRS 3.6.0 (traction unit is equipped with ETCS Level 2 version 3.6.0) 21 ETCS Level 0 22 ETCS Level 1 23 ETCS Level 2 24 ETCS Level 3 25 ETCS Level NSC 26 EVM 27 Indusi 54 28 Indusi 60 R 29 Indusi PZ 80 30 KBS-E 31 KCVB 32 KCVP 33 KVB 34 KVBP 35 LS 36 LS 90 37 LS I 38 LS III 39 LS IV 40 LZB 41 Mirel 42 NEXTEO 43 PZB 44 PZB90 45 SCMT 46 SHP 47 SIFA 48 STM ASFA 49 STM LZB 50 TBL 1 51 TBL 2 52 TVM 300 53 TVM 430 54 ZUB
source	<xs:simpleType name="TrainCC_SystemCode"> <xs:annotation> <xs:documentation>Type of Train Control System Identifies the command control system of the train in coded values. 1 ALSN 2 ASFA 3 ATB 1st Gen 4 ATB Next Gen 5 ATC

```
6    ATP
7    CIR 1 (traction unit is equipped with LZB CIR-ELKE I)
8    CIR 1+2 (traction unit is equipped with LZB CIR-ELKE I + II)
9    CIR 2 (traction unit is equipped with LZB CIR-ELKE II)
10    Crocodile
11    DAAT
12    EBICAB 700
13    EBICAB 900
14    EFA (all traction units/driving cabins of the train are equipped with an
electronic drivers cab display (EFA))
15    ETCS L1 LS plus EuroZUB
16    ETCS L1 SRS 2.3.0d (traction unit is equipped with ETCS Level 1 version 2.3.0d)
17    ETCS L2 SRS 2.3.0d (traction unit is equipped with ETCS Level 2 version 2.3.0d)
18    ETCS L2 SRS 3.3.0 (traction unit is equipped with ETCS Level 2 version 3.3.0)
19    ETCS L2 SRS 3.4.0 (traction unit is equipped with ETCS Level 2 version 3.4.0)
20    ETCS L2 SRS 3.6.0 (traction unit is equipped with ETCS Level 2 version 3.6.0)
21    ETCS Level 0
22    ETCS Level 1
23    ETCS Level 2
24    ETCS Level 3
25    ETCS Level NSC
26    EVM
27    Indusi 54
28    Indusi 60 R
29    Indusi PZ 80
30    KBS-E
31    KCVB
32    KCVP
33    KVB
34    KVBP
35    LS
36    LS 90
37    LS I
38    LS III
39    LS IV
40    LZB
41    Mirel
42    NEXTEO
43    PZB
44    PZB90
45    SCMT
46    SHP
47    SIFA
48    STM ASFA
49    STM LZB
50    TBL 1
51    TBL 2
52    TVM 300
53    TVM 430
54    ZUB</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:token">
    <xs:enumeration value="01"/>
    <xs:enumeration value="02"/>
    <xs:enumeration value="03"/>
    <xs:enumeration value="04"/>
    <xs:enumeration value="05"/>
    <xs:enumeration value="06"/>
    <xs:enumeration value="07"/>
    <xs:enumeration value="08"/>
    <xs:enumeration value="09"/>
    <xs:enumeration value="10"/>
    <xs:enumeration value="11"/>
    <xs:enumeration value="12"/>
```

```
      <xs:enumeration value="13"/>
      <xs:enumeration value="14"/>
      <xs:enumeration value="15"/>
      <xs:enumeration value="16"/>
      <xs:enumeration value="17"/>
      <xs:enumeration value="18"/>
      <xs:enumeration value="19"/>
      <xs:enumeration value="20"/>
      <xs:enumeration value="21"/>
      <xs:enumeration value="22"/>
      <xs:enumeration value="23"/>
      <xs:enumeration value="24"/>
      <xs:enumeration value="25"/>
      <xs:enumeration value="26"/>
      <xs:enumeration value="27"/>
      <xs:enumeration value="28"/>
      <xs:enumeration value="29"/>
      <xs:enumeration value="30"/>
      <xs:enumeration value="31"/>
      <xs:enumeration value="32"/>
      <xs:enumeration value="33"/>
      <xs:enumeration value="34"/>
      <xs:enumeration value="35"/>
      <xs:enumeration value="36"/>
      <xs:enumeration value="37"/>
      <xs:enumeration value="38"/>
      <xs:enumeration value="39"/>
      <xs:enumeration value="40"/>
      <xs:enumeration value="41"/>
      <xs:enumeration value="42"/>
      <xs:enumeration value="43"/>
      <xs:enumeration value="44"/>
      <xs:enumeration value="45"/>
      <xs:enumeration value="46"/>
      <xs:enumeration value="47"/>
      <xs:enumeration value="48"/>
      <xs:enumeration value="49"/>
      <xs:enumeration value="50"/>
      <xs:enumeration value="51"/>
      <xs:enumeration value="52"/>
      <xs:enumeration value="53"/>
      <xs:enumeration value="54"/>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **TypeOfIMHarmonizationCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	element **TypeOfIMHarmonization**
facets	Kind / Value / Annotation enumeration Full enumeration Part
annotation	documentation Enumeration of Type of IM harmonization: Full, Part

source	`<xs:simpleType name="TypeOfIMHarmonizationCode">`
	`  <xs:annotation>`
	`  <xs:documentation>Enumeration of Type of IM harmonization: Full, Part`

```
</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="Full"/>
    <xs:enumeration value="Part"/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TypeOfInformationCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:integer**
properties	base xs:integer
used by	element **TypeOfInformation**

facets

Kind	Value	Annotation
minInclusive	0	
maxInclusive	99	
enumeration	1	documentation harmonisation - in process
enumeration	2	documentation harmonisation - accepted
enumeration	3	documentation harmonisation - rejected
enumeration	4	documentation Request ready
enumeration	5	documentation path study request
enumeration	6	documentation pre-arranged path/reserve capacity
enumeration	7	documentation create offer
enumeration	8	documentation coordination update
enumeration	9	documentation draft offer
enumeration	10	documentation draft alternative offer
enumeration	11	documentation observation - in process
enumeration	12	documentation observation - complete
enumeration	13	documentation preparation of final offer - in process
enumeration	14	documentation preparation of final offer - accepted
enumeration	15	documentation preparation of final offer - rejected
enumeration	16	documentation final offer
enumeration	17	documentation final offer - accepted
enumeration	18	documentation alternative offer accepted
enumeration	19	documentation pre-accepted offer
enumeration	20	documentation Final Offer rejected
enumeration	21	documentation no alternative available
enumeration	22	documentation booked
enumeration	23	documentation preparation of draft alternative offer is in progress
enumeration	24	documentation alternative offer triggered by IM
enumeration	25	documentation offer/final offer rejected (without revision)

	enumeration 26 documentation alternative offer rejected (without revision) enumeration 27 documentation offer/final offer rejected (revision required) enumeration 28 documentation alternative offer rejected (revision required) enumeration 29 documentation withdrawal enumeration 30 documentation Create Dossier enumeration 31 documentation Close Dossier enumeration 32 documentation Path canceled full enumeration 33 documentation Path canceled partial enumeration 40 documentation Fully Assembled Path (FAP, constructed path) enumeration 42 documentation Preparation of draft offer – accepted enumeration 43 documentation Preparation of draft offer – rejected enumeration 44 documentation Draft offer rejected enumeration 45 documentation Draft no alternative available enumeration 50 documentation activate path (utilisation notification) enumeration 51 documentation deactivate path (utilisation notification) enumeration 52 documentation confirmation of utilisation notification enumeration 53 documentation Path and train cancelled enumeration 65 documentation Preparation of alternative offer in progress due to route update (used in PathNotAvailableMessage) enumeration 66 documentation Booked after route update (used in PathDetailsMessage)
annotation	documentation Enumeration indicating to which process step / process type in the planning does the message belong
source	

```
<xs:simpleType name="TypeOfInformationCode">
  <xs:annotation>
    <xs:documentation>Enumeration indicating to which process step / process type in
the planning does the message belong</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:integer">
    <xs:maxInclusive value="99"/>
    <xs:minInclusive value="0"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation>harmonisation - in process</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation>harmonisation - accepted</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation>harmonisation - rejected</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation>Request ready</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
```

```
      <xs:annotation>
        <xs:documentation>path study request</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation>pre-arranged path/reserve capacity</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation>create offer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation>coordination update</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation>draft offer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation>draft alternative offer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation>observation - in process</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation>observation - complete</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation>preparation of final offer - in process</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation>preparation of final offer - accepted</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation>preparation of final offer - rejected</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation>final offer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="17">
      <xs:annotation>
        <xs:documentation>final offer - accepted</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation>alternative offer accepted</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
      <xs:annotation>
        <xs:documentation>pre-accepted offer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="20">
      <xs:annotation>
        <xs:documentation>Final Offer rejected</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation>no alternative available</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation>booked</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation>preparation of draft alternative offer is in
progress</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation>alternative offer triggered by IM</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation>offer/final offer rejected (without
revision)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation>alternative offer rejected (without
revision)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="27">
      <xs:annotation>
        <xs:documentation>offer/final offer rejected (revision
required)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation>alternative offer rejected (revision
required)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="29">
      <xs:annotation>
        <xs:documentation>withdrawal</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation>Create Dossier</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation>Close Dossier</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation>Path canceled full</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="33">
      <xs:annotation>
        <xs:documentation>Path canceled partial</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation>Fully Assembled Path (FAP, constructed
path)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="42">
      <xs:annotation>
        <xs:documentation>Preparation of draft offer – accepted</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="43">
      <xs:annotation>
        <xs:documentation>Preparation of draft offer – rejected</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44">
      <xs:annotation>
        <xs:documentation>Draft offer rejected</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="45">
      <xs:annotation>
        <xs:documentation>Draft no alternative available</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation>activate path (utilisation notification)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation>deactivate path (utilisation
notification)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="52">
      <xs:annotation>
        <xs:documentation>confirmation of utilisation notification</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="53">
```

```
      <xs:annotation>
        <xs:documentation>Path and train cancelled </xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="65">
      <xs:annotation>
        <xs:documentation>Preparation of alternative offer in progress due to route
update (used in PathNotAvailableMessage)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="66">
      <xs:annotation>
        <xs:documentation>Booked after route update (used in
PathDetailsMessage)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TypeOfLoadUnitType**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	base xs:token
used by	elements **ILU_Type** **IntermodalTransportDataType/TypeOfLoadUnit**

facets

Kind	Value	Annotation
enumeration	00	documentation unknown
enumeration	01	documentation Container
enumeration	02	documentation swap bodies
enumeration	03	documentation semitrailers
enumeration	04	documentation truck

annotation

documentation
00=unknown, 01=Container, 02=swap bodies, 03=semitrailers, 04=truck

source

```
<xs:simpleType name="TypeOfLoadUnitType">
  <xs:annotation>
    <xs:documentation>00=unknown, 01=Container, 02=swap bodies, 03=semitrailers,
04=truck</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:token">
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation>unknown</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation>Container</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation>swap bodies</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="03">
      <xs:annotation>
        <xs:documentation>semitrailers</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="04">
      <xs:annotation>
        <xs:documentation>truck</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TypeOfRequestCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:short**
properties	base xs:short
used by	element **TypeOfRequest**
facets	Kind / Value / Annotation minInclusive 1 enumeration 1 documentation Study enumeration 2 documentation Request enumeration 3 documentation Modification
annotation	documentation Enumeration for the 3 different basic types of the planning processes types in the planning: Study (1), Request (2), Modification (3)

source

```
<xs:simpleType name="TypeOfRequestCode">
  <xs:annotation>
    <xs:documentation>Enumeration for the 3 different basic types of the planning
processes types in the planning: Study (1), Request (2), Modification
(3)</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:short">
    <xs:minInclusive value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation>Study</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation>Request</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation>Modification</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TypeOfRUHarmonizationCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:string**
properties	base xs:string
used by	element **TypeOfRUHarmonization**

facets	Kind / Value / Annotation enumeration Full enumeration Part enumeration None
annotation	documentation Type of RU harmonization: Full, Part, None.

source	`<xs:simpleType name="TypeOfRUHarmonizationCode">`
	`<xs:annotation>`
	`<xs:documentation>Type of RU harmonization: Full, Part, None.</xs:documentation>`
	`</xs:annotation>`
	`<xs:restriction base="xs:string">`
	`<xs:enumeration value="Full"/>`
	`<xs:enumeration value="Part"/>`
	`<xs:enumeration value="None"/>`
	`</xs:restriction>`
	`</xs:simpleType>`

simpleType **UnitType**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
properties	base xs:token
facets	Kind / Value / Annotation enumeration 1 documentation: Container enumeration 2 documentation: Other intermodal traffic enumeration 4 documentation: Rolling road (RR) enumeration 6 documentation: Semi-trailer on bogies enumeration 10 documentation: Container less than 20′ enumeration 11 documentation: Container 20′ enumeration 12 documentation: Container 30′ enumeration 13 documentation: Container 40′ enumeration 40 documentation: Semi-trailer truck/articulated lorry enumeration 41 documentation: Road tractor enumeration 42 documentation: Lorry without trailer enumeration 43 documentation: Lorry with trailer enumeration 50 documentation: Semi-trailer/road semi-trailer enumeration 51 documentation: Swap bodies
annotation	documentation Indicates the type of a Transportation unit.

source	`<xs:simpleType name="UnitType">`
	`<xs:annotation>`
	`<xs:documentation>Indicates the type of a Transportation unit.</xs:documentation>`
	`</xs:annotation>`
	`<xs:restriction base="xs:token">`
	`<xs:enumeration value="1">`
	`<xs:annotation>`
	`<xs:documentation>Container</xs:documentation>`
	`</xs:annotation>`
	`</xs:enumeration>`
	`<xs:enumeration value="2">`

```
      <xs:annotation>
        <xs:documentation>Other intermodal traffic</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation>Rolling road (RR)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation>Semi-trailer on bogies</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation>Container less than 20’</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation>Container 20’</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation>Container 30’</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation>Container 40’</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation>Semi-trailer truck/articulated lorry</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="41">
      <xs:annotation>
        <xs:documentation>Road tractor</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="42">
      <xs:annotation>
        <xs:documentation>Lorry without trailer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="43">
      <xs:annotation>
        <xs:documentation>Lorry with trailer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation>Semi-trailer/road semi-trailer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation>Swap bodies</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
  </xs:restriction>
</xs:simpleType>
```

attribute **LocationSubsidiaryTypeCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
used by	element **LocationSubsidiaryCode**

facets

Kind	Value	Annotation
enumeration	0	documentation Not Defined documentation not used
enumeration	1	documentation Track documentation The track is a uniquely defined part of location
enumeration	3	documentation Border Point Code documentation Special code for the Border Points are allocated at the country border and the points between different IM networks. Location of these points sometimes are not geographically same with the station or yard. Therefore these points are "logical point"
enumeration	4	documentation Sorting Code documentation Destination station of the wagon has a code in order to provide shunting technology.
enumeration	5	documentation Vehicle Parking Points documentation All points (tracks)
enumeration	6	documentation Public Loading Places documentation Is a type of physical location on the open access network where consignor or consignee can load or unload wagons
enumeration	7	documentation Private Loading Places documentation Is a type of physical location outside the open access network where consignor or consignee can load or unload wagons
enumeration	9	documentation Depot / Maintenance workshop.Place for overhaul or maintenance of the rolling stock.
enumeration	10	documentation Switch/turnout documentation The location where two tracks meet or diverge.
enumeration	15	documentation Platform documentation The area next to the track which has been raised to make access to railway vehicles easier.
enumeration	21	documentation Building documentation Those buildings where IM placed his staff for direct communication with RU staff or the IM buildings serve RU activities as well.
enumeration	22	documentation Level crossing documentation Place where rail and road crossing in level. on the same level (grade)
enumeration	23	documentation Bridge documentation Special built structure is over the road
enumeration	24	documentation Tunnel documentation Structure to to allow a railway line to pass under the surface.
enumeration	25	documentation

			Underpass documentation Undercrossing or underground passage under the railway track. (Not used by trains)
	enumeration	27	documentation Signal documentation A signal is a mechanical or electrical device erected beside a railway line to pass information relating to the state of the line ahead to train drivers/engineers.
	enumeration	28	documentation Sign and board documentation Equipment to inform the board staff for train traffic and shunting.
	enumeration	29	documentation Phase break documentation Border of the power supply systems (catenary).
	enumeration	33	documentation Hot spot detector documentation Trackside equipment which detects hot wheels or axle-box on passing trains.
	enumeration	36	documentation Freight yard documentation A freight yard is commercial usage of a physical location which can be used as a sending or a destination station in freight orders of rail freight transports. The freight yard can have his own codification
	enumeration	37	documentation Loading point documentation A loading point is a commercial usage of a physical location. Each loading point is assigned to a yard.
	enumeration	39	documentation Reservation code
	enumeration	40	documentation Metastation documentation To mark a meta location that forms the link between different stations that are considered as equal (for the traveller)
	enumeration	41	documentation CompanySpecificIdentifier documentation Company specific identifier of the primary location
	enumeration	42	documentation DIUM stations - Places of acceptance/delivery Station open into international traffic of goods (tariff point included in DIUM) – consignment acceptance/delivery station (loading points are excluded and covered by TypeCode 37).
	enumeration	43	documentation Passengers cars public loading Is a type of physical location on the open access network where passengers can put their car on a carrying train
	enumeration	45	documentation Sewage dump Place for cleaning purposes - disposal of the waste
	enumeration	46	documentation Refuelling Point Location where refuelling takes place
	enumeration	47	documentation Mains Supply Location where energy supply can be provided for the rolling stock e.g. preheating
	enumeration	48	documentation Water Supply Location where water supply can be provided for the rolling stock
	enumeration	50	documentation Indoor cleaning platform Cleaning point -interior
	enumeration	51	documentation Car-wash plant Cleaning point -outdoor
	enumeration	52	documentation Short dry-cleaning track Cleaning point
	enumeration	54	documentation Sand-filling station Location where sand is filled
	enumeration	56	documentation Signal box The location of a building containing signalling equipment
	enumeration	57	documentation Intermodal Terminal documentation Intermodal Terminal is a location which provides the space, equipment and operational environment under which the transfer of loading units (freight containers, swap bodies, semi-trailers or trailers) takes place

	enumeration 58 documentation OSJD system based location documentation Location code used within OSJD enumeration 59 documentation Train Service Substitute Stop documentation Place outside of railway station or railway stop, where passengers board or leave bus or any other transport mean as substitution of train service. Physical part of Primary Location. enumeration 60 documentation Multifunctional rail terminal documentation Facilities for conventional and/or intermodal rail/road transshipment principally open for public use and for all types of cargo. This kind of facility does not only provide transshipment, but also additional services like storage, consignment or road pre/end haulage. Physical part of Primary Location. enumeration 61 documentation Relief facility documentation Facilities providing equipment and infrastructure used to overcome a disruption (derailment, collision or other accidents). Physical part of Primary Location. enumeration 66 documentation Location ENEE Code documentation Legacy ENEE code of the parent primary location. Different coding of primary location. enumeration 70 documentation Network Border documentation Network border between two neighboring IM's; first or last Primary Location on a network. Attribute of primary location. enumeration 71 documentation State border documentation Political border between two member states. Attribute of primary location. enumeration 72 documentation Administrative border documentation Border point inside a member state to define federal structures or administrative districts or local areas. Attribute of primary location. enumeration 74 documentation Operational handover documentation Location where the responsibility for operation changes or can change between two involved IMs. Attribute of primary location. enumeration 75 documentation Planning handover documentation Location where the responsibility for timetable planning and path allocation changes or can change between two involved IMs. Attribute of primary location. enumeration 76 documentation Other technical facility documentation All technical installations and services that are not included in other facility types. E.g. Pre heating, de icing, air conditioning, Washing/cleaning of rolling stock, Disinfection of rolling stock, Sewage removal and Stationary brake test facilities. Physical part of Primary Location. enumeration 99 documentation Relation to Station documentation An indicator used to show that this location is a subsidiary of another location.
source	<xs:attribute name="LocationSubsidiaryTypeCode"> <xs:annotation> <xs:documentation/> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:token"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Not Defined</xs:documentation> <xs:documentation>not used</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1">

```
        <xs:annotation>
          <xs:documentation>Track</xs:documentation>
          <xs:documentation>The track is a uniquely defined part of
location</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation>Border Point Code</xs:documentation>
          <xs:documentation>Special code for the Border Points are allocated at the
country border and the points between different IM networks. Location of these points
sometimes are not geographically same with the station or yard. Therefore these
points are "logical point"</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4">
        <xs:annotation>
          <xs:documentation>Sorting Code</xs:documentation>
          <xs:documentation>Destination station of the wagon has a code in order to
provide shunting technology.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5">
        <xs:annotation>
          <xs:documentation>Vehicle Parking Points</xs:documentation>
          <xs:documentation>All points (tracks)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6">
        <xs:annotation>
          <xs:documentation>Public Loading Places</xs:documentation>
          <xs:documentation>Is a type of physical location on the open access network
where consignor or consignee can load or unload wagons</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="7">
        <xs:annotation>
          <xs:documentation>Private Loading Places</xs:documentation>
          <xs:documentation>Is a type of physical location outside the open access
network where consignor or consignee can load or unload wagons</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="9">
        <xs:annotation>
          <xs:documentation>Depot / Maintenance workshop.Place for overhaul or
maintenance of the rolling stock.    </xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="10">
        <xs:annotation>
          <xs:documentation>Switch/turnout</xs:documentation>
          <xs:documentation>The location where two tracks meet or
diverge.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="15">
        <xs:annotation>
          <xs:documentation>Platform</xs:documentation>
          <xs:documentation>The area next to the track which has been raised to make
access to railway vehicles easier.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="21">
        <xs:annotation>
```

```
          <xs:documentation>Building</xs:documentation>
          <xs:documentation>Those buildings where IM placed his staff for direct
communication with RU staff or the IM buildings serve RU activities as
well.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="22">
        <xs:annotation>
          <xs:documentation>Level crossing</xs:documentation>
          <xs:documentation>Place where rail and road crossing in level. on the same
level (grade)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="23">
        <xs:annotation>
          <xs:documentation>Bridge</xs:documentation>
          <xs:documentation>Special built structure is over the
road</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="24">
        <xs:annotation>
          <xs:documentation>Tunnel</xs:documentation>
          <xs:documentation>Structure to to allow a railway line to pass under the
surface.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="25">
        <xs:annotation>
          <xs:documentation>Underpass</xs:documentation>
          <xs:documentation>Undercrossing or underground passage under the railway
track. (Not used by trains)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="27">
        <xs:annotation>
          <xs:documentation>Signal</xs:documentation>
          <xs:documentation>A signal is a mechanical or electrical device erected
beside a railway line to pass information relating to the state of the line ahead to
train drivers/engineers.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="28">
        <xs:annotation>
          <xs:documentation>Sign and board</xs:documentation>
          <xs:documentation>Equipment to inform the board staff for train traffic and
shunting.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="29">
        <xs:annotation>
          <xs:documentation>Phase break</xs:documentation>
          <xs:documentation>Border of the power supply systems
(catenary).</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="33">
        <xs:annotation>
          <xs:documentation>Hot spot detector</xs:documentation>
          <xs:documentation>Trackside equipment which detects hot wheels or axle-box
on passing trains.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="36">
```

```
        <xs:annotation>
          <xs:documentation>Freight yard</xs:documentation>
          <xs:documentation>A freight yard is commercial usage of a physical location
which can be used as a sending or a destination station in freight orders of rail
freight transports. The freight yard can have his own codification</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="37">
        <xs:annotation>
          <xs:documentation>Loading point</xs:documentation>
          <xs:documentation>A loading point is a commercial usage of a physical
location. Each loading point is assigned to a yard.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="39">
        <xs:annotation>
          <xs:documentation>Reservation code</xs:documentation>
          <xs:documentation/>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="40">
        <xs:annotation>
          <xs:documentation>Metastation</xs:documentation>
          <xs:documentation>To mark a meta location that forms the link between
different stations that are considered as equal (for the
traveller)</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="41">
        <xs:annotation>
          <xs:documentation>CompanySpecificIdentifier</xs:documentation>
          <xs:documentation>Company specific identifier of the primary
location</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="42">
        <xs:annotation>
          <xs:documentation>DIUM stations - Places of acceptance/delivery
       Station open into international traffic of goods (tariff point included in
DIUM) – consignment acceptance/delivery station (loading points are excluded and
covered by TypeCode 37).</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="43">
        <xs:annotation>
          <xs:documentation>Passengers cars public loadingIs a type of physical
location on the open access network where passengers can put their car on a carrying
train</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="45">
        <xs:annotation>
          <xs:documentation>Sewage dump     Place for cleaning purposes - disposal of
the waste</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="46">
        <xs:annotation>
          <xs:documentation>Refuelling Point       Location where refuelling takes
place</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="47">
        <xs:annotation>
```

```
          <xs:documentation>Mains Supply    Location where energy supply can be
provided for the rolling stock e.g. preheating</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="48">
        <xs:annotation>
          <xs:documentation>Water Supply    Location where water supply can be
provided for the rolling stock      </xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="50">
        <xs:annotation>
          <xs:documentation>Indoor cleaning platform      Cleaning point -
interior</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="51">
        <xs:annotation>
          <xs:documentation>Car-wash plant  Cleaning point -
outdoor</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="52">
        <xs:annotation>
          <xs:documentation>Short dry-cleaning track      Cleaning
point</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="54">
        <xs:annotation>
          <xs:documentation>Sand-filling station   Location where sand is
filled</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="56">
        <xs:annotation>
          <xs:documentation>Signal box      The location of a building containing
signalling equipment</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="57">
        <xs:annotation>
          <xs:documentation>Intermodal Terminal</xs:documentation>
          <xs:documentation> Intermodal Terminal is a location which provides the
space, equipment and operational environment under which the transfer of loading
units (freight containers, swap bodies, semi-trailers or trailers) takes place
</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="58">
        <xs:annotation>
          <xs:documentation>OSJD system based location</xs:documentation>
          <xs:documentation>Location code used within OSJD</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="59">
        <xs:annotation>
          <xs:documentation>Train Service Substitute Stop</xs:documentation>
          <xs:documentation>Place outside of railway station or railway stop, where
passengers board or leave bus or any other transport mean as substitution of train
service. Physical part of Primary Location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="60">
```

```
        <xs:annotation>
          <xs:documentation>Multifunctional rail terminal</xs:documentation>
          <xs:documentation>Facilities for conventional and/or intermodal rail/road
transshipment principally open for public use and for all types of cargo. This kind
of facility does not only provide transshipment, but also additional services like
storage, consignment or road pre/end haulage. Physical part of Primary
Location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="61">
        <xs:annotation>
          <xs:documentation>Relief facility</xs:documentation>
          <xs:documentation>Facilities providing equipment and infrastructure used to
overcome a disruption (derailment, collision or other accidents). Physical part of
Primary Location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="66">
        <xs:annotation>
          <xs:documentation>Location ENEE Code</xs:documentation>
          <xs:documentation>Legacy ENEE code of the parent primary location.
Different coding of primary location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="70">
        <xs:annotation>
          <xs:documentation>Network Border</xs:documentation>
          <xs:documentation>Network border between two neighboring IM's; first or
last Primary Location on a network. Attribute of primary location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="71">
        <xs:annotation>
          <xs:documentation>State border</xs:documentation>
          <xs:documentation>Political border between two member states. Attribute of
primary location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="72">
        <xs:annotation>
          <xs:documentation>Administrative border</xs:documentation>
          <xs:documentation>Border point inside a member state to define federal
structures or administrative districts or local areas. Attribute of primary
location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="74">
        <xs:annotation>
          <xs:documentation>Operational handover</xs:documentation>
          <xs:documentation>Location where the responsibility for operation changes
or can change between two involved IMs. Attribute of primary
location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="75">
        <xs:annotation>
          <xs:documentation>Planning handover</xs:documentation>
          <xs:documentation>Location where the responsibility for timetable planning
and path allocation changes or can change between two involved IMs. Attribute of
primary location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="76">
        <xs:annotation>
```

```
          <xs:documentation>Other technical facility</xs:documentation>
          <xs:documentation>All technical installations and services that are not
included in other facility types. E.g. Pre heating, de icing, air conditioning,
Washing/cleaning of rolling stock, Disinfection of rolling stock, Sewage removal and
Stationary brake test facilities. Physical part of Primary
Location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="99">
        <xs:annotation>
          <xs:documentation>Relation to Station</xs:documentation>
          <xs:documentation>An indicator used to show that this location is a
subsidiary of another location.</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
</xs:attribute>
```

attribute **TimingQualifierCode**

namespace	http://www.era.europa.eu/schemes/TAFTSI/4.0
type	restriction of **xs:token**
used by	element **TimingAtLocation/Timing**

facets

Kind	Value	Annotation
enumeration	PLA	documentation: Public Location Arrival
enumeration	PLD	documentation: Public Location Departure
enumeration	ELA	documentation: Earliest Location Arrival
enumeration	ELD	documentation: Earliest Location Departure
enumeration	LLA	documentation: Latest Location Arrival
enumeration	LLD	documentation: Latest Location Departure
enumeration	ALA	documentation: Actual Location Arival
enumeration	ALD	documentation: Actual Location Departure
enumeration	ERT	documentation: Earliest Run Through
enumeration	ART	documentation: Actual Run Through
enumeration	LRT	documentation: Latest Run Through

source

```
<xs:attribute name="TimingQualifierCode">
  <xs:annotation>
    <xs:documentation/>
  </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:token">
      <xs:enumeration value="PLA">
        <xs:annotation>
          <xs:documentation>Public Location Arrival</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="PLD">
        <xs:annotation>
          <xs:documentation>Public Location Departure</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="ELA">
```

```
          <xs:annotation>
            <xs:documentation>Earliest Location Arrival</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="ELD">
          <xs:annotation>
            <xs:documentation>Earliest Location Departure</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="LLA">
          <xs:annotation>
            <xs:documentation>Latest Location Arrival</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="LLD">
          <xs:annotation>
            <xs:documentation>Latest Location Departure</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="ALA">
          <xs:annotation>
            <xs:documentation>Actual Location Arival</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="ALD">
          <xs:annotation>
            <xs:documentation>Actual Location Departure</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="ERT">
          <xs:annotation>
            <xs:documentation>Earliest Run Through</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="ART">
          <xs:annotation>
            <xs:documentation>Actual Run Through</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="LRT">
          <xs:annotation>
            <xs:documentation>Latest Run Through</xs:documentation>
          </xs:annotation>
        </xs:enumeration>
      </xs:restriction>
    </xs:simpleType>
  </xs:attribute>
```

simpleType **AnotherTrainAcceptableCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind: enumeration; Value: 1; Annotation: documentation — Desired train, the passenger accepts another train to the one requested
annotation	documentation Code list for Another train acceptable (B.5.44) appinfo <dc:title>Code list for Another train acceptable</dc:title> <dc:source>B.5.44</dc:source>
source	`<xs:simpleType name="AnotherTrainAcceptableCodeList">`

```
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for Another train acceptable
(B.5.44)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for Another train acceptable</dc:title>
      <dc:source>B.5.44</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Desired train, the passenger accepts another
train to the one requested</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **AvailableServiceTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
length	1	
enumeration	A	documentation Seats 1st Class smoking compartment coach
enumeration	B	documentation Seats 1st Class smoking open saloon coach
enumeration	C	documentation Seats 1st Class non-smoking compartment coach
enumeration	D	documentation Seats 1st Class non-smoking open saloon coach
enumeration	E	documentation Seats 2nd Class smoking compartment coach
enumeration	G	documentation Seats 2nd Class smoking open saloon coach
enumeration	F	documentation Seats 2nd Class non-smoking compartment coach
enumeration	J	documentation Seats 2nd Class non-smoking open saloon coach
enumeration	H	documentation Seats with meal at seat 1st Class smoking
enumeration	I	documentation Seats with meal at seat 1st Class non-smoking
enumeration	K	documentation Seats with meal at seat 2nd Class smoking
enumeration	L	documentation Seats with meal at seat 2nd Class non-smoking
enumeration	N	documentation Couchette 1st Class smoking
enumeration	O	documentation Couchette 1st Class non-smoking
enumeration	M	documentation Couchette 2nd Class smoking, four-berth
enumeration	P	documentation Couchette 2nd Class non-smoking, four-berth
enumeration	Q	documentation Couchette 2nd Class smoking
enumeration	R	documentation Couchette 2nd Class non-smoking
enumeration	S	documentation Single sleeping berth
enumeration	T	documentation Special sleeping berth
enumeration	U	documentation

	Double sleeping berth enumeration V documentation T2 sleeping berth enumeration W documentation T3 sleeping berth enumeration X documentation T4 sleeping berth enumeration Y documentation Restaurant car
annotation	documentation Code list for available services (B.5.62) appinfo <dc:title>Code list for available services</dc:title> <dc:source>B.5.62</dc:source>
source	

```
<xs:simpleType name="AvailableServiceTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for available services
(B.5.62)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for available services</dc:title>
      <dc:source>B.5.62</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:length value="1"/>
    <xs:enumeration value="A">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats 1st Class smoking compartment
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="B">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats 1st Class smoking open saloon
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="C">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats 1st Class non-smoking compartment
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="D">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats 1st Class non-smoking open saloon
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="E">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats 2nd Class smoking compartment
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="G">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats 2nd Class smoking open saloon
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="F">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats 2nd Class non-smoking compartment
coach</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="J">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats 2nd Class non-smoking open saloon
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="H">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats with meal at seat 1st Class
smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="I">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats with meal at seat 1st Class non-
smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="K">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats with meal at seat 2nd Class
smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="L">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats with meal at seat 2nd Class non-
smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="N">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 1st Class
smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="O">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 1st Class non-
smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="M">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 2nd Class smoking, four-
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="P">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 2nd Class non-smoking, four-
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Q">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 2nd Class
smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">Couchette 2nd Class non-
smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="S">
      <xs:annotation>
        <xs:documentation xml:lang="en">Single sleeping berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="T">
      <xs:annotation>
        <xs:documentation xml:lang="en">Special sleeping berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="U">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double sleeping berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="V">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 sleeping berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="W">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 sleeping berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 sleeping berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Y">
      <xs:annotation>
        <xs:documentation xml:lang="en">Restaurant car</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **BorderPointTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
minInclusive	0	
maxInclusive	9999	
enumeration	12	documentation DB documentation Waidhaus(Gr) documentation Waidhaus(Gr)
enumeration	13	documentation CD; DB documentation Praha documentation Praha
enumeration	19	documentation

			DSB; SJ documentation Kastrup(Gr) documentation Kastrup(Gr)
	enumeration	22	documentation DB; SJ documentation Sassnitz(Gr) documentation Sassnitz(Gr)
	enumeration	23	documentation DB; DSB documentation Puttgarden(MS) documentation Puttgarden(MS)
	enumeration	28	documentation DSB; NSB documentation Hirtshals documentation Hirtshals
	enumeration	30	documentation DSB; SJ documentation Helsingborg(Gr) documentation Helsingborg(Gr)
	enumeration	31	documentation DSB; SJ documentation Malmö C documentation Malmoe C
	enumeration	32	documentation DSB; SJ documentation København Havn documentation Kobenhavn Havn
	enumeration	85	documentation ATOC; DB; DSB; NS documentation Harwich(PQ) documentation Harwich
	enumeration	86	documentation ATOC; SNCF documentation Dover documentation Dover
	enumeration	97	documentation DB; IC Bus documentation Geleen(Gr) documentation Geleen(Gr)
	enumeration	98	documentation DB; IC Bus documentation Mol(Gr) documentation Mol(Gr)
	enumeration	122	documentation NSB documentation Kristiansand documentation Kristiansand
	enumeration	135	documentation DSB; SJ

			documentation
			Ystad
			documentation
			Ystad
	enumeration	137	documentation
			SJ
			documentation
			Malmoe C
			documentation
			Malmoe C
	enumeration	144	documentation
			SJ
			documentation
			Umeaa
			documentation
			Umeaa
	enumeration	145	documentation
			SJ
			documentation
			Sundsvall C
			documentation
			Sundsvall C
	enumeration	216	documentation
			SNCB; SNCF
			documentation
			Jeumont(fr)
			documentation
			Jeumont(fr)
	enumeration	217	documentation
			SNCB; SNCF
			documentation
			Quévy(fr)
			documentation
			Quevy(fr)
	enumeration	219	documentation
			SNCB; SNCF
			documentation
			Jeumont(fr)/Quévy(fr)
			documentation
			Jeumont/Quevy(fr)
	enumeration	220	documentation
			SNCB; SNCF
			documentation
			Blandain(fr)
			documentation
			Blandain(fr)
	enumeration	221	documentation
			SNCB; SNCF
			documentation
			Tourcoing(fr)
			documentation
			Tourcoing(fr)
	enumeration	222	documentation
			SNCB; SNCF
			documentation
			Blandain(fr)/Tourcoin(fr)
			documentation
			Bland./Tourc.(fr)
	enumeration	235	documentation
			CFL; SNCF
			documentation
			Bettembourg(fr)
			documentation
			Bettembourg(fr)
	enumeration	240	documentation
			SNCF; TI
			documentation
			Ventimiglia(fr)
			documentation
			Ventimiglia(fr)
	enumeration	241	documentation
			SNCF; TI
			documentation

			Limone-Confine documentation
	enumeration	242	Limone-Confine documentation SNCF; TI documentation
			Modane(fr) documentation
	enumeration	243	Modane(fr) documentation SNCF; TI documentation
			Piene(fr) documentation
	enumeration	250	Piene(fr) documentation CFF/SBB; SNCF documentation
			Le Châtelard(fr) documentation
	enumeration	252	Le Chatelard(fr) documentation CFF/SBB; SNCF documentation
			Genève-Eaux-Vives documentation
	enumeration	253	Geneve-Eaux-Vives documentation CFF/SBB; SNCF documentation
			Genève documentation
	enumeration	254	Geneve documentation CFF/SBB; SNCF documentation
			Vallorbe(fr) documentation
	enumeration	255	Vallorbe(fr) documentation CFF/SBB; SNCF documentation
			Les Verrières(fr) documentation
	enumeration	256	Les Verrieres(fr) documentation CFF/SBB; SNCF documentation
			Le Locle(Gr) documentation
	enumeration	259	Le Locle(Gr) documentation CFF/SBB; SNCF documentation
			Basel SBB documentation
	enumeration	270	Basel SBB documentation CFF/SBB; ÖBB documentation
			St. Margrethen documentation
	enumeration	271	St. Margrethen documentation CFF/SBB; ÖBB documentation
			Buchs(SG) documentation
	enumeration	280	Buchs(SG) documentation CP; RENFE documentation
			Badajoz(fr)

			documentation
			Badajoz(fr)
	enumeration	281	documentation
			CP; RENFE
			documentation
			Valencia de Alcantara(fr)
			documentation
			V.Alcantara(fr)
	enumeration	282	documentation
			CP; RENFE
			documentation
			Fuentes Onoro(fr)
			documentation
			Fuentes Onoro(fr)
	enumeration	283	documentation
			CP; RENFE
			documentation
			Barca de Alva(fr)
			documentation
			Barca de Alva(fr)
	enumeration	284	documentation
			CP; RENFE
			documentation
			Valenca(fr)
			documentation
			Valenca(fr)
	enumeration	290	documentation
			RENFE; SNCF
			documentation
			Port-Bou(fr)
			documentation
			Port-Bou(fr)
	enumeration	291	documentation
			RENFE; SNCF
			documentation
			Latour de Carol-Entveigt
			documentation
			Latour de Carol
	enumeration	292	documentation
			RENFE; SNCF
			documentation
			Canfranc(fr)
			documentation
			Canfranc(fr)
	enumeration	293	documentation
			RENFE; SNCF
			documentation
			Hendaye(fr)
			documentation
			Hendaye(fr)
	enumeration	303	documentation
			NS; SNCB
			documentation
			Roosendaal(fr)
			documentation
			Roosendaal(fr)
	enumeration	305	documentation
			NS, SNCB
			documentation
			Hazeldonk(Gr)
			documentation
			Hazeldonk(Gr)
	enumeration	308	documentation
			NS; SNCB
			documentation
			Visé(fr)
			documentation
			Vise(fr)
	enumeration	310	documentation
			SZ; TI
			documentation
			Villa-Opicina(fr)
			documentation

			Villa-Opicina(fr)
	enumeration	312	documentation
			SZ; TI
			documentation
			Nova Gorica(fr)
			documentation
			Nova Gorica(fr)
	enumeration	320	documentation
			CFF/SBB; TI
			documentation
			Tirano
			documentation
			Tirano
	enumeration	321	documentation
			CFF/SBB; TI
			documentation
			Chiasso
			documentation
			Chiasso
	enumeration	322	documentation
			CFF/SBB; TI
			documentation
			Pino transito
			documentation
			Pino transito
	enumeration	323	documentation
			CFF/SBB; TI
			documentation
			Camedo transito
			documentation
			Camedo transito
	enumeration	324	documentation
			CFF/SBB; TI
			documentation
			Iselle transito
			documentation
			Iselle transito
	enumeration	330	documentation
			ÖBB; TI
			documentation
			Tarvisio Boscoverde
			documentation
			Tarvisio B.verde
	enumeration	331	documentation
			ÖBB; TI
			documentation
			San Candido/Innichen
			documentation
			San Candido/Inni.
	enumeration	332	documentation
			ÖBB; TI
			documentation
			Brennero/Brenner
			documentation
			Brennero/Brenner
	enumeration	340	documentation
			CFL; SNCB
			documentation
			Gouvy(fr)
			documentation
			Gouvy(fr)
	enumeration	341	documentation
			CFL; SNCB
			documentation
			Athus(Gr)
			documentation
			Athus(Gr)
	enumeration	342	documentation
			CFL; SNCB
			documentation
			Sterpenich(fr)
			documentation
			Sterpenich(fr)

	enumeration	343	documentation CFL; SNCF documentation Rodange(fr) documentation Rodange(fr)
	enumeration	350	documentation CFARYM; OSE documentation Gevgelija(fr) documentation Gevgelija(fr)
	enumeration	351	documentation CFARYM; OSE documentation Kremenica(fr) documentation Kremenica(fr)
	enumeration	360	documentation SJ; VR documentation Haparanda(Gr) documentation Haparanda(Gr)
	enumeration	361	documentation ATTICA; VR documentation Hanko documentation Hanko
	enumeration	405	documentation DB; DSB documentation Toender(Gr) documentation Toender(Gr)
	enumeration	406	documentation DB; DSB documentation Flensburg(Gr) documentation Flensburg(Gr)
	enumeration	410	documentation DB; NS documentation Weener(Gr) documentation Weener(Gr)
	enumeration	412	documentation DB; NS documentation Bad Bentheim(Gr) documentation Bad Bentheim(Gr)
	enumeration	413	documentation DB; NS documentation Gronau(Westf)(Gr) documentation Gronau(Westf)(Gr)
	enumeration	416	documentation DB; NS documentation Emmerich(Gr) documentation Emmerich(Gr)
	enumeration	418	documentation DB; NS documentation Venlo(Gr) documentation Venlo(Gr)
	enumeration	420	documentation

			DB; NS
			documentation
			Herzogenrath(Gr)
			documentation
			Herzogenrath(Gr)
	enumeration	440	documentation
			SZ; ÖBB
			documentation
			Spielfeld(Gr)
			documentation
			Spielfeld(Gr)
	enumeration	441	documentation
			SZ; ÖBB
			documentation
			Bleiburg(Gr)
			documentation
			Bleiburg(Gr)
	enumeration	442	documentation
			SZ; ÖBB
			documentation
			Jesenice(Gr)
			documentation
			Jesenice(Gr)
	enumeration	452	documentation
			DB; SNCB
			documentation
			Aachen Süd(Gr)
			documentation
			Aachen Sued(Gr)
	enumeration	460	documentation
			DB; ÖBB
			documentation
			Passau Hbf
			documentation
			Passau Hbf
	enumeration	461	documentation
			DB; ÖBB
			documentation
			Simbach(Inn)
			documentation
			Simbach(Inn)
	enumeration	462	documentation
			DB; ÖBB
			documentation
			Salzburg Hbf
			documentation
			Salzburg Hbf
	enumeration	463	documentation
			DB; ÖBB
			documentation
			Kufstein
			documentation
			Kufstein
	enumeration	464	documentation
			DB; ÖBB
			documentation
			Mittenwald(Gr)
			documentation
			Mittenwald(Gr)
	enumeration	467	documentation
			DB; ÖBB
			documentation
			Lindau Hbf
			documentation
			Lindau Hbf
	enumeration	470	documentation
			DB; SNCF
			documentation
			Neuenburg(Gr)
			documentation
			Neuenburg(Gr)
	enumeration	471	documentation
			DB; SNCF

			documentation Kehl(Gr) documentation
	enumeration	472	Kehl(Gr) documentation DB; SNCF documentation
	enumeration	473	Lauterbourg(fr) documentation Lauterbourg(fr) documentation DB; SNCF documentation
	enumeration	475	Wissembourg(fr) documentation Wissembourg(fr) documentation DB; SNCF documentation
	enumeration	476	Hanweiler(Gr) documentation Hanweiler(Gr) documentation DB; SNCF documentation
	enumeration	479	Forbach(fr) documentation Forbach(fr) documentation DB; SNCF documentation
	enumeration	491	Apach(fr) documentation Apach(fr) documentation CFF/SBB; DB documentation
	enumeration	492	Basel Bad Bf documentation Basel Bad Bf documentation CFF/SBB; DB documentation
	enumeration	493	Waldshut(Gr) documentation Waldshut(Gr) documentation CFF/SBB; DB documentation
	enumeration	495	Schaffhausen documentation Schaffhausen documentation CFF/SBB; DB documentation
	enumeration	501	Konstanz documentation Konstanz documentation HZ; ZS documentation
	enumeration	502	Sid(Gr) documentation Sid(Gr) documentation HZ; ZS documentation
	enumeration	512	Erdut(Gr) documentation Erdut(Gr) documentation OSE; TCDD documentation

			Pythion(fr)
			documentation
			Pythion(fr)
	enumeration	520	documentation
			HZ; ZFBH
			documentation
			Metkovic(Gr)
			documentation
			Metkovic(Gr)
	enumeration	522	documentation
			HZ; ZRS
			documentation
			Dobrljin(Gr)
			documentation
			Dobrljin(Gr)
	enumeration	524	documentation
			HZ; ZRS
			documentation
			Slavonski Samac(Gr)
			documentation
			Slav. Samac(Gr)
	enumeration	525	documentation
			HZ; ZFBH; ZRS
			documentation
			Brcko(Gr)
			documentation
			Brcko(Gr)
	enumeration	540	documentation
			NSB; SJ
			documentation
			Vassijaure(Gr)
			documentation
			Vassijaure(Gr)
	enumeration	541	documentation
			NSB; SJ
			documentation
			Storlien(Gr)
			documentation
			Storlien(Gr)
	enumeration	542	documentation
			NSB; SJ
			documentation
			Charlottenberg(Gr)
			documentation
			Charlottenb(Gr)
	enumeration	543	documentation
			NSB; SJ
			documentation
			Kornsjö(Gr)
			documentation
			Kornsjoe(Gr)
	enumeration	550	documentation
			HZ; SZ
			documentation
			Mursko Sredisce(Gr)
			documentation
			Mursko Sredisce
	enumeration	551	documentation
			HZ; SZ
			documentation
			Cakovec(Gr)
			documentation
			Cakovec(Gr)
	enumeration	552	documentation
			HZ; SZ
			documentation
			Rogatec(Gr)
			documentation
			Rogatec(Gr)
	enumeration	553	documentation
			HZ; SZ
			documentation
			Kumrovec(Gr)

			documentation Kumrovec(Gr)
	enumeration	554	documentation HZ; SZ documentation Dobova(Gr) documentation Dobova(Gr)
	enumeration	555	documentation HZ; SZ documentation Metlika(Gr) documentation Metlika(Gr)
	enumeration	556	documentation HZ; SZ documentation Sapjane(Gr) documentation Sapjane(Gr)
	enumeration	557	documentation HZ; SZ documentation Buzet(Gr) documentation Buzet(Gr)
	enumeration	580	documentation CFL; DB documentation Igel(Gr) documentation Igel(Gr)
	enumeration	591	documentation ZRS; ZS documentation Zvornik Novi documentation Zvornik
	enumeration	601	documentation MAV; ÖBB documentation Hegyeshalom(Gr) documentation Hegyeshalom(Gr)
	enumeration	606	documentation GYSEV / ROeEE; ÖBB documentation Szentgotthárd(Gr) documentation Szentgotthard(Gr)
	enumeration	609	documentation GYSEV/ROeEE; ÖBB documentation Pamhagen(Gr) documentation Pamhagen(Gr)
	enumeration	610	documentation CD; ÖBB documentation Summerau(Gr) documentation Summerau(Gr)
	enumeration	611	documentation CD; ÖBB documentation Gmünd(Gr) documentation Gmuend(Gr)
	enumeration	612	documentation CD; ÖBB documentation Retz(Gr) documentation

			Retz(Gr)
	enumeration	613	documentation
			CD; ÖBB
			documentation
			Breclav(Gr)
			documentation
			Breclav(Gr)
	enumeration	616	documentation
			ÖBB; ZSSK
			documentation
			Marchegg(Gr)
			documentation
			Marchegg(Gr)
	enumeration	617	documentation
			ÖBB; ZSSK
			documentation
			Kittsee(Gr)
			documentation
			Kittsee(Gr)
	enumeration	620	documentation
			BDZ; ZS
			documentation
			Dimitrovgrad(fr)
			documentation
			Dimitrovgrad(fr)
	enumeration	642	documentation
			CD; DB
			documentation
			Furth i Wald(Gr)
			documentation
			Furth i Wald(Gr)
	enumeration	643	documentation
			CD; DB
			documentation
			Bayerisch Eisenstein
			documentation
			Bayerisch Eisenst
	enumeration	644	documentation
			CD; DB
			documentation
			Cheb(Gr)
			documentation
			Cheb(Gr)
	enumeration	645	documentation
			CD; DB
			documentation
			Selb(Gr)
			documentation
			Selb(Gr)
	enumeration	646	documentation
			CD; DB
			documentation
			Vojtanov(Gr)
			documentation
			Vojtanov(Gr)
	enumeration	647	documentation
			CD; DB
			documentation
			Potucky(Gr)
			documentation
			Potucky(Gr)
	enumeration	648	documentation
			CD; DB
			documentation
			Vejprty(Gr)
			documentation
			Vejprty(Gr)
	enumeration	649	documentation
			CD; DB
			documentation
			Schöna(Gr)
			documentation
			Schoena(Gr)

	enumeration	655	documentation CD; DB documentation Rumburk(Gr) documentation Rumburk(Gr)
	enumeration	658	documentation CD; DB documentation Zittau(Gr) documentation Zittau(Gr)
	enumeration	660	documentation CFR; ZS documentation Jimbolia(fr) documentation Jimbolia(fr)
	enumeration	661	documentation CFR; ZS documentation Vrsac(fr) documentation Vrsac(fr)
	enumeration	671	documentation ZCG; ZS documentation Bijelo Polje(Gr) documentation Bijelo Polje(Gr)
	enumeration	676	documentation CFARYM; ZS documentation Tabanovci(fr) documentation Tabanovci(fr)
	enumeration	678	documentation CFARYM; ZS documentation Deneral Jankovic(fr) documentation Djen.Jankovic(fr)
	enumeration	681	documentation DB; PKP documentation Grambow(Gr) documentation Grambow(Gr)
	enumeration	684	documentation DB; PKP documentation Tantow(Gr) documentation Tantow(Gr)
	enumeration	686	documentation DB; PKP documentation Kostrzyn(Gr) documentation Kostrzyn(Gr)
	enumeration	687	documentation DB; PKP documentation Frankfurt(Oder)(Gr) documentation Frankfurt(O)(Gr)
	enumeration	688	documentation DB; PKP documentation Gubin(Gr) documentation Gubin(Gr)
	enumeration	690	documentation

			DB; PKP documentation Forst(Gr) documentation
	enumeration	698	Forst(Gr) documentation DB; PKP documentation Zgorzelec(Gr) documentation
	enumeration	703	Zgorzelec(Gr) documentation BDZ; TCDD documentation Kapikule(Gr) documentation
	enumeration	711	Kapikule(Gr) documentation MAV; ZS documentation Subotica(Gr) documentation
	enumeration	712	Subotica(Gr) documentation MAV; ZS documentation Röszke(Gr) documentation
	enumeration	720	Roeszke(Gr) documentation RZD; VR documentation Vainikkala(Gr) documentation
	enumeration	730	Vainikkala(Gr) documentation HZ; MAV documentation Kotoriba(Gr) documentation
	enumeration	731	Kotoriba(Gr) documentation HZ; MAV documentation Koprivnica(Gr) documentation
	enumeration	733	Koprivnica(Gr) documentation HZ; MAV documentation Magyarbóly(Gr) documentation
	enumeration	760	Magyarboly(Gr) documentation BDZ ; OSE documentation Kulata(Gr) documentation
	enumeration	761	Kulata(Gr) documentation BDZ ; OSE documentation Svilengrad(Gr) documentation
	enumeration	774	Svilengrad(Gr) documentation MAV; SZ documentation Hodos(Gr) documentation
	enumeration	780	Hodos(Gr) documentation GYSEV/ROeEE; MAV

			documentation
			Hegyeshalom
			documentation
	enumeration	781	Hegyeshalom documentation GYSEV/ROeEE; MAV documentation
			Porpác documentation
	enumeration	782	Porpac documentation GYSEV/ROeEE; MAV documentation
			Zalaszentiván documentation
	enumeration	790	Zalaszentivan documentation GYSEV/ROeEE; MAV documentation
			Györ documentation
	enumeration	791	Gyoer documentation GYSEV/ROeEE; MAV documentation
			Csorna documentation
	enumeration	796	Csorna documentation GYSEV/ROeEE; ÖBB documentation
			Sopron documentation
	enumeration	815	Sopron documentation SNCB documentation
			Wannehain(fr) documentation
	enumeration	822	Wannehain(fr) documentation CD; PKP documentation
			Mezimesti(Gr) documentation
	enumeration	823	Mezimesti(Gr) documentation CD; PKP documentation
			Lichkov(Gr) documentation
	enumeration	824	Lichkov(Gr) documentation CZ; PL documentation
			Glucholazy(Gr) documentation
	enumeration	825	Glucholazy(Gr) documentation CD; PKP documentation
			Bohumin(Gr) documentation
	enumeration	826	Bohumin(Gr) documentation CD; PKP documentation
			Zebrzydowice(Gr) documentation
	enumeration	827	Zebrzydowice(Gr) documentation CD; PKP documentation

			Český Tesin(Gr) documentation
	enumeration	828	Cesky Tesin(Gr) documentation CD; PKP documentation
			Jakuszyce(Gr) documentation
	enumeration	830	Jakuszyce(Gr) documentation PKP; RZD documentation
			Braniewo(Gr) documentation
	enumeration	834	Braniewo(Gr) documentation PKP; ZSSK documentation
			Skalité(Gr) documentation
	enumeration	835	Skalite(Gr) documentation PKP; ZSSK documentation
			Plavec(Gr) documentation
	enumeration	836	Plavec(Gr) documentation PKP; ZSSK documentation
			Lupkow(Gr) documentation
	enumeration	840	Lupkow(Gr) documentation LG; PKP documentation
			Mockava(Gr) documentation
	enumeration	844	Mockava(Gr) documentation BC; PKP documentation
			Bruzgi(Gr) documentation
	enumeration	846	Bruzgi(Gr) documentation BC; PKP documentation
			Czeremcha(Gr) documentation
	enumeration	847	Czeremcha(Gr) documentation BC; PKP documentation
			Brest(Gr) documentation
	enumeration	880	Brest(Gr) documentation MAV; ZSSK documentation
			Sátoraljaújhely(Gr) documentation
	enumeration	881	Satoraljaujh.(Gr) documentation MAV; ZSSK documentation
			Cana(Gr) documentation
	enumeration	883	Cana(Gr) documentation MAV; ZSSK documentation
			Bánréve(Gr)

			documentation
			Banreve(Gr)
	enumeration	884	documentation
			MAV; ZSSK
			documentation
			Filakovo(Gr)
			documentation
			Filakovo(Gr)
	enumeration	887	documentation
			MAV; ZSSK
			documentation
			Szob(Gr)
			documentation
			Szob(Gr)
	enumeration	888	documentation
			MAV; ZSSK
			documentation
			Komárom(Gr)
			documentation
			Komarom(Gr)
	enumeration	889	documentation
			MAV; ZSSK
			documentation
			Rajka(Gr)
			documentation
			Rajka(Gr)
	enumeration	890	documentation
			CD; ZSSK
			documentation
			Kuty(Gr)
			documentation
			Kuty(Gr)
	enumeration	893	documentation
			CD; ZSSK
			documentation
			Vrbovce(Gr)
			documentation
			Vrbovce(Gr)
	enumeration	894	documentation
			CD; ZSSK
			documentation
			Nemsova(Gr)
			documentation
			Nemsova(Gr)
	enumeration	895	documentation
			CD; ZSSK
			documentation
			Horni Lidec(Gr)
			documentation
			Horni Lidec(Gr)
	enumeration	896	documentation
			CD; ZSSK
			documentation
			Cadca(Gr)
			documentation
			Cadca(Gr)
	enumeration	930	documentation
			CFR; UZ
			documentation
			Halmeu(Gr)
			documentation
			Halmeu(Gr)
	enumeration	931	documentation
			CFR; UZ
			documentation
			Teresva(Gr)
			documentation
			Teresva(Gr)
	enumeration	934	documentation
			CFR; UZ
			documentation
			Berlebash(Gr)
			documentation

			Berlebash(Gr)
	enumeration	935	documentation
			CFR; UZ
			documentation
			Vicsani(Gr)
			documentation
			Vicsani(Gr)
	enumeration	936	documentation
			CFM; CFR
			documentation
			Ungheni(Gr)
			documentation
			Ungheni(Gr)
	enumeration	937	documentation
			CFM; CFR
			documentation
			Prut(Gr)
			documentation
			Prut(Gr)
	enumeration	940	documentation
			CFR; MAV
			documentation
			Carei(Gr)
			documentation
			Carei(Gr)
	enumeration	941	documentation
			CFR; MAV
			documentation
			Nyírábrány(Gr)
			documentation
			Nyirabrany(Gr)
	enumeration	942	documentation
			CFR; MAV
			documentation
			Biharkeresztes(Gr)
			documentation
			Biharkereszt.(Gr)
	enumeration	944	documentation
			CFR; MAV
			documentation
			Salonta(Gr)
			documentation
			Salonta(Gr)
	enumeration	946	documentation
			CFR; MAV
			documentation
			Curtici(Gr)
			documentation
			Curtici(Gr)
	enumeration	950	documentation
			UZ; ZSSK
			documentation
			Chop(Gr)
			documentation
			Chop(Gr)
	enumeration	955	documentation
			MAV; UZ
			documentation
			Záhony(Gr)
			documentation
			Zahony(Gr)
	enumeration	960	documentation
			PKP; UZ
			documentation
			Jagodin(Gr)
			documentation
			Jagodin(Gr)
	enumeration	961	documentation
			PKP; UZ
			documentation
			Izov(Gr)
			documentation
			Izov(Gr)

	enumeration	962	documentation PKP; UZ documentation Medyka(Gr) documentation Medyka(Gr)
	enumeration	963	documentation PKP; UZ documentation Starzhava(Gr) documentation Starzhava(Gr)
	enumeration	966	documentation PKP; UZ documentation Hrebenne(Gr) documentation Hrebenne(Gr)
	enumeration	970	documentation BDZ; CFR documentation Kardam(Gr) documentation Kardam(Gr)
	enumeration	971	documentation BDZ; CFR documentation Russe(Gr) documentation Russe(Gr)
	enumeration	972	documentation BDZ; CFR documentation Vidin(Gr) documentation Vidin(Gr)
	enumeration	993	documentation DB documentation Rostock Hbf documentation Rostock
	enumeration	1001	documentation LDZ; LG documentation Sarkiai(Gr) documentation Sarkiai(Gr)
	enumeration	1006	documentation LDZ; LG documentation Kurcums(Gr) documentation Kurcums(Gr)
	enumeration	1010	documentation EVR; LDZ documentation Valga(Gr) documentation Valga(Gr)
	enumeration	1022	documentation BC; UZ documentation Horobichi(Gr) documentation Horobichi(Gr)
	enumeration	1026	documentation LG; RZD documentation Pagegiai(Gr) documentation Pagegiai(Gr)
	enumeration	1027	documentation

			LG; RZD documentation Kybartai(Gr) documentation Kybartai(Gr)
	enumeration	1035	documentation LDZ; RZD documentation Karsava(Gr) documentation Karsava(Gr)
	enumeration	1036	documentation LDZ; RZD documentation Posin(Gr) documentation Posin(Gr)
	enumeration	1045	documentation EVR; RZD documentation Narva(Gr) documentation Narva(Gr)
	enumeration	1046	documentation EVR; RZD documentation Orava(Gr) documentation Orava(Gr)
	enumeration	1050	documentation BC; LG documentation Sumskas(Gr) documentation Sumskas(Gr)
	enumeration	1051	documentation BC; LG documentation Beniakone(Gr) documentation Beniakone(Gr)
	enumeration	1053	documentation BC; LG documentation Poreche(Gr) documentation Poreche(Gr)
	enumeration	1060	documentation BC; LDZ documentation Bigosovo(Gr) documentation Bigosovo(Gr)
	enumeration	1070	documentation BC; RZD documentation Alesca(Gr) documentation Alesca(Gr)
	enumeration	1071	documentation BC; RZD documentation Ezerisce(Gr) documentation Ezerisce(Gr)
	enumeration	1072	documentation BC; RZD documentation Rudnia(Gr) documentation Rudnia(Gr)
	enumeration	1073	documentation BC; RZD

			documentation
			Osinovka(Gr)
			documentation
			Osinovka(Gr)
	enumeration	1076	documentation
			BC; RZD
			documentation
			Zlynka(Gr)
			documentation
			Zlynka(Gr)
	enumeration	1102	documentation
			RZD; UZ
			documentation
			Zernovo(Gr)
			documentation
			Zernovo(Gr)
	enumeration	1106	documentation
			RZD; UZ
			documentation
			Krasnuj Hutor(Gr)
			documentation
			Krasnuj Hutor(Gr)
	enumeration	1108	documentation
			RZD; UZ
			documentation
			Topoli(Gr)
			documentation
			Topoli(Gr)
	enumeration	1112	documentation
			RZD; UZ
			documentation
			Gukovo(Gr)
			documentation
			Gukovo(Gr)
	enumeration	1114	documentation
			RZD; UZ
			documentation
			Kvashino(Gr)
			documentation
			Kvashino(Gr)
	enumeration	1120	documentation
			BC; UZ
			documentation
			Zabolote(Gr)
			documentation
			Zabolote(Gr)
	enumeration	1121	documentation
			BC; UZ
			documentation
			Goryn(Gr)
			documentation
			Goryn(Gr)
	enumeration	1122	documentation
			BC; UZ
			documentation
			Slovechno(Gr)
			documentation
			Slovechno(Gr)
	enumeration	1123	documentation
			BC; UZ
			documentation
			Teriuha(Gr)
			documentation
			Teriuha(Gr)
	enumeration	1140	documentation
			CFM; UZ
			documentation
			Volchinec(Gr)
			documentation
			Volchinec(Gr)
	enumeration	1141	documentation
			CFM; UZ
			documentation

			Kriva(Gr)
			documentation
	enumeration	1142	Kriva(Gr)
			documentation
			CFM; UZ
			documentation
			Larga(Gr)
			documentation
	enumeration	1143	Larga(Gr)
			documentation
			CFM; UZ
			documentation
			Oknica(Gr)
			documentation
	enumeration	1146	Oknica(Gr)
			documentation
			CFM; UZ
			documentation
			Kuchurgan(Gr)
			documentation
	enumeration	1151	Kuchurgan(Gr)
			documentation
			KZH; RZD
			documentation
			Aksaraiskaia(Gr)
			documentation
	enumeration	1152	Aksaraiskaia(Gr)
			documentation
			KZH; RZD
			documentation
			Ozinki(Gr)
			documentation
	enumeration	1153	Ozinki(Gr)
			documentation
			KZH; RZD
			documentation
			Ileck(Gr)
			documentation
	enumeration	1155	Ileck(Gr)
			documentation
			KZH; RZD
			documentation
			Tobol(Gr)
			documentation
	enumeration	1158	Tobol(Gr)
			documentation
			KZH; RZD
			documentation
			Lokot(Gr)
			documentation
	enumeration	1159	Lokot(Gr)
			documentation
			KZH; RZD
			documentation
			Petropavlovsk(Gr)
			documentation
	enumeration	1211	Petropavlovsk(Gr)
			documentation
			KRG; KZH
			documentation
			Lugovaya(Gr)
			documentation
	enumeration	1501	Lugovaya(Gr)
			documentation
			CEL; CFS
			documentation
			Akkari
			documentation
	enumeration	1549	Akkari
			documentation
			TCCD
			documentation
			Kapýköy(Gr)

			documentation
			Kapikoy(Gr)
	enumeration	1560	documentation
			CFS; TCDD
			documentation
			Meydanekbez
			documentation
			Meydanekbez
	enumeration	1561	documentation
			CFS; TCDD
			documentation
			Cobanbey
			documentation
			Cobanbey
	enumeration	1562	documentation
			CFS; TCDD
			documentation
			Nusaybin
			documentation
			Nusaybin
	enumeration	1840	documentation
			KZD; RZD
			documentation
			Mandschuria(Gr)
			documentation
			Mandschuria(Gr)
	enumeration	1845	documentation
			KZD; KZH
			documentation
			Drujba(Gr)
			documentation
			Drujba(Gr)
	enumeration	1980	documentation
			RZD; ZC
			documentation
			Tumangan(Gr)
			documentation
			Tumangan(Gr)
	enumeration	1990	documentation
			MTZ; RZD
			documentation
			Naushki(Gr)
			documentation
			Naushki(Gr)
	enumeration	1991	documentation
			MTZ; RZD
			documentation
			Ereenzaw(Gr)
			documentation
			Ereenzaw(Gr)
	enumeration	2002	documentation
			GBPR; SNCF
			documentation
			Calais
			documentation
			Calais
	enumeration	2003	documentation
			GBPR; SNCF
			documentation
			Boulogne
			documentation
			Boulogne
	enumeration	2004	documentation
			GBPR; SNCF
			documentation
			Dieppe
			documentation
			Dieppe
	enumeration	2006	documentation
			CIE; GBPR; SNCF
			documentation
			Le Havre
			documentation

			Le Havre
	enumeration	2008	documentation
			CIE; SNCF
			documentation
			Cherbourg C
			documentation
			Cherbourg C
	enumeration	2050	documentation
			ONCFM; RENFE
			documentation
			Algeciras-Puerto
			documentation
			Algeciras-Puerto
	enumeration	2051	documentation
			ONCFM; RENFE
			documentation
			Málaga
			documentation
			Malaga
	enumeration	2061	documentation
			ATOC; CIE
			documentation
			Fishguard Harb
			documentation
			Fishguard Harb
	enumeration	2099	documentation
			BSB; CFF/SBB
			documentation
			Friedrichshafen(MS)
			documentation
			Friedrichshfn(MS)
	enumeration	2123	documentation
			ATOC; GBPR
			documentation
			Stranraer Harbo
			documentation
			Stranraer
	enumeration	2135	documentation
			DB; GBPR
			documentation
			Hamburg Landungsbrücken
			documentation
			Hamburg Landungsb
	enumeration	2153	documentation
			DSB; GBPR
			documentation
			Esbjerg Havn
			documentation
			Esbjerg Havn
	enumeration	2158	documentation
			GBPR; NIR
			documentation
			Larne Harbour
			documentation
			Larne Harbour
	enumeration	2175	documentation
			SNCB
			documentation
			Oostende(fr)
			documentation
			Oostende(fr)
	enumeration	2326	documentation
			SJ; VR
			documentation
			Helsinki S
			documentation
			Helsinki S
	enumeration	2327	documentation
			SJ; VR
			documentation
			Turku S
			documentation
			Turku S

	enumeration	2329	documentation VR documentation Vaasa S documentation Vaasa S
	enumeration	2348	documentation DSB; NSB documentation Oslo(Gr) documentation Oslo(Gr)
	enumeration	2355	documentation GBPR; NS documentation Hoek van Holland documentation Hoek van Holland
	enumeration	2388	documentation ATOC; GBPR documentation Newhaven Town documentation Newhaven Town
	enumeration	2389	documentation ATOC; GBPR documentation Southampton documentation Southampton
	enumeration	2392	documentation CIE; GBPR documentation Holyhead documentation Holyhead
	enumeration	2393	documentation CIE; GBPR documentation Liverpool documentation Liverpool
	enumeration	2397	documentation ATOC; GBPR documentation Newcastle documentation Newcastle
	enumeration	2496	documentation BSB; DB documentation Friedrichshafen.St. documentation Friedrichshfn.St.
	enumeration	2497	documentation DB; SJ; VR documentation Lübeck-Trave.Hafen documentation Luebeck-Trave.Haf
	enumeration	2517	documentation OSE; TI documentation Ancona documentation Ancona
	enumeration	2518	documentation OSE; TI documentation Bari documentation Bari
	enumeration	2519	documentation

			OSE; TI documentation Brindisi documentation Brindisi
	enumeration	2539	documentation CIE; GBPR documentation Dun Laoghaire Pier documentation Dun Laoghaire P
	enumeration	2583	documentation SJ documentation Goeteborg C documentation Goeteborg C
	enumeration	2589	documentation SJ documentation Stockholm C documentation Stockholm C
	enumeration	3083	documentation RENFE; ONCFM documentation Tanger-Puerto documentation Tanger-Puerto
	enumeration	4290	documentation KZH; UTI documentation Oazis(Gr) documentation Oazis(Gr)
	enumeration	4410	documentation KZH; UTI documentation Sary-Agatsh(Gr) documentation Sary-Agatsh(Gr)

annotation

documentation
If the station is also a border-point, this field should contain the corresponding border-point code in line with code list B.1.3 in ERA document "Code List".
appinfo
<dc:title>Border Point code list</dc:title>
<dc:source>B.1.3,B.2.9</dc:source>

source

```
<xs:simpleType name="BorderPointTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">If the station is also a border-point, this field
should contain the corresponding border-point code in line with code list B.1.3 in
ERA document "Code List".</xs:documentation>
    <xs:appinfo>
      <dc:title>Border Point code list</dc:title>
      <dc:source>B.1.3,B.2.9</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9999"/>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Waidhaus(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Waidhaus(Gr)</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Praha</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Praha</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DSB;
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kastrup(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kastrup(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sassnitz(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Sassnitz(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
DSB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Puttgarden(MS)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Puttgarden(MS)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DSB;
NSB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hirtshals</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hirtshals</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DSB;
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Helsingborg(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Helsingborg(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DSB;
```

```
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Malmö C</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Malmoe C</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DSB;
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">København Havn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kobenhavn Havn</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="85">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ATOC; DB;
DSB; NS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Harwich(PQ)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Harwich</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="86">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ATOC;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Dover</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Dover</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="97">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB; IC
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Geleen(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Geleen(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="98">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB; IC
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Mol(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Mol(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="122">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">NSB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kristiansand</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
```

```
description">Kristiansand</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="135">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DSB;
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Ystad</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Ystad</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="137">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Malmoe C</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Malmoe C</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="144">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Umeaa</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Umeaa</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="145">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sundsvall C</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Sundsvall C</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="216">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Jeumont(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Jeumont(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="217">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Quévy(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Quevy(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="219">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Jeumont(fr)/Quévy(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Jeumont/Quevy(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="220">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Blandain(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Blandain(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="221">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Tourcoing(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Tourcoing(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="222">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Blandain(fr)/Tourcoin(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Bland./Tourc.(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="235">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFL;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bettembourg(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Bettembourg(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="240">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCF;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Ventimiglia(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Ventimiglia(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="241">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCF;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
```

```
description">Limone-Confine</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Limone-Confine</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="242">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCF;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Modane(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Modane(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="243">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SNCF;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Piene(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Piene(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="250">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Le Châtelard(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Le Chatelard(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="252">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Genève-Eaux-Vives</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Geneve-Eaux-Vives</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="253">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Genève</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Geneve</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="254">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Vallorbe(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vallorbe(fr)</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="255">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Les Verrières(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Les Verrieres(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="256">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Le Locle(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Le Locle(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="259">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Basel SBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Basel SBB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="270">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">St. Margrethen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">St. Margrethen</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="271">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Buchs(SG)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Buchs(SG)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="280">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CP;
RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Badajoz(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Badajoz(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="281">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CP;
```

```
RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Valencia de Alcantara(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">V.Alcantara(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="282">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CP;
RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Fuentes Onoro(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Fuentes Onoro(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="283">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CP;
RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Barca de Alva(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Barca de Alva(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="284">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CP;
RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Valenca(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Valenca(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="290">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RENFE;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Port-Bou(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Port-Bou(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="291">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RENFE;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Latour de Carol-Entveigt</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Latour de Carol</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="292">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RENFE;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Canfranc(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
```

```
description">Canfranc(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="293">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RENFE;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hendaye(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hendaye(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="303">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">NS;
SNCB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Roosendaal(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Roosendaal(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="305">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">NS,
SNCB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hazeldonk(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hazeldonk(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="308">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">NS;
SNCB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Visé(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vise(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="310">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SZ;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Villa-Opicina(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Villa-Opicina(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="312">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SZ;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Nova Gorica(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Nova Gorica(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="320">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Tirano</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Tirano</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="321">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Chiasso</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Chiasso</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="322">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Pino transito</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Pino transito</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="323">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Camedo transito</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Camedo transito</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="324">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Iselle transito</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Iselle transito</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="330">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ÖBB;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Tarvisio Boscoverde</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Tarvisio B.verde</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="331">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ÖBB;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
```

```
description">San Candido/Innichen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">San Candido/Inni.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="332">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ÖBB;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Brennero/Brenner</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Brennero/Brenner</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="340">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFL;
SNCB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Gouvy(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Gouvy(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="341">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFL;
SNCB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Athus(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Athus(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="342">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFL;
SNCB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sterpenich(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Sterpenich(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="343">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFL;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Rodange(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Rodange(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="350">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFARYM;
OSE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Gevgelija(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Gevgelija(fr)</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="351">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFARYM;
OSE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kremenica(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kremenica(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="360">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SJ;
VR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Haparanda(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Haparanda(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="361">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ATTICA;
VR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hanko</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hanko</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="405">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
DSB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Toender(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Toender(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="406">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
DSB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Flensburg(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Flensburg(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="410">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
NS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Weener(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Weener(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="412">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
```

```
NS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bad Bentheim(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Bad Bentheim(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="413">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
NS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Gronau(Westf)(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Gronau(Westf)(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="416">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
NS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Emmerich(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Emmerich(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="418">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
NS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Venlo(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Venlo(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="420">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
NS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Herzogenrath(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Herzogenrath(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="440">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SZ;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Spielfeld(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Spielfeld(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="441">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SZ;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bleiburg(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
```

```
description">Bleiburg(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="442">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SZ;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Jesenice(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Jesenice(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="452">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
SNCB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Aachen Süd(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Aachen Sued(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="460">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Passau Hbf</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Passau Hbf</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="461">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Simbach(Inn)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Simbach(Inn)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="462">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Salzburg Hbf</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Salzburg Hbf</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="463">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kufstein</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kufstein</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="464">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Mittenwald(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Mittenwald(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="467">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Lindau Hbf</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Lindau Hbf</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="470">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Neuenburg(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Neuenburg(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="471">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kehl(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kehl(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="472">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Lauterbourg(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Lauterbourg(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="473">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Wissembourg(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Wissembourg(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="475">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
```

```
description">Hanweiler(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hanweiler(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="476">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Forbach(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Forbach(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="479">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Apach(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Apach(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="491">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Basel Bad Bf</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Basel Bad Bf</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="492">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Waldshut(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Waldshut(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="493">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Schaffhausen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Schaffhausen</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="495">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFF/SBB;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Konstanz</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Konstanz</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="501">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sid(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Sid(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="502">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Erdut(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Erdut(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="512">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">OSE;
TCDD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Pythion(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Pythion(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="520">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
ZFBH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Metkovic(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Metkovic(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="522">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
ZRS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Dobrljin(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Dobrljin(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="524">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
ZRS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Slavonski Samac(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Slav. Samac(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="525">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ; ZFBH;
```

```
ZRS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Brcko(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Brcko(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="540">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">NSB;
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Vassijaure(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vassijaure(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="541">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">NSB;
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Storlien(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Storlien(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="542">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">NSB;
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Charlottenberg(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Charlottenb(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="543">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">NSB;
SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kornsjö(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kornsjoe(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="550">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
SZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Mursko Sredisce(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Mursko Sredisce</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="551">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
SZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Cakovec(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
```

```
description">Cakovec(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="552">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
SZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Rogatec(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Rogatec(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="553">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
SZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kumrovec(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kumrovec(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="554">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
SZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Dobova(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Dobova(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="555">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
SZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Metlika(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Metlika(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="556">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
SZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sapjane(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Sapjane(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="557">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
SZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Buzet(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Buzet(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="580">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFL;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Igel(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Igel(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="591">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ZRS;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Zvornik Novi</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Zvornik</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="601">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hegyeshalom(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hegyeshalom(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="606">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GYSEV /
ROeEE; ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Szentgotthárd(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Szentgotthard(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="609">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GYSEV/ROeEE;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Pamhagen(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Pamhagen(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="610">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Summerau(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Summerau(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="611">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
```

```
description">Gmünd(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Gmuend(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="612">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Retz(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Retz(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="613">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Breclav(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Breclav(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="616">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ÖBB;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Marchegg(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Marchegg(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="617">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ÖBB;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kittsee(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kittsee(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="620">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BDZ;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Dimitrovgrad(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Dimitrovgrad(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="642">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Furth i Wald(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Furth i Wald(Gr)</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="643">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bayerisch Eisenstein</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Bayerisch Eisenst</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="644">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Cheb(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Cheb(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="645">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Selb(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Selb(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="646">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Vojtanov(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vojtanov(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="647">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Potucky(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Potucky(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="648">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Vejprty(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vejprty(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="649">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
```

```
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Schöna(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Schoena(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="655">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Rumburk(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Rumburk(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="658">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Zittau(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Zittau(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="660">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Jimbolia(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Jimbolia(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="661">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Vrsac(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vrsac(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="671">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ZCG;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bijelo Polje(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Bijelo Polje(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="676">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFARYM;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Tabanovci(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
```

```
description">Tabanovci(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="678">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFARYM;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Deneral Jankovic(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Djen.Jankovic(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="681">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Grambow(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Grambow(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="684">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Tantow(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Tantow(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="686">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kostrzyn(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kostrzyn(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="687">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Frankfurt(Oder)(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Frankfurt(O)(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="688">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Gubin(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Gubin(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="690">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Forst(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Forst(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="698">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Zgorzelec(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Zgorzelec(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="703">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BDZ;
TCDD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kapikule(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kapikule(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="711">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Subotica(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Subotica(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="712">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ZS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Röszke(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Roeszke(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="720">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RZD;
VR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Vainikkala(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vainikkala(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="730">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
```

```
description">Kotoriba(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kotoriba(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="731">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Koprivnica(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Koprivnica(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="733">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">HZ;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Magyarbóly(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Magyarboly(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="760">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BDZ ;
OSE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kulata(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kulata(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="761">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BDZ ;
OSE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Svilengrad(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Svilengrad(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="774">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
SZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hodos(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hodos(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="780">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GYSEV/ROeEE;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hegyeshalom</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hegyeshalom</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="781">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GYSEV/ROeEE;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Porpác</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Porpac</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="782">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GYSEV/ROeEE;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Zalaszentiván</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Zalaszentivan</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="790">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GYSEV/ROeEE;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Győr</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Gyoer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="791">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GYSEV/ROeEE;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Csorna</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Csorna</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="796">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GYSEV/ROeEE;
ÖBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sopron</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Sopron</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="815">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">SNCB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Wannehain(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Wannehain(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="822">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
```

```
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Mezimesti(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Mezimesti(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="823">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Lichkov(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Lichkov(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="824">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CZ;
PL</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Glucholazy(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Glucholazy(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="825">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bohumin(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Bohumin(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="826">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Zebrzydowice(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Zebrzydowice(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="827">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Ceský Tesin(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Cesky Tesin(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="828">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Jakuszyce(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
```

```
description">Jakuszyce(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="830">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">PKP;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Braniewo(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Braniewo(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="834">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">PKP;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Skalité(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Skalite(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="835">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">PKP;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Plavec(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Plavec(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="836">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">PKP;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Lupkow(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Lupkow(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="840">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">LG;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Mockava(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Mockava(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="844">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bruzgi(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Bruzgi(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="846">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Czeremcha(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Czeremcha(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="847">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
PKP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Brest(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Brest(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="880">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sátoraljaújhely(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Satoraljaujh.(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="881">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Cana(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Cana(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="883">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bánréve(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Banreve(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="884">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Filakovo(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Filakovo(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="887">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
```

```
description">Szob(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Szob(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="888">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Komárom(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Komarom(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="889">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Rajka(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Rajka(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="890">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kuty(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kuty(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="893">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Vrbovce(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vrbovce(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="894">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Nemsova(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Nemsova(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="895">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Horni Lidec(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Horni Lidec(Gr)</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="896">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CD;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Cadca(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Cadca(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="930">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Halmeu(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Halmeu(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="931">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Teresva(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Teresva(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="934">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Berlebash(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Berlebash(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="935">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Vicsani(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vicsani(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="936">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFM;
CFR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Ungheni(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Ungheni(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="937">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFM;
```

```
CFR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Prut(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Prut(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="940">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Carei(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Carei(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="941">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Nyírábrány(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Nyirabrany(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="942">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Biharkeresztes(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Biharkereszt.(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="944">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Salonta(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Salonta(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="946">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFR;
MAV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Curtici(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Curtici(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="950">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">UZ;
ZSSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Chop(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
```

```
description">Chop(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="955">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MAV;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Záhony(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Zahony(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="960">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">PKP;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Jagodin(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Jagodin(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="961">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">PKP;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Izov(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Izov(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="962">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">PKP;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Medyka(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Medyka(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="963">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">PKP;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Starzhava(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Starzhava(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="966">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">PKP;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hrebenne(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hrebenne(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="970">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BDZ;
CFR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kardam(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kardam(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="971">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BDZ;
CFR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Russe(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Russe(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="972">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BDZ;
CFR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Vidin(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vidin(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="993">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Rostock Hbf</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Rostock</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1001">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">LDZ;
LG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sarkiai(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Sarkiai(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1006">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">LDZ;
LG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kurcums(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kurcums(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1010">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">EVR;
LDZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
```

```
description">Valga(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Valga(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1022">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Horobichi(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Horobichi(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1026">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">LG;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Pagegiai(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Pagegiai(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1027">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">LG;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kybartai(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kybartai(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1035">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">LDZ;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Karsava(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Karsava(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1036">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">LDZ;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Posin(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Posin(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1045">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">EVR;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Narva(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Narva(Gr)</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="1046">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">EVR;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Orava(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Orava(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1050">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
LG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sumskas(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Sumskas(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1051">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
LG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Beniakone(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Beniakone(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1053">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
LG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Poreche(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Poreche(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1060">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
LDZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bigosovo(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Bigosovo(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1070">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Alesca(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Alesca(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1071">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
```

```
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Ezerisce(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Ezerisce(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1072">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Rudnia(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Rudnia(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1073">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Osinovka(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Osinovka(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1076">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Zlynka(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Zlynka(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1102">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RZD;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Zernovo(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Zernovo(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1106">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RZD;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Krasnuj Hutor(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Krasnuj Hutor(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1108">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RZD;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Topoli(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
```

```
description">Topoli(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1112">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RZD;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Gukovo(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Gukovo(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1114">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RZD;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kvashino(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kvashino(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1120">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Zabolote(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Zabolote(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1121">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Goryn(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Goryn(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1122">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Slovechno(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Slovechno(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1123">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BC;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Teriuha(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Teriuha(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1140">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFM;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Volchinec(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Volchinec(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1141">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFM;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kriva(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kriva(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1142">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFM;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Larga(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Larga(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1143">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFM;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Oknica(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Oknica(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1146">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFM;
UZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kuchurgan(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kuchurgan(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1151">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZH;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Aksaraiskaia(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Aksaraiskaia(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1152">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZH;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
```

```
description">Ozinki(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Ozinki(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1153">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZH;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Ileck(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Ileck(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1155">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZH;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Tobol(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Tobol(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1158">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZH;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Lokot(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Lokot(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1159">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZH;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Petropavlovsk(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Petropavlovsk(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1211">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KRG;
KZH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Lugovaya(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Lugovaya(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1501">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CEL;
CFS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Akkari</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Akkari</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="1549">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">TCCD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Kapýköy(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Kapikoy(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1560">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFS;
TCDD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Meydanekbez</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Meydanekbez</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1561">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFS;
TCDD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Cobanbey</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Cobanbey</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1562">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CFS;
TCDD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Nusaybin</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Nusaybin</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1840">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZD;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Mandschuria(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Mandschuria(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1845">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZD;
KZH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Drujba(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Drujba(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1980">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RZD;
```

```
ZC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Tumangan(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Tumangan(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1990">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MTZ;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Naushki(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Naushki(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1991">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">MTZ;
RZD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Ereenzaw(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Ereenzaw(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2002">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GBPR;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Calais</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Calais</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2003">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GBPR;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Boulogne</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Boulogne</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2004">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GBPR;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Dieppe</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Dieppe</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2006">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CIE; GBPR;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Le Havre</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
```

```
description">Le Havre</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2008">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CIE;
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Cherbourg C</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Cherbourg C</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2050">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ONCFM;
RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Algeciras-Puerto</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Algeciras-Puerto</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2051">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ONCFM;
RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Málaga</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Malaga</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2061">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ATOC;
CIE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Fishguard Harb</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Fishguard Harb</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2099">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BSB;
CFF/SBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Friedrichshafen(MS)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Friedrichshfn(MS)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2123">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ATOC;
GBPR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Stranraer Harbo</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Stranraer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2135">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB;
GBPR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hamburg Landungsbrücken</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hamburg Landungsb</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2153">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DSB;
GBPR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Esbjerg Havn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Esbjerg Havn</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2158">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GBPR;
NIR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Larne Harbour</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Larne Harbour</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2175">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">SNCB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Oostende(fr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Oostende(fr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2326">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SJ;
VR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Helsinki S</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Helsinki S</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2327">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">SJ;
VR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Turku S</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Turku S</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2329">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">VR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
```

```
description">Vaasa S</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Vaasa S</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2348">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DSB;
NSB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Oslo(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Oslo(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2355">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">GBPR;
NS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Hoek van Holland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Hoek van Holland</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2388">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ATOC;
GBPR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Newhaven Town</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Newhaven Town</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2389">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ATOC;
GBPR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Southampton</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Southampton</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2392">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CIE;
GBPR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Holyhead</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Holyhead</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2393">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CIE;
GBPR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Liverpool</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Liverpool</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="2397">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">ATOC;
GBPR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Newcastle</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Newcastle</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2496">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">BSB;
DB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Friedrichshafen.St.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Friedrichshfn.St.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2497">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">DB; SJ;
VR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Lübeck-Trave.Hafen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Luebeck-Trave.Haf</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2517">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">OSE;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Ancona</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Ancona</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2518">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">OSE;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Bari</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Bari</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2519">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">OSE;
TI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Brindisi</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Brindisi</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2539">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">CIE;
```

```
GBPR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Dun Laoghaire Pier</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Dun Laoghaire P</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2583">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Goeteborg C</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Goeteborg C</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2589">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned
carrier">SJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Stockholm C</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Stockholm C</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3083">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">RENFE;
ONCFM</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Tanger-Puerto</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Tanger-Puerto</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4290">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZH;
UTI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Oazis(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Oazis(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4410">
      <xs:annotation>
        <xs:documentation xml:lang="en" doc:docType="concerned carrier">KZH;
UTI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="35-letter border point
description">Sary-Agatsh(Gr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="17-letter border point
description">Sary-Agatsh(Gr)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CancellationReasonCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4

type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation minLength 2 maxLength 7 enumeration TO — documentation: Time out enumeration NA — documentation: No answer from TCO enumeration NAOXXXX — documentation: No Answer from Other TCO, XXXX = Company code of TCO documentation: XXXX = Company code of TCO enumeration TAC — documentation: Annulation of ticket by client enumeration TAD — documentation: Annulation of ticket by distributor enumeration PI — documentation: Procedure interrupted
annotation	documentation Code list for the cancellation (B.7.3) appinfo <dc:title>Code list for the cancellation</dc:title> <dc:source>B.7.3</dc:source>

source

```
<xs:simpleType name="CancellationReasonCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the cancellation
(B.7.3)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the cancellation</dc:title>
      <dc:source>B.7.3</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:minLength value="2"/>
    <xs:maxLength value="7"/>
    <xs:enumeration value="TO">
      <xs:annotation>
        <xs:documentation xml:lang="en">Time out</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="NA">
      <xs:annotation>
        <xs:documentation xml:lang="en">No answer from TCO</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="NAOXXXX">
      <xs:annotation>
        <xs:documentation xml:lang="en">No Answer from Other TCO, XXXX = Company code
of TCO</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">XXXX = Company code of
TCO</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TAC">
      <xs:annotation>
        <xs:documentation xml:lang="en">Annulation of ticket by
client</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TAD">
      <xs:annotation>
        <xs:documentation xml:lang="en">Annulation of ticket by
distributor</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="PI">
      <xs:annotation>
        <xs:documentation xml:lang="en">Procedure interrupted</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CardMemoTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
minInclusive	00	
maxInclusive	10	
totalDigits	2	
enumeration	01	documentation Senior card documentation Senior Karte documentation Carte Senior
enumeration	02	documentation FIP card documentation FIP Karte documentation Carte FIP
enumeration	03	documentation Pass overbooking documentation Pass upgrade Normaler Preis documentation Pass surclassement Plein Tarif
enumeration	04	documentation Railpass documentation Railpass documentation Railpass
enumeration	06	documentation Eurailpass documentation Eurailpass documentation Eurailpass
enumeration	07	documentation Eurailselectpass documentation Eurailselectpass documentation Eurailselectpass

annotation

documentation
Codes for the reduction card (B.2.7)
appinfo
<dc:title>Standard codes</dc:title>
<dc:source>B.2.7</dc:source>

source

```
<xs:simpleType name="CardMemoTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Codes for the reduction card
(B.2.7)</xs:documentation>
    <xs:appinfo>
      <dc:title>Standard codes</dc:title>
      <dc:source>B.2.7</dc:source>
```

```
      </xs:appinfo>
    </xs:annotation>
    <xs:restriction base="xs:nonNegativeInteger">
      <xs:minInclusive value="00"/>
      <xs:maxInclusive value="10"/>
      <xs:totalDigits value="2"/>
      <xs:enumeration value="01">
        <xs:annotation>
          <xs:documentation xml:lang="en">Senior card</xs:documentation>
          <xs:documentation xml:lang="de">Senior Karte</xs:documentation>
          <xs:documentation xml:lang="fr">Carte Senior</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="02">
        <xs:annotation>
          <xs:documentation xml:lang="en">FIP card</xs:documentation>
          <xs:documentation xml:lang="de">FIP Karte</xs:documentation>
          <xs:documentation xml:lang="fr">Carte FIP</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="03">
        <xs:annotation>
          <xs:documentation xml:lang="en">Pass overbooking</xs:documentation>
          <xs:documentation xml:lang="de">Pass upgrade Normaler
Preis</xs:documentation>
          <xs:documentation xml:lang="fr">Pass surclassement Plein
Tarif</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="04">
        <xs:annotation>
          <xs:documentation xml:lang="en">Railpass</xs:documentation>
          <xs:documentation xml:lang="de">Railpass</xs:documentation>
          <xs:documentation xml:lang="fr">Railpass</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="06">
        <xs:annotation>
          <xs:documentation xml:lang="en">Eurailpass</xs:documentation>
          <xs:documentation xml:lang="de">Eurailpass</xs:documentation>
          <xs:documentation xml:lang="fr">Eurailpass</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="07">
        <xs:annotation>
          <xs:documentation xml:lang="en">Eurailselectpass</xs:documentation>
          <xs:documentation xml:lang="de">Eurailselectpass</xs:documentation>
          <xs:documentation xml:lang="fr">Eurailselectpass</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **CertificatePresentationCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation minLength 0 enumeration TEXT documentation ASCII-code

	enumeration 3OF9 documentation: 3 of 9 barcode enumeration AZTXYZ documentation: 2D-barcode type AZTEC XYZ enumeration CHIP documentation: Chipcard
annotation	documentation code list for the presentation type of the certificate (B.7.2) appinfo <dc:title>Code list for the layout of the certificate</dc:title> <dc:source>B.7.2</dc:source>
source	<xs:simpleType name="CertificatePresentationCodeList"> <xs:annotation> <xs:documentation xml:lang="en">code list for the presentation type of the certificate (B.7.2)</xs:documentation> <xs:appinfo> <dc:title>Code list for the layout of the certificate</dc:title> <dc:source>B.7.2</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:minLength value="0"/> <xs:enumeration value="TEXT"> <xs:annotation> <xs:documentation xml:lang="en">ASCII-code</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3OF9"> <xs:annotation> <xs:documentation xml:lang="en">3 of 9 barcode</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="AZTXYZ"> <xs:annotation> <xs:documentation xml:lang="en">2D-barcode type AZTEC XYZ</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="CHIP"> <xs:annotation> <xs:documentation xml:lang="en">Chipcard</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **ChangeOfStationCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation totalDigits 1 enumeration 1 documentation: Other boarding station enumeration 2 documentation: Other destination station enumeration 3 documentation: Other boarding and destination station
annotation	documentation code list for the change of station (B.5.57) appinfo <dc:title>Code list for the change of station</dc:title> <dc:source>B.5.57</dc:source>

source

```
<xs:simpleType name="ChangeOfStationCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">code list for the change of station
(B.5.57)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the change of station</dc:title>
      <dc:source>B.5.57</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Other boarding station</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Other destination station</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Other boarding and destination
station</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ChangeOfTrainOrDateCodeList**

namespace: http://www.era.europa.eu/schemes/TAPTSI/1.4

type: restriction of **xs:nonNegativeInteger**

properties: base xs:nonNegativeInteger

facets

Kind	Value	Annotation
totalDigits	1	
enumeration	1	documentation: Same train, different train number
enumeration	2	documentation: Different train
enumeration	3	documentation: Different train, different date

annotation

documentation
code list for the change of train or date (B.5.56)
appinfo
<dc:title>Code list for the change of train or date</dc:title>
<dc:source>B.5.56</dc:source>

source

```
<xs:simpleType name="ChangeOfTrainOrDateCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">code list for the change of train or date
(B.5.56)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the change of train or date</dc:title>
      <dc:source>B.5.56</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Same train, different train
```

```
number</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Different train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Different train, different
date</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ClassTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation enumeration 1 — documentation: 1st Class enumeration 2 — documentation: 2nd Class enumeration C — documentation: Club enumeration P — documentation: Superior enumeration T — documentation: Tourist
annotation	documentation code list for the class type (B.5.24) appinfo <dc:title>Code list for the class</dc:title> <dc:source>B.5.24</dc:source>

source

```
<xs:simpleType name="ClassTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">code list for the class type
(B.5.24)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the class</dc:title>
      <dc:source>B.5.24</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">1st Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">2nd Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="C">
      <xs:annotation>
        <xs:documentation xml:lang="en">Club</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
      <xs:enumeration value="P">
        <xs:annotation>
          <xs:documentation xml:lang="en">Superior</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="T">
        <xs:annotation>
          <xs:documentation xml:lang="en">Tourist</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **CodeEntityTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
minLength	2	
maxLength	3	
whiteSpace	collapse	
enumeration	ALD	documentation Allegro Day
enumeration	ALN	documentation Allegro Night
enumeration	ARJ	documentation Artesia de jour
enumeration	ARN	documentation Artesia de nuit
enumeration	AVE	documentation AVE Spain
enumeration	BWE	documentation Berlin Warsava Express
enumeration	BRD	documentation Brennero Day
enumeration	BRN	documentation Brennero Night
enumeration	BPV	documentation Bruxelles - Province Françaises
enumeration	BRL	documentation Buxelles Lille
enumeration	CNL	documentation City Night Line
enumeration	DBN	documentation DB Nachtzug
enumeration	ELI	documentation Elipsos
enumeration	EUR	documentation Eurostar
enumeration	GL	documentation GL Renfe
enumeration	ILI	documentation IC run by Linx
enumeration	ISJ	documentation IC run by SJ
enumeration	LUS	documentation Lusitania
enumeration	LYR	documentation Lyria
enumeration	MB	documentation Malmo - Berlin
enumeration	PAN	documentation Paris Allemagne de nuit
enumeration	PG	documentation Paris Genève
enumeration	REG	documentation

	REG - Renfe enumeration RID documentation Riviera Day enumeration RIN documentation Riviera Night enumeration TA2 documentation Talgo 200 enumeration TAJ documentation Talgo Jour enumeration TGM documentation TGV Genève - Méditerranée enumeration GLI documentation TGV GLI enumeration THA documentation Thalys enumeration TJC documentation TJC Téoz enumeration LUN documentation TNC Lunéa enumeration TRE documentation Trenitalia enumeration TRN documentation TRN Corail enumeration XLI documentation X2000 run by Linx enumeration XSJ documentation X2000 run by SJ
annotation	documentation Code list for train coding appinfo <dc:title>Code entity</dc:title> <dc:source>B.2.1</dc:source>
source	

```
<xs:simpleType name="CodeEntityTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for train coding</xs:documentation>
    <xs:appinfo>
      <dc:title>Code entity</dc:title>
      <dc:source>B.2.1</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:minLength value="2"/>
    <xs:maxLength value="3"/>
    <xs:whiteSpace value="collapse"/>
    <xs:enumeration value="ALD">
      <xs:annotation>
        <xs:documentation xml:lang="en">Allegro Day</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="ALN">
      <xs:annotation>
        <xs:documentation xml:lang="en">Allegro Night</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="ARJ">
      <xs:annotation>
        <xs:documentation xml:lang="en">Artesia de jour</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="ARN">
      <xs:annotation>
        <xs:documentation xml:lang="en">Artesia de nuit</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AVE">
      <xs:annotation>
        <xs:documentation xml:lang="en">AVE Spain</xs:documentation>
      </xs:annotation>
```

```
      </xs:enumeration>
      <xs:enumeration value="BWE">
        <xs:annotation>
          <xs:documentation xml:lang="en">Berlin Warsava Express</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="BRD">
        <xs:annotation>
          <xs:documentation xml:lang="en">Brennero Day</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="BRN">
        <xs:annotation>
          <xs:documentation xml:lang="en">Brennero Night</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="BPV">
        <xs:annotation>
          <xs:documentation xml:lang="en">Bruxelles - Province
Françaises</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="BRL">
        <xs:annotation>
          <xs:documentation xml:lang="en">Buxelles Lille</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="CNL">
        <xs:annotation>
          <xs:documentation xml:lang="en">City Night Line</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="DBN">
        <xs:annotation>
          <xs:documentation xml:lang="en">DB Nachtzug</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="ELI">
        <xs:annotation>
          <xs:documentation xml:lang="en">Elipsos</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="EUR">
        <xs:annotation>
          <xs:documentation xml:lang="en">Eurostar</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="GL">
        <xs:annotation>
          <xs:documentation xml:lang="en">GL Renfe</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="ILI">
        <xs:annotation>
          <xs:documentation xml:lang="en">IC run by Linx</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="ISJ">
        <xs:annotation>
          <xs:documentation xml:lang="en">IC run by SJ</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="LUS">
        <xs:annotation>
```

```
        <xs:documentation xml:lang="en">Lusitania</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="LYR">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lyria</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="MB">
      <xs:annotation>
        <xs:documentation xml:lang="en">Malmo - Berlin</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="PAN">
      <xs:annotation>
        <xs:documentation xml:lang="en">Paris Allemagne de nuit</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="PG">
      <xs:annotation>
        <xs:documentation xml:lang="en">Paris Genève</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="REG">
      <xs:annotation>
        <xs:documentation xml:lang="en">REG - Renfe</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="RID">
      <xs:annotation>
        <xs:documentation xml:lang="en">Riviera Day</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="RIN">
      <xs:annotation>
        <xs:documentation xml:lang="en">Riviera Night</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TA2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Talgo 200</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TAJ">
      <xs:annotation>
        <xs:documentation xml:lang="en">Talgo Jour</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TGM">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV Genève - Méditerranée</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="GLI">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV GLI</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="THA">
      <xs:annotation>
        <xs:documentation xml:lang="en">Thalys</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TJC">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">TJC Téoz</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="LUN">
      <xs:annotation>
        <xs:documentation xml:lang="en">TNC Lunéa</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TRE">
      <xs:annotation>
        <xs:documentation xml:lang="en">Trenitalia</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TRN">
      <xs:annotation>
        <xs:documentation xml:lang="en">TRN Corail</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="XLI">
      <xs:annotation>
        <xs:documentation xml:lang="en">X2000 run by Linx</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="XSJ">
      <xs:annotation>
        <xs:documentation xml:lang="en">X2000 run by SJ</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CodeListStatusCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation enumeration 0 — documentation: Unchanged since previous version; documentation: 0 enumeration 1 — documentation: Added with this version; documentation: 0 enumeration 2 — documentation: Modified with this version; documentation: 2 enumeration 3 — documentation: To be deleted from next version; documentation: 3 enumeration 4 — documentation: To be deleted with this version; documentation: 4
annotation	documentation Code list for code list status (change management) documentation This code list will be used for the change management of the entries of the code lists appinfo <dc:title>Code status code list</dc:title> <dc:source>Code list document</dc:source>

source

```
<xs:simpleType name="CodeListStatusCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for code list status (change
management)</xs:documentation>
    <xs:documentation xml:lang="en">This code list will be used for the change
management of the entries of the code lists</xs:documentation>
    <xs:appinfo>
      <dc:title>Code status code list</dc:title>
      <dc:source>Code list document</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Unchanged since previous
version</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Added with this version</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Modified with this version</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">To be deleted from next
version</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">3</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">To be deleted with this
version</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">4</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CodeRangeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
minInclusive	00	
maxInclusive	99	
totalDigits	2	
enumeration	01	documentation Public
enumeration	02	documentation RIT
enumeration	03	documentation

	enumeration 04 documentation Group documentation Confidential
annotation	documentation Codes defined in code list B.2.6 appinfo <dc:title>Tariff range codes</dc:title> <dc:source>B.2.6</dc:source>
source	<xs:simpleType name="CodeRangeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Codes defined in code list B.2.6</xs:documentation> <xs:appinfo> <dc:title>Tariff range codes</dc:title> <dc:source>B.2.6</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:minInclusive value="00"/> <xs:maxInclusive value="99"/> <xs:totalDigits value="2"/> <xs:enumeration value="01"> <xs:annotation> <xs:documentation xml:lang="en">Public</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="02"> <xs:annotation> <xs:documentation xml:lang="en">RIT</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="03"> <xs:annotation> <xs:documentation xml:lang="en">Group</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="04"> <xs:annotation> <xs:documentation xml:lang="en">Confidential</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **CompanyCodeOfferCombinationCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation totalDigits 1 enumeration 0 documentation no change enumeration 1 documentation new offer enumeration 2 documentation offer deleted
annotation	documentation Code list for the company and offer combination (B.3.5) appinfo <dc:title>Flag for the combination of the Company code and the offer number</dc:title> <dc:source>B.3.5</dc:source>
source	<xs:simpleType name="CompanyCodeOfferCombinationCodeList">

```
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the company and offer combination
(B.3.5)</xs:documentation>
    <xs:appinfo>
      <dc:title>Flag for the combination of the Company code and the offer
number</dc:title>
      <dc:source>B.3.5</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">no change</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">new offer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">offer deleted</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CompartmentCharacteristicsTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation enumeration 1 — documentation: Not significant enumeration 2 — documentation: Male enumeration 3 — documentation: Female enumeration 4 — documentation: mixed (to be used to request compartments without separation of gender)
annotation	documentation Code list for the compartment characteristic (B.5.40) appinfo <dc:title>Code list for the compartment characteristic</dc:title> <dc:source>B.5.40</dc:source>

source

```
<xs:simpleType name="CompartmentCharacteristicsTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the compartment characteristic
(B.5.40)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the compartment characteristic</dc:title>
      <dc:source>B.5.40</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Male</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Female</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">mixed (to be used to request compartments
without separation of gender)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CompartmentPositionAllocationTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 1 enumeration 1 documentation: Lower enumeration 2 documentation: Upper enumeration 3 documentation: At both levels
annotation	documentation Code list for compartment position for reservation allocation (B.5.38.2) appinfo <dc:title>Code list for compartment position for reservation allocation</dc:title> <dc:source>B.5.38.2</dc:source>

source

```
<xs:simpleType name="CompartmentPositionAllocationTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for compartment position for
reservation allocation (B.5.38.2)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for compartment position for reservation
allocation</dc:title>
      <dc:source>B.5.38.2</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lower</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Upper</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">At both levels</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CompartmentPositionRequestTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation totalDigits 1 enumeration 1 documentation Lower if possible (when allocated = lower) enumeration 2 documentation Upper if possible (when allocated = upper)
annotation	documentation Code list for compartment position for reservation request (B.5.38.1) appinfo <dc:title>Code list for compartment position for reservation request</dc:title> <dc:source>B.5.38.1</dc:source>

source

```
<xs:simpleType name="CompartmentPositionRequestTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for compartment position for
reservation request (B.5.38.1)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for compartment position for reservation request</dc:title>
      <dc:source>B.5.38.1</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en"> Lower if possible (when allocated =
lower)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Upper if possible (when allocated =
upper)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CompartmentWithSpecialFeaturesAllocatedCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation minInclusive 00 maxInclusive 99 totalDigits 2 enumeration 00 documentation Not significant enumeration 01 documentation Passenger needing assistance/disabled passenger

	enumeration 02 documentation Unaccompanied child/young person enumeration 07 documentation places for passenger with small children enumeration 08 documentation places with easy access - PRMs enumeration 09 documentation Complete compartment enumeration 10 documentation Family area enumeration 11 documentation Quiet compartment enumeration 12 documentation Conference compartment enumeration 13 documentation Four-berth couchette compartment enumeration 15 documentation Compartment without animals enumeration 16 documentation Business Comfort – business seat with reduced service enumeration 20 documentation Couchette coach without equipment enumeration 34 documentation Seat near restaurant car enumeration 36 documentation Seat with drink enumeration 37 documentation Seat with meal enumeration 38 documentation Seat with electric power point enumeration 40 documentation PREMIUM enumeration 41 documentation Place with animals enumeration 42 documentation Breakfast included enumeration 43 documentation Area with amplifiers for mobile phones enumeration 44 documentation SOLO (individual seat) enumeration 45 documentation Duo face to face (2 seats facing) enumeration 46 documentation Duo side by side (2 seats side by side) enumeration 47 documentation Club Duo (2 seats facing in a separate compartment) enumeration 48 documentation Club 4 (4 seats facing normally 1st Class) enumeration 49 documentation Carré (4 seats facing normally 2nd Class) enumeration 50 documentation Salon (6 seats facing in a separate compartment) enumeration 51 documentation Kiosque (special seat in the edge area) enumeration 54 documentation Five-berth couchette compartment enumeration 55 documentation Double bed (Suite DeLuxe) enumeration 57 documentation place close to place with animals enumeration 58 documentation Place near children's play aera enumeration 59 documentation Area with WiFi Access Point
annotation	documentation Code list for the allocated compartment with special features (B.5.51.2) appinfo <dc:title>Code list for allocated compartment with special features</dc:title> <dc:source>B.5.51.2</dc:source>
source	<xs:simpleType name="CompartmentWithSpecialFeaturesAllocatedCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the allocated compartment with

```
special features (B.5.51.2)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for allocated compartment with special features</dc:title>
      <dc:source>B.5.51.2</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="00"/>
    <xs:maxInclusive value="99"/>
    <xs:totalDigits value="2"/>
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation xml:lang="en">Passenger needing assistance/disabled
passenger</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Unaccompanied child/young
person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="07">
      <xs:annotation>
        <xs:documentation xml:lang="en">places for passenger with small
children</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="08">
      <xs:annotation>
        <xs:documentation xml:lang="en">places with easy access - PRMs
</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="09">
      <xs:annotation>
        <xs:documentation xml:lang="en">Complete compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Family area</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Quiet compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">Conference compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">Four-berth couchette
compartment</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Compartment without
animals</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Business Comfort – business seat with reduced
service</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="20">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette coach without
equipment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat near restaurant car</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="36">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat with drink</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="37">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat with meal</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="38">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat with electric power
point</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation xml:lang="en">PREMIUM</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="41">
      <xs:annotation>
        <xs:documentation xml:lang="en">Place with animals</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="42">
      <xs:annotation>
        <xs:documentation xml:lang="en">Breakfast included</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="43">
      <xs:annotation>
        <xs:documentation xml:lang="en">Area with amplifiers for mobile
phones</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44">
      <xs:annotation>
        <xs:documentation xml:lang="en">SOLO (individual seat)</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="45">
      <xs:annotation>
        <xs:documentation xml:lang="en">Duo face to face (2 seats
facing)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="46">
      <xs:annotation>
        <xs:documentation xml:lang="en">Duo side by side (2 seats side by
side)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="47">
      <xs:annotation>
        <xs:documentation xml:lang="en">Club Duo (2 seats facing in a separate
compartment)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="48">
      <xs:annotation>
        <xs:documentation xml:lang="en">Club 4 (4 seats facing normally 1st
Class)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="49">
      <xs:annotation>
        <xs:documentation xml:lang="en">Carré (4 seats facing normally 2nd
Class)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation xml:lang="en">Salon (6 seats facing in a separate
compartment)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation xml:lang="en">Kiosque (special seat in the edge
area)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="54">
      <xs:annotation>
        <xs:documentation xml:lang="en">Five-berth couchette
compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="55">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double bed (Suite DeLuxe)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="57">
      <xs:annotation>
        <xs:documentation xml:lang="en">place close to place with
animals</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="58">
      <xs:annotation>
        <xs:documentation xml:lang="en">Place near children‘s play
```

```
aera</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="59">
      <xs:annotation>
        <xs:documentation xml:lang="en">Area with WiFi Access
Point</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CompartmentWithSpecialFeaturesCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
minInclusive	00	
maxInclusive	99	
totalDigits	2	
enumeration	00	documentation Not significant
enumeration	01	documentation Passenger needing assistance/disabled passenger
enumeration	02	documentation Unaccompanied child/young person
enumeration	07	documentation places for passenger with small children
enumeration	08	documentation places with easy access - PRMs
enumeration	09	documentation Complete compartment
enumeration	10	documentation Family area
enumeration	11	documentation Quiet compartment
enumeration	12	documentation Conference compartment
enumeration	13	documentation Four-berth couchette compartment
enumeration	15	documentation Seat in compartment without animals
enumeration	16	documentation Business Comfort – business seat with reduced service
enumeration	20	documentation Couchette coach without equipment
enumeration	34	documentation Seat close to restaurant car
enumeration	36	documentation Seat with drink
enumeration	37	documentation Seat with meal
enumeration	38	documentation Seat with electric power point
enumeration	40	documentation PREMIUM
enumeration	41	documentation Place with animals
enumeration	42	documentation Including breakfast
enumeration	43	documentation Area with amplifiers for mobile phone
enumeration	44	documentation SOLO (individual seat)
enumeration	45	documentation Duo face to face (2 seats facing)

	enumeration 46 documentation Duo side by side (2 seats side by side) enumeration 47 documentation Club Duo (2 seats facing in a separate compartment) enumeration 48 documentation Club 4 (4 seats facing normally 1st Class) enumeration 49 documentation Carré (4 seats facing normally 2nd Class) enumeration 50 documentation Salon (6 seats facing in separate compartment) enumeration 51 documentation Kiosque (special seats in edge area) enumeration 54 documentation Five-berth couchette compartment enumeration 55 documentation Double bed (suite DeLuxe) enumeration 57 documentation place close to place with animals enumeration 59 documentation Area with a WiFi Access Point
annotation	documentation Code list for a compartment with special features (B.5.37.2) appinfo <dc:title>Code list for a compartment with special features</dc:title> <dc:source>B.5.37.2</dc:source>

source

```
<xs:simpleType name="CompartmentWithSpecialFeaturesCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for a compartment with special features
(B.5.37.2)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for a compartment with special features</dc:title>
      <dc:source>B.5.37.2</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="00"/>
    <xs:maxInclusive value="99"/>
    <xs:totalDigits value="2"/>
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation xml:lang="en">Passenger needing assistance/disabled
passenger</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Unaccompanied child/young
person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="07">
      <xs:annotation>
        <xs:documentation xml:lang="en">places for passenger with small
children</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="08">
      <xs:annotation>
        <xs:documentation xml:lang="en">places with easy access - PRMs
</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="09">
      <xs:annotation>
        <xs:documentation xml:lang="en">Complete compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Family area</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Quiet compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">Conference compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">Four-berth couchette
compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat in compartment without
animals</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Business Comfort – business seat with reduced
service</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="20">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette coach without
equipment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat close to restaurant
car</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="36">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat with drink</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="37">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat with meal</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="38">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat with electric power
point</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation xml:lang="en">PREMIUM</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="41">
      <xs:annotation>
        <xs:documentation xml:lang="en">Place with animals</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="42">
      <xs:annotation>
        <xs:documentation xml:lang="en">Including breakfast</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="43">
      <xs:annotation>
        <xs:documentation xml:lang="en">Area with amplifiers for mobile
phone</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44">
      <xs:annotation>
        <xs:documentation xml:lang="en">SOLO (individual seat)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="45">
      <xs:annotation>
        <xs:documentation xml:lang="en">Duo face to face (2 seats
facing)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="46">
      <xs:annotation>
        <xs:documentation xml:lang="en">Duo side by side (2 seats side by
side)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="47">
      <xs:annotation>
        <xs:documentation xml:lang="en">Club Duo (2 seats facing in a separate
compartment)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="48">
      <xs:annotation>
        <xs:documentation xml:lang="en">Club 4 (4 seats facing normally 1st
Class)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="49">
      <xs:annotation>
        <xs:documentation xml:lang="en">Carré (4 seats facing normally 2nd
Class)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation xml:lang="en">Salon (6 seats facing in separate
compartment)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation xml:lang="en">Kiosque (special seats in edge
area)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="54">
      <xs:annotation>
        <xs:documentation xml:lang="en">Five-berth couchette
compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="55">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double bed (suite DeLuxe)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="57">
      <xs:annotation>
        <xs:documentation xml:lang="en">place close to place with
animals</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="59">
      <xs:annotation>
        <xs:documentation xml:lang="en">Area with a WiFi Access
Point</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ConnectingReservationsTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation enumeration 00 — documentation: no free connecting reservation enumeration 01 – 98 — documentation: number of free connecting reservations enumeration 99 — documentation: all connecting reservation are free
annotation	documentation Code list for connecting reservations (B.3.7) appinfo <dc:title>Code list for connecting reservations</dc:title> <dc:source>B.3.7</dc:source>

source

```
<xs:simpleType name="ConnectingReservationsTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for connecting reservations
(B.3.7)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for connecting reservations</dc:title>
      <dc:source>B.3.7</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">no free connecting
reservation</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01 - 98">
      <xs:annotation>
        <xs:documentation xml:lang="en">number of free connecting
reservations</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="99">
      <xs:annotation>
        <xs:documentation xml:lang="en">all connecting reservation are
free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CountryCodeUICType**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
enumeration	10	documentation Finland documentation Finnland documentation Finlande
enumeration	20	documentation Russian Federation documentation Russische Föderation documentation Russie, Fédération de
enumeration	21	documentation Belarus documentation Weissrussland documentation Bélarus
enumeration	22	documentation Ukraine documentation Ukraine documentation Ukraine
enumeration	23	documentation Moldova, Republic of documentation Moldawien, Republik documentation Moldova, République de
enumeration	24	documentation Lithuania documentation Litauen documentation Lituanie
enumeration	25	documentation Latvia documentation Lettland documentation Lettonie
enumeration	26	documentation Estonia

			documentation
			Estland
			documentation
			Estonie
	enumeration	27	documentation
			Kazakhstan
			documentation
			Kasachstan
			documentation
			Kazakhstan
	enumeration	28	documentation
			Georgia
			documentation
			Georgien
			documentation
			Géorgie
	enumeration	29	documentation
			Uzbekistan
			documentation
			Usbekistan
			documentation
			Ouzbékistan
	enumeration	30	documentation
			Korea, Democratic People's Republic of
			documentation
			Koreas Demokratische Volksrepublik
			documentation
			Corée, République populaire démocratique de
	enumeration	31	documentation
			Mongolia
			documentation
			Mongolei
			documentation
			Mongolie
	enumeration	32	documentation
			Viet nam
			documentation
			Vietnam
			documentation
			Viet Nam
	enumeration	33	documentation
			China
			documentation
			China
			documentation
			Chine
	enumeration	40	documentation
			Cuba
			documentation
			Kuba
			documentation
			Cuba
	enumeration	41	documentation
			Albania
			documentation
			Albanien
			documentation
			Albanie
	enumeration	42	documentation
			Japan
			documentation
			Japan
			documentation
			Japon
	enumeration	44	documentation
			Bosnia and Herzegovina, Serb Republic of
			documentation
			Bosnien und Herzegowinas, serbische Republik
			documentation
			Bosnie-Herzégovine, République serbe de
	enumeration	50	documentation
			Bosnia and Herzegovina, Muslim-Croat Federation of
			documentation

			Bosnien und Herzegowinas, kroatisch-moslemische Föderation documentation Bosnie-Herzegovine, Fédération croato-musulmane de
	enumeration	51	documentation Poland documentation Polen documentation Pologne
	enumeration	52	documentation Bulgaria documentation Bulgarien documentation Bulgarie
	enumeration	53	documentation Romania documentation Rumänien documentation Roumanie
	enumeration	54	documentation Czech Republic documentation Tschechische Republik documentation Tchèque, République
	enumeration	55	documentation Hungary documentation Ungarn documentation Hongrie
	enumeration	56	documentation Slovakia documentation Slowakei documentation Slovaquie
	enumeration	57	documentation Azerbaijan documentation Aserbaidschan documentation Azerbaïdjan
	enumeration	58	documentation Armenia documentation Armenien documentation Arménie
	enumeration	59	documentation Kyrgyzstan documentation Kirgisistan documentation Kirghizistan
	enumeration	60	documentation Ireland documentation Irland documentation Irlande
	enumeration	61	documentation Korea, Republic of documentation Koreanische Republik documentation Corée, République de
	enumeration	62	documentation Montenegro documentation Montenegro

			documentation
			Montenegro
	enumeration	65	documentation
			Macedonia, The former Yugoslav Republic of
			documentation
			Mazedonien, Ehemalige jugoslawische Republik
			documentation
			Macédoine, L'Ex-République Yougoslave de
	enumeration	66	documentation
			Tajikistan
			documentation
			Tadschikistan
			documentation
			Tadjikistan
	enumeration	67	documentation
			Turkmenistan
			documentation
			Turkmenistan
			documentation
			Turkménistan
	enumeration	70	documentation
			United Kingdom of Great Britain and Northern Ireland
			documentation
			Vereinigtes Königreich von Großbritannien und von Nordirland
			documentation
			Royaume-Uni de Grande-Bretagne et d'Irlande du Nord
	enumeration	71	documentation
			Spain
			documentation
			Spanien
			documentation
			Espagne
	enumeration	72	documentation
			Serbia
			documentation
			Serbien
			documentation
			Serbie
	enumeration	73	documentation
			Greece
			documentation
			Griechenland
			documentation
			Grèce
	enumeration	74	documentation
			Sweden
			documentation
			Schweden
			documentation
			Suède
	enumeration	75	documentation
			Turkey
			documentation
			Türkei
			documentation
			Turquie
	enumeration	76	documentation
			Norway
			documentation
			Norwegen
			documentation
			Norvège
	enumeration	78	documentation
			Croatia
			documentation
			Kroatien
			documentation
			Croatie
	enumeration	79	documentation
			Slovenia
			documentation
			Slowenien
			documentation

			Slovénie
	enumeration	80	documentation
			Germany
			documentation
			Deutschland
			documentation
			Allemagne
	enumeration	81	documentation
			Austria
			documentation
			Östenreich
			documentation
			Autriche
	enumeration	82	documentation
			Luxemburg
			documentation
			Luxemburg
			documentation
			Luxembourg
	enumeration	83	documentation
			Italy
			documentation
			Italien
			documentation
			Italie
	enumeration	84	documentation
			Netherlands
			documentation
			Niederlande
			documentation
			Pays-Bas
	enumeration	85	documentation
			Switzerland
			documentation
			Schweiz
			documentation
			Suisse
	enumeration	86	documentation
			Denmark
			documentation
			Dänemark
			documentation
			Danemark
	enumeration	87	documentation
			France
			documentation
			Frankreich
			documentation
			France
	enumeration	88	documentation
			Belgium
			documentation
			Belgien
			documentation
			Belgique
	enumeration	90	documentation
			Egypt
			documentation
			Ägypten
			documentation
			Egypte
	enumeration	91	documentation
			Tunesia
			documentation
			Tunesien
			documentation
			Tunisie
	enumeration	92	documentation
			Algeria
			documentation
			Algerien
			documentation
			Algérie

	enumeration 93 documentation Morocco documentation Marokko documentation Maroc enumeration 94 documentation Portugal documentation Portugal documentation Portugal enumeration 95 documentation Israel documentation Israel documentation Israël enumeration 96 documentation Iran, Islamic Republic of documentation Iran, Islamische Republik documentation Iran, République islamique d' enumeration 97 documentation Syrian Arab Republic documentation Syrien, Arabische Republik documentation Syrienne, République arabe enumeration 98 documentation Lebanon documentation Libanon documentation Liban enumeration 99 documentation Iraq documentation Irak documentation Iraq
annotation	documentation Code list for the UIC countries (B.8) appinfo <dc:title>Code list for the UIC countries</dc:title> <dc:source>B.8, B.9.1</dc:source>
source	<xs:simpleType name="CountryCodeUICType"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the UIC countries (B.8)</xs:documentation> <xs:appinfo> <dc:title>Code list for the UIC countries</dc:title> <dc:source>B.8, B.9.1</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="10"> <xs:annotation> <xs:documentation xml:lang="en">Finland</xs:documentation> <xs:documentation xml:lang="de">Finnland</xs:documentation> <xs:documentation xml:lang="fr">Finlande</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="20"> <xs:annotation> <xs:documentation xml:lang="en">Russian Federation</xs:documentation> <xs:documentation xml:lang="de">Russische Föderation</xs:documentation> <xs:documentation xml:lang="fr">Russie, Fédération de</xs:documentation>

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation xml:lang="en">Belarus</xs:documentation>
        <xs:documentation xml:lang="de">Weissrussland</xs:documentation>
        <xs:documentation xml:lang="fr">Bélarus</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ukraine</xs:documentation>
        <xs:documentation xml:lang="de">Ukraine</xs:documentation>
        <xs:documentation xml:lang="fr">Ukraine</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation xml:lang="en">Moldova, Republic of</xs:documentation>
        <xs:documentation xml:lang="de">Moldawien, Republik</xs:documentation>
        <xs:documentation xml:lang="fr">Moldova, République de</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lithuania</xs:documentation>
        <xs:documentation xml:lang="de">Litauen</xs:documentation>
        <xs:documentation xml:lang="fr">Lituanie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation xml:lang="en">Latvia</xs:documentation>
        <xs:documentation xml:lang="de">Lettland</xs:documentation>
        <xs:documentation xml:lang="fr">Lettonie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation xml:lang="en">Estonia</xs:documentation>
        <xs:documentation xml:lang="de">Estland</xs:documentation>
        <xs:documentation xml:lang="fr">Estonie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="27">
      <xs:annotation>
        <xs:documentation xml:lang="en">Kazakhstan</xs:documentation>
        <xs:documentation xml:lang="de">Kasachstan</xs:documentation>
        <xs:documentation xml:lang="fr">Kazakhstan</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation xml:lang="en">Georgia</xs:documentation>
        <xs:documentation xml:lang="de">Georgien</xs:documentation>
        <xs:documentation xml:lang="fr">Géorgie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="29">
      <xs:annotation>
        <xs:documentation xml:lang="en">Uzbekistan</xs:documentation>
        <xs:documentation xml:lang="de">Usbekistan</xs:documentation>
        <xs:documentation xml:lang="fr">Ouzbékistan</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en">Korea, Democratic People's Republic
of</xs:documentation>
        <xs:documentation xml:lang="de">Koreas Demokratische
Volksrepublik</xs:documentation>
        <xs:documentation xml:lang="fr">Corée, République populaire démocratique
de</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mongolia</xs:documentation>
        <xs:documentation xml:lang="de">Mongolei</xs:documentation>
        <xs:documentation xml:lang="fr">Mongolie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation xml:lang="en">Viet nam</xs:documentation>
        <xs:documentation xml:lang="de">Vietnam</xs:documentation>
        <xs:documentation xml:lang="fr">Viet Nam</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="33">
      <xs:annotation>
        <xs:documentation xml:lang="en">China</xs:documentation>
        <xs:documentation xml:lang="de">China</xs:documentation>
        <xs:documentation xml:lang="fr">Chine</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cuba</xs:documentation>
        <xs:documentation xml:lang="de">Kuba</xs:documentation>
        <xs:documentation xml:lang="fr">Cuba</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="41">
      <xs:annotation>
        <xs:documentation xml:lang="en">Albania</xs:documentation>
        <xs:documentation xml:lang="de">Albanien</xs:documentation>
        <xs:documentation xml:lang="fr">Albanie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="42">
      <xs:annotation>
        <xs:documentation xml:lang="en">Japan</xs:documentation>
        <xs:documentation xml:lang="de">Japan</xs:documentation>
        <xs:documentation xml:lang="fr">Japon</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bosnia and Herzegovina, Serb Republic of
</xs:documentation>
        <xs:documentation xml:lang="de">Bosnien und Herzegowinas, serbische
Republik</xs:documentation>
        <xs:documentation xml:lang="fr">Bosnie-Herzégovine, République serbe
de</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Bosnia and Herzegovina, Muslim-Croat
Federation of </xs:documentation>
        <xs:documentation xml:lang="de">Bosnien und Herzegowinas, kroatisch-
moslemische Föderation</xs:documentation>
        <xs:documentation xml:lang="fr">Bosnie-Herzegovine, Fédération croato-
musulmane de</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation xml:lang="en">Poland</xs:documentation>
        <xs:documentation xml:lang="de">Polen</xs:documentation>
        <xs:documentation xml:lang="fr">Pologne</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="52">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bulgaria</xs:documentation>
        <xs:documentation xml:lang="de">Bulgarien</xs:documentation>
        <xs:documentation xml:lang="fr">Bulgarie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="53">
      <xs:annotation>
        <xs:documentation xml:lang="en">Romania</xs:documentation>
        <xs:documentation xml:lang="de">Rumänien</xs:documentation>
        <xs:documentation xml:lang="fr">Roumanie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="54">
      <xs:annotation>
        <xs:documentation xml:lang="en">Czech Republic</xs:documentation>
        <xs:documentation xml:lang="de">Tschechische Republik</xs:documentation>
        <xs:documentation xml:lang="fr">Tchèque, République</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="55">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hungary</xs:documentation>
        <xs:documentation xml:lang="de">Ungarn</xs:documentation>
        <xs:documentation xml:lang="fr">Hongrie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="56">
      <xs:annotation>
        <xs:documentation xml:lang="en">Slovakia</xs:documentation>
        <xs:documentation xml:lang="de">Slowakei</xs:documentation>
        <xs:documentation xml:lang="fr">Slovaquie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="57">
      <xs:annotation>
        <xs:documentation xml:lang="en">Azerbaijan</xs:documentation>
        <xs:documentation xml:lang="de">Aserbaidschan</xs:documentation>
        <xs:documentation xml:lang="fr">Azerbaïdjan</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="58">
      <xs:annotation>
        <xs:documentation xml:lang="en">Armenia</xs:documentation>
        <xs:documentation xml:lang="de">Armenien</xs:documentation>
        <xs:documentation xml:lang="fr">Arménie</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="59">
      <xs:annotation>
        <xs:documentation xml:lang="en">Kyrgyzstan</xs:documentation>
        <xs:documentation xml:lang="de">Kirgisistan</xs:documentation>
        <xs:documentation xml:lang="fr">Kirghizistan</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="60">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ireland</xs:documentation>
        <xs:documentation xml:lang="de">Irland</xs:documentation>
        <xs:documentation xml:lang="fr">Irlande</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="61">
      <xs:annotation>
        <xs:documentation xml:lang="en">Korea, Republic of</xs:documentation>
        <xs:documentation xml:lang="de">Koreanische Republik</xs:documentation>
        <xs:documentation xml:lang="fr">Corée, République de</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
      <xs:annotation>
        <xs:documentation xml:lang="en">Montenegro</xs:documentation>
        <xs:documentation xml:lang="de">Montenegro</xs:documentation>
        <xs:documentation xml:lang="fr">Montenegro</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="65">
      <xs:annotation>
        <xs:documentation xml:lang="en">Macedonia, The former Yugoslav Republic
of</xs:documentation>
        <xs:documentation xml:lang="de">Mazedonien, Ehemalige jugoslawische
Republik</xs:documentation>
        <xs:documentation xml:lang="fr">Macédoine, L'Ex-République Yougoslave
de</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="66">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tajikistan</xs:documentation>
        <xs:documentation xml:lang="de">Tadschikistan</xs:documentation>
        <xs:documentation xml:lang="fr">Tadjikistan</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="67">
      <xs:annotation>
        <xs:documentation xml:lang="en">Turkmenistan</xs:documentation>
        <xs:documentation xml:lang="de">Turkmenistan</xs:documentation>
        <xs:documentation xml:lang="fr">Turkménistan</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="70">
      <xs:annotation>
        <xs:documentation xml:lang="en">United Kingdom of Great Britain and Northern
Ireland</xs:documentation>
        <xs:documentation xml:lang="de">Vereinigtes Königreich von Großbritannien und
von Nordirland</xs:documentation>
        <xs:documentation xml:lang="fr">Royaume-Uni de Grande-Bretagne et d'Irlande
du Nord</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="71">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Spain</xs:documentation>
        <xs:documentation xml:lang="de">Spanien</xs:documentation>
        <xs:documentation xml:lang="fr">Espagne</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="72">
      <xs:annotation>
        <xs:documentation xml:lang="en">Serbia</xs:documentation>
        <xs:documentation xml:lang="de">Serbien</xs:documentation>
        <xs:documentation xml:lang="fr">Serbie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="73">
      <xs:annotation>
        <xs:documentation xml:lang="en">Greece</xs:documentation>
        <xs:documentation xml:lang="de">Griechenland</xs:documentation>
        <xs:documentation xml:lang="fr">Grèce</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="74">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sweden</xs:documentation>
        <xs:documentation xml:lang="de">Schweden</xs:documentation>
        <xs:documentation xml:lang="fr">Suède</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="75">
      <xs:annotation>
        <xs:documentation xml:lang="en">Turkey</xs:documentation>
        <xs:documentation xml:lang="de">Türkei</xs:documentation>
        <xs:documentation xml:lang="fr">Turquie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="76">
      <xs:annotation>
        <xs:documentation xml:lang="en">Norway</xs:documentation>
        <xs:documentation xml:lang="de">Norwegen</xs:documentation>
        <xs:documentation xml:lang="fr">Norvège</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="78">
      <xs:annotation>
        <xs:documentation xml:lang="en">Croatia</xs:documentation>
        <xs:documentation xml:lang="de">Kroatien</xs:documentation>
        <xs:documentation xml:lang="fr">Croatie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="79">
      <xs:annotation>
        <xs:documentation xml:lang="en">Slovenia</xs:documentation>
        <xs:documentation xml:lang="de">Slowenien</xs:documentation>
        <xs:documentation xml:lang="fr">Slovénie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="80">
      <xs:annotation>
        <xs:documentation xml:lang="en">Germany</xs:documentation>
        <xs:documentation xml:lang="de">Deutschland</xs:documentation>
        <xs:documentation xml:lang="fr">Allemagne</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="81">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">Austria</xs:documentation>
        <xs:documentation xml:lang="de">Östenreich</xs:documentation>
        <xs:documentation xml:lang="fr">Autriche</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="82">
      <xs:annotation>
        <xs:documentation xml:lang="en">Luxemburg</xs:documentation>
        <xs:documentation xml:lang="de">Luxemburg</xs:documentation>
        <xs:documentation xml:lang="fr">Luxembourg</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="83">
      <xs:annotation>
        <xs:documentation xml:lang="en">Italy</xs:documentation>
        <xs:documentation xml:lang="de">Italien</xs:documentation>
        <xs:documentation xml:lang="fr">Italie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="84">
      <xs:annotation>
        <xs:documentation xml:lang="en">Netherlands</xs:documentation>
        <xs:documentation xml:lang="de">Niederlande</xs:documentation>
        <xs:documentation xml:lang="fr">Pays-Bas</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="85">
      <xs:annotation>
        <xs:documentation xml:lang="en">Switzerland</xs:documentation>
        <xs:documentation xml:lang="de">Schweiz</xs:documentation>
        <xs:documentation xml:lang="fr">Suisse</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="86">
      <xs:annotation>
        <xs:documentation xml:lang="en">Denmark</xs:documentation>
        <xs:documentation xml:lang="de">Dänemark</xs:documentation>
        <xs:documentation xml:lang="fr">Danemark</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="87">
      <xs:annotation>
        <xs:documentation xml:lang="en">France</xs:documentation>
        <xs:documentation xml:lang="de">Frankreich</xs:documentation>
        <xs:documentation xml:lang="fr">France</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="88">
      <xs:annotation>
        <xs:documentation xml:lang="en">Belgium</xs:documentation>
        <xs:documentation xml:lang="de">Belgien</xs:documentation>
        <xs:documentation xml:lang="fr">Belgique</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="90">
      <xs:annotation>
        <xs:documentation xml:lang="en">Egypt</xs:documentation>
        <xs:documentation xml:lang="de">Ägypten</xs:documentation>
        <xs:documentation xml:lang="fr">Egypte</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="91">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tunesia</xs:documentation>
```

```
        <xs:documentation xml:lang="de">Tunesien</xs:documentation>
        <xs:documentation xml:lang="fr">Tunisie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="92">
      <xs:annotation>
        <xs:documentation xml:lang="en">Algeria</xs:documentation>
        <xs:documentation xml:lang="de">Algerien</xs:documentation>
        <xs:documentation xml:lang="fr">Algérie</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="93">
      <xs:annotation>
        <xs:documentation xml:lang="en">Morocco</xs:documentation>
        <xs:documentation xml:lang="de">Marokko</xs:documentation>
        <xs:documentation xml:lang="fr">Maroc</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="94">
      <xs:annotation>
        <xs:documentation xml:lang="en">Portugal</xs:documentation>
        <xs:documentation xml:lang="de">Portugal</xs:documentation>
        <xs:documentation xml:lang="fr">Portugal</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="95">
      <xs:annotation>
        <xs:documentation xml:lang="en">Israel</xs:documentation>
        <xs:documentation xml:lang="de">Israel</xs:documentation>
        <xs:documentation xml:lang="fr">Israël</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="96">
      <xs:annotation>
        <xs:documentation xml:lang="en">Iran, Islamic Republic of</xs:documentation>
        <xs:documentation xml:lang="de">Iran, Islamische Republik</xs:documentation>
        <xs:documentation xml:lang="fr">Iran, République islamique
d'</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="97">
      <xs:annotation>
        <xs:documentation xml:lang="en">Syrian Arab Republic</xs:documentation>
        <xs:documentation xml:lang="de">Syrien, Arabische Republik</xs:documentation>
        <xs:documentation xml:lang="fr">Syrienne, République arabe</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="98">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lebanon</xs:documentation>
        <xs:documentation xml:lang="de">Libanon</xs:documentation>
        <xs:documentation xml:lang="fr">Liban</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="99">
      <xs:annotation>
        <xs:documentation xml:lang="en">Iraq</xs:documentation>
        <xs:documentation xml:lang="de">Irak</xs:documentation>
        <xs:documentation xml:lang="fr">Iraq</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **CurrencyCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation length 3
annotation	documentation Code list for currency (ISO 4217) documentation This item should be restricted to a code list?
source	<xs:simpleType name="CurrencyCodeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for currency (ISO 4217)</xs:documentation> <xs:documentation doc:docType="Remark">This item should be restricted to a code list?</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="3"/> </xs:restriction> </xs:simpleType>

simpleType **CustomerServiceCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:token**
properties	base xs:token
facets	Kind Value Annotation length 2 enumeration RB documentation refund before start of validity enumeration RA documentation refund after start of validity enumeration EB documentation exchange before start of validity enumeration EA documentation exchange after start validity enumeration TB documentation partial refund before start of validity enumeration TA documentation partial refund after start of validty
annotation	documentation Code list for customers service code (B.3.15) appinfo <dc:title>Code list for customers service code</dc:title> <dc:source>B.3.15</dc:source>
source	<xs:simpleType name="CustomerServiceCodeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for customers service code (B.3.15)</xs:documentation> <xs:appinfo> <dc:title>Code list for customers service code</dc:title> <dc:source>B.3.15</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:token"> <xs:length value="2"/> <xs:enumeration value="RB"> <xs:annotation> <xs:documentation xml:lang="en">refund before start of

```
validity</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="RA">
      <xs:annotation>
        <xs:documentation xml:lang="en">refund after start of
validity</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="EB">
      <xs:annotation>
        <xs:documentation xml:lang="en">exchange before start of
validity</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="EA">
      <xs:annotation>
        <xs:documentation xml:lang="en">exchange after start
validity</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TB">
      <xs:annotation>
        <xs:documentation xml:lang="en">partial refund before start of
validity</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TA">
      <xs:annotation>
        <xs:documentation xml:lang="en">partial refund after start of
validty</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **DisabilityTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:integer**
properties	base xs:integer

facets

Kind	Value	Annotation
minInclusive	1	
maxInclusive	99	
totalDigits	2	
enumeration	1	documentation walking disability
enumeration	2	documentation wheelchair bound person
enumeration	3	documentation wheelchair no bound person
enumeration	4	documentation Learning disability
enumeration	5	documentation mentally disabled
enumeration	6	documentation hearing impaired
enumeration	7	documentation Deaf
enumeration	8	documentation Visually impaired
enumeration	9	documentation Blind
enumeration	10	documentation

	Other disability
annotation	documentation Code list for the disability type (B.10.4) appinfo <dc:title>Code list for the disability type</dc:title> <dc:source>B.10.4</dc:source>

source

```
<xs:simpleType name="DisabilityTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the disability type
(B.10.4)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the disability type</dc:title>
      <dc:source>B.10.4</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:integer">
    <xs:minInclusive value="1"/>
    <xs:maxInclusive value="99"/>
    <xs:totalDigits value="2"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">walking disability</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">wheelchair bound person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">wheelchair no bound person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Learning disability</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">mentally disabled</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">hearing impaired</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Deaf</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Visually impaired</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Blind</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Other disability</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **DistributionChannelTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
minInclusive	00	
maxInclusive	99	
totalDigits	2	
enumeration	00	documentation: All Channels
enumeration	01	documentation: Stations
enumeration	02	documentation: Agencies
enumeration	03	documentation: Call centre
enumeration	04	documentation: Tour-operators
enumeration	05	documentation: Internet
enumeration	06	documentation: Automat

annotation

documentation
Code list for the distribution channel.
appinfo
<dc:title>Distribution channel code list</dc:title>
<dc:source>B.2.8</dc:source>

source

```
<xs:simpleType name="DistributionChannelTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the distribution
channel.</xs:documentation>
    <xs:appinfo>
      <dc:title>Distribution channel code list</dc:title>
      <dc:source>B.2.8</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="00"/>
    <xs:maxInclusive value="99"/>
    <xs:totalDigits value="2"/>
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">All Channels</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation xml:lang="en">Stations</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Agencies</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="03">
      <xs:annotation>
        <xs:documentation xml:lang="en">Call centre</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="04">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tour-operators</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="05">
      <xs:annotation>
        <xs:documentation xml:lang="en">Internet</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="06">
      <xs:annotation>
        <xs:documentation xml:lang="en">Automat</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ErrorCode_HomePrintingCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation enumeration 1 — documentation: Train not possible enumeration 2 — documentation: Client blacklisted enumeration 3 — documentation: System down enumeration 4 — documentation: Insufficient parameters enumeration 5 — documentation: Incompatible parameters
annotation	documentation Code list for error codes for home printed ticket (B.7.5) documentation Used in the CT message to indicate the error or acceptance of the certificate request appinfo <dc:title>Code list for error codes for home printed ticket</dc:title> <dc:source>B.7.5</dc:source>

source

```
<xs:simpleType name="ErrorCode_HomePrintingCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for error codes for home printed ticket
(B.7.5)</xs:documentation>
    <xs:documentation xml:lang="en">Used in the CT message to indicate the error or
acceptance of the certificate request</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for error codes for home printed ticket</dc:title>
      <dc:source>B.7.5</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Train not possible</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
      <xs:enumeration value="2">
        <xs:annotation>
          <xs:documentation xml:lang="en">Client blacklisted</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="3">
        <xs:annotation>
          <xs:documentation xml:lang="en">System down</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="4">
        <xs:annotation>
          <xs:documentation xml:lang="en">Insufficient parameters</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="5">
        <xs:annotation>
          <xs:documentation xml:lang="en">Incompatible parameters</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **FareCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
minLength	1	
maxLength	2	
enumeration	A	documentation Seat 1st Class
enumeration	AC	documentation Business Comfort – business seat with reduced service
enumeration	AH	documentation Classic (place in a historic coach) (1st class)
enumeration	AM	documentation Business compartment 1st Class
enumeration	AR	documentation Wheel chair seat 1st Class
enumeration	AS	documentation Quiet Compartment 1st Class
enumeration	AV	documentation Front view place (1st class)
enumeration	AW	documentation 1st Class with WiFi
enumeration	B	documentation Seat 2nd Class
enumeration	BC	documentation place near children's play area 2nd Class
enumeration	BD	documentation place with animal 2nd Class
enumeration	BE	documentation Restaurant (place in a dining car) (2nd class)
enumeration	BH	documentation Classic (place in a historic coach) (2nd class)
enumeration	BN	documentation place close to place with animal 2nd Class
enumeration	BP	documentation private compartment seats
enumeration	BR	documentation Wheelchair seat 2nd Class
enumeration	BS	documentation Quiet Compartment 2nd Class
enumeration	BW	documentation

			2nd Class with WiFi
	enumeration	C	documentation
			Couchette 1st Class
	enumeration	D	documentation
			Couchette 2nd Class
	enumeration	DC	documentation
			Couchette Comfort
	enumeration	DD	documentation
			Couchette Comfort 4 four-berth
	enumeration	DE	documentation
			Couchette Comfort 4 four-berth complete compartment
	enumeration	DF	documentation
			Ladies Compartment Couchette Comfort
	enumeration	DG	documentation
			Ladies Compartment Couchette Comfort 4 four-berth
	enumeration	DP	documentation
			Private compartment couchettes
	enumeration	DR	documentation
			Wheelchair in sleeping car
	enumeration	D2	documentation
			Cabin-couchette coach 2nd Class
	enumeration	D4	documentation
			Couchette 2nd Class four-berth
	enumeration	D5	documentation
			Couchette 2nd Class five-berth
	enumeration	D6	documentation
			Couchette 2nd Class six-berth
	enumeration	E	documentation
			Sleeperette 1st Class
	enumeration	EX	documentation
			Excellence Class
	enumeration	F	documentation
			Sleeperette 2nd Class
	enumeration	F4	documentation
			Ladies compartment couchette 2nd Class 4-berth
	enumeration	F6	documentation
			Ladies compartment couchette 2nd Class 6-berth
	enumeration	G	documentation
			Premium 1st Class
	enumeration	G2	documentation
			Premium Second Class
	enumeration	H	documentation
			Leisure 1st Class
	enumeration	I	documentation
			-
	enumeration	J	documentation
			-
	enumeration	K	documentation
			Euraffaires
	enumeration	L	documentation
			Single
	enumeration	M	documentation
			Special
	enumeration	MS	documentation
			Mini Suite - single person couchette compartment
	enumeration	N	documentation
			Double
	enumeration	O	documentation
			Vehicle parking place
	enumeration	O3	documentation
			Vehicle parking place category 1 - 3
	enumeration	O4	documentation
			Motorcycle
	enumeration	O5	documentation
			Motorcycle with sidecar
	enumeration	O8	documentation
			Vehicle parking place category 6 - 8
	enumeration	OB	documentation
			Bicycle
	enumeration	OL	documentation
			Long trailer category 3 - 5
	enumeration	OS	documentation
			Short trailer category 1 - 2

	enumeration OT documentation Tandem Bicycle enumeration P documentation T2 enumeration P4 documentation private compartment 4 couchette enumeration PD documentation Private compartment berth deluxe enumeration PS documentation Private compartment berth enumeration Q documentation T3 enumeration R documentation T4 enumeration S documentation Single with shower & WC enumeration SL documentation Single with shower & WC & double bed enumeration T documentation Double with shower & WC enumeration TL documentation Double with shower & WC & double bed enumeration U documentation T3 with shower & WC enumeration V documentation - enumeration W documentation Double with shower enumeration X documentation Club enumeration Y documentation Preferente enumeration Z documentation Tourist
annotation	documentation Code list for the fare code (B.5.308) appinfo <dc:title>Code list for fare code</dc:title> <dc:source>B.5.308</dc:source>
source	<xs:simpleType name="FareCodeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the fare code (B.5.308)</xs:documentation> <xs:appinfo> <dc:title>Code list for fare code</dc:title> <dc:source>B.5.308</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="2"/> <xs:enumeration value="A"> <xs:annotation> <xs:documentation xml:lang="en">Seat 1st Class</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="AC"> <xs:annotation> <xs:documentation xml:lang="en">Business Comfort – business seat with reduced service</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="AH"> <xs:annotation> <xs:documentation xml:lang="en">Classic (place in a historic coach) (1st class)</xs:documentation> </xs:annotation> </xs:enumeration>

```
    <xs:enumeration value="AM">
      <xs:annotation>
        <xs:documentation xml:lang="en">Business compartment 1st
Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AR">
      <xs:annotation>
        <xs:documentation xml:lang="en">Wheel chair seat 1st Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AS">
      <xs:annotation>
        <xs:documentation xml:lang="en">Quiet Compartment 1st
Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AV">
      <xs:annotation>
        <xs:documentation xml:lang="en">Front view place (1st
class)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AW">
      <xs:annotation>
        <xs:documentation xml:lang="en">1st Class with WiFi</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="B">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat 2nd Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BC">
      <xs:annotation>
        <xs:documentation xml:lang="en">place near children’s play area 2nd
Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BD">
      <xs:annotation>
        <xs:documentation xml:lang="en">place with animal 2nd
Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BE">
      <xs:annotation>
        <xs:documentation xml:lang="en">Restaurant (place in a dining car) (2nd
class)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BH">
      <xs:annotation>
        <xs:documentation xml:lang="en">Classic (place in a historic coach) (2nd
class)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BN">
      <xs:annotation>
        <xs:documentation xml:lang="en">place close to place with animal 2nd
Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BP">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">private compartment seats</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BR">
      <xs:annotation>
        <xs:documentation xml:lang="en">Wheelchair seat 2nd Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BS">
      <xs:annotation>
        <xs:documentation xml:lang="en">Quiet Compartment 2nd
Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BW">
      <xs:annotation>
        <xs:documentation xml:lang="en">2nd Class with WiFi</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="C">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 1st Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="D">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 2nd Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="DC">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette Comfort</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="DD">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette Comfort 4 four-
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="DE">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette Comfort 4 four-berth complete
compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="DF">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ladies Compartment Couchette
Comfort</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="DG">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ladies Compartment Couchette Comfort 4 four-
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="DP">
      <xs:annotation>
        <xs:documentation xml:lang="en">Private compartment
couchettes</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="DR">
      <xs:annotation>
        <xs:documentation xml:lang="en">Wheelchair in sleeping car</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="D2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cabin-couchette coach 2nd
Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="D4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 2nd Class four-
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="D5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 2nd Class five-
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="D6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchette 2nd Class six-
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="E">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sleeperette 1st Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="EX">
      <xs:annotation>
        <xs:documentation xml:lang="en">Excellence Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="F">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sleeperette 2nd Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="F4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ladies compartment couchette 2nd Class 4-
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="F6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ladies compartment couchette 2nd Class 6-
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="G">
      <xs:annotation>
        <xs:documentation xml:lang="en">Premium 1st Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="G2">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">Premium Second Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="H">
      <xs:annotation>
        <xs:documentation xml:lang="en">Leisure 1st Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="I">
      <xs:annotation>
        <xs:documentation xml:lang="en">-</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="J">
      <xs:annotation>
        <xs:documentation xml:lang="en">-</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="K">
      <xs:annotation>
        <xs:documentation xml:lang="en">Euraffaires</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="L">
      <xs:annotation>
        <xs:documentation xml:lang="en">Single</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="M">
      <xs:annotation>
        <xs:documentation xml:lang="en">Special</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="MS">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mini Suite - single person couchette
compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="N">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="O">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vehicle parking place</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="O3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vehicle parking place category 1 -
3</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="O4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motorcycle</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="O5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motorcycle with sidecar</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="O8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vehicle parking place category 6 -
8</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="OB">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bicycle</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="OL">
      <xs:annotation>
        <xs:documentation xml:lang="en">Long trailer category 3 -
5</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="OS">
      <xs:annotation>
        <xs:documentation xml:lang="en">Short trailer category 1 -
2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="OT">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tandem Bicycle</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="P">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="P4">
      <xs:annotation>
        <xs:documentation xml:lang="en">private compartment 4
couchette</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="PD">
      <xs:annotation>
        <xs:documentation xml:lang="en">Private compartment berth
deluxe</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="PS">
      <xs:annotation>
        <xs:documentation xml:lang="en">Private compartment berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Q">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="S">
      <xs:annotation>
        <xs:documentation xml:lang="en">Single with shower &amp;
```

```
WC</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="SL">
      <xs:annotation>
        <xs:documentation xml:lang="en">Single with shower &amp; WC &amp; double
bed</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="T">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double with shower &amp;
WC</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TL">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double with shower &amp; WC &amp; double
bed</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="U">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 with shower &amp; WC</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="V">
      <xs:annotation>
        <xs:documentation xml:lang="en">-</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="W">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double with shower</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X">
      <xs:annotation>
        <xs:documentation xml:lang="en">Club</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Y">
      <xs:annotation>
        <xs:documentation xml:lang="en">Preferente</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Z">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tourist</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **FareTableTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind: enumeration — Value: 1 — Annotation: documentation: distance-based

	enumeration 2 documentation route based enumeration 3 documentation set fare
annotation	documentation Code list for Fare table (B.3.13) appinfo <dc:title>Type of fare table</dc:title> <dc:source>B.3.13</dc:source>
source	<xs:simpleType name="FareTableTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for Fare table (B.3.13)</xs:documentation> <xs:appinfo> <dc:title>Type of fare table</dc:title> <dc:source>B.3.13</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">distance-based</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">route based</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation xml:lang="en">set fare</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **FieldFormattingTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation normal enumeration 1 documentation bold enumeration 2 documentation italic enumeration 3 documentation bold & italic enumeration 4 documentation small font (the "132-font" in RCT-2) enumeration 5 documentation small + bold enumeration 6 documentation small + italic enumeration 7 documentation small + bold + italic
annotation	documentation Code list for field formatting (B.7.6) appinfo

<dc:title>Code list for field formatting</dc:title>
<dc:source>B.7.6</dc:source>

source

```
<xs:simpleType name="FieldFormattingTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for field formatting
(B.7.6)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for field formatting</dc:title>
      <dc:source>B.7.6</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">normal</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">bold</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">italic</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">bold &amp;amp; italic</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">small font (the "132-font" in RCT-
2)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">small + bold</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">small + italic</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en"> small + bold + italic</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **FirstPersonAllPersonTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:token**

properties	base xs:token
facets	Kind Value Annotation length 1 enumeration E documentation the first person enumeration A documentation all person
annotation	documentation Code list for first person or all persons (B.3.14) appinfo <dc:title>Code list for first person or all persons</dc:title> <dc:source>B.3.14</dc:source>
source	<xs:simpleType name="FirstPersonAllPersonTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for first person or all persons (B.3.14)</xs:documentation> <xs:appinfo> <dc:title>Code list for first person or all persons</dc:title> <dc:source>B.3.14</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:token"> <xs:length value="1"/> <xs:enumeration value="E"> <xs:annotation> <xs:documentation xml:lang="en">the first person</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="A"> <xs:annotation> <xs:documentation xml:lang="en">all person</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **IndividualReservationTicketsRequestedCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation enumeration 1 documentation Individual reservation ticket requested
annotation	documentation Code list for individual reservation requests (B.5.43) appinfo <dc:title>Code list for individual reservation requests</dc:title> <dc:source>B.5.43</dc:source>
source	<xs:simpleType name="IndividualReservationTicketsRequestedCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for individual reservation requests (B.5.43)</xs:documentation> <xs:appinfo> <dc:title>Code list for individual reservation requests</dc:title> <dc:source>B.5.43</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">Individual reservation ticket

```
requested</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **IRTTariffNameCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
maxLength	32	
enumeration	72/73	documentation Normal Adult/Child documentation Normal documentation Normal Adulte/Enfant
enumeration	74/75	documentation Leisure Adult/Child documentation Tourist documentation Loisir Adulte/Enfant
enumeration	65/66	documentation Excursion Adult/Child documentation Ausflug documentation Excursion Adulte/Enfant
enumeration	78	documentation Senior documentation Senior documentation Senior
enumeration	86	documentation Youth documentation Junior documentation Jeune
enumeration	44/19/49	documentation Pass 1/2/3 documentation Pass 1/2/3 documentation Pass 1/2/3
enumeration	92/93	documentation Group documentation Gruppe documentation Groupe
enumeration	96	documentation Weelchair documentation Reisender im Rollstuhl documentation Personne en fauteuil roulant
enumeration	97	documentation Weelchair companion documentation Begleiter eines Blinden documentation Accompagnateur d'aveugle
enumeration	98	documentation

	enumeration 99 FIP Leisure documentation FIP privat documentation FIP Loisir documentation FIP Service documentation FIP Dienstreise documentation FIP service
annotation	documentation Code list for the tariff name (B.2.5) appinfo <dc:title>Code list for the tariff name</dc:title> <dc:source>B.2.5</dc:source>
source	

```
<xs:simpleType name="IRTTariffNameCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the tariff name
(B.2.5)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the tariff name</dc:title>
      <dc:source>B.2.5</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="32"/>
    <xs:enumeration value="72/73">
      <xs:annotation>
        <xs:documentation xml:lang="en">Normal Adult/Child</xs:documentation>
        <xs:documentation xml:lang="de">Normal </xs:documentation>
        <xs:documentation xml:lang="fr">Normal Adulte/Enfant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="74/75">
      <xs:annotation>
        <xs:documentation xml:lang="en">Leisure Adult/Child</xs:documentation>
        <xs:documentation xml:lang="de">Tourist</xs:documentation>
        <xs:documentation xml:lang="fr">Loisir Adulte/Enfant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="65/66">
      <xs:annotation>
        <xs:documentation xml:lang="en">Excursion Adult/Child</xs:documentation>
        <xs:documentation xml:lang="de">Ausflug</xs:documentation>
        <xs:documentation xml:lang="fr">Excursion Adulte/Enfant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="78">
      <xs:annotation>
        <xs:documentation xml:lang="en">Senior</xs:documentation>
        <xs:documentation xml:lang="de">Senior</xs:documentation>
        <xs:documentation xml:lang="fr">Senior</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="86">
      <xs:annotation>
        <xs:documentation xml:lang="en">Youth</xs:documentation>
        <xs:documentation xml:lang="de">Junior</xs:documentation>
        <xs:documentation xml:lang="fr">Jeune</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44/19/49">
      <xs:annotation>
        <xs:documentation xml:lang="en">Pass 1/2/3</xs:documentation>
        <xs:documentation xml:lang="de">Pass 1/2/3</xs:documentation>
```

```
        <xs:documentation xml:lang="fr">Pass 1/2/3</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="92/93">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group</xs:documentation>
        <xs:documentation xml:lang="de">Gruppe</xs:documentation>
        <xs:documentation xml:lang="fr">Groupe</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="96">
      <xs:annotation>
        <xs:documentation xml:lang="en">Weelchair</xs:documentation>
        <xs:documentation xml:lang="de">Reisender im Rollstuhl</xs:documentation>
        <xs:documentation xml:lang="fr">Personne en fauteuil
roulant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="97">
      <xs:annotation>
        <xs:documentation xml:lang="en">Weelchair companion</xs:documentation>
        <xs:documentation xml:lang="de">Begleiter eines Blinden</xs:documentation>
        <xs:documentation xml:lang="fr">Accompagnateur d’aveugle</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="98">
      <xs:annotation>
        <xs:documentation xml:lang="en">FIP Leisure</xs:documentation>
        <xs:documentation xml:lang="de">FIP privat</xs:documentation>
        <xs:documentation xml:lang="fr">FIP Loisir</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="99">
      <xs:annotation>
        <xs:documentation xml:lang="en">FIP Service</xs:documentation>
        <xs:documentation xml:lang="de">FIP Dienstreise</xs:documentation>
        <xs:documentation xml:lang="fr">FIP service</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **JourneyCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 1 enumeration 1 documentation: single journey enumeration 2 documentation: multiple journeys enumeration 3 documentation: single return enumeration 4 documentation: multiple return journeys
annotation	documentation Code list for a single journey or to a number of sections for a journey (B.5.33) documentation Shows wheter the request refers to a single journey or to one of a number of sections of journey. appinfo <dc:title>Code list for a single journey or to a number of sections for a journey</dc:title>

	<dc:source>B.5.33</dc:source>
source	<xs:simpleType name="JourneyCodeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for a single journey or to a number of sections for a journey (B.5.33)</xs:documentation> <xs:documentation xml:lang="en">Shows wheter the request refers to a single journey or to one of a number of sections of journey.</xs:documentation> <xs:appinfo> <dc:title>Code list for a single journey or to a number of sections for a journey</dc:title> <dc:source>B.5.33</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:totalDigits value="1"/> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">single journey</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">multiple journeys</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation xml:lang="en">single return</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation xml:lang="en">multiple return journeys</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **LoadingLowerDeckTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation enumeration 0 documentation Not significant enumeration 1 documentation Definitely on lower deck
annotation	documentation Code list for loading on the lower deck (B.5.70) appinfo <dc:title>Code list for loading on the lower deck</dc:title> <dc:source>B.5.70</dc:source>
source	<xs:simpleType name="LoadingLowerDeckTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for loading on the lower deck (B.5.70)</xs:documentation> <xs:appinfo> <dc:title>Code list for loading on the lower deck</dc:title> <dc:source>B.5.70</dc:source> </xs:appinfo> </xs:annotation>

```
    <xs:restriction base="xs:nonNegativeInteger">
      <xs:enumeration value="0">
        <xs:annotation>
          <xs:documentation xml:lang="en">Not significant</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation xml:lang="en">Definitely on lower deck</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **LocationBorderPointTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: Frontier and transit points between railway companies (Intersection of a rail line with a national frontier or transit point between two IMs,Docking points for ferry boats equipped with rails for links between two IMs;) enumeration 1 documentation: Frontier and transit points between railway companies (Intersection of a rail line with a national frontier or transit point between two IMs,Docking points for ferry boats equipped with rails for links between two IMs;) enumeration 2 documentation: Sea, lake and river ports (water/land and land/water) including docking points for air cushion vehicles with the exception of docking points for ferry boats equipped with rails; enumeration 3 documentation: Sea, lake and river ports (water/land and land/water) including docking points for air cushion vehicles with the exception of docking points for ferry boats equipped with rails; enumeration 4 documentation: Reserved. enumeration 5 documentation: Reserved. enumeration 6 documentation: Reserved. enumeration 7 documentation: Reserved. enumeration 8 documentation: Reserved. enumeration 9 documentation: Reserved.
annotation	documentation Code list for the border locations (B.9.2) appinfo <dc:title>Type of Border point code list</dc:title> <dc:source>B.9.2</dc:source>

source

```
<xs:simpleType name="LocationBorderPointTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the border locations
(B.9.2)</xs:documentation>
    <xs:appinfo>
      <dc:title>Type of Border point code list</dc:title>
      <dc:source>B.9.2</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
```

```
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Frontier and transit points between railway
companies (Intersection of a rail line with a national frontier or transit point
between two IMs,Docking points for ferry boats equipped with rails for links between
two IMs;)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Frontier and transit points between railway
companies (Intersection of a rail line with a national frontier or transit point
between two IMs,Docking points for ferry boats equipped with rails for links between
two IMs;)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sea, lake and river ports (water/land and
land/water) including docking points for air cushion vehicles with the exception of
docking points for ferry boats equipped with rails;</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sea, lake and river ports (water/land and
land/water) including docking points for air cushion vehicles with the exception of
docking points for ferry boats equipped with rails;</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reserved.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reserved.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reserved.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reserved.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reserved.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reserved.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **LocationCategoryCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: Inland station, yards, halts enumeration 1 documentation: Frontier station enumeration 2 documentation: Frontier and transit point enumeration 3 documentation: Tariff points enumeration 4 documentation: Warehouses, workshops enumeration 5 documentation: Administrative offices, organisational units, town offices; enumeration 6 documentation: Travel Agencies, Sales Points for tickets, enumeration 7 documentation: Bus stop (preceding of following rail journey) enumeration 8 documentation: Loading points, terminals enumeration 9 documentation: Other action points
annotation	documentation Code list for a location category (B.9.3) appinfo <dc:title>Location category</dc:title> <dc:source>B.9.3</dc:source>

source

```
<xs:simpleType name="LocationCategoryCodeTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for a location category
(B.9.3)</xs:documentation>
    <xs:appinfo>
      <dc:title>Location category</dc:title>
      <dc:source>B.9.3</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Inland station, yards,
halts</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Frontier station</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Frontier and transit point</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tariff points</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Warehouses, workshops</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Administrative offices, organisational units,
town offices;</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Travel Agencies, Sales Points for
tickets,</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bus stop (preceding of following rail
journey)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Loading points, terminals</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Other action points</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **LocationOpeningStatusCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 1 maxInclusive 9 enumeration 1 documentation: Open to passenger traffic enumeration 2 documentation: Open to freight traffic enumeration 3 documentation: Open to passenger traffic and freight traffic enumeration 4 documentation: Free enumeration 5 documentation: Free enumeration 6 documentation: Free enumeration 7 documentation: Free enumeration 8 documentation: Free enumeration 9 documentation: Free
annotation	documentation Code list for the opening ststus of a location (B.9.4)

appinfo
<dc:title>Location opening status</dc:title>
<dc:source>B.9.4</dc:source>

source

```
<xs:simpleType name="LocationOpeningStatusCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the opening ststus of a location
(B.9.4)</xs:documentation>
    <xs:appinfo>
      <dc:title>Location opening status</dc:title>
      <dc:source>B.9.4</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="1"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Open to passenger traffic</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Open to freight traffic</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Open to passenger traffic and freight
traffic</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **LocationUtilizationTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: Closed to all traffic enumeration 1 documentation: Unrestricted utility enumeration 2 documentation: Free enumeration 4 documentation: Free enumeration 5 documentation: Free enumeration 6 documentation: Free enumeration 7 documentation: Free enumeration 8 documentation: Free enumeration 9 documentation: Only for tariff and settlement requirements (notional frontier and transit points)
annotation	documentation Code list for the utilization of a location (B.9.5) appinfo <dc:title>Location utilization status</dc:title> <dc:source>B.9.5</dc:source>

source

```
<xs:simpleType name="LocationUtilizationTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the utilization of a location
(B.9.5)</xs:documentation>
    <xs:appinfo>
      <dc:title>Location utilization status</dc:title>
      <dc:source>B.9.5</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Closed to all traffic</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Unrestricted utility</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Only for tariff and settlement requirements
(notional frontier and transit points)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **MarkOfChangedPriceTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 1 enumeration 1 documentation: Price is different from the price of the original reservation.
annotation	documentation Code list for the flag mark of changed price appinfo <dc:title>Mark of changed price code list</dc:title> <dc:source>B.5.75</dc:source>

source

```
<xs:simpleType name="MarkOfChangedPriceTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the flag mark of changed
price</xs:documentation>
    <xs:appinfo>
      <dc:title>Mark of changed price code list</dc:title>
      <dc:source>B.5.75</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Price is different from the price of the
original reservation.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **MeetingPointTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:int**
properties	base xs:int
facets	Kind / Value / Annotation enumeration 1 documentation: Taxi stand enumeration 2 documentation: Service point / "Meeting point" enumeration 3 documentation: Sales office enumeration 4 documentation: At the platform enumeration 5 documentation: South entrance enumeration 6 documentation: North entrance enumeration 7 documentation: Main entrance enumeration 8 documentation: East entrance enumeration 9 documentation: West entrance enumeration 10 documentation: At the platform near the mobile ramp enumeration 11 documentation: At the platform near the coach
annotation	documentation Meeting point for PRM assistance booking (B.10.3) appinfo <dc:title>Meeting point for PRM assistance</dc:title> <dc:source>B.10.3</dc:source>

source

```
<xs:simpleType name="MeetingPointTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Meeting point for PRM assistance booking
(B.10.3)</xs:documentation>
    <xs:appinfo>
      <dc:title>Meeting point for PRM assistance</dc:title>
      <dc:source>B.10.3</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:int">
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Taxi stand</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Service point /  “Meeting
point”</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sales office</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">At the platform </xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
      <xs:enumeration value="5">
        <xs:annotation>
          <xs:documentation xml:lang="en">South entrance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="6">
        <xs:annotation>
          <xs:documentation xml:lang="en">North entrance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="7">
        <xs:annotation>
          <xs:documentation xml:lang="en">Main entrance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="8">
        <xs:annotation>
          <xs:documentation xml:lang="en">East entrance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="9">
        <xs:annotation>
          <xs:documentation xml:lang="en">West entrance</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="10">
        <xs:annotation>
          <xs:documentation xml:lang="en">At the platform near the mobile
ramp</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="11">
        <xs:annotation>
          <xs:documentation xml:lang="en">At the platform near the
coach</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **OTTFareTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 2 enumeration 01 documentation: standard NRT fare enumeration 02 documentation: kilometre-based fare enumeration 03 documentation: market-based fare enumeration 04 documentation: group fare enumeration 05 documentation: Surcharges enumeration 06 documentation: supplements
annotation	documentation Code list for fare type (B.1.1,B.3.17) appinfo <dc:title>Code list for fare type</dc:title> <dc:source>B.1.1,B.3.17</dc:source>

source

```
<xs:simpleType name="OTTFareTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for fare type
(B.1.1,B.3.17)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for fare type</dc:title>
      <dc:source>B.1.1,B.3.17</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="2"/>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation xml:lang="en">standard NRT fare</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation xml:lang="en">kilometre-based fare</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="03">
      <xs:annotation>
        <xs:documentation xml:lang="en">market-based fare</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="04">
      <xs:annotation>
        <xs:documentation xml:lang="en">group fare</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="05">
      <xs:annotation>
        <xs:documentation xml:lang="en">Surcharges</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="06">
      <xs:annotation>
        <xs:documentation xml:lang="en">supplements</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PassengerIdentificationNumberID_TypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:ID**
properties	base xs:ID

facets

Kind	Value	Annotation
enumeration	VISA	documentation VISA documentation only some digits are shown, rest: x (to avoid fraud) - e.g. If the card number is: 4589 3453 2342 1232 there appears only xxxx xxxx xxxx 1232
enumeration	MAST	documentation Mastercard documentation only some digits are shown, rest: x (to avoid fraud) - e.g. If the card number is: 4589 3453 2342 1232 there appears only xxxx xxxx xxxx 1232
enumeration	AMEX	documentation American Express documentation

	only some digits are shown, rest: x (to avoid fraud) - e.g. If the card number is: 4589 3453 2342 1232 there appears only xxxx xxxx xxxx 1232 enumeration EUID documentation European Identity Card documentation only some digits are shown, rest: x (to avoid fraud) - e.g. If the card number is: 4589 3453 2342 1232 there appears only xxxx xxxx xxxx 1232 enumeration BAHN documentation Bahn Card (DB) enumeration THLS documentation Lys-card on Thalys enumeration RAIL documentation Railplus
annotation	documentation Code list for the passenger identification (B.7.1) appinfo <dc:title>Code list for a passenger identification</dc:title> <dc:source>B.7.1</dc:source>
source	

```
<xs:simpleType name="PassengerIdentificationNumberID_TypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the passenger identification
(B.7.1)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for a passenger identification</dc:title>
      <dc:source>B.7.1</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:ID">
    <xs:enumeration value="VISA">
      <xs:annotation>
        <xs:documentation xml:lang="en">VISA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">only some digits are
shown, rest: x (to avoid fraud) - e.g. If the card number is: 4589 3453 2342 1232
       there appears only xxxx xxxx xxxx 1232</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="MAST">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mastercard</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">only some digits are
shown, rest: x (to avoid fraud) - e.g. If the card number is: 4589 3453 2342 1232
       there appears only xxxx xxxx xxxx 1232</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AMEX">
      <xs:annotation>
        <xs:documentation xml:lang="en">American Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">only some digits are
shown, rest: x (to avoid fraud) - e.g. If the card number is: 4589 3453 2342 1232
       there appears only xxxx xxxx xxxx 1232</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="EUID">
      <xs:annotation>
        <xs:documentation xml:lang="en">European Identity Card</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">only some digits are
shown, rest: x (to avoid fraud) - e.g. If the card number is: 4589 3453 2342 1232
       there appears only xxxx xxxx xxxx 1232</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="BAHN">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bahn Card (DB)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="THLS">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Lys-card on Thalys</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="RAIL">
      <xs:annotation>
        <xs:documentation xml:lang="en">Railplus</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PassengerWithVehicleCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation enumeration 1 documentation: Car-carrying train - outward journey enumeration 2 documentation: Car-carrying train - return journey
annotation	documentation Code list for a passenger with a car (B.5.77) appinfo <dc:title>Code list for a passenger with a car</dc:title> <dc:source>B.5.77</dc:source>

source

```
<xs:simpleType name="PassengerWithVehicleCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for a passenger with a car
(B.5.77)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for a passenger with a car</dc:title>
      <dc:source>B.5.77</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Car-carrying train - outward
journey</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Car-carrying train - return
journey</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PersonOfferSwitchTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:token**
properties	base xs:token
facets	Kind / Value / Annotation length 1 enumeration P documentation

	enumeration O Person documentation Offer
annotation	documentation Code list for switch between offer and person (B.3.16) appinfo <dc:title>Minimum and maximum amount per person / offer</dc:title> <dc:source>B.3.16</dc:source>
source	<xs:simpleType name="PersonOfferSwitchTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for switch between offer and person (B.3.16)</xs:documentation> <xs:appinfo> <dc:title>Minimum and maximum amount per person / offer</dc:title> <dc:source>B.3.16</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:token"> <xs:length value="1"/> <xs:enumeration value="P"> <xs:annotation> <xs:documentation xml:lang="en">Person</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="O"> <xs:annotation> <xs:documentation xml:lang="en">Offer</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **PictogramCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation enumeration 101 documentation Special conditions are made available by the RU appinfo <dc:source>Pictures/code_101.png</dc:source> enumeration 102 documentation Station offering a baggage collection and delivery service appinfo <dc:source>Pictures/code_102.png</dc:source> enumeration 103 documentation Station with a customs office appinfo <dc:source>Pictures/code_103.png</dc:source> enumeration 104 documentation Solely for traffic from this station appinfo <dc:source>Pictures/code_104.png</dc:source> enumeration 105 documentation Rail link appinfo <dc:source>Pictures/code_105.png</dc:source> enumeration 106 documentation Ferry link appinfo <dc:source>Pictures/code_106.png</dc:source> enumeration 107 documentation Bus link appinfo

	<dc:source>Pictures/code_107.png</dc:source> enumeration 108 documentation Coupon only valid during operating hours appinfo <dc:source>Pictures/code_108.png</dc:source> enumeration 109 documentation Series for which pre-printed coupons exist appinfo <dc:source>Pictures/code_109.png</dc:source> enumeration 110 documentation Coupon which cannot be used for the opposite direction appinfo <dc:source>Pictures/code_110.png</dc:source> enumeration 111 documentation Journey section for which the PRR EC 1371/2007 is not applicable appinfo <dc:source>Pictures/code_111.png</dc:source> enumeration 112 documentation Distance valid for individual passengers documentation If none of the pictograms V, B or G is used, the record relating to the route in question is valid for individual passengers, baggage and groups. appinfo <dc:source>Pictures/code_112.png</dc:source> enumeration 113 documentation Distance valid for baggage documentation If none of the pictograms V, B or G is used, the record relating to the route in question is valid for individual passengers, baggage and groups. appinfo <dc:source>Pictures/code_113.png</dc:source> enumeration 114 documentation Distance valid for groups documentation If none of the pictograms V, B or G is used, the record relating to the route in question is valid for individual passengers, baggage and groups. appinfo <dc:source>Pictures/code_114.png</dc:source> enumeration 115 documentation Journey section by rail or by ferry appinfo <dc:source>Pictures/code_115.png</dc:source> enumeration 116 documentation Journey section by rail or by bus appinfo <dc:source>Pictures/code_116.png</dc:source> enumeration 117 documentation Journey section by ferry or by bus appinfo <dc:source>Pictures/code_117.png</dc:source> enumeration 118 documentation Single appinfo <dc:source>Pictures/code_118.png</dc:source> enumeration 119 documentation Return appinfo <dc:source>Pictures/code_119.png</dc:source> enumeration 120 documentation Baggage may be checked-in from and to this station appinfo <dc:source>Pictures/code_120.png</dc:source>
annotation	documentation Code list for pictograms (B.1.2) appinfo <dc:title>Code list for pictograms</dc:title> <dc:source>B.1.2</dc:source>
source	<xs:simpleType name="PictogramCodeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for pictograms (B.1.2)</xs:documentation> <xs:appinfo>

```
      <dc:title>Code list for pictograms</dc:title>
      <dc:source>B.1.2</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:enumeration value="101">
      <xs:annotation>
        <xs:documentation xml:lang="en">Special conditions are made available by the
RU</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_101.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="102">
      <xs:annotation>
        <xs:documentation xml:lang="en">Station offering a baggage collection and
delivery service</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_102.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="103">
      <xs:annotation>
        <xs:documentation xml:lang="en">Station with a customs
office</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_103.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="104">
      <xs:annotation>
        <xs:documentation xml:lang="en">Solely for traffic from this
station</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_104.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="105">
      <xs:annotation>
        <xs:documentation xml:lang="en">Rail link</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_105.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="106">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ferry link</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_106.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="107">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bus link</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_107.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="108">
      <xs:annotation>
        <xs:documentation xml:lang="en">Coupon only valid during operating
hours</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_108.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="109">
      <xs:annotation>
        <xs:documentation xml:lang="en">Series for which pre-printed coupons
exist</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_109.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="110">
      <xs:annotation>
        <xs:documentation xml:lang="en">Coupon which cannot be used for the opposite
direction</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_110.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="111">
      <xs:annotation>
        <xs:documentation xml:lang="en">Journey section for which the PRR EC
1371/2007 is not applicable</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_111.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="112">
      <xs:annotation>
        <xs:documentation xml:lang="en">Distance valid for individual
passengers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">If none of the
pictograms V, B or G is used, the record relating to the route in question is valid
for individual passengers, baggage and groups.</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_112.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="113">
      <xs:annotation>
        <xs:documentation xml:lang="en">Distance valid for baggage</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">If none of the
pictograms V, B or G is used, the record relating to the route in question is valid
for individual passengers, baggage and groups.</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_113.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="114">
      <xs:annotation>
        <xs:documentation xml:lang="en">Distance valid for groups</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">If none of the
```

```
pictograms V, B or G is used, the record relating to the route in question is valid
for individual passengers, baggage and groups.</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_114.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="115">
      <xs:annotation>
        <xs:documentation xml:lang="en">Journey section by rail or by
ferry</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_115.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="116">
      <xs:annotation>
        <xs:documentation xml:lang="en">Journey section by rail or by
bus</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_116.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="117">
      <xs:annotation>
        <xs:documentation xml:lang="en">Journey section by ferry or by
bus</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_117.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="118">
      <xs:annotation>
        <xs:documentation xml:lang="en">Single</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_118.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="119">
      <xs:annotation>
        <xs:documentation xml:lang="en">Return</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_119.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="120">
      <xs:annotation>
        <xs:documentation xml:lang="en">Baggage may be checked-in from and to this
station</xs:documentation>
        <xs:appinfo>
          <dc:source>Pictures/code_120.png</dc:source>
        </xs:appinfo>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PlaceCodeTypeBerthCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:token**
properties	base xs:token

facets

Kind	Value	Annotation
enumeration	0	documentation - documentation Value used for the first berth number, if it is a number sequence (0 means from/to). A number sequence shall include more than 2 places.
enumeration	1	documentation Single compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
enumeration	2	documentation Special compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
enumeration	3	documentation Special compartment – upper compartment
enumeration	4	documentation Special compartment – lower compartment
enumeration	5	documentation Double compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
enumeration	6	documentation Double compartment – male travelers documentation Value also used for the numbers of the berths which are allocated beyond a completely reserved compartment.
enumeration	7	documentation Double compartment – male travelers – upper berth
enumeration	8	documentation Double compartment – male travelers – lower berth
enumeration	9	documentation Double compartment – female travelers documentation Value also used for the numbers of the berths which are allocated beyond a completely reserved compartment.
enumeration	A	documentation Double compartment – female travelers – upper berth
enumeration	B	documentation Double compartment – female travelers – lower berth
enumeration	C	documentation T2 compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
enumeration	D	documentation T2 compartment – male travelers documentation Value also used for the numbers of the berths which are allocated beyond a completely reserved compartment.
enumeration	E	documentation T2 compartment – male travelers – upper berth
enumeration	F	documentation T2 compartment – male travelers – lower berth
enumeration	G	documentation T2 compartment – female travelers documentation Value also used for the numbers of the berths which are allocated beyond a completely reserved compartment.
enumeration	H	documentation T2 compartment – female travelers – upper berth
enumeration	I	documentation T2 compartment – female travelers – lower berth

	enumeration	J	documentation T2 compartment - upper compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
	enumeration	K	documentation T2 compartment – lower compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
	enumeration	L	documentation T2 compartment – male traveler - upper compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
	enumeration	M	documentation T2 compartment – male traveler - lower compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
	enumeration	N	documentation T2 compartment – male traveler – upper berth - upper compartment
	enumeration	O	documentation T2 compartment – male traveler – lower berth - upper compartment
	enumeration	P	documentation T2 compartment – female traveler - upper compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
	enumeration	Q	documentation T2 compartment – female traveler - lower compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
	enumeration	R	documentation T2 compartment – female traveler – upper berth - upper compartment
	enumeration	S	documentation T2 compartment – female traveler – lower berth - upper compartment
	enumeration	T	documentation T3 compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence
	enumeration	U	documentation T3 compartment – male traveler documentation Value also used for the numbers of the berths which are allocated beyond a completely reserved compartment.
	enumeration	V	documentation T3 compartment – male traveler – upper berth
	enumeration	W	documentation T3 compartment – male traveler – middle berth
	enumeration	X	documentation T3 compartment – male traveler – lower berth
	enumeration	Y	documentation T3 compartment – female traveler documentation Value also used for the numbers of the berths which are allocated beyond a completely reserved compartment.
	enumeration	Z	documentation T3 compartment – female traveler – upper berth
	enumeration	(	documentation T3 compartment – female traveler – middle berth
	enumeration	)	documentation T3 compartment – female traveler – lower berth
	enumeration	,	documentation T4 compartment documentation Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.
	enumeration	+	documentation T4 compartment – male traveler documentation

	Value also used for the numbers of the berths which are allocated beyond a completely reserved compartment. enumeration - documentation T4 compartment – male traveler – upper berth enumeration . documentation T4 compartment – male traveler – lower berth enumeration / documentation T4 compartment – female traveler documentation Value also used for the numbers of the berths which are allocated beyond a completely reserved compartment. enumeration : documentation T4 compartment – female traveler – upper berth enumeration = documentation T4 compartment – female traveler – lower berth enumeration a documentation Double compartment – mixed gender – upper berth enumeration b documentation Double compartment – mixed gender – lower berth enumeration c documentation T2 compartment – mixed gender – upper berth enumeration d documentation T2 compartment – mixed gender – lower berth enumeration e documentation T2 compartment – mixed gender – upper compartment enumeration f documentation T2 compartment – mixed gender – upper berth – lower compartment enumeration g documentation T2 compartment – mixed gender – lower berth – lower compartment enumeration h documentation T3 compartment – mixed gender – upper berth enumeration i documentation T3 compartment – mixed gender – middle berth enumeration j documentation T3 compartment – mixed gender – lower berth enumeration k documentation T4 compartment – mixed gender – upper berth enumeration l documentation T4 compartment – mixed gender – lower berth
annotation	documentation Code list for berth allocation (B.5.50.3) appinfo <dc:title>Code list for berth allocation</dc:title> <dc:source>B.5.50.3</dc:source>
source	<xs:simpleType name="PlaceCodeTypeBerthCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for berth allocation (B.5.50.3)</xs:documentation> <xs:appinfo> <dc:title>Code list for berth allocation</dc:title> <dc:source>B.5.50.3</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:token"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation xml:lang="en">-</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark">Value used for the first berth number, if it is a number sequence (0 means from/to). A number sequence shall include more than 2 places.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">Single compartment</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place numbers, if it is for a completely reserved compartment, or value used for the second place number if it involves a numerically sequence.</xs:documentation> </xs:annotation>

```
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Special compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Special compartment – upper
compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Special compartment – lower
compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double compartment </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double compartment – male
travelers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value also used for the
numbers of the berths which are allocated beyond a completely reserved
compartment.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double compartment – male travelers – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double compartment – male travelers – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double compartment – female
travelers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value also used for the
numbers of the berths which are allocated beyond a completely reserved
compartment.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="A">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double compartment – female travelers – upper
berth</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="B">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double compartment – female travelers – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="C">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="D">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – male
travelers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value also used for the
numbers of the berths which are allocated beyond a completely reserved
compartment.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="E">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – male travelers – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="F">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – male travelers – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="G">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – female
travelers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value also used for the
numbers of the berths which are allocated beyond a completely reserved
compartment.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="H">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – female travelers – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="I">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – female travelers – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="J">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment - upper
compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="K">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – lower
compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="L">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – male traveler - upper
compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="M">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – male traveler - lower
compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="N">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – male traveler – upper berth
- upper compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="O">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – male traveler – lower berth
- upper  compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="P">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – female traveler - upper
compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Q">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – female traveler - lower
compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – female traveler – upper
berth - upper compartment</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="S">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – female traveler – lower
berth - upper  compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="T">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="U">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – male
traveler</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value also used for the
numbers of the berths which are allocated beyond a completely reserved
compartment.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="V">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – male traveler – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="W">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – male traveler – middle
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – male traveler – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Y">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – female
traveler</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value also used for the
numbers of the berths which are allocated beyond a completely reserved
compartment.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="Z">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – female traveler – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="(">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – female traveler – middle
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value=")">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – female traveler – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value=",">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for all place
numbers, if it is for a completely reserved compartment, or value used for the second
place number if it involves a numerically sequence.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="+">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 compartment – male
traveler</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value also used for the
numbers of the berths which are allocated beyond a completely reserved
compartment.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="-">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 compartment – male traveler – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value=".">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 compartment – male traveler – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="/">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 compartment – female
traveler</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value also used for the
numbers of the berths which are allocated beyond a completely reserved
compartment.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value=":">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 compartment – female traveler – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="=">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 compartment – female traveler – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="a">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double compartment – mixed gender – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="b">
      <xs:annotation>
        <xs:documentation xml:lang="en">Double compartment – mixed gender – lower
```

```
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="c">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – mixed gender – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="d">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – mixed gender – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="e">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – mixed gender – upper
compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="f">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – mixed gender – upper berth –
lower compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="g">
      <xs:annotation>
        <xs:documentation xml:lang="en">T2 compartment – mixed gender – lower berth –
lower compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="h">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – mixed gender – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="i">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – mixed gender – middle
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="j">
      <xs:annotation>
        <xs:documentation xml:lang="en">T3 compartment – mixed gender – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="k">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 compartment – mixed gender – upper
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="l">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 compartment – mixed gender – lower
berth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
```

	</xs:simpleType>

simpleType **PlaceCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:token**
properties	base xs:token
facets	Kind / Value / Annotation enumeration 0 — documentation: - ; documentation: Value used for the first seat number, if it is a number sequence (0 means from/to). A number sequence shall include more than 2 places. enumeration 1 — documentation: seat(s) in smoking area ; documentation: Value used for the second seat number, if it is a number sequence or an individual seat number, which belongs to one or more number sequences. This value is likewise used for all numbers not necessarily in continuous number sequence where the seat position is not given. enumeration 2 — documentation: Window seat(s) in smoking area enumeration 3 — documentation: Middle seat(s) in smoking area enumeration 4 — documentation: Gangway seat(s) in smoking area enumeration 5 — documentation: seat(s) in non-smoking area ; documentation: Value used for the second seat number, if it is a number sequence or an individual seat number, which belongs to one or more number sequences. This value is likewise used for all numbers not necessarily in continuous number sequence where the seat position is not given. enumeration 6 — documentation: Window seat(s) in non-smoking area enumeration 7 — documentation: Middle seat(s) in non-smoking area enumeration 8 — documentation: Gangway seat(s) in non-smoking area enumeration 9 — documentation: Without specific location information ; documentation: Value used for the second seat number, if it is a number sequence or an individual seat number, which belongs to one or more number sequences. This value is likewise used for all numbers not necessarily in continuous number sequence where the seat position is not given. enumeration A — documentation: Window seat(s) enumeration B — documentation: Middle seat(s) enumeration C — documentation: Gangway seat(s)
annotation	documentation Code list for seat allocation (B.5.50.1) appinfo <dc:title>Seat allocation (seats and seats with meal)</dc:title> <dc:source>B.5.50.1</dc:source>
source	<xs:simpleType name="PlaceCodeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for seat allocation (B.5.50.1)</xs:documentation> <xs:appinfo> <dc:title>Seat allocation (seats and seats with meal)</dc:title> <dc:source>B.5.50.1</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:token"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation xml:lang="en">-</xs:documentation>

```
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for the first
seat number, if it is a number sequence (0 means from/to). A number sequence shall
include more than 2 places.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">seat(s)  in smoking area</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for the
second seat number, if it is a number sequence or an individual seat number, which
belongs to one or more number sequences. This value is likewise used for all numbers
not necessarily in continuous number sequence where the seat position is not
given.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Window seat(s)  in smoking area
</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Middle  seat(s) in smoking
area</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Gangway seat(s) in smoking
area</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">seat(s)  in non-smoking
area</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for the
second seat number, if it is a number sequence or an individual seat number, which
belongs to one or more number sequences. This value is likewise used for all numbers
not necessarily in continuous number sequence where the seat position is not
given.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Window seat(s)  in non-smoking area
</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Middle  seat(s) in non-smoking
area</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Gangway seat(s) in non-smoking
area</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">Without specific location
information</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for the
second seat number, if it is a number sequence or an individual seat number, which
belongs to one or more number sequences. This value is likewise used for all numbers
not necessarily in continuous number sequence where the seat position is not
given.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="A">
      <xs:annotation>
        <xs:documentation xml:lang="en">Window seat(s)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="B">
      <xs:annotation>
        <xs:documentation xml:lang="en">Middle  seat(s)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="C">
      <xs:annotation>
        <xs:documentation xml:lang="en">Gangway seat(s)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PlaceCodeTypeCouchetteCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:token**
properties	base xs:token

facets

Kind	Value	Annotation
enumeration	0	documentation - documentation Value used for the first couchette number, if it is a number sequence (0 means from/to). A number sequence shall include more than 2 places.
enumeration	1	documentation couchette(s) in smoking area documentation Value used for the second couchette number, if it is a number sequence or an individual couchette number, which belongs to one or more number sequences. This value is likewise used for all numbers not necessarily in continuous number sequence where the couchette position is not given.
enumeration	2	documentation Upper couchette(s) in smoking area
enumeration	3	documentation Middle couchette(s) in smoking area
enumeration	4	documentation Lower couchette(s) in smoking area
enumeration	5	documentation couchette(s) in non-smoking area documentation Value used for the second couchette number, if it is a number sequence or an individual couchette number, which belongs to one or more number sequences. This value is likewise used for all numbers not necessarily in continuous number sequence where the couchette position is not given.
enumeration	6	documentation Upper couchette(s) in non-smoking area
enumeration	7	documentation Middle couchette(s) in non-smoking area
enumeration	8	documentation Lower couchette(s) in non-smoking area
enumeration	9	documentation Without specific location information documentation Value used for the second couchette number, if it is a number sequence or an individual couchette

	number, which belongs to one or more number sequences. This value is likewise used for all numbers not necessarily in continuous number sequence where the couchette position is not given. enumeration A documentation Upper couchette(s) enumeration B documentation Middle couchette(s) enumeration C documentation Lower couchette(s)
annotation	documentation Code list for couchette allocation (B.5.50.2) appinfo <dc:title>Code list for couchette allocation</dc:title> <dc:source>B.5.50.2</dc:source>
source	<xs:simpleType name="PlaceCodeTypeCouchetteCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for couchette allocation (B.5.50.2)</xs:documentation> <xs:appinfo> <dc:title>Code list for couchette allocation</dc:title> <dc:source>B.5.50.2</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:token"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation xml:lang="en">-</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark">Value used for the first couchette number, if it is a number sequence (0 means from/to). A number sequence shall include more than 2 places.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">couchette(s) in smoking area</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark">Value used for the second couchette number, if it is a number sequence or an individual couchette number, which belongs to one or more number sequences. This value is likewise used for all numbers not necessarily in continuous number sequence where the couchette position is not given.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">Upper couchette(s) in smoking area</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation xml:lang="en">Middle couchette(s) in smoking area</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation xml:lang="en">Lower couchette(s) in smoking area</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation xml:lang="en">couchette(s) in non-smoking area</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark">Value used for the

```
second couchette number, if it is a number sequence or an individual couchette
number, which belongs to one or more number sequences. This value is likewise used
for all numbers not necessarily in continuous number sequence where the couchette
position is not given.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Upper couchette(s)  in non-smoking area
</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Middle  couchette(s) in non-smoking
area</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lower couchette(s) in non-smoking
area</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Without specific location
information</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Value used for the
second couchette number, if it is a number sequence or an individual couchette
number, which belongs to one or more number sequences. This value is likewise used
for all numbers not necessarily in continuous number sequence where the couchette
position is not given.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="A">
      <xs:annotation>
        <xs:documentation xml:lang="en">Upper couchette(s)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="B">
      <xs:annotation>
        <xs:documentation xml:lang="en">Middle  couchette(s)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="C">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lower couchette(s)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PriceCalculationCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 1 enumeration 1 documentation: Inclusive price, single journey

	enumeration 2 documentation Non-inclusive price, single journey enumeration 3 documentation Inclusive price, multiple journeys enumeration 4 documentation Non-inclusive price, multiple journeys enumeration 5 documentation Inclusive price vehicle only, single journey enumeration 6 documentation Inclusive price vehicle only, multiple journeys
annotation	documentation Code list for price calculation (B.5.54) appinfo <dc:title>Code list for price calculation</dc:title> <dc:source>B.5.54</dc:source>
source	<xs:simpleType name="PriceCalculationCodeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for price calculation (B.5.54)</xs:documentation> <xs:appinfo> <dc:title>Code list for price calculation</dc:title> <dc:source>B.5.54</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:totalDigits value="1"/> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">Inclusive price, single journey</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">Non-inclusive price, single journey</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation xml:lang="en">Inclusive price, multiple journeys</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation xml:lang="en">Non-inclusive price, multiple journeys</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation xml:lang="en">Inclusive price vehicle only, single journey</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation xml:lang="en">Inclusive price vehicle only, multiple journeys</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **PRMAssistanceFacilitiesCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation totalDigits 2 enumeration 1 documentation Non collapsible manual wheelchair weight up to 200 kg including the person enumeration 2 documentation Non collapsible manual wheelchair weight up to 250 kg including the person enumeration 3 documentation Non collapsible manual wheelchair weight up to 300 kg including the person enumeration 4 documentation Non collapsible manual wheelchair weight up to 350 kg including the person enumeration 5 documentation Non collapsible electrical wheelchair weight up to 200 kg including the person enumeration 6 documentation Non collapsible electrical wheelchair weight up to 250 kg including the person enumeration 7 documentation Non collapsible electrical wheelchair weight up to 300 kg including the person enumeration 8 documentation Non collapsible electrical wheelchair weight up to 350 kg including the person enumeration 9 documentation Collapsible wheelchair weight up to 200 kg including the person enumeration 10 documentation Collapsible wheelchair weight up to 250 kg including the person enumeration 11 documentation Collapsible wheelchair weight up to 300 kg including the person enumeration 12 documentation Collapsible wheelchair weight up to 350 kg including the person enumeration 13 documentation Walking frame documentation Rollator enumeration 14 documentation Tricycle enumeration 15 documentation Other / Unspecified (weight and description have to be given in remarks) enumeration 16 documentation Walking sticks enumeration 17 documentation White cane enumeration 18 documentation No equipment
annotation	documentation Code list for PRM Facilities for Assistance (B.10.2) appinfo <dc:title>Code list for PRM Facilities for Assistance</dc:title> <dc:source>B.10.2</dc:source>

source

```
<xs:simpleType name="PRMAssistanceFacilitiesCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for PRM Facilities for Assistance
(B.10.2)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for PRM Facilities for Assistance</dc:title>
      <dc:source>B.10.2</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="2"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non collapsible manual wheelchair weight up
to 200 kg including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non collapsible manual wheelchair weight up
to 250 kg including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non collapsible manual wheelchair weight up
to 300 kg including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non collapsible manual wheelchair weight up
to 350 kg including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non collapsible electrical wheelchair weight
up to 200 kg including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non collapsible electrical wheelchair weight
up to 250 kg including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non collapsible electrical wheelchair weight
up to 300 kg including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non collapsible electrical wheelchair weight
up to 350 kg including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Collapsible wheelchair weight up to 200 kg
including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Collapsible wheelchair weight up to 250 kg
including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Collapsible wheelchair weight up to 300 kg
including the person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">Collapsible wheelchair weight up to 350 kg
including the person</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">Walking frame</xs:documentation>
        <xs:documentation xml:lang="de">Rollator</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tricycle</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Other / Unspecified (weight and description
have to be given in remarks)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Walking sticks</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="17">
      <xs:annotation>
        <xs:documentation xml:lang="en">White cane</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation xml:lang="en">No equipment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PRMBookingTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 1 documentation: Booking reference of the station providing the assistance enumeration 2 documentation: Booking reference of the requesting RU enumeration 3 documentation: Booking reference of a ticket enumeration 4 documentation: External reference provided by the requesting RU enumeration 5 documentation: External reference provided by the assistance providing RU (booking RU)
annotation	documentation Code list for PRM bookings (B.10.1) documentation Not used appinfo <dc:title>Code list for PRM booking</dc:title> <dc:source>B.10.1</dc:source>
source	`<xs:simpleType name="PRMBookingTypeCodeList">`

```
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for PRM bookings
(B.10.1)</xs:documentation>
    <xs:documentation xml:lang="en" doc:docType="Remark">Not used</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for PRM booking</dc:title>
      <dc:source>B.10.1</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Booking reference of the station providing
the assistance</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Booking reference of the requesting
RU</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Booking reference of a ticket
</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">External reference provided by the requesting
RU</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">External reference provided by the assistance
providing RU (booking RU)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PRMLocalFacilitiesCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 2 enumeration 1 documentation Elevator enumeration 2 documentation Escalator enumeration 3 documentation Mobile Ramp enumeration 4 documentation Luggage Caddy enumeration 5 documentation Ramp enumeration 6 documentation

			Repeater (for hearing impaired)
	enumeration	7	documentation
			Wheelchair available
	enumeration	8	documentation
			Disabled parking area
	enumeration	9	documentation
			Toilets for PRMs
	enumeration	10	documentation
			Ground guidelines for blinds
	enumeration	11	documentation
			Speakers for blinds
	enumeration	12	documentation
			Information Braille
	enumeration	13	documentation
			Guidelines on the wall for blinds
	enumeration	14	documentation
			Information screens displaying hand sign language
	enumeration	15	documentation
			Enlarged doors
	enumeration	17	documentation
			Automatic doors
	enumeration	18	documentation
			Lift
	enumeration	19	documentation
			Other

annotation

documentation
Code list for PRM local facilites (B.10.5)
appinfo
<dc:title>Code list for PRM LocalFacility</dc:title>
<dc:source>B.10.5</dc:source>

source

```
<xs:simpleType name="PRMLocalFacilitiesCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for PRM local facilites
(B.10.5)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for PRM LocalFacility</dc:title>
      <dc:source>B.10.5</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="2"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Elevator</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Escalator</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mobile Ramp</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Luggage Caddy</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ramp</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Repeater (for hearing
impaired)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Wheelchair available</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Disabled parking area</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Toilets for PRMs</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ground guidelines for
blinds</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Speakers for blinds</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">Information Braille</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">Guidelines on the wall for
blinds</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">Information screens displaying hand sign
language</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Enlarged doors</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="17">
      <xs:annotation>
        <xs:documentation xml:lang="en">Automatic doors</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lift</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Other</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PRMOnBoardFacilitiesCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
totalDigits	2	
enumeration	1	documentation Place for wheelchair
enumeration	2	documentation Visual and acoustic signs for closing doors
enumeration	3	documentation Visual signs in the coach
enumeration	4	documentation SOS button in toilet
enumeration	5	documentation SOS button near wheelchair seat
enumeration	6	documentation Ground guidelines for blinds
enumeration	7	documentation Low floor vehicle
enumeration	8	documentation PRM toilets
enumeration	9	documentation Speakers
enumeration	10	documentation Mobile ramp platform/coach
enumeration	11	documentation Other

annotation

documentation
Code list for PRM onboard facilites (B.10.6)
appinfo
<dc:title>Code list for PRM on board facilities</dc:title>
<dc:source>B.10.6</dc:source>

source

```
<xs:simpleType name="PRMOnBoardFacilitiesCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for PRM onboard facilites
(B.10.6)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for PRM on board facilities</dc:title>
      <dc:source>B.10.6</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="2"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Place for wheelchair</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Visual and acoustic signs for closing
doors</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Visual signs in the coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">SOS button in toilet</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">SOS button near wheelchair
seat</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ground guidelines for
blinds</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Low floor vehicle</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">PRM toilets</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Speakers</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mobile ramp platform/coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Other</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PRMReplyCodeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
totalDigits	3	
enumeration	1	documentation Assistance available and confirmed
enumeration	2	documentation a. not possible at this station for the requested train
enumeration	3	documentation a. not possible due to minimum change time

	enumeration 4 documentation a. not possible at this station at the required platform enumeration 5 documentation a. not possible during the requested time enumeration 6 documentation wheelchair too heavy enumeration 7 documentation train data invalid enumeration 8 documentation station not found enumeration 9 documentation a. to be arranged manually only enumeration 10 documentation Too late for assistance booking
annotation	documentation Code list for PRM reply codes (B.10.7) appinfo <dc:title>Code list for PRM reservation reques reply codes</dc:title> <dc:source>B.10.7</dc:source>
source	

```
<xs:simpleType name="PRMReplyCodeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for PRM reply codes
(B.10.7)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for PRM reservation reques reply codes</dc:title>
      <dc:source>B.10.7</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="3"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Assistance available and
confirmed</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">a. not possible at this station for the
requested train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">a. not possible due to minimum change
time</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">a. not possible at this station at the
required platform</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">a. not possible during the requested
time</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">wheelchair too heavy</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">train data invalid</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">station not found</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">a. to be arranged manually
only</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Too late for assistance
booking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PurchaseConditions1CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: Not significant enumeration 1 documentation: Open access enumeration 2 documentation: Booking required enumeration 3 documentation: Depending on availability
annotation	documentation Code List for purchase conditions (B.5.316.1) documentation Not used appinfo <dc:title>Code list for the purchase conditions</dc:title> <dc:source>B.5.316.1</dc:source>

source

```
<xs:simpleType name="PurchaseConditions1CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code List for purchase conditions
(B.5.316.1)</xs:documentation>
    <xs:documentation xml:lang="en" doc:docType="Remark">Not used</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the purchase conditions</dc:title>
      <dc:source>B.5.316.1</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Open access</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Booking required</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Depending on availability</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PurchaseConditions2CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: Not significant enumeration 1 documentation: No conditions enumeration 2 documentation: Only in advanced sales
annotation	documentation Code List for purchase conditions (B.5.316.2) documentation Not used appinfo <dc:title>Code list for the purchase conditions</dc:title> <dc:source>B.5.316.2</dc:source>

source

```
<xs:simpleType name="PurchaseConditions2CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code List for purchase conditions
(B.5.316.2)</xs:documentation>
    <xs:documentation xml:lang="en" doc:docType="Remark">Not used</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the purchase conditions</dc:title>
      <dc:source>B.5.316.2</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">No conditions</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Only in advanced sales</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **PurchaseConditions3CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: Not significant enumeration 1 documentation: No refund permitted enumeration 2 documentation: Partial refund possible enumeration 3 documentation: Complete refund possible
annotation	documentation Code List for purchase conditions (B.5.316.3) documentation Not used appinfo <dc:title>Code list for the purchase conditions</dc:title> <dc:source>B.5.316.3</dc:source>

source

```
<xs:simpleType name="PurchaseConditions3CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code List for purchase conditions
(B.5.316.3)</xs:documentation>
    <xs:documentation xml:lang="en" doc:docType="Remark">Not used</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the purchase conditions</dc:title>
      <dc:source>B.5.316.3</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">No refund permitted</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Partial refund possible</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Complete refund possible</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ReasonForCancellationTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
length	2	
enumeration	01	documentation Operating error
enumeration	02	documentation Strike
enumeration	03	documentation Exchange
enumeration	04	documentation Cancellation before payment
enumeration	05	documentation Automatic cancelation on a reservation subject to a bilaterally agreed cancellation time limit

annotation

documentation
Code list for the reason for cancellation (B.5.74)
appinfo
<dc:title>Code list for the reason for cancellation</dc:title>
<dc:source>B.5.74</dc:source>

source

```
<xs:simpleType name="ReasonForCancellationTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the reason for cancellation
(B.5.74)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the reason for cancellation</dc:title>
      <dc:source>B.5.74</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:length value="2"/>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation xml:lang="en">Operating error</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Strike</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="03">
      <xs:annotation>
        <xs:documentation xml:lang="en">Exchange</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="04">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cancellation before
payment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="05">
      <xs:annotation>
        <xs:documentation xml:lang="en">Automatic cancelation on a reservation
subject to a bilaterally agreed cancellation time limit</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ReplyCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
totalDigits	3	
enumeration	001	documentation Syntax error: general reply in the case of erroneous coding or erroneous construction of request.
enumeration	003	documentation Personal Data missing on the booking
enumeration	004	documentation Provided Personal Data is incomplete or outdated (e.g. passport is expired at the travel date)
enumeration	005	documentation Number of passengers provided does not match requirements
enumeration	006	documentation Message too long (in case of binary messages only) (e.g. in case the long element is sent to SNCF)
enumeration	007	documentation No Security Features supported
enumeration	008	documentation Exchange of passenger(s) not allowed
enumeration	009	documentation Requesting system not known
enumeration	010	documentation Reservation closed: the reservation equipment cannot be reached in the logic sense.
enumeration	020	documentation Request cannot be processed because there is no provision for: - the type of request (e.g. adjacent accommodation, specific accommodation) or - the type of service (e.g. partial cancellation, exchange) or - the service (e.g. ferry, mealtime, taxi at station) or - a reservation in more than one compartment or in more than one type of berth.
enumeration	030	documentation Erroneous cancellation data (reference number, train, date, number of accommodations), or cancellation already carried out.
enumeration	031	documentation Incompatibility of the accommodation designations when specific or adjacent accommodations are requested.
enumeration	032	documentation Train category and tariff details incompatible.
enumeration	033	documentation Erroneous cancellation data (reference number, train, date, number of accommodation).
enumeration	034	documentation Already cancelled.
enumeration	035	documentation reserved
enumeration	040	documentation Beginning or closing of booking period not respected.
enumeration	050	documentation Train cannot be reserved on the sector requested and/or on the day requested.
enumeration	051	documentation Train provisionally closed to reservations.
enumeration	052	documentation Unknown station code given for boarding or alighting station.
enumeration	060	documentation Service in the train requested or in the reservation sector requested not available on the day requested.
enumeration	061	documentation Service (e.g. couchette coach) and requested reservation sector not compatible on the day requested. * will not be used in future (please replace with Code 060)
enumeration	070	documentation Request for "definitely smoking" or "definitely non-smoking" cannot be met.
enumeration	071	documentation Compartment request cannot be met.
enumeration	072	documentation Request for a particular seat position cannot be met.

	enumeration 073 documentation Special offer/quota not available. enumeration 074 documentation Requested separate or mixed gender allocation not possible enumeration 075 documentation Individual ticketing for this request cannot be met enumeration 080 documentation Service sold out in the requested train or on the requested reservation section for the day requested. enumeration 081 documentation Not possible to accommodate together; divide reservation request. enumeration 082 documentation Service class not available. enumeration 083 documentation Invalid tariff combination. enumeration 084 documentation Cancellation not permitted. enumeration 085 documentation Partial cancellation not permitted. enumeration 086 documentation Tariff requested no longer available. enumeration 087 documentation Tariff not valid for this number of passengers or this service. enumeration 088 documentation Tariff code necessary for train. enumeration 100 documentation Allocation possible; in addition to negative partial replies to a combined request. enumeration 106 documentation Message too long for translation enumeration 110 documentation Reservation temporarily not possible; allocation from the requested offer temporarily not possible for operating or data-processing reasons. enumeration 111 documentation Reservation not possible; electronic allocation from the requested offer will not be possible for operating or data-processing reasons for a considerable time. enumeration 120 documentation Correction message: processing not possible. enumeration 200 documentation Request not permitted on account of the conditions of sale. enumeration 201 documentation Request does not correspond to the definition of the product. enumeration 202 documentation Refund not possible for this product.
annotation	documentation Code list for the reply codes (B.5.63) appinfo <dc:title>Code list for the reply codes</dc:title> <dc:source>B.5.63</dc:source>
source	<xs:simpleType name="ReplyCodeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the reply codes (B.5.63)</xs:documentation> <xs:appinfo> <dc:title>Code list for the reply codes</dc:title> <dc:source>B.5.63</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:totalDigits value="3"/> <xs:enumeration value="001"> <xs:annotation> <xs:documentation xml:lang="en">Syntax error: general reply in the case of erroneous coding or erroneous construction of request.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="003"> <xs:annotation> <xs:documentation xml:lang="en">Personal Data missing on the booking</xs:documentation> </xs:annotation>

```
    </xs:enumeration>
    <xs:enumeration value="004">
      <xs:annotation>
        <xs:documentation xml:lang="en">Provided Personal Data is incomplete or
outdated (e.g. passport is expired at the travel date)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="005">
      <xs:annotation>
        <xs:documentation xml:lang="en">Number of passengers provided does not match
requirements</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="006">
      <xs:annotation>
        <xs:documentation xml:lang="en">Message too long (in case of binary messages
only) (e.g. in case the long element is sent to SNCF)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="007">
      <xs:annotation>
        <xs:documentation xml:lang="en">No Security Features
supported</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="008">
      <xs:annotation>
        <xs:documentation xml:lang="en">Exchange of passenger(s) not
allowed</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="009">
      <xs:annotation>
        <xs:documentation xml:lang="en">Requesting system not
known</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="010">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation closed: the reservation equipment
cannot be reached in the logic sense.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="020">
      <xs:annotation>
        <xs:documentation xml:lang="en">Request cannot be processed because there is
no provision for: - the type of request (e.g. adjacent accommodation, specific
accommodation) or - the type of service (e.g. partial cancellation, exchange) or -
the service (e.g. ferry, mealtime, taxi at station) or - a reservation in more than
one compartment or in more than one type of berth.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="030">
      <xs:annotation>
        <xs:documentation xml:lang="en">Erroneous cancellation data (reference
number, train, date, number of accommodations), or cancellation already carried
out.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="031">
      <xs:annotation>
        <xs:documentation xml:lang="en">Incompatibility of the accommodation
designations when specific or adjacent accommodations are
requested.</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="032">
      <xs:annotation>
        <xs:documentation xml:lang="en">Train category and tariff details
incompatible.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="033">
      <xs:annotation>
        <xs:documentation xml:lang="en">Erroneous cancellation data (reference
number, train, date, number of accommodation).</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="034">
      <xs:annotation>
        <xs:documentation xml:lang="en">Already cancelled.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="035">
      <xs:annotation>
        <xs:documentation xml:lang="en">reserved</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="040">
      <xs:annotation>
        <xs:documentation xml:lang="en">Beginning or closing of booking period not
respected.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="050">
      <xs:annotation>
        <xs:documentation xml:lang="en">Train cannot be reserved on the sector
requested and/or on the day requested.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="051">
      <xs:annotation>
        <xs:documentation xml:lang="en">Train provisionally closed to
reservations.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="052">
      <xs:annotation>
        <xs:documentation xml:lang="en">Unknown station code given for boarding or
alighting station.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="060">
      <xs:annotation>
        <xs:documentation xml:lang="en">Service in the train requested or in the
reservation sector requested not available on the day requested.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="061">
      <xs:annotation>
        <xs:documentation xml:lang="en">Service (e.g. couchette coach) and requested
reservation sector not compatible on the day requested. * will not be used in future
(please replace with Code 060)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="070">
      <xs:annotation>
        <xs:documentation xml:lang="en">Request for "definitely smoking" or
```

```
"definitely non-smoking" cannot be met.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="071">
      <xs:annotation>
        <xs:documentation xml:lang="en">Compartment request cannot be
met.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="072">
      <xs:annotation>
        <xs:documentation xml:lang="en">Request for a particular seat position cannot
be met.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="073">
      <xs:annotation>
        <xs:documentation xml:lang="en">Special offer/quota not
available.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="074">
      <xs:annotation>
        <xs:documentation xml:lang="en">Requested separate or mixed gender allocation
not possible</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="075">
      <xs:annotation>
        <xs:documentation xml:lang="en">Individual ticketing for this request cannot
be met</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="080">
      <xs:annotation>
        <xs:documentation xml:lang="en">Service sold out in the requested train or on
the requested reservation section for the day requested.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="081">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not possible to accommodate together; divide
reservation request.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="082">
      <xs:annotation>
        <xs:documentation xml:lang="en">Service class not
available.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="083">
      <xs:annotation>
        <xs:documentation xml:lang="en">Invalid tariff
combination.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="084">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cancellation not
permitted.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="085">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Partial cancellation not
permitted.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="086">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tariff requested no longer
available.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="087">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tariff not valid for this number of
passengers or this service.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="088">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tariff code necessary for
train.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="100">
      <xs:annotation>
        <xs:documentation xml:lang="en">Allocation possible; in addition to negative
partial replies to a combined request.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="106">
      <xs:annotation>
        <xs:documentation xml:lang="en">Message too long for translation
</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="110">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation temporarily not possible;
allocation from the requested offer temporarily not possible for operating or data-
processing reasons.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="111">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation not possible; electronic
allocation from the requested offer will not be possible for operating or data-
processing reasons for a considerable time.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="120">
      <xs:annotation>
        <xs:documentation xml:lang="en">Correction message: processing not
possible.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="200">
      <xs:annotation>
        <xs:documentation xml:lang="en">Request not permitted on account of the
conditions of sale.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="201">
      <xs:annotation>
        <xs:documentation xml:lang="en">Request does not correspond to the definition
```

```
of the product.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="202">
      <xs:annotation>
        <xs:documentation xml:lang="en">Refund not possible for this
product.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **RequestingOfficeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation enumeration 0 — documentation: Station office enumeration 1 — documentation: Travel agency enumeration 2 — documentation: not used enumeration 3 — documentation: Sales on board enumeration 4 — documentation: Call Centre of a Railway undertaking enumeration 5 — documentation: Ticket vending machine of a railway undertaking enumeration 6 — documentation: internal use by reservations systems only (e.g. training) enumeration 7 — documentation: Synchronisation message enumeration 8 — documentation: Website of a travel agency organisation enumeration 9 — documentation: Website of a railway undertaking
annotation	documentation Code list for requesting office (B.5.8) appinfo <dc:title>Code list for requesting office</dc:title> <dc:source>B.5.8</dc:source>

source

```
<xs:simpleType name="RequestingOfficeTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for requesting office
(B.5.8)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for requesting office</dc:title>
      <dc:source>B.5.8</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Station office</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Travel agency</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">not used</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sales on board</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Call Centre of a Railway undertaking
</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ticket vending machine of a railway
undertaking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">internal use by reservations systems only
(e.g. training)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Synchronisation message</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Website of a travel agency
organisation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Website of a railway
undertaking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ReservationFeeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: No reservation fee enumeration 1 documentation: one reservation fee for return travel enumeration 2 documentation: reservation fee per direction
annotation	documentation

	Code list for reservation fee (B.3.6) appinfo <dc:title>Code list for reservation fee</dc:title> <dc:source>B.3.6</dc:source>
source	<xs:simpleType name="ReservationFeeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for reservation fee (B.3.6)</xs:documentation> <xs:appinfo> <dc:title>Code list for reservation fee</dc:title> <dc:source>B.3.6</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:minInclusive value="0"/> <xs:maxInclusive value="9"/> <xs:enumeration value="0"> <xs:annotation> <xs:documentation xml:lang="en">No reservation fee</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">one reservation fee for return travel</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">reservation fee per direction</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **ReservationSystemTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation enumeration 10 documentation Duetto enumeration 12 documentation DSB enumeration 15 documentation Resarail-Eurostar enumeration 18 documentation Resarail-THALYS enumeration 20 documentation EXPRESS 3-RZD enumeration 21 documentation EXPRESS 3-BC enumeration 22 documentation ASO PT UZ enumeration 23 documentation EXPRESS 3-CFM enumeration 24 documentation EXPRESS 3-LG enumeration 25 documentation EXPRESS 3-LDZ enumeration 26 documentation EXPRESS 3-EVR

	enumeration	27	documentation	EXPRESS 3-KZH
	enumeration	29	documentation	EXPRESS 3-UTI
	enumeration	43	documentation	EPA-MAV
	enumeration	44	documentation	GYSEV
	enumeration	45	documentation	EPA-SBB
	enumeration	50	documentation	EPA-ZFBH
	enumeration	51	documentation	PKP
	enumeration	53	documentation	EPA-CFR
	enumeration	54	documentation	ARES
	enumeration	55	documentation	MAV-RES
	enumeration	56	documentation	KVC
	enumeration	57	documentation	SV
	enumeration	59	documentation	EXPRESS 3-KRG
	enumeration	62	documentation	EPA-ZPCG
	enumeration	65	documentation	EPA-MZ
	enumeration	66	documentation	EXPRESS 3-TZD
	enumeration	67	documentation	CFR
	enumeration	70	documentation	ATOC
	enumeration	71	documentation	SIRE-RENFE
	enumeration	72	documentation	EPA-ZS
	enumeration	73	documentation	OSE
	enumeration	74	documentation	PETRA
	enumeration	75	documentation	TCDD
	enumeration	76	documentation	PLADS90-NSB
	enumeration	77	documentation	Railbest
	enumeration	78	documentation	EPA-HZ
	enumeration	79	documentation	EPA-SZ
	enumeration	80	documentation	EPA-DB
	enumeration	81	documentation	EPA-ÖBB
	enumeration	82	documentation	EPA-CFL
	enumeration	83	documentation	PICO
	enumeration	84	documentation	EPA-NS
	enumeration	85	documentation	EPR
	enumeration	86	documentation	PLADS90-DSB
	enumeration	87	documentation	Resarail-SNCF
	enumeration	88	documentation	EPA-SNCB
	enumeration	89	documentation	

	OEBB-ARES enumeration 90 documentation SZ-SEPA enumeration 91 documentation MAV-JERES enumeration 92 documentation ENTUR-ESS enumeration 93 documentation RhB enumeration 94 documentation SIRE-CP enumeration 95 documentation CFL
annotation	documentation Code list for the type of the reservation system (B.5.1) appinfo <dc:title>Code list for the type of the reservation system</dc:title> <dc:source>B.5.1</dc:source>
source	

```
<xs:simpleType name="ReservationSystemTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the type of the reservation system
(B.5.1)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the type of the reservation system</dc:title>
      <dc:source>B.5.1</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Duetto</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">DSB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Resarail-Eurostar</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation xml:lang="en">Resarail-THALYS</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="20">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-RZD</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-BC</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation xml:lang="en">ASO PT UZ</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-CFM</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-LG</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-LDZ</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-EVR</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="27">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-KZH</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="29">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-UTI</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="43">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-MAV</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44">
      <xs:annotation>
        <xs:documentation xml:lang="en">GYSEV</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="45">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-SBB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-ZFBH</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation xml:lang="en">PKP</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="53">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-CFR</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="54">
      <xs:annotation>
        <xs:documentation xml:lang="en">ARES</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="55">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">MAV-RES</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="56">
      <xs:annotation>
        <xs:documentation xml:lang="en">KVC</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="57">
      <xs:annotation>
        <xs:documentation xml:lang="en">SV</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="59">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-KRG</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-ZPCG</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="65">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-MZ</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="66">
      <xs:annotation>
        <xs:documentation xml:lang="en">EXPRESS 3-TZD</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="67">
      <xs:annotation>
        <xs:documentation xml:lang="en">CFR</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="70">
      <xs:annotation>
        <xs:documentation xml:lang="en">ATOC</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="71">
      <xs:annotation>
        <xs:documentation xml:lang="en">SIRE-RENFE</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="72">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-ZS</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="73">
      <xs:annotation>
        <xs:documentation xml:lang="en">OSE</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="74">
      <xs:annotation>
        <xs:documentation xml:lang="en">PETRA</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="75">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">TCDD</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="76">
      <xs:annotation>
        <xs:documentation xml:lang="en">PLADS90-NSB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="77">
      <xs:annotation>
        <xs:documentation xml:lang="en">Railbest</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="78">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-HZ</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="79">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-SZ</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="80">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-DB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="81">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-ÖBB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="82">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-CFL</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="83">
      <xs:annotation>
        <xs:documentation xml:lang="en">PICO</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="84">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPA-NS</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="85">
      <xs:annotation>
        <xs:documentation xml:lang="en">EPR</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="86">
      <xs:annotation>
        <xs:documentation xml:lang="en">PLADS90-DSB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="87">
      <xs:annotation>
        <xs:documentation xml:lang="en">Resarail-SNCF</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
      <xs:enumeration value="88">
        <xs:annotation>
          <xs:documentation xml:lang="en">EPA-SNCB</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="89">
        <xs:annotation>
          <xs:documentation xml:lang="en">OEBB-ARES</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="90">
        <xs:annotation>
          <xs:documentation xml:lang="en">SZ-SEPA</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="91">
        <xs:annotation>
          <xs:documentation xml:lang="en">MAV-JERES</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="92">
        <xs:annotation>
          <xs:documentation xml:lang="en">ENTUR-ESS</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="93">
        <xs:annotation>
          <xs:documentation xml:lang="en">RhB</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="94">
        <xs:annotation>
          <xs:documentation xml:lang="en">SIRE-CP</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="95">
        <xs:annotation>
          <xs:documentation xml:lang="en">CFL</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **RoundingFactorTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation enumeration 000 documentation: no rounding is permitted enumeration 005 documentation: to a full 5 cents enumeration 010 documentation: to a full 10 cents enumeration 020 documentation: to a full 20 cents enumeration 050 documentation: to a full 50 cents enumeration 100 documentation: to a full euro
annotation	documentation Code list for rounding factor (B.3.12)

	appinfo <dc:title>Code list for rounding factor</dc:title> <dc:source>B.3.12</dc:source>
source	<xs:simpleType name="RoundingFactorTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for rounding factor (B.3.12)</xs:documentation> <xs:appinfo> <dc:title>Code list for rounding factor</dc:title> <dc:source>B.3.12</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="000"> <xs:annotation> <xs:documentation xml:lang="en">no rounding is permitted</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="005"> <xs:annotation> <xs:documentation xml:lang="en">to a full 5 cents</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="010"> <xs:annotation> <xs:documentation xml:lang="en">to a full 10 cents</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="020"> <xs:annotation> <xs:documentation xml:lang="en">to a full 20 cents</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="050"> <xs:annotation> <xs:documentation xml:lang="en">to a full 50 cents</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="100"> <xs:annotation> <xs:documentation xml:lang="en">to a full euro</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **RoundingTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:token**
properties	base xs:token
facets	Kind / Value / Annotation length 1 enumeration - documentation: round down enumeration + documentation: round up enumeration 0 documentation: round down below 0.5, up from 0.5 enumeration N documentation: no rounding
annotation	documentation Code list for rounding (B.3.11)

	appinfo <dc:title>Code list for rounding</dc:title> <dc:source>B.3.11</dc:source>
source	<xs:simpleType name="RoundingTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for rounding (B.3.11)</xs:documentation> <xs:appinfo> <dc:title>Code list for rounding</dc:title> <dc:source>B.3.11</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:token"> <xs:length value="1"/> <xs:enumeration value="-"> <xs:annotation> <xs:documentation xml:lang="en">round down</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="+"> <xs:annotation> <xs:documentation xml:lang="en">round up</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0"> <xs:annotation> <xs:documentation xml:lang="en">round down below 0.5, up from 0.5</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="N"> <xs:annotation> <xs:documentation xml:lang="en">no rounding</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **SeasonTicketTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: no enumeration 1 documentation: weekly pass (any 7-day period) enumeration 2 documentation: weekly pass (calendar week) enumeration 3 documentation: monthly pass (any monthly period) enumeration 4 documentation: monthly pass (calendar month)
annotation	documentation Code list for season tickets (B.3.8) appinfo <dc:title>Code list for season tickets</dc:title> <dc:source>B.3.8</dc:source>
source	<xs:simpleType name="SeasonTicketTypeCodeList"> <xs:annotation>

```
    <xs:documentation xml:lang="en">Code list for season tickets
(B.3.8)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for season tickets</dc:title>
      <dc:source>B.3.8</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">no</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">weekly pass (any 7-day
period)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">weekly pass (calendar
week)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">monthly pass (any monthly
period)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">monthly pass (calendar
month)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ServiceCodeTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation length 1 enumeration 0 documentation: All available Classes enumeration 1 documentation: 1st Class (seats and couchettes) enumeration 2 documentation: 2nd Class (seats and couchettes) enumeration C documentation: Club enumeration P documentation: Preferente enumeration T documentation: Tourist
annotation	documentation Code list for service code (B.5.318)

	documentation Not used appinfo <dc:title>Code list for service code</dc:title> <dc:source>B.5.318</dc:source>
source	<xs:simpleType name="ServiceCodeTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for service code (B.5.318)</xs:documentation> <xs:documentation doc:docType="Remark">Not used</xs:documentation> <xs:appinfo> <dc:title>Code list for service code</dc:title> <dc:source>B.5.318</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="1"/> <xs:enumeration value="0"> <xs:annotation> <xs:documentation xml:lang="en">All available Classes</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">1st Class (seats and couchettes)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">2nd Class (seats and couchettes)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="C"> <xs:annotation> <xs:documentation xml:lang="en">Club</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="P"> <xs:annotation> <xs:documentation xml:lang="en">Preferente</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="T"> <xs:annotation> <xs:documentation xml:lang="en">Tourist</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **ServiceIdentifierCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: Not significant

	enumeration 1 documentation Service available enumeration 2 documentation Service not available
annotation	documentation Code list for service code (B.5.319) documentation Not used appinfo <dc:title>Code list for service code</dc:title> <dc:source>B.5.319</dc:source>
source	<xs:simpleType name="ServiceIdentifierCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for service code (B.5.319)</xs:documentation> <xs:documentation doc:docType="Remark">Not used</xs:documentation> <xs:appinfo> <dc:title>Code list for service code</dc:title> <dc:source>B.5.319</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:minInclusive value="0"/> <xs:maxInclusive value="9"/> <xs:enumeration value="0"> <xs:annotation> <xs:documentation xml:lang="en">Not significant</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">Service available</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">Service not available</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **ServiceInformationCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation Not significant enumeration 1 documentation Product information enumeration 2 documentation Train service information enumeration 3 documentation Station information
annotation	documentation Code list for service information (B.5.320) documentation Not used appinfo <dc:title>Code list for service information</dc:title>

<dc:source>B.5.320</dc:source>

source

```
<xs:simpleType name="ServiceInformationCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for service information
(B.5.320)</xs:documentation>
    <xs:documentation doc:docType="Remark">Not used</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for service information</dc:title>
      <dc:source>B.5.320</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Product information</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Train service information </xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Station information</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **ServiceTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
length	2	
enumeration	00	documentation Not significant
enumeration	01	documentation Seats in trains
enumeration	02	documentation Couchettes in trains
enumeration	03	documentation Berths in trains
enumeration	04	documentation Seats with meal at seat in trains
enumeration	05	documentation meal in train restaurant car
enumeration	06	documentation car-carrying train
enumeration	30	documentation car on ferry
enumeration	31	documentation Passenger on ferry
enumeration	40	documentation Hire car

	enumeration 50 documentation Hotel enumeration 51 documentation Timetable information enumeration 52 documentation Price information enumeration 53 documentation Ticket enumeration 54 documentation information on available offer enumeration 61 documentation Application text "train" enumeration 62 documentation Application text "coach" enumeration 63 documentation Application text "meal in restaurant car" enumeration 64 documentation Application text "loading list" enumeration 65 documentation Application text "provisional listing mealtime" enumeration 66 documentation Application text "provisional loading list" enumeration 67 documentation Application text "provisional listing of berths
annotation	documentation Code list for service (B.5.15) documentation codes 07-29, 32 to 39, 41 to 49, 55 - 60, 68 to 79 free, 80 to 99 Reserved for national requirements appinfo <dc:title>Code list for Service</dc:title> <dc:source>B.5.15</dc:source>

source

```
<xs:simpleType name="ServiceTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for service (B.5.15)</xs:documentation>
    <xs:documentation xml:lang="en">codes 07-29, 32 to 39, 41 to 49, 55 - 60, 68 to
79 free, 80 to 99 Reserved for national requirements</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for Service</dc:title>
      <dc:source>B.5.15</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:length value="2"/>
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats in trains</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Couchettes in trains</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="03">
      <xs:annotation>
        <xs:documentation xml:lang="en">Berths in trains</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="04">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seats with meal at seat in
trains</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="05">
      <xs:annotation>
        <xs:documentation xml:lang="en">meal in train restaurant
car</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="06">
      <xs:annotation>
        <xs:documentation xml:lang="en">car-carrying train</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en">car on ferry</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en">Passenger on ferry</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hire car</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hotel</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation xml:lang="en">Timetable information</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="52">
      <xs:annotation>
        <xs:documentation xml:lang="en">Price information</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="53">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ticket</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="54">
      <xs:annotation>
        <xs:documentation xml:lang="en">information on available
offer</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="61">
      <xs:annotation>
        <xs:documentation xml:lang="en">Application text "train"</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
      <xs:annotation>
        <xs:documentation xml:lang="en">Application text "coach"</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="63">
      <xs:annotation>
        <xs:documentation xml:lang="en">Application text "meal in restaurant
car"</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="64">
      <xs:annotation>
        <xs:documentation xml:lang="en">Application text "loading
list"</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="65">
      <xs:annotation>
        <xs:documentation xml:lang="en">Application text "provisional listing
mealtime"</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="66">
      <xs:annotation>
        <xs:documentation xml:lang="en">Application text "provisional loading
list"</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="67">
      <xs:annotation>
        <xs:documentation xml:lang="en">Application text "provisional listing of
berths</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **SingleOutwardJourneyTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 documentation: irrelevant enumeration 1 documentation: single journey enumeration 2 documentation: outward and return journey
annotation	documentation Code list for descision about single or outward journeys (B.3.9) appinfo <dc:title>Code list for descision about single or outward journeys</dc:title> <dc:source>B.3.9</dc:source>

source

```
<xs:simpleType name="SingleOutwardJourneyTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for descision about single or outward
journeys (B.3.9)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for descision about single or outward journeys</dc:title>
      <dc:source>B.3.9</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
```

```
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="9"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">irrelevant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">single journey</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">outward and return journey</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **SmokingNonSmokingTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 1 enumeration 1 documentation: Smoking enumeration 2 documentation: Non-smoking
annotation	documentation Code list for smoking/non-smoking (B.5.35) appinfo <dc:title>Code list for Smoking/non-smoking</dc:title> <dc:source>B.5.35</dc:source>

source

```
<xs:simpleType name="SmokingNonSmokingTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for smoking/non-smoking
(B.5.35)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for Smoking/non-smoking</dc:title>
      <dc:source>B.5.35</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non-smoking</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **SpecialOfferOrAllocationsTypeAllocatedCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
enumeration	00	documentation Not significant
enumeration	01 to 10	documentation Free
enumeration	09	documentation complete (private) compartment (thus it can be combined wit the existing code for 4 place couchette on positions 3/4)
enumeration	11	documentation Railtour (at present SBB - FS offer)
enumeration	12	documentation Frantour (at present SNCF offer)
enumeration	13	documentation Wasteels (at present SBB - FS offer)
enumeration	14	documentation CIT (Compagnia Italiana Turismo) (at present SBB - FS offer)
enumeration	15	documentation Geerinck (at present SNCF - SBB offer)
enumeration	16	documentation Trans (at present SNCF offer)
enumeration	17 to 29	documentation Free
enumeration	30	documentation Female compartment in couchette coach
enumeration	31	documentation side by side (e.g. connected neighbouring Mini Suites on the same level)
enumeration	32 to 49	documentation Free
enumeration	50 to 99	documentation Reserved for national requirements of the RUs

annotation

documentation
Code list for special offers (B.5.51.3)
appinfo
<dc:title>Code list for special offers</dc:title>
<dc:source>B.5.51.3</dc:source>

source

```
<xs:simpleType name="SpecialOfferOrAllocationsTypeAllocatedCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for special offers
(B.5.51.3)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for special offers</dc:title>
      <dc:source>B.5.51.3</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01 to 10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="09">
      <xs:annotation>
        <xs:documentation xml:lang="en">complete (private) compartment (thus it can
be combined wit the existing code for 4 place couchette on positions
3/4)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Railtour (at present SBB - FS
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">Frantour (at present SNCF
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">Wasteels (at present SBB - FS
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">CIT (Compagnia Italiana Turismo) (at present
SBB - FS offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Geerinck (at present SNCF - SBB
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Trans (at present SNCF
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="17 to 29">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en">Female compartment in couchette
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en">side by side (e.g. connected neighbouring
Mini Suites on the same level)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32 to 49">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50 to 99">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reserved for national requirements of the
RUs</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
  </xs:restriction>
</xs:simpleType>
```

simpleType **SpecialOfferOrAllocationsTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
enumeration	00	documentation Not significant
enumeration	01 to 10	documentation Free
enumeration	09	documentation complete (private) compartment (thus it can be combined wit the existing code for 4 place couchette on positions 3/4)
enumeration	11	documentation Railtour (at present SBB - FS offer)
enumeration	12	documentation Frantour (at present SNCF offer)
enumeration	13	documentation Wasteels (at present SBB - FS offer)
enumeration	14	documentation CIT (Compagnia Italiana Turismo) (at present SBB - FS offer)
enumeration	15	documentation Geerinck (at present SNCF - SBB offer)
enumeration	16	documentation Trans (at present SNCF offer)
enumeration	17 to 29	documentation Free
enumeration	30	documentation Female compartment in couchette coach
enumeration	31 to 49	documentation Free
enumeration	50 to 99	documentation Reserved for national requirements of the RUs

annotation

documentation
Code list for special offers (B.5.37.3)
appinfo
<dc:title>Code list for special offers</dc:title>
<dc:source>B.5.37.3</dc:source>

source

```
<xs:simpleType name="SpecialOfferOrAllocationsTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for special offers
(B.5.37.3)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for special offers</dc:title>
      <dc:source>B.5.37.3</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01 to 10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="09">
      <xs:annotation>
        <xs:documentation xml:lang="en">complete (private) compartment (thus it can
be combined wit the existing code for 4 place couchette on positions
```

```
3/4)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Railtour (at present SBB - FS
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">Frantour (at present SNCF
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">Wasteels (at present SBB - FS
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">CIT (Compagnia Italiana Turismo) (at present
SBB - FS offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Geerinck (at present SNCF - SBB
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Trans (at present SNCF
offer)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="17 to 29">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en">Female compartment in couchette
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31 to 49">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50 to 99">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reserved for national requirements of the
RUs</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **SpecialSeriesTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation minInclusive 0 maxInclusive 9 enumeration 0 — documentation: No, all series may be used enumeration 1 — documentation: excluded series = entries in "OFSE" table enumeration 2 — documentation: permitted series = entries in "OFSE" table
annotation	documentation Code list for special series (B.3.10) appinfo <dc:title>Code list for special series</dc:title> <dc:source>B.3.10</dc:source>
source	<xs:simpleType name="SpecialSeriesTypeCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for special series (B.3.10)</xs:documentation> <xs:appinfo> <dc:title>Code list for special series</dc:title> <dc:source>B.3.10</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:minInclusive value="0"/> <xs:maxInclusive value="9"/> <xs:enumeration value="0"> <xs:annotation> <xs:documentation xml:lang="en">No, all series may be used</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">excluded series = entries in "OFSE" table</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">permitted series = entries in "OFSE" table</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **TariffCodeIRTTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	final union base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 2 enumeration 00 — documentation: No tariff applicable

	enumeration	07	documentation Group 3 or Group Saver (Ad)
	enumeration	08	documentation Group 3 or Group Saver (Ch)
	enumeration	09	documentation Escapade or Fixed day return
	enumeration	10	documentation Group 1 or "Séduction" (Ad)
	enumeration	11	documentation Season ticket
	enumeration	12	documentation Group 1 or "Séduction" (Enf)
	enumeration	13	documentation RIT Ad - Medium level or RIT2
	enumeration	14	documentation RIT Ad - Low level or RIT2 TGB
	enumeration	16	documentation Réduction Entreprise or Corporate Reduced Price
	enumeration	18	documentation Bahncard AD
	enumeration	19	documentation Pass 2 or partial pass
	enumeration	21	documentation Eurodomino Pass or Free Pass
	enumeration	22	documentation Affaire Ad TGB or Trade Fair /Congress or Business
	enumeration	23	documentation Affaire Ch TGB or Business
	enumeration	24	documentation Loisir Ad TGB or Leisure AD/Weekend
	enumeration	25	documentation FIP or SNCF travel permit
	enumeration	27	documentation Loisir Ch TGB or Leisure Ch/Weekend
	enumeration	28	documentation Senior Ad TGB
	enumeration	30	documentation Entreprise TGB or TCP Ad TGB
	enumeration	31	documentation Bahncard Ch
	enumeration	34	documentation RIT 2 Ad or RIT 1 Ad TGB
	enumeration	35	documentation RIT 2 Ch or RIT 1 Ch TGB
	enumeration	36	documentation Promo jeune TGB or Youth Ad TGB
	enumeration	37	documentation Mini Ad TGB
	enumeration	39	documentation Mini Ch TGB
	enumeration	41	documentation Week end Ad TGB
	enumeration	43	documentation Séjour or Promo/Supersaver or Mini
	enumeration	44	documentation Pass
	enumeration	45	documentation Pass InterRail or Parliament
	enumeration	46	documentation Enfant + Jeunes or Child + Youth
	enumeration	47	documentation Multi
	enumeration	48	documentation Mini group (2 to 5 people)
	enumeration	49	documentation Mini group (2 to 5 people)
	enumeration	51	documentation Connexion 2
	enumeration	52	documentation Connexion 1 or Free global price
	enumeration	53	documentation DUO or Découverte à 2 or Escapade à 2
	enumeration	54	documentation

			Adulte aller or Global Price Ad
	enumeration	55	documentation
			T4 Complète AS (TTTP)
	enumeration	56	documentation
			Enfant aller or Global Price Ch
	enumeration	57	documentation
			RIT Disney TGB
	enumeration	58	documentation
			RIT neige ski Ad
	enumeration	59	documentation
			RIT neige ski Ch
	enumeration	60	documentation
			RIT 2 Ch (Thalys)
	enumeration	69	documentation
			RES (SNCF local traffic)
	enumeration	71	documentation
			First premium (Eurostar) or Second Plus (Eurostar)
	enumeration	72	documentation
			Normal Ad or Business Ad
	enumeration	73	documentation
			Normal Ch or Business Ch
	enumeration	74	documentation
			Loisir Ad
	enumeration	75	documentation
			Weekend
	enumeration	76	documentation
			Découverte J30 or RIT OM or Super Apex
	enumeration	77	documentation
			Loisir Ch
	enumeration	78	documentation
			Senior or Découverte Senior or RES
	enumeration	79	documentation
			Enfant + Senior
	enumeration	86	documentation
			Youth -26 years or Découverte 12-25
	enumeration	87	documentation
			Séduction (Eurostar) or Apex 1 or Super Saver Apex
	enumeration	88	documentation
			Excursion or Partenaire Expo
	enumeration	89	documentation
			Enfant or Séjour Child or Super Saver Child
	enumeration	90	documentation
			Promo Ad or Droit d'accès (Thalys) or Séduction (TGV Ligne de Coeur)
	enumeration	91	documentation
			Promo Ch or Mini Child
	enumeration	92	documentation
			Group Ad or Group 2
	enumeration	93	documentation
			Group Ch or Group 2
	enumeration	94	documentation
			RIT Ad or RIT 1
	enumeration	95	documentation
			RIT Child or RIT 1
	enumeration	96	documentation
			Hand icapé or fauteuil roulant or Wheelchair Ad
	enumeration	97	documentation
			Accompagnateur/guide handicapé or Accompanying person
	enumeration	98	documentation
			FIP loisir/leisure
	enumeration	99	documentation
			FIP service/duty
annotation	documentation Code list for the tariff codes (B.2.2, B.5.42,B.5.327) appinfo <dc:title>Code list for the tariff codes</dc:title> <dc:source>B.2.2,B.5.42,B.5.327</dc:source>		
source	<xs:simpleType name="TariffCodeIRTTypeCodeList" final="union"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the tariff codes (B.2.2, B.5.42,B.5.327)</xs:documentation> <xs:appinfo> <dc:title>Code list for the tariff codes</dc:title>		

```
      <dc:source>B.2.2,B.5.42,B.5.327</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="2"/>
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">No tariff applicable</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="07">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group 3 or Group Saver
(Ad)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="08">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group 3 or Group Saver
(Ch)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="09">
      <xs:annotation>
        <xs:documentation xml:lang="en">Escapade or Fixed day
return</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group 1 or "Séduction"
(Ad)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Season ticket</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group 1 or "Séduction"
(Enf)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT Ad - Medium level or
RIT2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT Ad - Low level or RIT2
TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Réduction Entreprise or Corporate Reduced
Price</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Bahncard AD</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
      <xs:annotation>
        <xs:documentation xml:lang="en">Pass 2 or partial pass</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation xml:lang="en">Eurodomino Pass or Free
Pass</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation xml:lang="en">Affaire Ad TGB or Trade Fair /Congress or
Business</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation xml:lang="en">Affaire Ch TGB or Business</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation xml:lang="en">Loisir Ad TGB or Leisure
AD/Weekend</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation xml:lang="en">FIP or SNCF travel permit</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="27">
      <xs:annotation>
        <xs:documentation xml:lang="en">Loisir Ch TGB or Leisure
Ch/Weekend</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation xml:lang="en">Senior Ad TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en">Entreprise TGB or TCP Ad
TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bahncard Ch</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT 2 Ad or RIT 1 Ad TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="35">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT 2 Ch or RIT 1 Ch TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="36">
      <xs:annotation>
        <xs:documentation xml:lang="en">Promo jeune TGB or Youth Ad
TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="37">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mini Ad TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="39">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mini Ch TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="41">
      <xs:annotation>
        <xs:documentation xml:lang="en">Week end Ad TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="43">
      <xs:annotation>
        <xs:documentation xml:lang="en">Séjour or Promo/Supersaver or
Mini</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44">
      <xs:annotation>
        <xs:documentation xml:lang="en">Pass</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="45">
      <xs:annotation>
        <xs:documentation xml:lang="en">Pass InterRail or
Parliament</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="46">
      <xs:annotation>
        <xs:documentation xml:lang="en">Enfant + Jeunes or Child +
Youth</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="47">
      <xs:annotation>
        <xs:documentation xml:lang="en">Multi</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="48">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mini group (2 to 5 people)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="49">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mini group (2 to 5 people)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation xml:lang="en">Connexion 2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="52">
      <xs:annotation>
        <xs:documentation xml:lang="en">Connexion 1 or Free global
price</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="53">
      <xs:annotation>
        <xs:documentation xml:lang="en">DUO or Découverte à 2 or Escapade à
2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="54">
      <xs:annotation>
        <xs:documentation xml:lang="en">Adulte aller or Global Price
Ad</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="55">
      <xs:annotation>
        <xs:documentation xml:lang="en">T4 Complète AS (TTTP)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="56">
      <xs:annotation>
        <xs:documentation xml:lang="en">Enfant aller or Global Price
Ch</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="57">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT Disney TGB</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="58">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT neige ski Ad</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="59">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT neige ski Ch</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="60">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT 2 Ch (Thalys)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="69">
      <xs:annotation>
        <xs:documentation xml:lang="en">RES (SNCF local traffic)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="71">
      <xs:annotation>
        <xs:documentation xml:lang="en">First premium (Eurostar) or Second Plus
(Eurostar)</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="72">
      <xs:annotation>
        <xs:documentation xml:lang="en">Normal Ad or Business Ad</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="73">
      <xs:annotation>
        <xs:documentation xml:lang="en">Normal Ch or Business Ch</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="74">
      <xs:annotation>
        <xs:documentation xml:lang="en">Loisir Ad</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="75">
      <xs:annotation>
        <xs:documentation xml:lang="en">Weekend</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="76">
      <xs:annotation>
        <xs:documentation xml:lang="en">Découverte J30 or RIT OM or Super
Apex</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="77">
      <xs:annotation>
        <xs:documentation xml:lang="en">Loisir Ch</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="78">
      <xs:annotation>
        <xs:documentation xml:lang="en">Senior or Découverte Senior or
RES</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="79">
      <xs:annotation>
        <xs:documentation xml:lang="en">Enfant + Senior</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="86">
      <xs:annotation>
        <xs:documentation xml:lang="en">Youth -26 years or Découverte 12-
25</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="87">
      <xs:annotation>
        <xs:documentation xml:lang="en">Séduction (Eurostar) or Apex 1 or Super Saver
Apex</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="88">
      <xs:annotation>
        <xs:documentation xml:lang="en">Excursion or Partenaire
Expo</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="89">
      <xs:annotation>
        <xs:documentation xml:lang="en">Enfant or Séjour Child or Super Saver
```

```
Child</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="90">
      <xs:annotation>
        <xs:documentation xml:lang="en">Promo Ad or Droit d’accès (Thalys) or
Séduction (TGV Ligne de Coeur)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="91">
      <xs:annotation>
        <xs:documentation xml:lang="en">Promo Ch or Mini Child</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="92">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group Ad or Group 2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="93">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group Ch or Group 2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="94">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT Ad or RIT 1</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="95">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIT Child or RIT 1</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="96">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hand icapé or fauteuil roulant or Wheelchair
Ad</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="97">
      <xs:annotation>
        <xs:documentation xml:lang="en">Accompagnateur/guide handicapé or
Accompanying person</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="98">
      <xs:annotation>
        <xs:documentation xml:lang="en">FIP loisir/leisure</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="99">
      <xs:annotation>
        <xs:documentation xml:lang="en">FIP service/duty</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TestTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4

type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation totalDigits 1 enumeration 0 documentation production documentation The value of these field must agree with the type of session (production or test). documentation 0 enumeration 1 documentation test message documentation The value of these field must agree with the type of session (production or test). documentation 0 enumeration 2 documentation free documentation 0 enumeration 9 documentation booking information / cancellation information documentation In case of messages with this value 9 the reservation or cancellation information is evaluated identical to a real booking, but the booking or cancellation is not made persistent. The reply messages might not include a valid reference number. There must not be accountings for these transactions. There must not be correction or synchronization requests made related to these transactions. documentation 0
annotation	documentation Code list for the test type (B.5.11) appinfo <dc:title>Code list for the test type</dc:title> <dc:source>B.5.11</dc:source>

source

```
<xs:simpleType name="TestTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the test type
(B.5.11)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the test type</dc:title>
      <dc:source>B.5.11</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">production</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The value of these
field must agree with the type of session (production or test).</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">test message</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The value of these
field must agree with the type of session (production or test).</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">free</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Description"/>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">booking information / cancellation
information</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">In case of messages
with this value 9 the reservation or cancellation information is evaluated identical
to a real booking, but the booking or cancellation is not made persistent. The reply
messages might not include a valid reference number. There must not be accountings
for these transactions. There must not be correction or synchronization requests made
related to these transactions.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TrailerCategoryTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 1 enumeration 1 documentation: Trailer less than 2,31 m in length enumeration 2 documentation: Trailer between 2,31 m and 2,50 m in length enumeration 3 documentation: Trailer between 2,51 m and 3,80 m in length enumeration 4 documentation: Trailer between 3,81 m and 5,30 m in length
annotation	documentation Code list for the trailer category (B.5.45) appinfo <dc:title>Code list for the trailer category</dc:title> <dc:source>B.5.45</dc:source>

source

```
<xs:simpleType name="TrailerCategoryTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the trailer category
(B.5.45)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the trailer category</dc:title>
      <dc:source>B.5.45</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Trailer less than 2,31 m in
length</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Trailer between 2,31 m and 2,50 m in
length</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Trailer between 2,51 m and 3,80 m in
length</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Trailer between 3,81 m and 5,30 m in
length</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type1131CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation maxLength 17 enumeration 37 documentation: Railway locations environment documentation: Code identifying locations in railway documentation: 0
annotation	documentation Code list for identification code (B.4.1131) appinfo <dc:title>Identification code</dc:title> <dc:source>B.4.1131</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type1131CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for identification code
(B.4.1131)</xs:documentation>
    <xs:appinfo>
      <dc:title>Identification code</dc:title>
      <dc:source>B.4.1131</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="17"/>
    <xs:enumeration value="37">
      <xs:annotation>
        <xs:documentation xml:lang="en">Railway locations
environment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Code identifying
locations in railway</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type1153CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation maxLength 3 enumeration AGX documentation Previous scheme/plan number documentation Reference number previously assigned to a service scheme or plan documentation 0 enumeration AUE documentation Travel service documentation Reference identifying a travel service documentation 0 enumeration AVI documentation Customer travel service identifier documentation Travel service identifier published to the customer documentation 0 enumeration AWK documentation Service provider documentation Reference to the service provider documentation 0 enumeration AWL documentation Error position documentation Reference to the position of an error in a message or document documentation 0 enumeration AWM documentation Service category reference documentation Reference identifying the service category documentation 0 enumeration AWN documentation Connected location documentation Reference of a connected location documentation 0 enumeration AWO documentation Related party documentation Reference of a related party documentation 0 enumeration X01 documentation Location's reservation identifier documentation Reference to the identifier used for reservation at this location documentation 0 enumeration X02 documentation Location's reservation identifier documentation Reference between two service brands documentation 0

annotation

documentation
Code list for Reference code qualifier (B.4.1153)
appinfo
<dc:title>Reference code qualifier</dc:title>
<dc:source>B.4.1153</dc:source>
<dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
<dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type1153CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for Reference code qualifier
(B.4.1153)</xs:documentation>
    <xs:appinfo>
      <dc:title>Reference code qualifier</dc:title>
      <dc:source>B.4.1153</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="AGX">
      <xs:annotation>
        <xs:documentation xml:lang="en">Previous scheme/plan
number</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reference number
previously assigned to a service scheme or plan</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AUE">
      <xs:annotation>
        <xs:documentation xml:lang="en">Travel service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reference
identifying a travel service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AVI">
      <xs:annotation>
        <xs:documentation xml:lang="en">Customer travel service
identifier</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Travel service
identifier published to the customer</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AWK">
      <xs:annotation>
        <xs:documentation xml:lang="en">Service provider</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reference to the
service provider</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AWL">
      <xs:annotation>
        <xs:documentation xml:lang="en">Error position</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reference to the
position of an error in a message or document</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AWM">
      <xs:annotation>
        <xs:documentation xml:lang="en">Service category reference</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reference
identifying the service category</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AWN">
      <xs:annotation>
        <xs:documentation xml:lang="en">Connected location</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reference of a
connected location</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AWO">
      <xs:annotation>
        <xs:documentation xml:lang="en">Related party</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reference of a
related party</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X01">
      <xs:annotation>
        <xs:documentation xml:lang="en">Location’s reservation
identifier</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reference to the
identifier used for reservation at this location</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Location’s reservation
identifier</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reference between
two service brands</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type1225CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation maxLength 3 enumeration 56 documentation: Deletion documentation

	Message or message part containing items to be deleted documentation 0 enumeration 61 documentation Complete dataset documentation The delivery contains the complete data set documentation When used in SKDUPD, the message contains the complete schedule data delivery of the sender. When used in TSDUPD, the message contains his whole set of location data (stations). documentation 0 enumeration 62 documentation Update documentation The delivery contains updates to a data set sent previously documentation When used in SKDUPD, the message contains updates to a schedule. When used in TSDUPD, the message contains updates to location data (stations). documentation 0
annotation	documentation Code list for message function code (B.4.1225) documentation Code list should be aligned to EDIFACT Working Group TT&L code list appinfo <dc:title>Message function code</dc:title> <dc:source>B.4.1225</dc:source>

source

```
<xs:simpleType name="type1225CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for message function code
(B.4.1225)</xs:documentation>
    <xs:documentation doc:docType="Remark">Code list should be aligned to EDIFACT
Working Group TT&amp;amp;L code list</xs:documentation>
    <xs:appinfo>
      <dc:title>Message function code</dc:title>
      <dc:source>B.4.1225</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="56">
      <xs:annotation>
        <xs:documentation xml:lang="en">Deletion</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Message or message
part containing items to be deleted</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="61">
      <xs:annotation>
        <xs:documentation xml:lang="en">Complete dataset</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The delivery
contains the complete data set</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">When used in SKDUPD, the
message contains the complete schedule data delivery of the sender. When used in
TSDUPD, the message contains his whole set of location data
(stations).</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
      <xs:annotation>
        <xs:documentation xml:lang="en">Update</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The delivery
contains updates to a data set sent previously</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark">When used in SKDUPD, the
message contains updates to a schedule. When used in TSDUPD, the message contains
updates to location data (stations).</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type2005CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
maxLength	3	
enumeration	11	documentation Dispatch date and or time documentation Date/time on/at which the goods are expected to be dispatched or shipped documentation Also: Date and time of delivery documentation 0
enumeration	45	documentation Compilation date and time documentation Date and time of the compilation documentation Also: Date and time of creation documentation 0
enumeration	62	documentation Excluded date documentation Date excluded from a period of time documentation 0
enumeration	66	documentation Excluded period documentation An interval of time excluded from a period of time documentation 0
enumeration	68	documentation Additional period documentation An interval of time added to a period of time documentation 0
enumeration	70	documentation Additional date documentation Date added to a period of time. documentation 0
enumeration	87	documentation Travel service connection time documentation Time elapsing between the arrival of a travel service and the departure of a connecting travel service documentation 0
enumeration	88	documentation Summer time, start documentation Date on which the summertime starts documentation 0

	enumeration 98 documentation Winter time, start documentation Date on which the wintertime starts documentation 0 enumeration 273 documentation Validity period documentation Period during which the referred object is valid documentation 0 enumeration 748 documentation Opening hours documentation Hours during which a service is open documentation 0 enumeration X documentation Release delivery date documentation See SNCF documentation 0
annotation	documentation Code list for Date or time or period function code qualifier (B.4.2005) appinfo <dc:title>Date or time or period function code qualifier</dc:title> <dc:source>B.4.2005</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>
source	<xs:simpleType name="type2005CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for Date or time or period function code qualifier (B.4.2005)</xs:documentation> <xs:appinfo> <dc:title>Date or time or period function code qualifier</dc:title> <dc:source>B.4.2005</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="3"/> <xs:enumeration value="11"> <xs:annotation> <xs:documentation xml:lang="en">Dispatch date and or time</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">Date/time on/at which the goods are expected to be dispatched or shipped</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark">Also: Date and time of delivery</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="45"> <xs:annotation> <xs:documentation xml:lang="en">Compilation date and time</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">Date and time of the compilation</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark">Also: Date and time of creation</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="62"> <xs:annotation> <xs:documentation xml:lang="en">Excluded date</xs:documentation>

```
        <xs:documentation xml:lang="en" doc:docType="Description">Date excluded from
a period of time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="66">
      <xs:annotation>
        <xs:documentation xml:lang="en">Excluded period</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">An interval of time
excluded from a period of time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="68">
      <xs:annotation>
        <xs:documentation xml:lang="en">Additional period</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">An interval of time
added to a period of time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="70">
      <xs:annotation>
        <xs:documentation xml:lang="en">Additional date</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Date added to a
period of time.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="87">
      <xs:annotation>
        <xs:documentation xml:lang="en">Travel service connection
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time elapsing
between the arrival of a travel service and the departure of a connecting travel
service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="88">
      <xs:annotation>
        <xs:documentation xml:lang="en">Summer time, start</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Date on which the
summertime starts</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="98">
      <xs:annotation>
        <xs:documentation xml:lang="en">Winter time, start</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Date on which the
wintertime starts</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="273">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">Validity period</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Period during which
the referred object is valid</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="748">
      <xs:annotation>
        <xs:documentation xml:lang="en">Opening hours</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Hours during which
a service is open</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X">
      <xs:annotation>
        <xs:documentation xml:lang="en">Release delivery date</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">See
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type2029CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
maxLength	3	
enumeration	CET	documentation Central European standard time documentation Time zone applicable in Central European countries documentation = GMT + 1 hour documentation 0
enumeration	EET	documentation Eastern European standard time documentation Time zone applicable in Eastern European countries documentation = GMT + 2 hours documentation 0
enumeration	GMT	documentation Greenwich mean time documentation Time zone applicable in countries aligned with the United Kingdom documentation 0
enumeration	R2T	documentation Russia zone 2 standard time documentation Time zone applicable in Russia zone 2 (also Baghdad standard time) documentation = GMT + 3 hours documentation 0

	enumeration R3T documentation Russia zone 3 standard time documentation Time zone applicable in Russia zone 3 documentation = GMT + 4 hours documentation 0 enumeration R4T documentation Russia zone 4 standard time documentation Time zone applicable in Russia zone 4 documentation = GMT + 5 hours documentation 0 enumeration R5T documentation Russia zone 5 standard time documentation Time zone applicable in Russia zone 5 documentation = GMT + 6 hours documentation 0 enumeration R6T documentation Russia zone 6 standard time documentation Time zone applicable in Russia zone 6 documentation = GMT + 7 hours documentation 0 enumeration R7T documentation Russia zone 7 standard time documentation Time zone applicable in Russia zone 7 documentation = GMT + 8 hours documentation 0 enumeration R8T documentation Russia zone 8 standard time documentation Time zone applicable in Russia zone 8 documentation = GMT + 9 hours documentation 0 enumeration WET documentation West European time documentation Time zone applicable in West European countries documentation 0
annotation	documentation Code list for Time zone identifier (B.4.2029) appinfo <dc:title>Time zone identifier</dc:title> <dc:source>B.4.2029</dc:source>
source	<xs:simpleType name="type2029CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for Time zone identifier (B.4.2029)</xs:documentation> <xs:appinfo> <dc:title>Time zone identifier</dc:title> <dc:source>B.4.2029</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="3"/> <xs:enumeration value="CET">

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Central European standard
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in Central European countries</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">= GMT + 1
hour</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="EET">
      <xs:annotation>
        <xs:documentation xml:lang="en">Eastern European standard
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in Eastern European countries</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">= GMT + 2
hours</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="GMT">
      <xs:annotation>
        <xs:documentation xml:lang="en">Greenwich mean time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in countries aligned with the United Kingdom</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R2T">
      <xs:annotation>
        <xs:documentation xml:lang="en">Russia zone 2 standard
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in Russia zone 2 (also Baghdad standard time)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">= GMT + 3
hours</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R3T">
      <xs:annotation>
        <xs:documentation xml:lang="en">Russia zone 3 standard
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in Russia zone 3</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">= GMT + 4
hours</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R4T">
      <xs:annotation>
        <xs:documentation xml:lang="en">Russia zone 4 standard
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in Russia zone 4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">= GMT + 5
hours</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R5T">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Russia zone 5 standard
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in Russia zone 5</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">= GMT + 6
hours</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R6T">
      <xs:annotation>
        <xs:documentation xml:lang="en">Russia zone 6 standard
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in Russia zone 6</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">= GMT + 7
hours</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R7T">
      <xs:annotation>
        <xs:documentation xml:lang="en">Russia zone 7 standard
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in Russia zone 7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">= GMT + 8
hours</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="R8T">
      <xs:annotation>
        <xs:documentation xml:lang="en">Russia zone 8 standard
time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in Russia zone 8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">= GMT + 9
hours</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="WET">
      <xs:annotation>
        <xs:documentation xml:lang="en">West European time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time zone
applicable in West European countries</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type3035CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation maxLength 3

	enumeration	DDL	documentation Group of passengers documentation A group of passengers documentation 0
	enumeration	DDO	documentation Location manager documentation Party responsible for the management of the location documentation 0
	enumeration	DDP	documentation Group leader documentation Party responsible for a group documentation 0
	enumeration	FI	documentation Copy message to documentation Party that is to receive a copy of a message documentation Used to specify the party/address where a TTKRSP message has to be sent to for printing documentation 0
	enumeration	FL	documentation Passenger documentation The party is a passenger documentation 0
	enumeration	HI	documentation Requester documentation The party is the requester or originator of a request documentation 0
	enumeration	HN	documentation Service performer documentation Party performing a service documentation 0
	enumeration	LR	documentation Administration centre documentation Administration centre. documentation 0
	enumeration	LT	documentation Secretariat documentation Party is a secretariat. documentation 0
	enumeration	SB	documentation Sales responsible documentation A party being responsible for sales documentation 0
	enumeration	TU	documentation President documentation President, manager, chief documentation E.g., station manager documentation 0
	enumeration	WF	documentation Information agency documentation

	Information agency, desk documentation 0
annotation	documentation Code list for party function code qualifier (B.4.3035) appinfo <dc:title>party function code qualifier list</dc:title> <dc:source>B.4.3035</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type3035CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for party function code qualifier
(B.4.3035)</xs:documentation>
    <xs:appinfo>
      <dc:title>party function code qualifier list</dc:title>
      <dc:source>B.4.3035</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="DDL">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group of passengers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">A group of
passengers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="DDO">
      <xs:annotation>
        <xs:documentation xml:lang="en">Location manager</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Party responsible
for the management of the location</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="DDP">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group leader</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Party responsible
for a group</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="FI">
      <xs:annotation>
        <xs:documentation xml:lang="en">Copy message to</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Party that is to
receive a copy of a message</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Used to specify the
party/address where a TTKRSP message has to be sent to for
printing</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="FL">
      <xs:annotation>
        <xs:documentation xml:lang="en">Passenger</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The party is a
```

```
passenger</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="HI">
      <xs:annotation>
        <xs:documentation xml:lang="en">Requester</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The party is the
requester or originator of a request</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="HN">
      <xs:annotation>
        <xs:documentation xml:lang="en">Service performer</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Party performing a
service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="LR">
      <xs:annotation>
        <xs:documentation xml:lang="en">Administration centre</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Administration
centre.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="LT">
      <xs:annotation>
        <xs:documentation xml:lang="en">Secretariat</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Party is a
secretariat.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="SB">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sales responsible</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">A party being
responsible for sales</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TU">
      <xs:annotation>
        <xs:documentation xml:lang="en">President</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">President, manager,
chief</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">E.g., station
manager</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="WF">
      <xs:annotation>
        <xs:documentation xml:lang="en">Information agency</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Information agency,
```

```
desk</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type3039CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	final union base xs:string

facets

Kind	Value	Annotation
pattern	[0-9A-Z]{4}	
enumeration	X001	documentation HF documentation Hovedstadens Trafikselskab documentation Denmark, local traffic in Copenhagen area documentation 0
enumeration	3052	documentation Silja Line documentation Silja Line documentation Sweden. Ferries Sweden-Finland documentation 0
enumeration	X014	documentation Strömma Kanal documentation Strömma Kanal AB documentation Sweden. Ferries (no traffic at the moment) documentation 0
enumeration	X015	documentation Swebus documentation Swebus Express AB documentation Sweden. Bus. documentation 0
enumeration	X018	documentation Inlandsbanan documentation Inlandsbanan AB documentation Sweden. Touristic trains on the Inland line documentation 0
enumeration	X019	documentation Visingsötrafiken documentation Visingsö ferry company documentation Sweden. Ferries Gränna-Visingsö documentation 0
enumeration	X020	documentation Kosterbatarna documentation Koster ferry company documentation

			Sweden. No traffic at the moment
			documentation
			0
	enumeration	X022	documentation
			Upplands Lokaltrafik
			documentation
			Uppland's public transport
			documentation
			Sweden. Local trains and buses
			documentation
			0
	enumeration	X023	documentation
			Länstrafiken Sörmland
			documentation
			Public Transport of Sörmland
			documentation
			Sweden. Buses
			documentation
			0
	enumeration	X024	documentation
			Östgötatrafiken
			documentation
			Östgöta public transport
			documentation
			Sweden. Local trains and buses
			documentation
			0
	enumeration	X026	documentation
			Lanstrafiken Kronoberg
			documentation
			Public transport of Kronoberg
			documentation
			Sweden. Bus
			documentation
			0
	enumeration	X027	documentation
			Kalmar Lanstrafik
			documentation
			Kalmar public transport
			documentation
			Sweden. Bus
			documentation
			0
	enumeration	X028	documentation
			Gotlands kommun
			documentation
			Municipality of Gotland
			documentation
			Sweden. Bus
			documentation
			0
	enumeration	X029	documentation
			Blekingetrafik
			documentation
			Blekinge public transport
			documentation
			Sweden. Bus
			documentation
			0
	enumeration	X030	documentation
			Stadstrafiken Malmö
			documentation
			City of Malmö
			documentation
			Sweden. Bus
			documentation
			0
	enumeration	X031	documentation
			Hallandstrafiken
			documentation
			Halland's public transport
			documentation
			Sweden. Bus

			documentation
			0
	enumeration	X032	documentation
			Västtrafik Fyrbodal
			documentation
			Public transport of Fyrbodal
			documentation
			Sweden. Bus
			documentation
			0
	enumeration	X033	documentation
			Västtrafik Sjuhärad
			documentation
			Public transport of Sjuhärad
			documentation
			Sweden. Local trains and buses
			documentation
			0
	enumeration	X034	documentation
			Västtrafik Skaraborg
			documentation
			Public transport of Skaraborg
			documentation
			Sweden. Local trains and buses
			documentation
			0
	enumeration	X035	documentation
			Värmlandstrafik
			documentation
			Värmland's public transport
			documentation
			Sweden. Local trains and buses
			documentation
			0
	enumeration	X036	documentation
			Västmanland Länstrafiken
			documentation
			Västmanland's public transport
			documentation
			Sweden. Local trains and buses
			documentation
			0
	enumeration	X037	documentation
			Dalatrafik
			documentation
			Dala public transport
			documentation
			Sweden. Local trains and buses
			documentation
			0
	enumeration	X038	documentation
			X-Trafik
			documentation
			X-Trafik AB
			documentation
			Sweden. Local trains and buses
			documentation
			0
	enumeration	X039	documentation
			Länstrafiken Västernorrland
			documentation
			Public transport of Västernorrland
			documentation
			Sweden. Local trains and buses
			documentation
			0
	enumeration	X040	documentation
			Länstrafiken Jämtlands
			documentation
			Public transport of Jämtland
			documentation
			Sweden. Bus
			documentation

			0
	enumeration	X041	documentation Länstrafiken Västerbotten documentation Public transport of Västerbotten documentation Sweden. Bus documentation 0
	enumeration	X045	documentation Skanetrafiken documentation Skane's public transport documentation Sweden. Local trains, bus documentation 0
	enumeration	X046	documentation Flygbussarna documentation Airport coaches documentation Sweden. Bus documentation 0
	enumeration	X047	documentation Norsk buss documentation Norwegian buses documentation Sweden. Bus Charlottenberg-Konsvinger-Oslo documentation 0
	enumeration	X048	documentation Västtrafik Göteborgsomradet documentation Public transport of Göteborg documentation Sweden. Local trains, bus documentation 0
	enumeration	X049	documentation Destination Gotland documentation Destination Gotland documentation Sweden. Ferries. documentation 0
	enumeration	X051	documentation Länstrafiken M/F Ulvön documentation Ulvön ferry company documentation Sweden. Ferries. documentation 0
	enumeration	X053	documentation Ven-trafiken documentation Ven ferry company documentation Sweden. Ferries. documentation 0
	enumeration	X056	documentation Länstrafiken Örebro documentation Public transport of Örebro documentation Sweden. Local trains and bus documentation 0

	enumeration	X057	documentation Metronom regional documentation Metronom regional documentation Germany. DB AG code value =R0 documentation 0
	enumeration	X059	documentation VIAS Odenwaldbahn documentation VIAS Odenwaldbahn documentation Germany. DB AG code value =R4 documentation 0
	enumeration	X060	documentation Vulkan-Eifel-Bahn Betriebsgesellschaft mbH documentation Vulkan-Eifel-Bahn Betriebsgesellschaft mbH documentation Germany. DB AG code value =V3 documentation 0
	enumeration	X062	documentation WTB Wutachtalbahn (Museum) documentation WTB Wutachtalbahn (Museum) documentation Germany. DB AG code value =V9 documentation 0
	enumeration	X063	documentation WestfalenBahn GmbH documentation WestfalenBahn GmbH documentation Germany. DB AG code value =W3 documentation 0
	enumeration	X064	documentation Bergslagstag documentation Bergslagstag documentation Sweden. Local trains documentation 0
	enumeration	X065	documentation Unknown Swedish carrier documentation Unknown Swedish carrier documentation For temporary use until new code value is formally available documentation 0
	enumeration	X067	documentation Vogtland-Express documentation Vogtland-Express documentation Germany. DB AG code value = XD documentation 0
	enumeration	X068	documentation Brohltal-Schmalspurreisenbahn Betriebs-GmbH documentation Brohltal-Schmalspurreisenbahn Betriebs-GmbH documentation Germany. DB AG code value = AL documentation 0
	enumeration	X069	documentation

			Waxholmsbolaget
			documentation
			Waxholm's ferry company
			documentation
			Sweden. Ferries.
			documentation
			0
	enumeration	X070	documentation
			ABG Anhaltische Bahngesellschaft mbH
			documentation
			ABG Anhaltische Bahngesellschaft mbH
			documentation
			Germany. DB AG code value = AL
			documentation
			0
	enumeration	X071	documentation
			ABELLIO Rail GmbH
			documentation
			ABELLIO Rail GmbH
			documentation
			Germany. DB AG code value =AR
			documentation
			0
	enumeration	X072	documentation
			Busse DB Niedersachsen/Bremen und Schleswig-Holstein/Hamburg
			documentation
			Busse DB Niedersachsen/Bremen und Schleswig-Holstein/Hamburg
			documentation
			Germany. DB AG code value = B1
			documentation
			0
	enumeration	X073	documentation
			Vectus Verkehrsgesellschaft mbH
			documentation
			Vectus Verkehrsgesellschaft mbH
			documentation
			Germany. DB AG code value = C4
			documentation
			0
	enumeration	X074	documentation
			Connex
			documentation
			Connex
			documentation
			Germany. DB AG code value =CX
			documentation
			0
	enumeration	X075	documentation
			Dampfbahn Fränkische Schweiz e.V.
			documentation
			Dampfbahn Fränkische Schweiz e.V.
			documentation
			Germany. DB AG code value = F9
			documentation
			0
	enumeration	X076	documentation
			Neumünster - Heide - Büsum
			documentation
			Neumünster - Heide - Büsum
			documentation
			Germany. DB AG code value = H0
			documentation
			0
	enumeration	X077	documentation
			Sächsisch-Böhmische Eisenbahngesellschaft mbH
			documentation
			Sächsisch-Böhmische Eisenbahngesellschaft mbH
			documentation
			Germany. DB AG code value =HD
			documentation
			0
	enumeration	X079	documentation
			HEX HarzElbeExpress (Connex)

			documentation
			HEX HarzElbeExpress (Connex)
			documentation
			Germany. DB AG code value =HX
			documentation
			0
	enumeration	X080	documentation
			Köln-Düsseldorfer Deutsche Rheinschifffahrt AG
			documentation
			Köln-Düsseldorfer Deutsche Rheinschifffahrt AG
			documentation
			Germany. DB AG code value =KD
			documentation
			0
	enumeration	X081	documentation
			SBB GmbH
			documentation
			SBB GmbH
			documentation
			Germany. DB AG code value =L7
			documentation
			0
	enumeration	X082	documentation
			Betriebsgesellschaft Mainschleifenbahn mbH
			documentation
			Betriebsgesellschaft Mainschleifenbahn mbH
			documentation
			Germany. DB AG code value =M9
			documentation
			0
	enumeration	X083	documentation
			NordWestBahn in Westfalen
			documentation
			NordWestBahn in Westfalen
			documentation
			Germany. DB AG code value =N2
			documentation
			0
	enumeration	X084	documentation
			Niederbarnimer Eisenbahn
			documentation
			Niederbarnimer Eisenbahn
			documentation
			Germany. DB AG code value =NB
			documentation
			0
	enumeration	X087	documentation
			AB
			documentation
			Appenzeller Bahnen
			documentation
			Switzerland
			documentation
			0
	enumeration	X088	documentation
			TPC-al
			documentation
			Transports Publics du Chablais (AL)
			documentation
			Switzerland
			documentation
			0
	enumeration	X089	documentation
			TPC-aomc
			documentation
			Transports Publics du Chablais (AOMC)
			documentation
			Switzerland
			documentation
			0
	enumeration	X090	documentation
			TPC-asd
			documentation

			Transports Publics du Chablais (ASD) documentation Switzerland documentation 0
	enumeration	X091	documentation MBC documentation Morges-Bière-Cossonay documentation Switzerland documentation 0
	enumeration	X092	documentation BDWM-bd documentation BDWM Transport (BD0 documentation Switzerland documentation 0
	enumeration	X093	documentation BLM documentation Bergbahn Lauterbrunnen-Mürren documentation Switzerland documentation 0
	enumeration	X094	documentation BOB documentation Berner Oberland-Bahnen documentation Switzerland documentation 0
	enumeration	X095	documentation BLT documentation Baselland Transport documentation Switzerland documentation 0
	enumeration	X096	documentation ASM-bti documentation Aare Seeland mobil (BTI) documentation Switzerland documentation 0
	enumeration	X097	documentation TPC-bvb documentation Transports Publics du Chablais (BVB) documentation Switzerland documentation 0
	enumeration	X098	documentation MVR-cev documentation Montreux-Vevey-Riviera (CEV) documentation Switzerland documentation 0
	enumeration	X099	documentation CJ documentation Chemins de fer du Jura

			documentation Switzerland documentation 0
	enumeration	X100	documentation TRN-cmn documentation Transports Régionaux Neuchâtelois documentation Switzerland (CMN) documentation 0
	enumeration	X101	documentation RM documentation Regionalverkehr Mittelland documentation Switzerland documentation 0
	enumeration	X102	documentation FB documentation Forchbahn documentation Switzerland documentation 0
	enumeration	X103	documentation FLP documentation Ferrovia Lugano-Ponte Tresa documentation Switzerland documentation 0
	enumeration	X104	documentation MGB-fo documentation Matterhorn Gotthard Bahn (FO) documentation Switzerland documentation 0
	enumeration	X105	documentation FART documentation Ferrovie Autolinee Regionali Ticinesi documentation Switzerland documentation 0
	enumeration	X106	documentation FW documentation Frauenfeld-Wil documentation Switzerland documentation 0
	enumeration	X107	documentation TPF documentation Transports Publics Fribourgeois documentation Switzerland documentation 0
	enumeration	X108	documentation LEB documentation Lausanne-Echallens-Bercher documentation

			Switzerland documentation 0
	enumeration	X109	documentation ASM-rvo documentation Aare Seeland mobil (RVO) documentation Switzerland Romanshorn-Schaffhausen documentation 0
	enumeration	X110	documentation RA documentation RegionAlp documentation 0
	enumeration	X111	documentation TMR-mc documentation Transports de Martigny et Régions SA documentation Switzerland (MC) documentation 0
	enumeration	X112	documentation TMR-mo documentation Transports de Martigny et Régions SA documentation Switzerland (MO) documentation 0
	enumeration	X113	documentation MOB documentation Montreux-Oberland Bernois documentation Switzerland documentation 0
	enumeration	X114	documentation THURBO documentation THURBO documentation Switzerland documentation 0
	enumeration	X115	documentation NStCM documentation Nyon-St-Cergue-Morez documentation Switzerland documentation 0
	enumeration	X116	documentation OC documentation Orbe-Chavornay documentation Switzerland documentation 0
	enumeration	X117	documentation OeBB documentation Oensingen-Balstahl-Bahn documentation Switzerland documentation 0

	enumeration	X118	documentation TRAVYS-pbr documentation Transports Vallée de Joux-Yverdon-Ste-Croix (PBr) documentation Switzerland Ste-Croix (PBr) documentation 0
	enumeration	X119	documentation RHB documentation Rorschach-Heiden-Bahn documentation Switzerland documentation 0
	enumeration	X121	documentation TRN-rvt documentation Transports Régionaux Neuchâtelois documentation Switzerland (RVT) documentation 0
	enumeration	X122	documentation SZU documentation Sihltal-Zürich-Uetliberg documentation Switzerland documentation 0
	enumeration	X123	documentation SOB-sob documentation Schweizerische Südostbahn (SOB) documentation Switzerland documentation 0
	enumeration	X124	documentation ZB documentation Zentralbahn documentation Switzerland documentation 0
	enumeration	X125	documentation RBS documentation Regionalverkehr Bern-Solothurn documentation Switzerland documentation 0
	enumeration	X126	documentation TB documentation Trogenerbahn documentation Switzerland documentation 0
	enumeration	X127	documentation MGB-bvz documentation Matterhorn Gotthard Bahn (BVZ) documentation Switzerland documentation 0
	enumeration	X128	documentation

			WB documentation Waldenburgerbahn documentation Switzerland documentation 0
	enumeration	X129	documentation AAR-wsb documentation AAR bus+bahn (WSB) documentation Switzerland documentation 0
	enumeration	X130	documentation TRAVYS-ysc documentation Transports Vallée de Joux-Yverdon-Ste-Croix (YSteC) documentation Switzerland documentation 0
	enumeration	X131	documentation BRB documentation Brienz-Rothorn-Bahn documentation Switzerland documentation 0
	enumeration	X132	documentation GGB documentation Gornergrat Bahn documentation Switzerland documentation 0
	enumeration	X133	documentation JB documentation Jungfraubahn documentation Switzerland documentation 0
	enumeration	X134	documentation MVR-mtgm documentation Montreux-Vevey-Riviera (MtGN) documentation Switzerland documentation 0
	enumeration	X135	documentation MIB documentation Meiringen-Innertkirchen-Bahn documentation Switzerland documentation 0
	enumeration	X136	documentation PB documentation Pilatus-Bahnen documentation Switzerland documentation 0
	enumeration	X137	documentation RB

			documentation
			Rigi-Bahnen
			documentation
			Switzerland
			documentation
			0
	enumeration	X138	documentation
			RhW
			documentation
			Bergbahn Rheineck-Walzenhausen
			documentation
			Switzerland
			documentation
			0
	enumeration	X139	documentation
			SPB
			documentation
			Schynige Platte-Bahn
			documentation
			Switzerland
			documentation
			0
	enumeration	X140	documentation
			WAB
			documentation
			Wengernalpbahn
			documentation
			Switzerland
			documentation
			0
	enumeration	X161	documentation
			AKN Eisenbahn AG
			documentation
			AKN Eisenbahn AG
			documentation
			Germany. DB AG code value = A0
			documentation
			0
	enumeration	X162	documentation
			Museumsbahn Hamm e.V.
			documentation
			Museumsbahn Hamm e.V.
			documentation
			Germany. DB AG code value = A2
			documentation
			0
	enumeration	X163	documentation
			Nassauische Touristikbahn e.V.
			documentation
			Nassauische Touristikbahn e.V.
			documentation
			Germany. DB AG code value = A4
			documentation
			0
	enumeration	X164	documentation
			EuroBahn Alzey - Kirchheimbolanden
			documentation
			EuroBahn Alzey - Kirchheimbolanden
			documentation
			Germany. DB AG code value = A5
			documentation
			0
	enumeration	X165	documentation
			Alptalbahn
			documentation
			Alptalbahn
			documentation
			Germany. DB AG code value = A6
			documentation
			0
	enumeration	X166	documentation
			Ammertalbahn (RAB Ulm)
			documentation

			Ammertalbahn (RAB Ulm) documentation Germany. DB AG code value = A7 documentation 0
	enumeration	X167	documentation SDG Sächsische Dampfeisenbahngesellschaft mbH documentation SDG Sächsische Dampfeisenbahngesellschaft mbH documentation Germany. DB AG code value = BD documentation 0
	enumeration	X168	documentation City-Bahn Chemnitz documentation City-Bahn Chemnitz documentation Germany. DB AG code value = CD documentation 0
	enumeration	X170	documentation Kandertalbahn documentation Kandertalbahn documentation Germany. DB AG code value = C6 documentation 0
	enumeration	X171	documentation Schönbuchbahn documentation Schönbuchbahn documentation Germany. DB AG code value = C7 documentation 0
	enumeration	X172	documentation Döllnitzbahn documentation Döllnitzbahn documentation Germany. DB AG code value = DD documentation 0
	enumeration	X173	documentation Rurtalbahn documentation Rurtalbahn documentation Germany. DB AG code value = D3 documentation 0
	enumeration	X174	documentation Erfurter Bahn documentation Erfurter Bahn documentation Germany. DB AG code value = EB documentation 0
	enumeration	X175	documentation Freiberger Eisenbahngesellschaft documentation Freiberger Eisenbahngesellschaft documentation Germany. DB AG code value = ED documentation 0
	enumeration	X176	documentation MecklenburgBahn documentation MecklenburgBahn

			documentation
			Germany. DB AG code value = EW
			documentation
			0
	enumeration	X178	documentation
			Nebenbahn Ebingen-Ostmettingen
			documentation
			Nebenbahn Ebingen-Ostmettingen
			documentation
			Germany. DB AG code value = E7
			documentation
			0
	enumeration	X179	documentation
			Bodensee-Oberschwaben-Bahn
			documentation
			Bodensee-Oberschwaben-Bahn
			documentation
			Germany. DB AG code value = F7
			documentation
			0
	enumeration	X180	documentation
			Kreiswerke Gelnhausen
			documentation
			Kreiswerke Gelnhausen
			documentation
			Germany. DB AG code value = G4
			documentation
			0
	enumeration	X181	documentation
			Nebenbahn Gaildorf-Untergröningen
			documentation
			Nebenbahn Gaildorf-Untergröningen
			documentation
			Germany. DB AG code value = G7
			documentation
			0
	enumeration	X182	documentation
			Harzer Schmalspurbahn
			documentation
			Harzer Schmalspurbahn
			documentation
			Germany. DB AG code value = HL
			documentation
			0
	enumeration	X183	documentation
			Hellertalbahn
			documentation
			Hellertalbahn
			documentation
			Germany. DB AG code value = H2
			documentation
			0
	enumeration	X184	documentation
			Hohenzollerische Landesbahn
			documentation
			Hohenzollerische Landesbahn
			documentation
			Germany. DB AG code value = H7
			documentation
			0
	enumeration	X185	documentation
			HLB Hessische Landesbahn
			documentation
			HLB Hessische Landesbahn
			documentation
			Germany. DB AG code value = K4
			documentation
			0
	enumeration	X186	documentation
			Stadtbahnen des KVV
			documentation
			Stadtbahnen des KVV
			documentation

			Germany. DB AG code value = K6 documentation 0
	enumeration	X187	documentation Nebenbahn Korntal-Weissach documentation Nebenbahn Korntal-Weissach documentation Germany. DB AG code value = K7 documentation 0
	enumeration	X188	documentation HLB Hessische Landesbahn documentation HLB Hessische Landesbahn documentation Germany. DB AG code value = K9 documentation 0
	enumeration	X189	documentation Lipperländer (EuroBahn) documentation Lipperländer (EuroBahn) documentation Germany. DB AG code value = L2 documentation 0
	enumeration	X190	documentation Butzbacher Licher Eisenbahn documentation Butzbacher Licher Eisenbahn documentation Germany. DB AG code value = L4 documentation 0
	enumeration	X191	documentation Mecklenburgische Bäderbahn Molli documentation Mecklenburgische Bäderbahn Molli documentation Germany. DB AG code value = MW documentation 0
	enumeration	X193	documentation (Niedersachsen/Bremen) documentation Museumsbahnen Hannover (Niedersachsen/Bremen) documentation Germany. DB AG code value = M1 documentation 0
	enumeration	X194	documentation Museumsbahn Merzig-Losheim documentation Museumsbahn Merzig-Losheim documentation Germany. DB AG code value = M5 documentation 0
	enumeration	X196	documentation Nebenbahn Amstetten-Gerstetten documentation Nebenbahn Amstetten-Gerstetten documentation Germany. DB AG code value = M7 documentation 0
	enumeration	X197	documentation Norddeutsche Eisenbahngesellschaft Niebüll GmbH documentation Norddeutsche Eisenbahngesellschaft Niebüll GmbH documentation Germany. DB AG code value = N0

			documentation
			0
	enumeration	X198	documentation
			NordWestBahn
			documentation
			NordWestBahn
			documentation
			Germany. DB AG code value = N1
			documentation
			0
	enumeration	X199	documentation
			cantus Verkehrsgesellschaft mbH
			documentation
			cantus Verkehrsgesellschaft mbH
			documentation
			Germany. DB AG code value = N4
			documentation
			0
	enumeration	X200	documentation
			Breisgau-S-Bahn
			documentation
			Breisgau-S-Bahn
			documentation
			Germany. DB AG code value = N6
			documentation
			0
	enumeration	X201	documentation
			Nebenbahn
			documentation
			Nebenbahn Nürtingen-Neuffen
			documentation
			Germany. DB AG code value = N7
			documentation
			0
	enumeration	X202	documentation
			Sächsisch Oberlausitzer Eisenbahngesellschaft
			documentation
			Sächsisch Oberlausitzer Eisenbahngesellschaft
			documentation
			Germany. DB AG code value = OD
			documentation
			0
	enumeration	X203	documentation
			OLA Ostseeland Verkehr GmbH
			documentation
			OLA Ostseeland Verkehr GmbH
			documentation
			Germany. DB AG code value = OM
			documentation
			0
	enumeration	X204	documentation
			Ortenau-S-Bahn
			documentation
			Ortenau-S-Bahn
			documentation
			Germany. DB AG code value = O6
			documentation
			0
	enumeration	X205	documentation
			Eisenbahn-Betriebgesellschaft Ochsenhausen GmbH
			documentation
			Eisenbahn-Betriebgesellschaft Ochsenhausen GmbH
			documentation
			Germany. DB AG code value = O7
			documentation
			0
	enumeration	X206	documentation
			Prignitzer Eisenbahn GmbH
			documentation
			Prignitzer Eisenbahn GmbH
			documentation
			Germany. DB AG code value = PE
			documentation

			0
	enumeration	X208	documentation PRE Rügensche Bäderbahn documentation PRE Rügensche Bäderbahn documentation Germany. DB AG code value = RW documentation 0
	enumeration	X209	documentation Ravensberger Bahn documentation Ravensberger Bahn documentation Germany. DB AG code value = R2 documentation 0
	enumeration	X211	documentation Hohenzollersche Landesbahn HzL documentation Hohenzollersche Landesbahn HzL documentation Germany. DB AG code value = R7 documentation 0
	enumeration	X212	documentation Regentalbahn documentation Regentalbahn documentation Germany. DB AG code value = R9 documentation 0
	enumeration	X213	documentation Süd-Thüringen Bahn documentation Süd-Thüringen Bahn documentation Germany. DB AG code value = SB documentation 0
	enumeration	X214	documentation Schienenersatzverkehre und Busse Dresden (Sachsen) documentation Schienenersatzverkehre und Busse Dresden (Sachsen) documentation Germany. DB AG code value = SD documentation 0
	enumeration	X216	documentation Südwestdeutsche Verkehrs AG documentation Südwestdeutsche Verkehrs AG documentation Germany. DB AG code value = S6 documentation 0
	enumeration	X218	documentation Berliner S-Bahn documentation Berliner S-Bahn documentation Germany. DB AG code value = S9 documentation 0
	enumeration	X219	documentation Traditionsbahn Radebeul Ost e.V. documentation Traditionsbahn Radebeul Ost e.V. documentation Germany. DB AG code value = TD documentation 0

	enumeration	X220	documentation TRANS REGIO Deutsche Regionalbahn GmbH documentation TRANS REGIO Deutsche Regionalbahn GmbH documentation Germany. DB AG code value = TR documentation 0
	enumeration	X221	documentation Thüringerwaldbahn documentation Thüringerwaldbahn documentation Germany. DB AG code value = TU documentation 0
	enumeration	X222	documentation Teuto-Express documentation Teuto-Express documentation Germany. DB AG code value = T2 documentation 0
	enumeration	X223	documentation Mittelthurgaubahn documentation Mittelthurgaubahn documentation Germany. DB AG code value = T6 documentation 0
	enumeration	X224	documentation Trossinger Eisenbahn documentation Trossinger Eisenbahn documentation Germany. DB AG code value = T7 documentation 0
	enumeration	X225	documentation Bayerische Oberlandbahn documentation Bayerische Oberlandbahn documentation Germany. DB AG code value = T8 documentation 0
	enumeration	X226	documentation Inselberg Express documentation Inselberg Express documentation Germany. DB AG code value = UI documentation 0
	enumeration	X227	documentation Meininger Busbetriebe documentation Meininger Busbetriebe documentation Germany. DB AG code value = US documentation 0
	enumeration	X228	documentation Usedomer Bäderbahn documentation Usedomer Bäderbahn documentation Germany. DB AG code value = UW documentation 0
	enumeration	X229	documentation

			Ulmer Eisenbahnfreunde
			documentation
			Ulmer Eisenbahnfreunde
			documentation
			Germany. DB AG code value = U7
			documentation
			0
	enumeration	X230	documentation
			Museumsbahnen Kiel (Schleswig/Holstein)
			documentation
			Museumsbahnen Kiel (Schleswig/Holstein)
			documentation
			Germany. DB AG code value = V0
			documentation
			0
	enumeration	X231	documentation
			Nebenbahn Vaihingen-Enzweihlingen
			documentation
			Nebenbahn Vaihingen-Enzweihlingen
			documentation
			Germany. DB AG code value = V7
			documentation
			0
	enumeration	X232	documentation
			Wyker Dampfschiff Reederei (WDR)
			documentation
			Wyker Dampfschiff Reederei (WDR)
			documentation
			Germany. DB AG code value = W0
			documentation
			0
	enumeration	X233	documentation
			Daadetalbahn
			documentation
			Daadetalbahn
			documentation
			Germany. DB AG code value = W2
			documentation
			0
	enumeration	X234	documentation
			Nebenbahn Schorndorf-Rudersberg
			documentation
			Nebenbahn Schorndorf-Rudersberg
			documentation
			Germany. DB AG code value = W7
			documentation
			0
	enumeration	X235	documentation
			Sylter Verkehrsgesellschaft
			documentation
			Sylter Verkehrsgesellschaft
			documentation
			Germany. DB AG code value = Y0
			documentation
			0
	enumeration	X236	documentation
			Eisenbahnfreunde
			documentation
			Eisenbahnfreunde Zollernbahn
			documentation
			Germany. DB AG code value = Z7
			documentation
			0
	enumeration	X237	documentation
			S-Bahn Hamburg
			documentation
			S-Bahn Hamburg
			documentation
			Germany. DB AG code value = 0S
			documentation
			0
	enumeration	X238	documentation
			NordOstseeBahn

			documentation
			NordOstseeBahn
			documentation
			Germany. DB AG code value = 0N
			documentation
			0
	enumeration	X251	documentation
			Östereichische Bundesbahnen (Autoreisezüge)
			documentation
			Austrian Federal Railways (Car trains)
			documentation
			Austria. ÖBB code value = 810001
			documentation
			0
	enumeration	X252	documentation
			BahnBus
			documentation
			Austrian Federal Railways (Buses)
			documentation
			Austria. ÖBB code value = 810002
			documentation
			0
	enumeration	X256	documentation
			Achenseebahn
			documentation
			Achenseebahn AG
			documentation
			Austria. ÖBB code value = 810006
			documentation
			0
	enumeration	X258	documentation
			Stern Hafferl
			documentation
			Stern und Hafferl, Gmunden
			documentation
			Austria. ÖBB code value = 810008
			documentation
			0
	enumeration	X261	documentation
			Schneebergbahn
			documentation
			NÖ Schneebergbahn GmbH
			documentation
			Austria. ÖBB code value = 810011
			documentation
			0
	enumeration	3023	documentation
			STLB
			documentation
			Steiermärkische Landesbahnen
			documentation
			Austria. ÖBB code value = 810012
			documentation
			0
	enumeration	X263	documentation
			Hallstätterseeschifffahrt
			documentation
			K. u. K. Hemetsberger
			documentation
			Austria. ÖBB code value = 810013
			documentation
			0
	enumeration	X265	documentation
			ÖBB-Bus (Schienenersatzverkehr)
			documentation
			Austrian Federal Railways
			documentation
			Austria. ÖBB code value = 810015
			documentation
			0
	enumeration	X281	documentation
			DFDS
			documentation

			DFDS (ship from Copenhagen to Oslo) documentation Denmark. DSB code value = 000030 documentation 0
	enumeration	X282	documentation Lyngby-Nærum Jernbane documentation Lyngby-Nærum Jernbane (train) documentation Denmark. DSB code value = 000033 documentation 0
	enumeration	X283	documentation Helsingør-Hornbæk-Gilleleje documentation Helsingør-Hornbæk-Gilleleje (train) documentation Denmark. DSB code value = 000034 documentation 0
	enumeration	X284	documentation Frederiksværkbanen documentation Frederiksværkbanen (train) documentation Denmark. DSB code value = 000035 documentation 0
	enumeration	X285	documentation Gribskovbanen documentation Gribskovbanen (train) documentation Denmark. DSB code value = 000036 documentation 0
	enumeration	X286	documentation Østbanen documentation Østbanen (train) documentation Denmark. DSB code value = 000037 documentation 0
	enumeration	X287	documentation Lollandsbanen documentation Lollandsbanen (train) documentation Denmark. DSB code value = 000038 documentation 0
	enumeration	X288	documentation Odsherreds Jernbane documentation Odsherreds Jernbane (train) documentation Denmark. DSB code value = 000039 documentation 0
	enumeration	X289	documentation Høng-Tølløse Jernbane documentation Høng-Tølløse Jernbane (train) documentation Denmark. DSB code value = 000040 documentation 0
	enumeration	X290	documentation Hads-Ning Herreders Jernbane documentation Hads-Ning Herreders Jernbane (train)

			documentation
			Denmark. DSB code value = 000041
			documentation
			0
	enumeration	X291	documentation
			Hjørring Privatbaner
			documentation
			Hjørring Privatbaner (train)
			documentation
			Denmark. DSB code value = 000042
			documentation
			0
	enumeration	X292	documentation
			Skagensbanen
			documentation
			Skagensbanen (train)
			documentation
			Denmark. DSB code value = 000043
			documentation
			0
	enumeration	X293	documentation
			Vestbanen
			documentation
			Vestbanen (train)
			documentation
			Denmark. DSB code value = 000044
			documentation
			0
	enumeration	X294	documentation
			Vemb Lemvig Thyborøn Jernbane
			documentation
			Vemb Lemvig Thyborøn Jernbane (train)
			documentation
			Denmark. DSB code value = 000045
			documentation
			0
	enumeration	X295	documentation
			HT
			documentation
			HT (train)
			documentation
			Denmark. DSB code value = 000048. Maybe replacing DSB code values 33-37
			documentation
			0
	enumeration	X296	documentation
			Århus Amt
			documentation
			Århus Amt (train)
			documentation
			Denmark. DSB code value = 000049. Maybe replacing DSB code value 41
			documentation
			0
	enumeration	X297	documentation
			STS
			documentation
			STS (train)
			documentation
			Denmark. DSB code value = 000051. Maybe replacing DSB code value 38
			documentation
			0
	enumeration	X298	documentation
			Ringkjøbing Amt
			documentation
			Ringkjøbing Amt (train)
			documentation
			Denmark. DSB code value = 000055. Maybe replacing DSB code value 45
			documentation
			0
	enumeration	X299	documentation
			NT
			documentation
			NT (train)
			documentation

			Denmark. DSB code value = 000057. Maybe replacing DSB code values 42-43
			documentation
			0
	enumeration	X300	documentation
			Bornholmstrafikken Copenhagen-Roenne, Ystad-Roenne)
			documentation
			Bornholmstrafikken (ship
			documentation
			Denmark. DSB code value = 000061
			documentation
			0
	enumeration	X301	documentation
			Metro Copenhagen
			documentation
			Metro Copenhagen
			documentation
			Denmark. DSB code value = 000082
			documentation
			0
	enumeration	X302	documentation
			Arriva
			documentation
			Arriva (former DSB routes in Jutland)
			documentation
			Denmark. DSB code value = 000087
			documentation
			0
	enumeration	X305	documentation
			Arriva Trains Wales Service
			documentation
			Arriva Trains Wales Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X306	documentation
			c2c Service
			documentation
			c2c Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X307	documentation
			Cross-Country
			documentation
			Cross-Country (XC)
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X308	documentation
			Chiltern Railways Service
			documentation
			Chiltern Railways Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X309	documentation
			First Great Western Service
			documentation
			First Great Western Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X310	documentation
			London Overground
			documentation
			London Overground (LO)
			documentation
			Great Britain, ATOC

			documentation
			0
	enumeration	X311	documentation
			First ScotRail Service
			documentation
			First ScotRail Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X312	documentation
			Gatwick Express Service
			documentation
			Gatwick Express Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X313	documentation
			National Express East Coast
			documentation
			National Express East Coast (GR)
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X314	documentation
			Heathrow Express Service
			documentation
			Heathrow Express Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X315	documentation
			Hull Trains Service
			documentation
			Hull Trains Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X316	documentation
			Island Line Service
			documentation
			Island Line Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X317	documentation
			Merseyrail Service
			documentation
			Merseyrail Service
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X318	documentation
			East Midland Trains
			documentation
			East Midland Trains (EM)
			documentation
			Great Britain, ATOC
			documentation
			0
	enumeration	X319	documentation
			Northern Rail Service
			documentation
			Northern Rail Service
			documentation
			Great Britain, ATOC
			documentation

			0
	enumeration	X320	documentation One Service documentation One Service documentation Great Britain, ATOC documentation 0
	enumeration	X321	documentation London Midland documentation London Midland (LM) documentation Great Britain, ATOC documentation 0
	enumeration	X322	documentation Southern Service documentation Southern Service documentation Great Britain, ATOC documentation 0
	enumeration	X323	documentation South Eastern Trains Service documentation South Eastern Trains Service documentation Great Britain, ATOC documentation 0
	enumeration	X324	documentation South West Trains Service documentation South West Trains Service documentation Great Britain, ATOC documentation 0
	enumeration	X326	documentation TransPennine Express Service documentation TransPennine Express Service documentation Great Britain, ATOC documentation 0
	enumeration	X327	documentation Virgin Trains Service documentation Virgin Trains Service documentation Great Britain, ATOC documentation 0
	enumeration	X328	documentation Grand Central documentation Grand Central (GC) documentation Great Britain, ATOC documentation 0
	enumeration	X330	documentation Caledonian MacBrayne documentation Shipping company serving Scottish islands (UK code QC) documentation Great Britain, ATOC documentation 0

	enumeration	X331	documentation Hovertravel documentation Shipping company serving Isle of Wight (UK code QH) documentation Great Britain, ATOC documentation 0
	enumeration	X332	documentation Irish Ferries documentation Irish sea service (UK code QI) documentation Great Britain, ATOC documentation 0
	enumeration	X333	documentation Wightlink documentation Shipping company serving Isle of Wight (UK code QK) documentation Great Britain, ATOC documentation 0
	enumeration	X334	documentation Isle of Man Steam Packet Company documentation Shipping company serving Isle of Man (UK code QM) documentation Great Britain, ATOC documentation 0
	enumeration	X335	documentation Condor Ferries documentation Shipping company serving Chanel Issslands (UK code QO) documentation Great Britain, ATOC documentation 0
	enumeration	X336	documentation Red Funnel documentation Shipping company serving Isle of Wight (UK code QR) documentation Great Britain, ATOC documentation 0
	enumeration	X337	documentation Stena Line documentation Dutch & Irish sea services (UK code QS) documentation Great Britain, ATOC documentation 0
	enumeration	X339	documentation Northlink documentation Orkney and Shetland sea services documentation Great Britain, ATOC documentation 0
	enumeration	X340	documentation Heathrow Connect documentation London-Heathrow services (UK code HC) documentation Great Britain, ATOC documentation 0
	enumeration	X341	documentation

			Tourist Train operator documentation Tourist Train operator documentation Great Britain, ATOC documentation 0
	enumeration	X342	documentation North Yorkshire Moors Railway documentation North Yorkshire Moors Railway (NY) documentation Great Britain, ATOC documentation 0
	enumeration	X345	documentation Bla taget documentation Skandinaviska Jernbanor documentation Sweden. Local trains documentation 0
	enumeration	X346	documentation Dopravní podnik documentation Dopravní podnik hl.m. Prahy, a.s. documentation CD / Czech Republic documentation 0
	enumeration	X347	documentation KŽC Doprava documentation KŽC Doprava, s.r.o. documentation CD / Czech Republic documentation 0
	enumeration	X349	documentation Veolia Transport Morava documentation Veolia Transport Morava a.s. documentation CD / Czech Republic documentation 0
	enumeration	X350	documentation Thameslink documentation Thameslink documentation Great Britain, ATOC documentation 0
	enumeration	X351	documentation Great Northern documentation Great Northern documentation Great Britain, ATOC documentation 0
	enumeration	X352	documentation Koleje Malopolskie documentation Koleje Malopolskie documentation Poland documentation 0
	enumeration	X354	documentation KOLŚLĄSK

			documentation
			Koleje Śląskie Spółka z o.o.
			documentation
			Poland
			documentation
			0
	enumeration	X355	documentation
			ŁKA
			documentation
			Łódzka Kolej Aglomeracyjna Sp. z o.o.
			documentation
			Poland
			documentation
			0
	enumeration	X356	documentation
			AFA
			documentation
			Autoverkehr Frutigen-Adelboden
			documentation
			Switzerland
			documentation
			0
	enumeration	X357	documentation
			BOS
			documentation
			Bus Ostschweiz
			documentation
			Switzerland
			documentation
			0
	enumeration	X358	documentation
			FART Auto
			documentation
			Servizio d'automobili FART
			documentation
			Switzerland
			documentation
			0
	enumeration	X359	documentation
			PAG
			documentation
			PostAuto Schweiz
			documentation
			Switzerland
			documentation
			0
	enumeration	X360	documentation
			BVB
			documentation
			Basler Verkehrsbetriebe
			documentation
			Switzerland
			documentation
			0
	enumeration	X361	documentation
			ABAG
			documentation
			Aletsch Bahnen
			documentation
			Switzerland
			documentation
			0
	enumeration	X362	documentation
			TPF
			documentation
			Service d'automobiles TPF
			documentation
			Switzerland
			documentation
			0
	enumeration	X363	documentation
			LLB
			documentation

			Auto Leuk-Leukerbad
			documentation
			Switzerland
			documentation
			0
	enumeration	X364	documentation
			SMC
			documentation
			Transport Sierre-Montana-Crans
			documentation
			Switzerland
			documentation
			0
	enumeration	X365	documentation
			SGV
			documentation
			Schifffahrtsgesellschaft des Vierwaldstättersees
			documentation
			Switzerland
			documentation
			0
	enumeration	X366	documentation
			TPC Auto
			documentation
			Service d'automobiles TPC
			documentation
			Switzerland
			documentation
			0
	enumeration	X367	documentation
			TMR Auto
			documentation
			Service d'automobiles TMR
			documentation
			Switzerland
			documentation
			0
	enumeration	X368	documentation
			CGN
			documentation
			CGN Lac Leman
			documentation
			Switzerland
			documentation
			0
	enumeration	X369	documentation
			TL
			documentation
			Transport publics de la Region Lausannoise
			documentation
			Switzerland
			documentation
			0
	enumeration	X370	documentation
			LSMS
			documentation
			Schilthornbahn
			documentation
			Switzerland
			documentation
			0
	enumeration	X371	documentation
			VBL
			documentation
			Verkehrsbetriebe Luzern
			documentation
			Switzerland
			documentation
			0
	enumeration	X372	documentation
			TRAVYS AUTO
			documentation
			Transports Vallée de Joux-Yverdon-Ste-Croix

	documentation Switzerland documentation 0
annotation	documentation Code list for the railway undertaking code (B.4.3039) appinfo <dc:title>railway undertaking code</dc:title> <dc:source>B.4.0004,B.4.0010,B.4.3039</dc:source>
source	

```
<xs:simpleType name="type3039CodeList" final="union">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the railway undertaking code
(B.4.3039)</xs:documentation>
    <xs:appinfo>
      <dc:title>railway undertaking code</dc:title>
      <dc:source>B.4.0004,B.4.0010,B.4.3039</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:pattern value="[0-9A-Z]{4}"/>
    <xs:enumeration value="X001">
      <xs:annotation>
        <xs:documentation xml:lang="en">HF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Hovedstadens
Trafikselskab</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark, local traffic
in Copenhagen area </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3052">
      <xs:annotation>
        <xs:documentation xml:lang="en">Silja Line</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Silja
Line</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Ferries Sweden-
Finland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X014">
      <xs:annotation>
        <xs:documentation xml:lang="en">Strömma Kanal</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Strömma Kanal
AB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Ferries (no
traffic at the moment)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X015">
      <xs:annotation>
        <xs:documentation xml:lang="en">Swebus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Swebus Express
AB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X018">
      <xs:annotation>
        <xs:documentation xml:lang="en">Inlandsbanan</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Inlandsbanan
AB</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Touristic trains
on the Inland line</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X019">
      <xs:annotation>
        <xs:documentation xml:lang="en">Visingsötrafiken</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Visingsö ferry
company</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Ferries Gränna-
Visingsö</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X020">
      <xs:annotation>
        <xs:documentation xml:lang="en">Kosterbatarna</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Koster ferry
company</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. No traffic at
the moment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X022">
      <xs:annotation>
        <xs:documentation xml:lang="en">Upplands Lokaltrafik</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Uppland's public
transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X023">
      <xs:annotation>
        <xs:documentation xml:lang="en">Länstrafiken Sörmland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Public Transport of
Sörmland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X024">
      <xs:annotation>
        <xs:documentation xml:lang="en">Östgötatrafiken</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Östgöta public
transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X026">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lanstrafiken Kronoberg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Public transport of
Kronoberg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="X027">
      <xs:annotation>
        <xs:documentation xml:lang="en">Kalmar Lanstrafik</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Kalmar public
transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X028">
      <xs:annotation>
        <xs:documentation xml:lang="en">Gotlands kommun</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Municipality of
Gotland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X029">
      <xs:annotation>
        <xs:documentation xml:lang="en">Blekingetrafik</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Blekinge public
transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X030">
      <xs:annotation>
        <xs:documentation xml:lang="en">Stadstrafiken Malmö</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">City of
Malmö</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X031">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hallandstrafiken</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Halland's public
transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X032">
      <xs:annotation>
        <xs:documentation xml:lang="en">Västtrafik Fyrbodal</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Public transport of
Fyrbodal</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X033">
      <xs:annotation>
        <xs:documentation xml:lang="en">Västtrafik Sjuhärad</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Description">Public transport of
Sjuhärad</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X034">
      <xs:annotation>
        <xs:documentation xml:lang="en">Västtrafik Skaraborg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Public transport of
Skaraborg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X035">
      <xs:annotation>
        <xs:documentation xml:lang="en">Värmlandstrafik</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Värmland's public
transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X036">
      <xs:annotation>
        <xs:documentation xml:lang="en">Västmanland Länstrafiken</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Västmanland's
public transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X037">
      <xs:annotation>
        <xs:documentation xml:lang="en">Dalatrafik</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Dala public
transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X038">
      <xs:annotation>
        <xs:documentation xml:lang="en">X-Trafik</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">X-Trafik
AB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X039">
      <xs:annotation>
        <xs:documentation xml:lang="en">Länstrafiken
Västernorrland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Public transport of
Västernorrland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
```

```
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X040">
      <xs:annotation>
        <xs:documentation xml:lang="en">Länstrafiken Jämtlands</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Public transport of
Jämtland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X041">
      <xs:annotation>
        <xs:documentation xml:lang="en">Länstrafiken Västerbotten</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Public transport of
Västerbotten</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X045">
      <xs:annotation>
        <xs:documentation xml:lang="en">Skanetrafiken</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Skane's public
transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains,
bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X046">
      <xs:annotation>
        <xs:documentation xml:lang="en">Flygbussarna</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Airport
coaches</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X047">
      <xs:annotation>
        <xs:documentation xml:lang="en">Norsk buss</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Norwegian
buses</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Bus
Charlottenberg-Konsvinger-Oslo</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X048">
      <xs:annotation>
        <xs:documentation xml:lang="en">Västtrafik
Göteborgsomradet</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Public transport of
Göteborg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains,
bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="X049">
      <xs:annotation>
        <xs:documentation xml:lang="en">Destination Gotland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Destination
Gotland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Ferries.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X051">
      <xs:annotation>
        <xs:documentation xml:lang="en">Länstrafiken M/F Ulvön</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Ulvön ferry
company</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Ferries.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X053">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ven-trafiken</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Ven ferry
company</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Ferries.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X056">
      <xs:annotation>
        <xs:documentation xml:lang="en">Länstrafiken Örebro</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Public transport of
Örebro</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local trains and
bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X057">
      <xs:annotation>
        <xs:documentation xml:lang="en">Metronom regional</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Metronom
regional</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =R0</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X059">
      <xs:annotation>
        <xs:documentation xml:lang="en">VIAS Odenwaldbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">VIAS
Odenwaldbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =R4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X060">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vulkan-Eifel-Bahn Betriebsgesellschaft
```

```
mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Vulkan-Eifel-Bahn
Betriebsgesellschaft mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =V3</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X062">
      <xs:annotation>
        <xs:documentation xml:lang="en">WTB Wutachtalbahn (Museum)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">WTB Wutachtalbahn
(Museum)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =V9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X063">
      <xs:annotation>
        <xs:documentation xml:lang="en">WestfalenBahn GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">WestfalenBahn
GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =W3</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X064">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bergslagstag</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Bergslagstag</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local
trains</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X065">
      <xs:annotation>
        <xs:documentation xml:lang="en">Unknown Swedish carrier</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Unknown Swedish
carrier</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">For temporary use until
new code value is formally available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X067">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vogtland-Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Vogtland-
Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = XD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X068">
      <xs:annotation>
        <xs:documentation xml:lang="en">Brohltal-Schmalspurreisenbahn Betriebs-
GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Brohltal-
Schmalspurreisenbahn Betriebs-GmbH</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = AL</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X069">
      <xs:annotation>
        <xs:documentation xml:lang="en">Waxholmsbolaget</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Waxholm's ferry
company</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden.
Ferries.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X070">
      <xs:annotation>
        <xs:documentation xml:lang="en">ABG Anhaltische Bahngesellschaft
mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">ABG Anhaltische
Bahngesellschaft mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = AL</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X071">
      <xs:annotation>
        <xs:documentation xml:lang="en">ABELLIO Rail GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">ABELLIO Rail
GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =AR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X072">
      <xs:annotation>
        <xs:documentation xml:lang="en">Busse DB Niedersachsen/Bremen und Schleswig-
Holstein/Hamburg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Busse DB
Niedersachsen/Bremen und Schleswig-Holstein/Hamburg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = B1</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X073">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vectus Verkehrsgesellschaft
mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Vectus
Verkehrsgesellschaft mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = C4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X074">
      <xs:annotation>
        <xs:documentation xml:lang="en">Connex</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Connex</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
```

```
value =CX</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X075">
      <xs:annotation>
        <xs:documentation xml:lang="en">Dampfbahn Fränkische Schweiz
e.V.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Dampfbahn
Fränkische Schweiz e.V.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = F9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X076">
      <xs:annotation>
        <xs:documentation xml:lang="en">Neumünster - Heide - Büsum</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Neumünster - Heide
- Büsum</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = H0</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X077">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sächsisch-Böhmische Eisenbahngesellschaft
mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Sächsisch-Böhmische
Eisenbahngesellschaft mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =HD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X079">
      <xs:annotation>
        <xs:documentation xml:lang="en">HEX HarzElbeExpress
(Connex)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">HEX HarzElbeExpress
(Connex)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =HX</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X080">
      <xs:annotation>
        <xs:documentation xml:lang="en">Köln-Düsseldorfer Deutsche Rheinschifffahrt
AG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Köln-Düsseldorfer
Deutsche Rheinschifffahrt AG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =KD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X081">
      <xs:annotation>
        <xs:documentation xml:lang="en">SBB GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">SBB
GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
```

```
value =L7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X082">
      <xs:annotation>
        <xs:documentation xml:lang="en">Betriebsgesellschaft Mainschleifenbahn
mbH</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Betriebsgesellschaft Mainschleifenbahn
mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =M9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X083">
      <xs:annotation>
        <xs:documentation xml:lang="en">NordWestBahn in Westfalen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">NordWestBahn in
Westfalen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =N2</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X084">
      <xs:annotation>
        <xs:documentation xml:lang="en">Niederbarnimer Eisenbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Niederbarnimer
Eisenbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value =NB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X087">
      <xs:annotation>
        <xs:documentation xml:lang="en">AB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Appenzeller
Bahnen</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X088">
      <xs:annotation>
        <xs:documentation xml:lang="en">TPC-al</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports Publics
du Chablais (AL)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X089">
      <xs:annotation>
        <xs:documentation xml:lang="en">TPC-aomc</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports Publics
du Chablais (AOMC)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X090">
      <xs:annotation>
        <xs:documentation xml:lang="en">TPC-asd</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports Publics
du Chablais (ASD)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X091">
      <xs:annotation>
        <xs:documentation xml:lang="en">MBC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Morges-Bière-
Cossonay</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X092">
      <xs:annotation>
        <xs:documentation xml:lang="en">BDWM-bd    </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">BDWM Transport
(BD0</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X093">
      <xs:annotation>
        <xs:documentation xml:lang="en">BLM</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bergbahn
Lauterbrunnen-Mürren</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X094">
      <xs:annotation>
        <xs:documentation xml:lang="en">BOB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Berner Oberland-
Bahnen</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X095">
      <xs:annotation>
        <xs:documentation xml:lang="en">BLT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Baselland
Transport</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X096">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">ASM-bti</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Aare Seeland mobil
(BTI)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X097">
      <xs:annotation>
        <xs:documentation xml:lang="en">TPC-bvb</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports Publics
du Chablais (BVB)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X098">
      <xs:annotation>
        <xs:documentation xml:lang="en">MVR-cev</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Montreux-Vevey-
Riviera (CEV)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X099">
      <xs:annotation>
        <xs:documentation xml:lang="en">CJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Chemins de fer du
Jura</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X100">
      <xs:annotation>
        <xs:documentation xml:lang="en">TRN-cmn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports
Régionaux Neuchâtelois </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Switzerland
(CMN)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X101">
      <xs:annotation>
        <xs:documentation xml:lang="en">RM</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Regionalverkehr
Mittelland</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X102">
      <xs:annotation>
        <xs:documentation xml:lang="en">FB</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Forchbahn</xs:documentation>
        <xs:documentation xml:lang="en"
```

```
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X103">
      <xs:annotation>
        <xs:documentation xml:lang="en">FLP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Ferrovia Lugano-
Ponte Tresa</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X104">
      <xs:annotation>
        <xs:documentation xml:lang="en">MGB-fo</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Matterhorn Gotthard
Bahn (FO)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X105">
      <xs:annotation>
        <xs:documentation xml:lang="en">FART</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Ferrovie Autolinee
Regionali Ticinesi</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X106">
      <xs:annotation>
        <xs:documentation xml:lang="en">FW</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Frauenfeld-
Wil</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X107">
      <xs:annotation>
        <xs:documentation xml:lang="en">TPF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports Publics
Fribourgeois</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X108">
      <xs:annotation>
        <xs:documentation xml:lang="en">LEB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Lausanne-Echallens-
Bercher</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="X109">
      <xs:annotation>
        <xs:documentation xml:lang="en">ASM-rvo</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Aare Seeland mobil
(RVO)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Switzerland Romanshorn-
Schaffhausen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X110">
      <xs:annotation>
        <xs:documentation xml:lang="en">RA</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">RegionAlp</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X111">
      <xs:annotation>
        <xs:documentation xml:lang="en">TMR-mc</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports de
Martigny et Régions SA </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Switzerland
(MC)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X112">
      <xs:annotation>
        <xs:documentation xml:lang="en">TMR-mo</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports de
Martigny et Régions SA </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Switzerland
(MO)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X113">
      <xs:annotation>
        <xs:documentation xml:lang="en">MOB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Montreux-Oberland
Bernois</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X114">
      <xs:annotation>
        <xs:documentation xml:lang="en">THURBO</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">THURBO</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X115">
      <xs:annotation>
        <xs:documentation xml:lang="en">NStCM</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nyon-St-Cergue-
Morez</xs:documentation>
```

```
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X116">
      <xs:annotation>
        <xs:documentation xml:lang="en">OC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Orbe-
Chavornay</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X117">
      <xs:annotation>
        <xs:documentation xml:lang="en">OeBB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Oensingen-Balstahl-
Bahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X118">
      <xs:annotation>
        <xs:documentation xml:lang="en">TRAVYS-pbr</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports Vallée
de Joux-Yverdon-Ste-Croix (PBr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Switzerland Ste-Croix
(PBr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X119">
      <xs:annotation>
        <xs:documentation xml:lang="en">RHB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Rorschach-Heiden-
Bahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X121">
      <xs:annotation>
        <xs:documentation xml:lang="en">TRN-rvt</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports
Régionaux Neuchâtelois </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Switzerland
(RVT)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X122">
      <xs:annotation>
        <xs:documentation xml:lang="en">SZU</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Sihltal-Zürich-
Uetliberg</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="X123">
      <xs:annotation>
        <xs:documentation xml:lang="en">SOB-sob</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Schweizerische
Südostbahn (SOB)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X124">
      <xs:annotation>
        <xs:documentation xml:lang="en">ZB</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Zentralbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X125">
      <xs:annotation>
        <xs:documentation xml:lang="en">RBS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Regionalverkehr
Bern-Solothurn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X126">
      <xs:annotation>
        <xs:documentation xml:lang="en">TB</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Trogenerbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X127">
      <xs:annotation>
        <xs:documentation xml:lang="en">MGB-bvz</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Matterhorn Gotthard
Bahn (BVZ)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X128">
      <xs:annotation>
        <xs:documentation xml:lang="en">WB</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Waldenburgerbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X129">
      <xs:annotation>
        <xs:documentation xml:lang="en">AAR-wsb</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Description">AAR bus+bahn
(WSB)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X130">
      <xs:annotation>
        <xs:documentation xml:lang="en">TRAVYS-ysc</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports  Vallée
de Joux-Yverdon-Ste-Croix (YSteC)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X131">
      <xs:annotation>
        <xs:documentation xml:lang="en">BRB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Brienz-Rothorn-
Bahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X132">
      <xs:annotation>
        <xs:documentation xml:lang="en">GGB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Gornergrat
Bahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X133">
      <xs:annotation>
        <xs:documentation xml:lang="en">JB</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Jungfraubahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X134">
      <xs:annotation>
        <xs:documentation xml:lang="en">MVR-mtgm</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Montreux-Vevey-
Riviera (MtGN)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X135">
      <xs:annotation>
        <xs:documentation xml:lang="en">MIB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Meiringen-
Innertkirchen-Bahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X136">
      <xs:annotation>
        <xs:documentation xml:lang="en">PB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Pilatus-
Bahnen</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X137">
      <xs:annotation>
        <xs:documentation xml:lang="en">RB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Rigi-
Bahnen</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X138">
      <xs:annotation>
        <xs:documentation xml:lang="en">RhW</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bergbahn Rheineck-
Walzenhausen</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X139">
      <xs:annotation>
        <xs:documentation xml:lang="en">SPB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Schynige Platte-
Bahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X140">
      <xs:annotation>
        <xs:documentation xml:lang="en">WAB</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Wengernalpbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X161">
      <xs:annotation>
        <xs:documentation xml:lang="en">AKN Eisenbahn AG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">AKN Eisenbahn
AG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = A0</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X162">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Museumsbahn Hamm e.V.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Museumsbahn Hamm
e.V.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = A2</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X163">
      <xs:annotation>
        <xs:documentation xml:lang="en">Nassauische Touristikbahn
e.V.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nassauische
Touristikbahn e.V.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = A4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X164">
      <xs:annotation>
        <xs:documentation xml:lang="en">EuroBahn Alzey -
Kirchheimbolanden</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">EuroBahn Alzey -
Kirchheimbolanden</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = A5</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X165">
      <xs:annotation>
        <xs:documentation xml:lang="en">Alptalbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Alptalbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = A6</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X166">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ammertalbahn (RAB Ulm)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Ammertalbahn (RAB
Ulm)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = A7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X167">
      <xs:annotation>
        <xs:documentation xml:lang="en">SDG Sächsische Dampfeisenbahngesellschaft
mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">SDG Sächsische
Dampfeisenbahngesellschaft mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = BD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X168">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">City-Bahn Chemnitz</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">City-Bahn
Chemnitz</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = CD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X170">
      <xs:annotation>
        <xs:documentation xml:lang="en">Kandertalbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Kandertalbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = C6</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X171">
      <xs:annotation>
        <xs:documentation xml:lang="en">Schönbuchbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Schönbuchbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = C7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X172">
      <xs:annotation>
        <xs:documentation xml:lang="en">Döllnitzbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Döllnitzbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = DD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X173">
      <xs:annotation>
        <xs:documentation xml:lang="en">Rurtalbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Rurtalbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = D3</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X174">
      <xs:annotation>
        <xs:documentation xml:lang="en">Erfurter Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Erfurter
Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = EB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X175">
      <xs:annotation>
        <xs:documentation xml:lang="en">Freiberger
Eisenbahngesellschaft</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Freiberger
Eisenbahngesellschaft</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = ED</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X176">
      <xs:annotation>
        <xs:documentation xml:lang="en">MecklenburgBahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">MecklenburgBahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = EW</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X178">
      <xs:annotation>
        <xs:documentation xml:lang="en">Nebenbahn Ebingen-
Ostmettingen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nebenbahn Ebingen-
Ostmettingen </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = E7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X179">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bodensee-Oberschwaben-Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bodensee-
Oberschwaben-Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = F7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X180">
      <xs:annotation>
        <xs:documentation xml:lang="en">Kreiswerke Gelnhausen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Kreiswerke
Gelnhausen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = G4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X181">
      <xs:annotation>
        <xs:documentation xml:lang="en">Nebenbahn Gaildorf-
Untergröningen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nebenbahn Gaildorf-
Untergröningen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = G7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X182">
      <xs:annotation>
        <xs:documentation xml:lang="en">Harzer Schmalspurbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Harzer
Schmalspurbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = HL</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X183">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hellertalbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Hellertalbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = H2</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X184">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hohenzollerische
Landesbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Hohenzollerische
Landesbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = H7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X185">
      <xs:annotation>
        <xs:documentation xml:lang="en">HLB Hessische Landesbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">HLB Hessische
Landesbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = K4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X186">
      <xs:annotation>
        <xs:documentation xml:lang="en">Stadtbahnen des KVV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Stadtbahnen des
KVV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = K6</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X187">
      <xs:annotation>
        <xs:documentation xml:lang="en">Nebenbahn Korntal-Weissach</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nebenbahn Korntal-
Weissach</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = K7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X188">
      <xs:annotation>
        <xs:documentation xml:lang="en">HLB Hessische Landesbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">HLB Hessische
Landesbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = K9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="X189">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lipperländer (EuroBahn)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Lipperländer
(EuroBahn)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = L2</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X190">
      <xs:annotation>
        <xs:documentation xml:lang="en">Butzbacher Licher
Eisenbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Butzbacher Licher
Eisenbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = L4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X191">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mecklenburgische Bäderbahn
Molli</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Mecklenburgische
Bäderbahn Molli</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = MW</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X193">
      <xs:annotation>
        <xs:documentation xml:lang="en">(Niedersachsen/Bremen)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Museumsbahnen
Hannover (Niedersachsen/Bremen)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = M1</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X194">
      <xs:annotation>
        <xs:documentation xml:lang="en">Museumsbahn Merzig-Losheim</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Museumsbahn Merzig-
Losheim</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = M5</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X196">
      <xs:annotation>
        <xs:documentation xml:lang="en">Nebenbahn Amstetten-
Gerstetten</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nebenbahn
Amstetten-Gerstetten</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = M7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X197">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Norddeutsche Eisenbahngesellschaft Niebüll
GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Norddeutsche
Eisenbahngesellschaft Niebüll GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = N0</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X198">
      <xs:annotation>
        <xs:documentation xml:lang="en">NordWestBahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">NordWestBahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = N1</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X199">
      <xs:annotation>
        <xs:documentation xml:lang="en">cantus Verkehrsgesellschaft
mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">cantus
Verkehrsgesellschaft mbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = N4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X200">
      <xs:annotation>
        <xs:documentation xml:lang="en">Breisgau-S-Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Breisgau-S-
Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = N6</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X201">
      <xs:annotation>
        <xs:documentation xml:lang="en">Nebenbahn </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nebenbahn
Nürtingen-Neuffen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = N7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X202">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sächsisch Oberlausitzer
Eisenbahngesellschaft</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Sächsisch
Oberlausitzer Eisenbahngesellschaft</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = OD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X203">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">OLA Ostseeland Verkehr
GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">OLA Ostseeland
Verkehr GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = OM</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X204">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ortenau-S-Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Ortenau-S-
Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = O6</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X205">
      <xs:annotation>
        <xs:documentation xml:lang="en">Eisenbahn-Betriebgesellschaft Ochsenhausen
GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Eisenbahn-
Betriebgesellschaft Ochsenhausen GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = O7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X206">
      <xs:annotation>
        <xs:documentation xml:lang="en">Prignitzer Eisenbahn GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Prignitzer
Eisenbahn GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = PE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X208">
      <xs:annotation>
        <xs:documentation xml:lang="en">PRE   Rügensche Bäderbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">PRE   Rügensche
Bäderbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = RW</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X209">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ravensberger Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Ravensberger
Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = R2</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X211">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hohenzollersche Landesbahn
HzL</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Description">Hohenzollersche
Landesbahn HzL</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = R7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X212">
      <xs:annotation>
        <xs:documentation xml:lang="en">Regentalbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Regentalbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = R9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X213">
      <xs:annotation>
        <xs:documentation xml:lang="en">Süd-Thüringen Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Süd-Thüringen
Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = SB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X214">
      <xs:annotation>
        <xs:documentation xml:lang="en">Schienenersatzverkehre und Busse Dresden
(Sachsen)</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Schienenersatzverkehre und Busse Dresden
(Sachsen)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = SD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X216">
      <xs:annotation>
        <xs:documentation xml:lang="en">Südwestdeutsche Verkehrs
AG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Südwestdeutsche
Verkehrs AG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = S6</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X218">
      <xs:annotation>
        <xs:documentation xml:lang="en">Berliner S-Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Berliner S-
Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = S9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X219">
      <xs:annotation>
        <xs:documentation xml:lang="en">Traditionsbahn Radebeul Ost
e.V.</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Description">Traditionsbahn
Radebeul Ost e.V.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = TD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X220">
      <xs:annotation>
        <xs:documentation xml:lang="en">TRANS REGIO Deutsche Regionalbahn
GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">TRANS REGIO
Deutsche Regionalbahn GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = TR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X221">
      <xs:annotation>
        <xs:documentation xml:lang="en">Thüringerwaldbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Thüringerwaldbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = TU</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X222">
      <xs:annotation>
        <xs:documentation xml:lang="en">Teuto-Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Teuto-
Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = T2</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X223">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mittelthurgaubahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Mittelthurgaubahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = T6</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X224">
      <xs:annotation>
        <xs:documentation xml:lang="en">Trossinger Eisenbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Trossinger
Eisenbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = T7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X225">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bayerische Oberlandbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bayerische
Oberlandbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
```

```
value = T8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X226">
      <xs:annotation>
        <xs:documentation xml:lang="en">Inselberg Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Inselberg
Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = UI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X227">
      <xs:annotation>
        <xs:documentation xml:lang="en">Meininger Busbetriebe</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Meininger
Busbetriebe</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = US</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X228">
      <xs:annotation>
        <xs:documentation xml:lang="en">Usedomer Bäderbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Usedomer
Bäderbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = UW</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X229">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ulmer Eisenbahnfreunde</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Ulmer
Eisenbahnfreunde</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = U7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X230">
      <xs:annotation>
        <xs:documentation xml:lang="en">Museumsbahnen Kiel
(Schleswig/Holstein)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Museumsbahnen Kiel
(Schleswig/Holstein)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = V0</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X231">
      <xs:annotation>
        <xs:documentation xml:lang="en">Nebenbahn Vaihingen-
Enzweihlingen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nebenbahn
Vaihingen-Enzweihlingen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = V7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X232">
      <xs:annotation>
        <xs:documentation xml:lang="en">Wyker Dampfschiff Reederei
(WDR)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Wyker Dampfschiff
Reederei (WDR)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = W0</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X233">
      <xs:annotation>
        <xs:documentation xml:lang="en">Daadetalbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Daadetalbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = W2</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X234">
      <xs:annotation>
        <xs:documentation xml:lang="en">Nebenbahn Schorndorf-
Rudersberg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nebenbahn
Schorndorf-Rudersberg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = W7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X235">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sylter
Verkehrsgesellschaft</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Sylter
Verkehrsgesellschaft</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = Y0</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X236">
      <xs:annotation>
        <xs:documentation xml:lang="en">Eisenbahnfreunde </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Eisenbahnfreunde
Zollernbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = Z7</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X237">
      <xs:annotation>
        <xs:documentation xml:lang="en">S-Bahn Hamburg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">S-Bahn
Hamburg</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = 0S</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="X238">
      <xs:annotation>
        <xs:documentation xml:lang="en">NordOstseeBahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">NordOstseeBahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Germany. DB AG code
value = 0N</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X251">
      <xs:annotation>
        <xs:documentation xml:lang="en">Östereichische Bundesbahnen
(Autoreisezüge)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Austrian Federal
Railways (Car trains)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Austria. ÖBB code value
= 810001</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X252">
      <xs:annotation>
        <xs:documentation xml:lang="en">BahnBus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Austrian Federal
Railways (Buses)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Austria. ÖBB code value
= 810002</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X256">
      <xs:annotation>
        <xs:documentation xml:lang="en">Achenseebahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Achenseebahn
AG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Austria. ÖBB code value
= 810006</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X258">
      <xs:annotation>
        <xs:documentation xml:lang="en">Stern Hafferl</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Stern und Hafferl,
Gmunden</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Austria. ÖBB code value
= 810008</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X261">
      <xs:annotation>
        <xs:documentation xml:lang="en">Schneebergbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">NÖ Schneebergbahn
GmbH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Austria. ÖBB code value
= 810011</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3023">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">STLB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Steiermärkische
Landesbahnen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Austria. ÖBB code value
= 810012</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X263">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hallstätterseeschifffahrt</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">K. u. K.
Hemetsberger</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Austria. ÖBB code value
= 810013</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X265">
      <xs:annotation>
        <xs:documentation xml:lang="en">ÖBB-Bus
(Schienenersatzverkehr)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Austrian Federal
Railways </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Austria. ÖBB code value
= 810015</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X281">
      <xs:annotation>
        <xs:documentation xml:lang="en">DFDS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">DFDS (ship from
Copenhagen to Oslo)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000030</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X282">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lyngby-Nærum Jernbane</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Lyngby-Nærum
Jernbane (train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000033</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X283">
      <xs:annotation>
        <xs:documentation xml:lang="en">Helsingør-Hornbæk-
Gilleleje</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Helsingør-Hornbæk-
Gilleleje (train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000034</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X284">
      <xs:annotation>
        <xs:documentation xml:lang="en">Frederiksværkbanen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Frederiksværkbanen
```

```
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000035</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X285">
      <xs:annotation>
        <xs:documentation xml:lang="en">Gribskovbanen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Gribskovbanen
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000036</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X286">
      <xs:annotation>
        <xs:documentation xml:lang="en">Østbanen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Østbanen
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000037</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X287">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lollandsbanen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Lollandsbanen
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000038</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X288">
      <xs:annotation>
        <xs:documentation xml:lang="en">Odsherreds Jernbane</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Odsherreds Jernbane
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000039</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X289">
      <xs:annotation>
        <xs:documentation xml:lang="en">Høng-Tølløse Jernbane</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Høng-Tølløse
Jernbane (train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000040</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X290">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hads-Ning Herreders
Jernbane</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Hads-Ning Herreders
Jernbane (train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000041</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X291">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hjørring Privatbaner</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Hjørring
Privatbaner (train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000042</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X292">
      <xs:annotation>
        <xs:documentation xml:lang="en">Skagensbanen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Skagensbanen
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000043</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X293">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vestbanen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Vestbanen
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000044</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X294">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vemb Lemvig Thyborøn
Jernbane</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Vemb Lemvig
Thyborøn Jernbane (train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000045</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X295">
      <xs:annotation>
        <xs:documentation xml:lang="en">HT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">HT
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000048. Maybe replacing DSB code values 33-37</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X296">
      <xs:annotation>
        <xs:documentation xml:lang="en">Århus Amt</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Århus Amt
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000049. Maybe replacing DSB code value 41</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="X297">
      <xs:annotation>
        <xs:documentation xml:lang="en">STS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">STS
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000051. Maybe replacing DSB code value 38</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X298">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ringkjøbing Amt</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Ringkjøbing Amt
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000055. Maybe replacing DSB code value 45</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X299">
      <xs:annotation>
        <xs:documentation xml:lang="en">NT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">NT
(train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000057. Maybe replacing DSB code values 42-43</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X300">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bornholmstrafikken Copenhagen-Roenne, Ystad-
Roenne)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bornholmstrafikken
(ship </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000061</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X301">
      <xs:annotation>
        <xs:documentation xml:lang="en">Metro Copenhagen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Metro
Copenhagen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000082</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X302">
      <xs:annotation>
        <xs:documentation xml:lang="en">Arriva</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Arriva (former DSB
routes in Jutland)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Denmark. DSB code value
= 000087</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X305">
      <xs:annotation>
        <xs:documentation xml:lang="en">Arriva Trains Wales
```

```
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Arriva Trains Wales
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain, ATOC
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X306">
      <xs:annotation>
        <xs:documentation xml:lang="en">c2c Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">c2c
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X307">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cross-Country</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Cross-Country
(XC)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X308">
      <xs:annotation>
        <xs:documentation xml:lang="en">Chiltern Railways Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Chiltern Railways
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X309">
      <xs:annotation>
        <xs:documentation xml:lang="en">First Great Western
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First Great Western
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X310">
      <xs:annotation>
        <xs:documentation xml:lang="en">London Overground</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">London Overground
(LO)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X311">
      <xs:annotation>
        <xs:documentation xml:lang="en">First ScotRail Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First ScotRail
Service</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X312">
      <xs:annotation>
        <xs:documentation xml:lang="en">Gatwick Express Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Gatwick Express
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X313">
      <xs:annotation>
        <xs:documentation xml:lang="en">National Express East
Coast</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">National Express
East Coast (GR)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X314">
      <xs:annotation>
        <xs:documentation xml:lang="en">Heathrow Express Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Heathrow Express
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X315">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hull Trains Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Hull Trains
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X316">
      <xs:annotation>
        <xs:documentation xml:lang="en">Island Line Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Island Line
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X317">
      <xs:annotation>
        <xs:documentation xml:lang="en">Merseyrail Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Merseyrail
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X318">
      <xs:annotation>
        <xs:documentation xml:lang="en">East Midland Trains</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">East Midland Trains
(EM)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X319">
      <xs:annotation>
        <xs:documentation xml:lang="en">Northern Rail Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Northern Rail
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X320">
      <xs:annotation>
        <xs:documentation xml:lang="en">One Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">One
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X321">
      <xs:annotation>
        <xs:documentation xml:lang="en">London Midland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">London Midland
(LM)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X322">
      <xs:annotation>
        <xs:documentation xml:lang="en">Southern Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Southern
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X323">
      <xs:annotation>
        <xs:documentation xml:lang="en">South Eastern Trains
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">South Eastern
Trains Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X324">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">South West Trains Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">South West Trains
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X326">
      <xs:annotation>
        <xs:documentation xml:lang="en">TransPennine Express
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">TransPennine
Express Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X327">
      <xs:annotation>
        <xs:documentation xml:lang="en">Virgin Trains Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Virgin Trains
Service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X328">
      <xs:annotation>
        <xs:documentation xml:lang="en">Grand Central</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Grand Central
(GC)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X330">
      <xs:annotation>
        <xs:documentation xml:lang="en">Caledonian MacBrayne</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Shipping company
serving  Scottish islands (UK code QC)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X331">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hovertravel</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Shipping company
serving  Isle of Wight (UK code QH)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X332">
      <xs:annotation>
        <xs:documentation xml:lang="en">Irish Ferries</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Irish sea service
```

```
(UK code QI)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X333">
      <xs:annotation>
        <xs:documentation xml:lang="en">Wightlink</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Shipping company
serving  Isle of Wight (UK code QK)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X334">
      <xs:annotation>
        <xs:documentation xml:lang="en">Isle of Man Steam Packet
Company</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Shipping company
serving  Isle of Man (UK code QM)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X335">
      <xs:annotation>
        <xs:documentation xml:lang="en">Condor Ferries</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Shipping company
serving  Chanel Issslands (UK code QO)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X336">
      <xs:annotation>
        <xs:documentation xml:lang="en">Red Funnel</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Shipping company
serving  Isle of Wight (UK code QR)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X337">
      <xs:annotation>
        <xs:documentation xml:lang="en">Stena Line</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Dutch &amp;amp; Irish
sea services (UK code QS)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X339">
      <xs:annotation>
        <xs:documentation xml:lang="en">Northlink</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Orkney and Shetland
sea services</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X340">
      <xs:annotation>
        <xs:documentation xml:lang="en">Heathrow Connect </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">London-Heathrow
services (UK code HC)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X341">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tourist Train operator</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Tourist Train
operator</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X342">
      <xs:annotation>
        <xs:documentation xml:lang="en">North Yorkshire Moors
Railway</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">North Yorkshire
Moors Railway (NY)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X345">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bla taget</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Skandinaviska
Jernbanor</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Sweden. Local
trains</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X346">
      <xs:annotation>
        <xs:documentation xml:lang="en">Dopravní podnik</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Dopravní podnik
hl.m. Prahy, a.s.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">CD / Czech
Republic</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X347">
      <xs:annotation>
        <xs:documentation xml:lang="en">KŽC Doprava</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">KŽC Doprava,
s.r.o.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">CD / Czech
Republic</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="X349">
      <xs:annotation>
        <xs:documentation xml:lang="en">Veolia Transport Morava</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Veolia Transport
Morava a.s.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">CD / Czech
Republic</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X350">
      <xs:annotation>
        <xs:documentation xml:lang="en">Thameslink</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Thameslink</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X351">
      <xs:annotation>
        <xs:documentation xml:lang="en">Great Northern</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Great
Northern</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Great Britain,
ATOC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X352">
      <xs:annotation>
        <xs:documentation xml:lang="en">Koleje Malopolskie</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Koleje
Malopolskie</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Poland
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X354">
      <xs:annotation>
        <xs:documentation xml:lang="en">KOLŚLĄSK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Koleje Śląskie
Spółka z o.o.</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Poland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X355">
      <xs:annotation>
        <xs:documentation xml:lang="en">ŁKA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Łódzka Kolej
Aglomeracyjna Sp. z o.o.</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Poland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X356">
      <xs:annotation>
        <xs:documentation xml:lang="en">AFA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Autoverkehr
```

```
Frutigen-Adelboden</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X357">
      <xs:annotation>
        <xs:documentation xml:lang="en">BOS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bus
Ostschweiz</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X358">
      <xs:annotation>
        <xs:documentation xml:lang="en">FART Auto</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Servizio
d'automobili FART</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X359">
      <xs:annotation>
        <xs:documentation xml:lang="en">PAG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">PostAuto
Schweiz</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X360">
      <xs:annotation>
        <xs:documentation xml:lang="en">BVB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Basler
Verkehrsbetriebe</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X361">
      <xs:annotation>
        <xs:documentation xml:lang="en">ABAG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Aletsch
Bahnen</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X362">
      <xs:annotation>
        <xs:documentation xml:lang="en">TPF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Service
d'automibiles TPF</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X363">
      <xs:annotation>
        <xs:documentation xml:lang="en">LLB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Auto Leuk-
Leukerbad</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X364">
      <xs:annotation>
        <xs:documentation xml:lang="en">SMC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transport Sierre-
Montana-Crans</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X365">
      <xs:annotation>
        <xs:documentation xml:lang="en">SGV</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Schifffahrtsgesellschaft des
Vierwaldstättersees</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X366">
      <xs:annotation>
        <xs:documentation xml:lang="en">TPC Auto</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Service
d'automobiles TPC</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X367">
      <xs:annotation>
        <xs:documentation xml:lang="en">TMR Auto</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Service
d'automobiles TMR</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X368">
      <xs:annotation>
        <xs:documentation xml:lang="en">CGN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">CGN Lac
Leman</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X369">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">TL</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transport publics
de la Region Lausannoise</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X370">
      <xs:annotation>
        <xs:documentation xml:lang="en">LSMS</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Schilthornbahn</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X371">
      <xs:annotation>
        <xs:documentation xml:lang="en">VBL</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Verkehrsbetriebe
Luzern</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X372">
      <xs:annotation>
        <xs:documentation xml:lang="en">TRAVYS AUTO</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transports Vallée
de Joux-Yverdon-Ste-Croix</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Switzerland</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type3055CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
maxLength	3	
enumeration	3	documentation IATA documentation International Air Transport Association documentation 0
enumeration	12	documentation UIC documentation International Union of Railways documentation 0
enumeration	288	documentation OSJD

	documentation Code identifying OSJD, Organisation for Co-operation of Railways documentation 0
annotation	documentation Code specifying the agency responsible for a code list (B.4.3055) appinfo <dc:title>party function code list</dc:title> <dc:source>B.4.3055</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type3055CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code specifying the agency responsible for a code
list (B.4.3055)</xs:documentation>
    <xs:appinfo>
      <dc:title>party function code list</dc:title>
      <dc:source>B.4.3055</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">IATA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">International Air
Transport Association</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">UIC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">International Union
of Railways</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="288">
      <xs:annotation>
        <xs:documentation xml:lang="en">OSJD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Code identifying
OSJD, Organisation for Co-operation of Railways</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type3131CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation maxLength 3 enumeration 1 documentation Postal address

	documentation The address is representing a postal address documentation 0 enumeration 2 documentation Fiscal address documentation The address is the one required by fiscal administration documentation 0
annotation	documentation Address type code (B.4.3131) appinfo <dc:title>Address type code</dc:title> <dc:source>B.4.3131</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>
source	<xs:simpleType name="type3131CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Address type code (B.4.3131)</xs:documentation> <xs:appinfo> <dc:title>Address type code</dc:title> <dc:source>B.4.3131</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="3"/> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">Postal address</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">The address is representing a postal address</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">Fiscal address</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">The address is the one required by fiscal administration</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **type3153CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation maxLength 3 enumeration EM documentation Electronic mail documentation Exchange of mail by electronic means documentation 0 enumeration FX documentation

	Telefax documentation Device used for transmitting and reproducing fixed graphic material (as printing) by means of signals over telephone lines or other electronic transmission media documentation 0 enumeration TE documentation Telephone documentation Voice/data transmission by telephone documentation 0 enumeration TL documentation Telex documentation Transmission of text/data via telex documentation 0
annotation	documentation Communication medium type code (B.4.3153) appinfo <dc:title>Communication medium type code list</dc:title> <dc:source>B.4.3153</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type3153CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Communication medium type code
(B.4.3153)</xs:documentation>
    <xs:appinfo>
      <dc:title>Communication medium type code list</dc:title>
      <dc:source>B.4.3153</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="EM">
      <xs:annotation>
        <xs:documentation xml:lang="en">Electronic mail</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Exchange of mail by
electronic means</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="FX">
      <xs:annotation>
        <xs:documentation xml:lang="en">Telefax</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Device used for
transmitting and reproducing fixed graphic material (as printing) by means of signals
over telephone lines or other electronic transmission media</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TE">
      <xs:annotation>
        <xs:documentation xml:lang="en">Telephone</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Voice/data
transmission by telephone</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="TL">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Telex</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Transmission of
text/data via telex</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type3225CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	**xs:string**
properties	base xs:string
annotation	documentation Location name code (B.4.3225) appinfo <dc:title>Location name code</dc:title> <dc:source>B.4.3225</dc:source> <dcterms:rightsHolder>ERA</dcterms:rightsHolder> <dc:source>ERA</dc:source> documentation TAP TSI Technical Document B.9

source

```
<xs:simpleType name="type3225CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Location name code (B.4.3225)</xs:documentation>
    <xs:appinfo>
      <dc:title>Location name code</dc:title>
      <dc:source>B.4.3225</dc:source>
      <dcterms:rightsHolder>ERA</dcterms:rightsHolder>
      <dc:source>ERA</dc:source>
    </xs:appinfo>
    <xs:documentation xml:lang="en">TAP TSI Technical Document B.9</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:string"/>
</xs:simpleType>
```

simpleType **type3227CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
maxLength	3	
enumeration	5	documentation Place of departure documentation Port, airport or other location from which a means of transport or transport equipment is scheduled to depart or has departed. documentation 0
enumeration	8	documentation Place of destination documentation Port, airport or other location to which a means transport or transport equipment is destined documentation 0
enumeration	17	documentation Border crossing place

			documentation
			The location is a border point
			documentation
			0
	enumeration	26	documentation
			Agglomeration of locations (City)
			documentation
			an abstract one (for customer information)
			documentation
			Used for itinerary retrieve reasons. Cannot be referenced by trains
			documentation
			0
	enumeration	29	documentation
			Railway station
			documentation
			The location is a railway station
			documentation
			0
	enumeration	92	documentation
			Routing
			documentation
			Indication of a routing place
			documentation
			The location is a via location in a journey
			documentation
			0
	enumeration	212	documentation
			Pricing area (tariff zone)
			documentation
			An area for which the same price is applicable
			documentation
			Used for pricing reasons
			documentation
			0
	enumeration	230	documentation
			Stop on request
			documentation
			The travel service only stops at the location when requested by a passenger
			documentation
			0
	enumeration	250	documentation
			Tourism location
			documentation
			The location is a point of interest for tourism
			documentation
			0
	enumeration	254	documentation
			Bus station
			documentation
			Name or identification of a bus station.
			documentation
			0
	enumeration	255	documentation
			Ferry terminal
			documentation
			Name or identification of a ferry terminal.
			documentation
			0
	enumeration	259	documentation
			Travel agency
			documentation
			The location is a travel agency.
			documentation
			0
	enumeration	258	documentation
			Town sales office
			documentation
			The location is a town sales office.
			documentation
			0
	enumeration	X04	documentation
			Other station
			documentation

	The location is another station documentation 0
annotation	documentation Location function code qualifier (B.4.3227) appinfo <dc:title>Location function code qualifier</dc:title> <dc:source>B.4.3227</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>
source	<xs:simpleType name="type3227CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Location function code qualifier (B.4.3227)</xs:documentation> <xs:appinfo> <dc:title>Location function code qualifier</dc:title> <dc:source>B.4.3227</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="3"/> <xs:enumeration value="5"> <xs:annotation> <xs:documentation xml:lang="en">Place of departure</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">Port, airport or other location from which a means of transport or transport equipment is scheduled to depart or has departed.</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation xml:lang="en">Place of destination</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">Port, airport or other location to which a means transport or transport equipment is destined</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="17"> <xs:annotation> <xs:documentation xml:lang="en">Border crossing place</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">The location is a border point</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="26"> <xs:annotation> <xs:documentation xml:lang="en">Agglomeration of locations (City)</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">an abstract one (for customer information)</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark">Used for itinerary retrieve reasons. Cannot be referenced by trains</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="29"> <xs:annotation>

```
        <xs:documentation xml:lang="en">Railway station</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The location is a
railway station</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="92">
      <xs:annotation>
        <xs:documentation xml:lang="en">Routing</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Indication of a
routing place</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">The location is a via
location in a journey</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="212">
      <xs:annotation>
        <xs:documentation xml:lang="en">Pricing area (tariff zone)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">An area for which
the same price is applicable</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Used for pricing
reasons</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="230">
      <xs:annotation>
        <xs:documentation xml:lang="en">Stop on request</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The travel service
only stops at the location when requested by a passenger</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="250">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tourism location</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The location is a
point of interest for tourism</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="254">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bus station</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Name or
identification of a bus station.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="255">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ferry terminal</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Name or
identification of a ferry terminal.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="259">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Travel agency</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The location is a
travel agency.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="258">
      <xs:annotation>
        <xs:documentation xml:lang="en">Town sales office</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The location is a
town sales office.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X04">
      <xs:annotation>
        <xs:documentation xml:lang="en">Other station</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The location is
another station</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type3455CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
maxLength	3	
enumeration	1	documentation Language normally used documentation Language normally used documentation 0
enumeration	2	documentation Language understood documentation Language understood by the person documentation 0
enumeration	3	documentation Spoken language documentation Language that can be spoken by a person documentation 0
enumeration	4	documentation Written language documentation Language that can be written by a person documentation 0
enumeration	5	documentation Read language documentation Language that can be read by a person documentation

	0 enumeration 6 documentation For all types of communication documentation Language used for all types of communications documentation 0 enumeration 7 documentation Native language documentation Language first spoken by the person documentation 0
annotation	documentation Code qualifying a language (B.4.3455) appinfo <dc:title>Language code qualifier</dc:title> <dc:source>B.4.3455</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>
source	

```
<xs:simpleType name="type3455CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code qualifying a language
(B.4.3455)</xs:documentation>
    <xs:appinfo>
      <dc:title>Language code qualifier</dc:title>
      <dc:source>B.4.3455</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Language normally used</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Language normally
used</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Language understood</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Language understood
by the person</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Spoken language</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Language that can
be spoken by a person</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Written language</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Language that can
be written by a person</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Read language</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Language that can
be read by a person</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">For all types of
communication</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Language used for
all types of communications</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Native language</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Language first
spoken by the person</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type3475CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation maxLength 3 enumeration 2 documentation: Current address documentation: Current address documentation: 0
annotation	documentation Address status code (B.4.3475) appinfo <dc:title>Address status code</dc:title> <dc:source>B.4.3475</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type3475CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Address status code (B.4.3475)</xs:documentation>
    <xs:appinfo>
      <dc:title>Address status code</dc:title>
      <dc:source>B.4.3475</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
```

```
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Current address</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Current
address</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type3477CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation maxLength 3 enumeration 5 — documentation: Unstructured address; documentation: Unstructured address, comprising an unspecified mix of components; documentation: 0
annotation	documentation Address format code (B.4.3477) appinfo <dc:title>Address format code</dc:title> <dc:source>B.4.3477</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type3477CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Address format code (B.4.3477)</xs:documentation>
    <xs:appinfo>
      <dc:title>Address format code</dc:title>
      <dc:source>B.4.3477</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Unstructured address</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Unstructured
address, comprising an unspecified mix of components</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type4025CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation maxLength 3 enumeration AAR — documentation: Railway enumeration AAR — documentation: Railway related business enumeration AAR — documentation: 0
annotation	documentation Code list for the business function code (B.4.4025) appinfo <dc:title>Business function code</dc:title> <dc:source>B.4.4025</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type4025CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the business function code
(B.4.4025)</xs:documentation>
    <xs:appinfo>
      <dc:title>Business function code</dc:title>
      <dc:source>B.4.4025</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="AAR">
      <xs:annotation>
        <xs:documentation xml:lang="en">Railway</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Railway related
business</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type4049CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation maxLength 3 enumeration 1 — documentation: Connection guaranteed enumeration 1 — documentation: The connection is guaranteed under any circumstances. enumeration 1 — documentation: 0 enumeration X02 — documentation: Connection normally guaranteed enumeration X02 — documentation: The connection is normally guaranteed, although the connection time available is shorter than the location connection time.

	documentation 0 enumeration X03 documentation Connection not guaranteed documentation The connection is not guaranteed, although the connection time available is longer than the location connection time documentation 0 enumeration X04 documentation Connection never guaranteed documentation The connection is never guaranteed, although the connection time available is longer than the location connection time documentation 0
annotation	documentation Certainty description code (B.4.4049) appinfo <dc:title>Code list for certainity description code</dc:title> <dc:source>B.4.4049</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>
source	

```
<xs:simpleType name="type4049CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Certainty description code
(B.4.4049)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for certainity description code</dc:title>
      <dc:source>B.4.4049</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Connection guaranteed</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The connection is
guaranteed under any circumstances.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Connection normally
guaranteed</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The connection is
normally guaranteed, although the connection time available is shorter than the
location connection time.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X03">
      <xs:annotation>
        <xs:documentation xml:lang="en">Connection not guaranteed</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The connection is
not guaranteed, although the connection time available is longer than the location
connection time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X04">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Connection never
guaranteed</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The connection is
never guaranteed, although the connection time available is longer than the location
connection time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type4405CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation maxLength 3 enumeration 21 documentation: Temporary; documentation: Status is temporary; documentation: 0 enumeration 81 documentation: Definitive; documentation: The data is definitive; documentation: 0 enumeration 113 documentation: Incomplete data; documentation: The data is incomplete; documentation: 0
annotation	documentation Code list for status description code (B.4.4405) appinfo <dc:title>Code list for status description code</dc:title> <dc:source>B.4.4405</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type4405CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for status description code
(B.4.4405)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for status description code</dc:title>
      <dc:source>B.4.4405</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation xml:lang="en">Temporary</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Status is
temporary</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="81">
      <xs:annotation>
        <xs:documentation xml:lang="en">Definitive</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The data is
definitive</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="113">
      <xs:annotation>
        <xs:documentation xml:lang="en">Incomplete data</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The data is
incomplete</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type4451CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string

facets

Kind	Value	Annotation
maxLength	3	
enumeration	AAO	documentation Error description documentation Error described by a free text documentation 0
enumeration	ADU	documentation Note documentation Text subject is note documentation 0
enumeration	AGW	documentation Location documentation Description of a location documentation Used to specify foreign language name(s) of a location documentation 0
enumeration	AUY	documentation Service characteristic documentation Free text description is related to a service characteristic. documentation 0
enumeration	BLO	documentation Period of time documentation Text subject is a period of time documentation 0
enumeration	PRD	documentation Product information documentation

	enumeration X02 Text subject is product information documentation 0 documentation Location short name documentation Shortened name for display or printing documentation 0
annotation	documentation Code list for Text subject code qualifier (B.4.4451) appinfo <dc:title>Text subject code qualifier</dc:title> <dc:source>B.4.4451</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>
source	

```
<xs:simpleType name="type4451CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for Text subject code qualifier
(B.4.4451)</xs:documentation>
    <xs:appinfo>
      <dc:title>Text subject code qualifier</dc:title>
      <dc:source>B.4.4451</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="AAO">
      <xs:annotation>
        <xs:documentation xml:lang="en">Error description</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Error described by
a free text</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="ADU">
      <xs:annotation>
        <xs:documentation xml:lang="en">Note</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Text subject is
note</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AGW">
      <xs:annotation>
        <xs:documentation xml:lang="en">Location</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Description of a
location</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Used to specify foreign
language name(s) of a location</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="AUY">
      <xs:annotation>
        <xs:documentation xml:lang="en">Service characteristic</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Free text
description is related to a service characteristic.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="BLO">
      <xs:annotation>
        <xs:documentation xml:lang="en">Period of time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Text subject is a
period of time</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="PRD">
      <xs:annotation>
        <xs:documentation xml:lang="en">Product information</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Text subject is
product information</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="X02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Location short name</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Shortened name for
display or printing</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type5261CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:integer**
properties	base xs:integer

facets

Kind	Value	Annotation
enumeration	10	documentation Adult documentation The associated charge is per adult documentation 0
enumeration	11	documentation Child documentation The associated charge is per child documentation 0
enumeration	12	documentation Employee documentation The associated charge is per employee documentation FIP documentation 0
enumeration	24	documentation Person aged between 4 and 11 years documentation The associated charge is per person between 4 and 11 years. documentation 0
enumeration	25	documentation Person between 4 and 12 years documentation

			The associated charge is per person between 4 and 12 years documentation 0
	enumeration	26	documentation Person between 4 and 13 years documentation The associated charge is per person between 4 and 13 years. documentation 0
	enumeration	27	documentation Person between 4 and 16 years documentation The associated charge is per person between 4 and 16 years. documentation 0
	enumeration	28	documentation Person between 5 and 12 years documentation The associated charge is per person between 5 and 12 years. documentation 0
	enumeration	29	documentation Person between 5 and 16 years documentation The associated charge is per person between 5 and 16 years. documentation 0
	enumeration	30	documentation Person between 6 and 12 years documentation The associated charge is per person between 6 and 12 years. documentation 0
	enumeration	31	documentation Person between 6 and 14 years documentation The associated charge is per person between 6 and 14 years. documentation 0
	enumeration	32	documentation Person between 6 and 15 years documentation The associated charge is per person between 6 and 15 years. documentation 0
	enumeration	33	documentation Person between 6 and 16 years documentation The associated charge is per person between 6 and 16 years. documentation 0
	enumeration	34	documentation Person between 6 and 17 years documentation The associated charge is per person between 6 and 17 years. documentation 0
	enumeration	35	documentation Person between 7 and 12 years documentation The associated charge is per person between 7 and 12 years. documentation 0
	enumeration	36	documentation Person between 7 and 15 years documentation The associated charge is per person between 7 and 15 years. documentation 0
	enumeration	37	documentation Person between 11 and 99 years documentation The associated charge is per person between 11 and 99 years.

			documentation
			0
	enumeration	38	documentation
			Person between 12 and 99 years
			documentation
			The associated charge is per person between 12 and 99 years.
			documentation
			0
	enumeration	39	documentation
			Person between 13 and 99 years
			documentation
			The associated charge is per person between 13 and 99 years.
			documentation
			0
	enumeration	40	documentation
			Person between 14 and 99 years
			documentation
			The associated charge is per person between 14 and 99 years.
			documentation
			0
	enumeration	41	documentation
			Person between 15 and 99 years.
			documentation
			The associated charge is per person between 15 and 99 years.
			documentation
			0
	enumeration	42	documentation
			Person between 16 and 99 years.
			documentation
			The associated charge is per person between 16 and 99 years.
			documentation
			0
	enumeration	43	documentation
			Person between 17 and 99 years.
			documentation
			The associated charge is per person between 17 and 99 years.
			documentation
			0
	enumeration	44	documentation
			Person between 26 and 99 years.
			documentation
			The associated charge is per person between 26 and 99 years.
			documentation
			0
	enumeration	45	documentation
			Child accompanied by ancestor
			documentation
			The associated charge is per child accompanied by an ancestor.
			documentation
			0
	enumeration	46	documentation
			All type of Passengers
			documentation
			The associated charge is for all types of passenger independent of the age
			documentation
			0
	enumeration	47	documentation
			Familly Group
			documentation
			The associated charge is for family group
			documentation
			0
	enumeration	48	documentation
			Mini Group
			documentation
			The associated charge is for group smaller than the normal standard group
			documentation
			0
	enumeration	102	documentation
			Passenger in wheelchair
			documentation
			The associated charge is for a passenger in a wheelchair.
			documentation

	0 enumeration 103 documentation Companion of a disabled person documentation The associated charge is per companion of a disabled person such as a blind passenger or a passenger in a wheelchair. documentation 0 enumeration 104 documentation Small animal in carrier documentation The associated charge is for an animal no bigger than a domestic cat, carried in a suitable container such as a cage or a box documentation 0 enumeration 105 documentation Dog documentation The associated charge is for a dog. documentation 0 enumeration 106 documentation Bicycle documentation The associated charge is for a bicycle documentation 0 enumeration 107 documentation Youth documentation The associated charge is for a person between childhood and adulthood. documentation 0 enumeration 108 documentation Senior documentation The associated charge is for an elderly person such as an old age pensioner. documentation 0 enumeration 109 documentation Infant documentation The associated charge is per very young child or baby. documentation 0 enumeration 110 documentation Accompanied child documentation The associated charge is for a child accompanied by an adult. documentation 0 enumeration 111 documentation Child as separate passenger documentation The associated charge is for a child occupying its own seat, couchette or sleeping berth. documentation 0 enumeration 112 documentation Blind person documentation The associated charge is for a blind person. documentation 0 enumeration 113 documentation Infant as separate passenger documentation The associated charge is for an infant occupying its own seat, couchette or sleeping berth. documentation 0
annotation	documentation Code list for the charge unit code (B.2.4, B.3.2, B.4.5261, B.7.4) appinfo <dc:title>Code list for charge unit code</dc:title>

<dc:source>B.2.4,B.3.2,B.4.5261,B.7.4</dc:source>

source

```
<xs:simpleType name="type5261CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the charge unit code (B.2.4, B.3.2, B.4.5261, B.7.4)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for charge unit code</dc:title>
      <dc:source>B.2.4,B.3.2,B.4.5261,B.7.4</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:integer">
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Adult</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated charge is per adult</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Child</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated charge is per child</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">Employee</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated charge is per employee</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">FIP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person aged between 4 and 11 years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated charge is per person between 4 and 11 years. </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 4 and 12 years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated charge is per person between 4 and 12 years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 4 and 13 years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated charge is per person between 4 and 13 years.</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="27">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 4 and 16
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 4 and 16 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 5 and 12
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 5 and 12 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="29">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 5 and 16
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 5 and 16 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 6 and 12
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 6 and 12 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 6 and 14
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 6 and 14 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 6 and 15
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 6 and 15 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="33">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 6 and 16
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 6 and 16 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 6 and 17
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 6 and 17 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="35">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 7 and 12
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 7 and 12 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="36">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 7 and 15
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 7 and 15 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="37">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 11 and 99
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 11 and 99 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="38">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 12 and 99
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 12 and 99 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="39">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 13 and 99
years</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 13 and 99 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 14 and 99
years</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 14 and 99 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="41">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 15 and 99
years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 15 and 99 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="42">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 16 and 99
years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 16 and 99 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="43">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 17 and 99
years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 17 and 99 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44">
      <xs:annotation>
        <xs:documentation xml:lang="en">Person between 26 and 99
years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per person between 26 and 99 years.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="45">
      <xs:annotation>
        <xs:documentation xml:lang="en">Child accompanied by
ancestor</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per child accompanied by an ancestor.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="46">
      <xs:annotation>
        <xs:documentation xml:lang="en">All type of Passengers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for all types of passenger independent of the age</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="47">
      <xs:annotation>
        <xs:documentation xml:lang="en">Familly Group</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for family group</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="48">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mini Group</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for group smaller than the normal standard group</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="102">
      <xs:annotation>
        <xs:documentation xml:lang="en">Passenger in wheelchair</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for a passenger in a wheelchair. </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="103">
      <xs:annotation>
        <xs:documentation xml:lang="en">Companion of a disabled
person</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per companion of a disabled person such as a blind passenger or a passenger
in a wheelchair.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="104">
      <xs:annotation>
        <xs:documentation xml:lang="en">Small animal in carrier</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for an animal no bigger than a domestic cat, carried in a suitable
container such as a cage or a box</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="105">
      <xs:annotation>
        <xs:documentation xml:lang="en">Dog</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for a dog.</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="106">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bicycle</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for a bicycle</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="107">
      <xs:annotation>
        <xs:documentation xml:lang="en">Youth</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for a person between childhood and adulthood.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="108">
      <xs:annotation>
        <xs:documentation xml:lang="en">Senior</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for an elderly person such as an old age pensioner.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="109">
      <xs:annotation>
        <xs:documentation xml:lang="en">Infant</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is per very young child or baby.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="110">
      <xs:annotation>
        <xs:documentation xml:lang="en">Accompanied child</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for a child accompanied by an adult.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="111">
      <xs:annotation>
        <xs:documentation xml:lang="en">Child as separate
passenger</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for a child occupying its own seat, couchette or sleeping
berth.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="112">
      <xs:annotation>
        <xs:documentation xml:lang="en">Blind person</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
```

```
charge is for a blind person.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="113">
      <xs:annotation>
        <xs:documentation xml:lang="en">Infant as separate
passenger</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The associated
charge is for an infant occupying its own seat, couchette or sleeping
berth.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type5263CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation maxLength 2 enumeration NO documentation: Normal; documentation: Normal rate; documentation: 0 enumeration RE documentation: Discount in train other than TGV; documentation: Discount in train other than TGV; documentation: 0 enumeration SF documentation: Special fare; documentation: Special fare applies; documentation: 0 enumeration SP documentation: Supplement; documentation: A supplement is to be paid; documentation: 0
annotation	documentation Code list specifying the rate type identifier (B.4.5263) appinfo <dc:title>Code list specifying the rate type identifier</dc:title> <dc:source>B.4.5263</dc:source>

source

```
<xs:simpleType name="type5263CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list specifying the rate type identifier
(B.4.5263)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list specifying the rate type identifier</dc:title>
      <dc:source>B.4.5263</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
```

```
    <xs:maxLength value="2"/>
    <xs:enumeration value="NO">
      <xs:annotation>
        <xs:documentation xml:lang="en">Normal</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Normal
rate</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="RE">
      <xs:annotation>
        <xs:documentation xml:lang="en">Discount in train other than
TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Discount in train
other than TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="SF">
      <xs:annotation>
        <xs:documentation xml:lang="en">Special fare</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Special fare
applies</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="SP">
      <xs:annotation>
        <xs:documentation xml:lang="en">Supplement</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">A supplement is to
be paid</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type6411CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation maxLength 3 enumeration ANN documentation Year documentation Measurement unit is year documentation 0 enumeration DAY documentation Day documentation Measurement unit is day documentation 0 enumeration HUR documentation Hour documentation

	Measurement unit is hour documentation 0 enumeration KMT documentation Kilometre documentation Measurement unit is kilometre documentation 0 enumeration MIN documentation Minute documentation Measurement unit is minute documentation 0 enumeration MON documentation Month documentation Measurement unit is month documentation 0 enumeration MTR documentation Metre documentation Measurement unit is metre documentation 0 enumeration SMI documentation Mile (statute mile) documentation Measurement unit is statute mile documentation 0 enumeration WEE documentation Week documentation Measurement unit is week documentation 0 enumeration YRD documentation Yard documentation Measurement unit is yard documentation 0
annotation	documentation Code list specifying the unit of measurement (B.4.6411) appinfo <dc:title>Code list specifying the unit of measurement</dc:title> <dc:source>B.4.6411</dc:source>
source	<xs:simpleType name="type6411CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list specifying the unit of measurement (B.4.6411)</xs:documentation> <xs:appinfo> <dc:title>Code list specifying the unit of measurement</dc:title> <dc:source>B.4.6411</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="3"/> <xs:enumeration value="ANN"> <xs:annotation> <xs:documentation xml:lang="en">Year</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is year</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration>

```
    <xs:enumeration value="DAY">
      <xs:annotation>
        <xs:documentation xml:lang="en">Day</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is
day</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="HUR">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hour</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is
hour</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="KMT">
      <xs:annotation>
        <xs:documentation xml:lang="en">Kilometre</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is
kilometre</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="MIN">
      <xs:annotation>
        <xs:documentation xml:lang="en">Minute</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is
minute</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="MON">
      <xs:annotation>
        <xs:documentation xml:lang="en">Month</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is
month</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="MTR">
      <xs:annotation>
        <xs:documentation xml:lang="en">Metre</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is
metre</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="SMI">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mile (statute mile)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is
statute mile</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="WEE">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Week</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is
week</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="YRD">
      <xs:annotation>
        <xs:documentation xml:lang="en">Yard</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Measurement unit is
yard</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type7009BrandNameCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	final list base xs:string
used by	element **PlannedTrainData/CommercialTrafficType**

facets

Kind	Value	Annotation
maxLength	17	
enumeration	46	documentation TAJ documentation TAJ documentation Day car train documentation 13 documentation 0
enumeration	47	documentation TAC documentation TAC documentation Car sleeper train, motor rail (CST) documentation 14 documentation 0
enumeration	48	documentation SAE documentation SAE documentation Unaccompanied car service, motor rail documentation 14 documentation 0
enumeration	49	documentation EIC documentation EkspresIC documentation Fast and Comfortable Interregional trains documentation

			10 documentation 0
	enumeration	50	documentation EC documentation EuroCity documentation EuroCity documentation 9 documentation 0
	enumeration	51	documentation ICE documentation ICE documentation ICE documentation 8 documentation 0
	enumeration	52	documentation AVE documentation AVE documentation AVE documentation 8 documentation 0
	enumeration	53	documentation EIL documentation EUROSTAR documentation Eurostar documentation 8 documentation 0
	enumeration	54	documentation documentation documentation Talgo documentation 9 documentation 0
	enumeration	55	documentation OTU documentation Oresundstog documentation Oresundstog documentation 10 documentation 0
	enumeration	56	documentation TGV documentation TGV documentation TGV Bruxelles – Lille / Province documentation 8 documentation

			0
	enumeration	58	documentation
			TRN
			documentation
			Intercités
			documentation
			Intercités
			documentation
			9
			documentation
			0
	enumeration	59	documentation
			AE
			documentation
			ALLEGRO
			documentation
			Allegro
			documentation
			8
			documentation
			0
	enumeration	60	documentation
			ECB
			documentation
			EuroCityBrenner
			documentation
			EuroCityBrenner
			documentation
			9
			documentation
			0
	enumeration	62	documentation
			documentation
			documentation
			Suburban service
			documentation
			12
			documentation
			0
	enumeration	63	documentation
			IC
			documentation
			Intercity
			documentation
			Intercity
			documentation
			9
			documentation
			0
	enumeration	64	documentation
			documentation
			documentation
			Hotel Train
			documentation
			13
			documentation
			0
	enumeration	65	documentation
			documentation
			Ferry
			documentation
			hydrofoil
			documentation
			33
			documentation
			0
	enumeration	66	documentation

			IC documentation Intercity documentation Inter City Lyn documentation 9 documentation 0
	enumeration	67	documentation documentation documentation TRN documentation 10 documentation 0
	enumeration	68	documentation documentation documentation International documentation 9 documentation 0
	enumeration	69	documentation documentation documentation Express documentation 10 documentation 0
	enumeration	70	documentation EN documentation EuroNight documentation Euro Night documentation 13 documentation 0
	enumeration	71	documentation HST documentation High-speed train documentation High-speed train documentation 8 documentation 0
	enumeration	72	documentation TRN documentation TRAIN documentation Train SNCF documentation 9 documentation 0
	enumeration	73	documentation TGV

			documentation TGV documentation TGV Sud-Est documentation 8 documentation 0
	enumeration	74	documentation TGV documentation TGV documentation TGV Atlantique documentation 8 documentation 0
	enumeration	75	documentation TGV documentation TGV documentation TGV Nord documentation 8 documentation 0
	enumeration	76	documentation TGV documentation TGV documentation TGV Lyria documentation 8 documentation 0
	enumeration	77	documentation TGV documentation TGV documentation TGV Duplex documentation 8 documentation 0
	enumeration	79	documentation TGV documentation TGV documentation TGV Est documentation 8 documentation 0
	enumeration	80	documentation TGV documentation TGV documentation TGV Interconnexion documentation 8 documentation 0
	enumeration	82	documentation documentation THALYS documentation

			Thalys documentation 8 documentation 0
	enumeration	83	documentation documentation Ferry documentation hovercraft documentation 33 documentation 0
	enumeration	84	documentation RE documentation regional train documentation Regional documentation 11 documentation 0
	enumeration	85	documentation WTE documentation Wilhelm Tell Express documentation Wilhelm Tell Express documentation 10 documentation 0
	enumeration	87	documentation documentation PENDOLINO documentation Pendolino documentation 8 documentation 0
	enumeration	88	documentation Suburban documentation 8 documentation 0
	enumeration	89	documentation ALV documentation Alvia documentation Alvia documentation 8 documentation 0
	enumeration	90	documentation AVN documentation Avant documentation Avant documentation 8 documentation 0
	enumeration	91	documentation

			TER documentation TRAIN documentation Regional TER documentation 11 documentation 0
	enumeration	92	documentation REG documentation NSB Regiontog documentation NSB Regiontog documentation 37 documentation 0
	enumeration	93	documentation FB documentation FRECCIABIANCA documentation FRECCIABIANCA documentation 8 documentation 0
	enumeration	94	documentation SC documentation SuperCity documentation Supercity documentation 9 documentation 0
	enumeration	95	documentation CNL documentation City Night Line (D) documentation DB Nachtzug documentation 13 documentation 0
	enumeration	96	documentation INI documentation InterCityNotte Italia documentation InterCityNotte documentation 13 documentation 0
	enumeration	97	documentation GB documentation ATOC MEMBER OPERATED SERVICE documentation ATOC MEMBER OPERATED SERVICE documentation 37 documentation 0
	enumeration	98	documentation ESI documentation ES* Italia

			documentation Eurostar Italia documentation 8 documentation 0
	enumeration	99	documentation documentation documentation Funicular documentation 15 documentation 0
	enumeration	100	documentation documentation documentation Airport train documentation 12 documentation 0
	enumeration	101	documentation Night train documentation 13 documentation 0
	enumeration	102	documentation documentation documentation Touristic train documentation 9 documentation 0
	enumeration	107	documentation documentation documentation Historical train, steam engine train documentation 16 documentation 0
	enumeration	108	documentation IRE documentation IRE documentation Interregio-Express documentation 10 documentation 0
	enumeration	109	documentation RB documentation RB documentation Regionalbahn documentation 11 documentation

			0
	enumeration	110	documentation RE documentation RE documentation Regional-Express documentation 11 documentation 0
	enumeration	111	documentation RT documentation RT documentation RegioTram documentation 11 documentation 0
	enumeration	112	documentation documentation documentation Shinkansen documentation 8 documentation 0
	enumeration	113	documentation THT documentation TrainHotel Talgo documentation Train hotel talgo documentation 13 documentation 0
	enumeration	114	documentation EUR documentation Euromed documentation Euromed documentation 9 documentation 0
	enumeration	115	documentation ALR documentation Alaris documentation Alaris documentation 9 documentation 0
	enumeration	116	documentation ALT documentation Altaria documentation Altaria documentation 9 documentation 0
	enumeration	117	documentation

			ARC documentation Arco documentation intercity documentation 9 documentation 2
	enumeration	119	documentation documentation documentation S-Bahn documentation 12 documentation 0
	enumeration	121	documentation Night Train documentation Night Train documentation 13 documentation 0
	enumeration	122	documentation IR documentation Interregional documentation Interregional documentation 10 documentation 0
	enumeration	123	documentation IRN documentation Interregional Night Train documentation Interregional Night Train documentation 13 documentation 2
	enumeration	124	documentation NLT documentation TOLSTOI documentation Tolstoi documentation 13 documentation 0
	enumeration	126	documentation documentation documentation ARZ documentation 14 documentation 0
	enumeration	128	documentation AVE documentation RENFE SNCF EN COOPERATION documentation

			RENFE SNCF documentation 8 documentation 0
	enumeration	129	documentation TGV documentation RENFE SNCF EN COOPERATION documentation RENFE SNCF documentation 8 documentation 0
	enumeration	130	documentation BUS documentation IC Bus documentation Bus documentation 32 documentation 0
	enumeration	131	documentation BUS documentation IC Bus international documentation Bus documentation 32 documentation 0
	enumeration	153	documentation documentation special train documentation Sonderzug documentation 9 documentation 0
	enumeration	154	documentation documentation documentation InterCityRapid documentation 9 documentation 0
	enumeration	155	documentation documentation documentation InterPici documentation 9 documentation 0
	enumeration	157	documentation documentation documentation Fast train

documentation
9
documentation
0
enumeration 158 documentation

documentation

documentation
Euregio
documentation
11
documentation
0
enumeration 159 documentation

documentation
Bus
documentation
IC Ersatzbus
documentation
32
documentation
0
enumeration 160 documentation

documentation
Bus
documentation
IP Ersatzbus
documentation
32
documentation
0
enumeration 162 documentation

documentation
Bus
documentation
Replacement Bus
documentation
32
documentation
0
enumeration 163 documentation
TGV
documentation
TGV
documentation
TGV Duplex Lyria
documentation
8
documentation
0
enumeration 166 documentation
TGV
documentation
TGV INOUI
documentation
TGV Duplex France Allemagne
documentation
8
documentation
2
enumeration 170 documentation
YHT
documentation
YHT
documentation
High speed train in Turkey
documentation
8

			documentation 0
	enumeration	171	documentation FA documentation FRECCIARGENTO documentation FRECCIARGENTO documentation 8 documentation 0
	enumeration	172	documentation FR documentation FRECCIAROSSA documentation FRECCIAROSSA documentation 8 documentation 0
	enumeration	173	documentation AP documentation Albula Panoramawagen documentation Albula Panoramawagen documentation 10 documentation 0
	enumeration	174	documentation BEX documentation Bernina Express documentation Bernina Express (Panorama Train) documentation 10 documentation 0
	enumeration	175	documentation GEX documentation Glacier Express documentation Glacier Express (Panorama Train) documentation 10 documentation 0
	enumeration	176	documentation GP documentation Golden Pass documentation Golden Pass (Panorama Train) documentation 10 documentation 0
	enumeration	177	documentation BNI documentation Bernina Panorama documentation Bernina Panorama documentation 11 documentation 0
	enumeration	178	documentation

			zb documentation zb Zentralbahn AG documentation Luzern-Interlaken Express (Panorama Train) documentation 10 documentation 0
	enumeration	179	documentation BXB documentation Bernina Express Bus documentation Bernina Express (Panorama Bus) documentation 32 documentation 0
	enumeration	200	documentation GGB documentation Gornergrat Bahn documentation Mountain train documentation 10 documentation 0
	enumeration	202	documentation ICE documentation ICE-Allemagne France documentation ICE Allemagne-France documentation 8 documentation 0
	enumeration	203	documentation documentation ÖBB-NIGHTLINE documentation ÖBB Night Line documentation 13 documentation 0
	enumeration	205	documentation ICP documentation Intercity Plus documentation Intercity Plus documentation 9 documentation 0
	enumeration	206	documentation RID documentation Riviera Day documentation Riviera day documentation 9 documentation 0
	enumeration	207	documentation RIN documentation Riviera Night

			documentation
			Riviera night
			documentation
			9
			documentation
			0
	enumeration	209	documentation
			RJ
			documentation
			R A I L JET
			documentation
			Rail Jet
			documentation
			9
			documentation
			0
	enumeration	213	documentation
			AZ
			documentation
			DB Autozug
			documentation
			DB Autozug
			documentation
			14
			documentation
			0
	enumeration	214	documentation
			documentation
			Berlin-Warszawa-Express
			documentation
			Berlin-Warszawa-Express
			documentation
			8
			documentation
			0
	enumeration	215	documentation
			documentation
			Railpromo Austria Express/Treski
			documentation
			Austria Express/Treski
			documentation
			13
			documentation
			0
	enumeration	216	documentation
			documentation
			PRECIOS MERCADO
			documentation
			Precios Mercado
			documentation
			9
			documentation
			0
	enumeration	219	documentation
			TGV
			documentation
			TGV
			documentation
			TGV
			documentation
			8
			documentation
			0
	enumeration	223	documentation
			FB
			documentation
			FB
			documentation
			FernBus

			documentation
			32
			documentation
			0
	enumeration	224	documentation
			ICB
			documentation
			Intercitybus
			documentation
			ÖBB-Intercitybus
			documentation
			32
			documentation
			0
	enumeration	225	documentation
			TLK
			documentation
			TLK train
			documentation
			Yours Rail Lines
			documentation
			10
			documentation
			0
	enumeration	226	documentation
			A
			documentation
			RailBus
			documentation
			RailBus
			documentation
			32
			documentation
			0
	enumeration	227	documentation
			BUS
			documentation
			Replacement bus for Regional Train
			documentation
			Replacement bus for Regional Train
			documentation
			32
			documentation
			0
	enumeration	228	documentation
			IR
			documentation
			InterREGIO train
			documentation
			InterREGIO train
			documentation
			10
			documentation
			0
	enumeration	229	documentation
			IRB
			documentation
			Replacement bus for InterRegio train
			documentation
			Replacement bus for InterRegio train
			documentation
			32
			documentation
			0
	enumeration	230	documentation
			MP
			documentation
			Fast International Train
			documentation
			Fast International Train
			documentation
			10
			documentation

			0
	enumeration	231	documentation
			MR
			documentation
			musicREGIO train
			documentation
			musicREGIO train
			documentation
			11
			documentation
			0
	enumeration	232	documentation
			Os
			documentation
			Stopping Train
			documentation
			Stopping Train
			documentation
			11
			documentation
			0
	enumeration	233	documentation
			P
			documentation
			Fast Train
			documentation
			Fast Train
			documentation
			10
			documentation
			0
	enumeration	234	documentation
			R
			documentation
			REGIO train
			documentation
			REGIO train
			documentation
			11
			documentation
			0
	enumeration	235	documentation
			RE
			documentation
			REGIOekspres train
			documentation
			REGIOekspres train
			documentation
			10
			documentation
			0
	enumeration	236	documentation
			VR
			documentation
			viaREGIO train
			documentation
			viaREGIO train
			documentation
			11
			documentation
			0
	enumeration	237	documentation
			TK
			documentation
			TurKol
			documentation
			TurKol
			documentation
			11
			documentation
			0
	enumeration	238	documentation
			EIP

			documentation EIC Premium documentation High-speed train documentation 8 documentation 0
	enumeration	239	documentation SKM documentation PKP SKM w Trojmiescie documentation PKP SKM w Trojmiescie documentation 12 documentation 0
	enumeration	240	documentation SA documentation SAPSAN documentation High speed train documentation 8 documentation 0
	enumeration	242	documentation STR documentation STRIZH documentation Strizh night train documentation 13 documentation 0
	enumeration	243	documentation STR documentation STRIZH documentation Strizh interregional documentation 8 documentation 0
	enumeration	244	documentation NJ documentation NJ documentation NJ Night Jet documentation 13 documentation 0
	enumeration	245	documentation CAR documentation AUTOCAR documentation French regional buses (not sold via Hermes) documentation 32 documentation 0
	enumeration	246	documentation RJX documentation RJX documentation

			RJX railjet xpress documentation 8 documentation 0
	enumeration	247	documentation CJX documentation CJX documentation CJX cityjet xpress documentation 10 documentation 0
	enumeration	248	documentation Night train BC documentation Night train BC documentation 13 documentation 0
	enumeration	249	documentation TGV documentation TGV INOUI documentation TGV INOUI documentation 8 documentation 0
	enumeration	250	documentation TGV documentation TGV INOUI documentation TGV INOUI DUPLEX (double decker TGV) documentation 8 documentation 0
	enumeration	251	documentation ALI documentation Aare Linth documentation Aare Linth (Panorama Train) documentation 10 documentation 0
	enumeration	252	documentation TGO documentation Treno Gottardo documentation Treno Gottardo (Panorama Train) documentation 10 documentation 0
	enumeration	253	documentation VAE documentation Voralpen-Express documentation Voralpen-Express (Panorama Train) documentation 10 documentation 0

	enumeration 254 documentation LK documentation FRECCIALINK documentation FRECCIALINK documentation 32 documentation 0 enumeration 255 documentation FRN documentation FRECCIAROSSA NOTTE documentation FRECCIAROSSA NOTTE documentation 13 documentation 0 enumeration 256 documentation ABS documentation ANEK – SUPERFAST JOINT VENTURE documentation Domestic routes Crete documentation 33 documentation 0 enumeration 257 documentation ASF documentation ANEK – SUPERFAST JOINT VENTURE documentation International Lines Italy-Greece and V.V. documentation 33 documentation 0 enumeration 258 documentation BSF documentation BLUE STAR FERRIES MARITIME SA CO JOINT VENTURE documentation Domestic routes Greece documentation 33 documentation 0 enumeration 259 documentation HSW documentation BLUE STAR FERRIES MARITIME SA CO JOINT VENTURE documentation Domestic routes Greece documentation 33 documentation 0
annotation	documentation Code list for the service brand name (B.4.7009) appinfo <dc:title>Code list for the service brand name</dc:title> <dc:source>B.4.7009,B.5.82,B.5.83,B.5.84</dc:source>
source	<xs:simpleType name="type7009BrandNameCodeList" final="list"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the service brand name (B.4.7009)</xs:documentation> <xs:appinfo> <dc:title>Code list for the service brand name</dc:title>

```
      <dc:source>B.4.7009,B.5.82,B.5.83,B.5.84</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="17"/>
    <xs:enumeration value="46">
      <xs:annotation>
        <xs:documentation xml:lang="en">TAJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TAJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Day car
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="47">
      <xs:annotation>
        <xs:documentation xml:lang="en">TAC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TAC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Car sleeper
train, motor rail (CST)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">14</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="48">
      <xs:annotation>
        <xs:documentation xml:lang="en">SAE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">SAE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Unaccompanied car service, motor rail</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">14</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="49">
      <xs:annotation>
        <xs:documentation xml:lang="en">EIC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">EkspresIC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Fast and
Comfortable Interregional trains</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation xml:lang="en">EC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">EuroCity </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">EuroCity</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="51">
      <xs:annotation>
        <xs:documentation xml:lang="en">ICE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">ICE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">ICE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="52">
      <xs:annotation>
        <xs:documentation xml:lang="en">AVE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">AVE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">AVE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="53">
      <xs:annotation>
        <xs:documentation xml:lang="en">EIL</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">EUROSTAR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Eurostar</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="54">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Talgo</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="55">
      <xs:annotation>
        <xs:documentation xml:lang="en">OTU</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Oresundstog</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Oresundstog</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="56">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV
Bruxelles – Lille / Province</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="58">
      <xs:annotation>
        <xs:documentation xml:lang="en">TRN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Intercités</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Intercités</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="59">
      <xs:annotation>
        <xs:documentation xml:lang="en">AE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">ALLEGRO</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Allegro</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="60">
      <xs:annotation>
        <xs:documentation xml:lang="en">ECB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">EuroCityBrenner</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">EuroCityBrenner</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Suburban
service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">12</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="63">
      <xs:annotation>
        <xs:documentation xml:lang="en">IC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Intercity  </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Intercity</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="64">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Hotel
Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="65">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Ferry</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">hydrofoil</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">33</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="66">
      <xs:annotation>
        <xs:documentation xml:lang="en">IC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Intercity  </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Inter City
Lyn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="67">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">TRN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="68">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">International</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="69">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="70">
      <xs:annotation>
        <xs:documentation xml:lang="en">EN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">EuroNight  </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Euro
Night</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="71">
      <xs:annotation>
        <xs:documentation xml:lang="en">HST</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">High-
speed train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">High-speed
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="72">
      <xs:annotation>
        <xs:documentation xml:lang="en">TRN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TRAIN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Train
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="73">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV Sud-
Est</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="74">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV
Atlantique</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="75">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV
Nord</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="76">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV
Lyria</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="77">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV
Duplex</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="79">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV
Est</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="80">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV
Interconnexion</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="82">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">THALYS
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Thalys</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="83">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Ferry</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">hovercraft</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">33</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="84">
      <xs:annotation>
        <xs:documentation xml:lang="en">RE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">regional train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Regional</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="85">
      <xs:annotation>
        <xs:documentation xml:lang="en">WTE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Wilhelm
Tell Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Wilhelm Tell
Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="87">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">PENDOLINO  </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Pendolino</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="88">
      <xs:annotation>
        <xs:documentation xml:lang="en"/>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation"/>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Suburban</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="89">
      <xs:annotation>
        <xs:documentation xml:lang="en">ALV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Alvia</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Alvia</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="90">
      <xs:annotation>
        <xs:documentation xml:lang="en">AVN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Avant</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Avant</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="91">
      <xs:annotation>
        <xs:documentation xml:lang="en">TER</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TRAIN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Regional
TER</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="92">
      <xs:annotation>
        <xs:documentation xml:lang="en">REG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">NSB
Regiontog</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">NSB
Regiontog</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">37</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="93">
      <xs:annotation>
        <xs:documentation xml:lang="en">FB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
```

```
reservation">FRECCIABIANCA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">FRECCIABIANCA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="94">
      <xs:annotation>
        <xs:documentation xml:lang="en">SC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">SuperCity </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Supercity</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="95">
      <xs:annotation>
        <xs:documentation xml:lang="en">CNL</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">City
Night Line (D) </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">DB
Nachtzug</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="96">
      <xs:annotation>
        <xs:documentation xml:lang="en">INI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">InterCityNotte Italia  </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">InterCityNotte</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="97">
      <xs:annotation>
        <xs:documentation xml:lang="en">GB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">ATOC
MEMBER OPERATED SERVICE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">ATOC MEMBER
OPERATED SERVICE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">37</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="98">
      <xs:annotation>
        <xs:documentation xml:lang="en">ESI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">ES*
Italia </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Eurostar
Italia</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
```

```
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="99">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Funicular</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">15</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="100">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Airport
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">12</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="101">
      <xs:annotation>
        <xs:documentation xml:lang="en"/>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation"/>
        <xs:documentation xml:lang="en" doc:docType="merits description">Night
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="102">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Touristic
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="107">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Historical
train, steam engine train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">16</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="108">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">IRE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">IRE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Interregio-
Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="109">
      <xs:annotation>
        <xs:documentation xml:lang="en">RB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">RB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Regionalbahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="110">
      <xs:annotation>
        <xs:documentation xml:lang="en">RE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">RE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Regional-
Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="111">
      <xs:annotation>
        <xs:documentation xml:lang="en">RT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">RT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">RegioTram</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="112">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Shinkansen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="113">
      <xs:annotation>
        <xs:documentation xml:lang="en">THT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TrainHotel Talgo</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="merits description">Train hotel
talgo</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="114">
      <xs:annotation>
        <xs:documentation xml:lang="en"> EUR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
Euromed</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Euromed</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="115">
      <xs:annotation>
        <xs:documentation xml:lang="en"> ALR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
Alaris</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Alaris</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="116">
      <xs:annotation>
        <xs:documentation xml:lang="en"> ALT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
Altaria</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Altaria</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="117">
      <xs:annotation>
        <xs:documentation xml:lang="en">ARC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Arco</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">intercity</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="119">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">S-
Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">12</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="121">
      <xs:annotation>
        <xs:documentation xml:lang="en"/>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Night
Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Night
Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="122">
      <xs:annotation>
        <xs:documentation xml:lang="en">IR </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Interregional</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Interregional</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="123">
      <xs:annotation>
        <xs:documentation xml:lang="en">IRN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Interregional Night Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Interregional Night Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="124">
      <xs:annotation>
        <xs:documentation xml:lang="en">NLT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TOLSTOI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Tolstoi</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="126">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">ARZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">14</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="128">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">AVE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">RENFE
SNCF EN COOPERATION</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">RENFE
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="129">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">RENFE
SNCF EN COOPERATION</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">RENFE
SNCF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="130">
      <xs:annotation>
        <xs:documentation xml:lang="en">BUS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">IC
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="131">
      <xs:annotation>
        <xs:documentation xml:lang="en">BUS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">IC Bus
international</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="153">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">special
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Sonderzug</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="154">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="merits
description">InterCityRapid</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="155">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">InterPici</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="157">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Fast
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="158">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">Euregio</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="159">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Bus
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">IC
Ersatzbus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="160">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Bus
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">IP
Ersatzbus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="162">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Bus
</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Replacement
Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="163">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV Duplex
Lyria</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="166">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">TGV
INOUI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV Duplex
France Allemagne</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">2</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="170">
      <xs:annotation>
        <xs:documentation xml:lang="en">YHT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">YHT</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">High speed
train in Turkey</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="171">
      <xs:annotation>
        <xs:documentation xml:lang="en">FA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">FRECCIARGENTO</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">FRECCIARGENTO</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="172">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">FR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">FRECCIAROSSA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">FRECCIAROSSA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="173">
      <xs:annotation>
        <xs:documentation xml:lang="en">AP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Albula
Panoramawagen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Albula
Panoramawagen</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="174">
      <xs:annotation>
        <xs:documentation xml:lang="en">BEX</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Bernina
Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Bernina
Express (Panorama Train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="175">
      <xs:annotation>
        <xs:documentation xml:lang="en">GEX</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Glacier
Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Glacier
Express (Panorama Train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="176">
      <xs:annotation>
        <xs:documentation xml:lang="en">GP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Golden
Pass</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Golden Pass
(Panorama Train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="177">
      <xs:annotation>
        <xs:documentation xml:lang="en">BNI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Bernina
Panorama</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="merits description">Bernina
Panorama</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="178">
      <xs:annotation>
        <xs:documentation xml:lang="en">zb</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">zb
Zentralbahn AG</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Luzern-
Interlaken Express (Panorama Train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="179">
      <xs:annotation>
        <xs:documentation xml:lang="en">BXB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Bernina
Express Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Bernina
Express (Panorama Bus)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="200">
      <xs:annotation>
        <xs:documentation xml:lang="en">GGB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Gornergrat Bahn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Mountain
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="202">
      <xs:annotation>
        <xs:documentation xml:lang="en">ICE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">ICE-
Allemagne France  </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">ICE
Allemagne-France</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="203">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">ÖBB-
NIGHTLINE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">ÖBB Night
Line</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="205">
      <xs:annotation>
        <xs:documentation xml:lang="en">ICP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Intercity Plus </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Intercity
Plus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="206">
      <xs:annotation>
        <xs:documentation xml:lang="en">RID</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Riviera
Day </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Riviera
day</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="207">
      <xs:annotation>
        <xs:documentation xml:lang="en">RIN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Riviera
Night </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Riviera
night</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="209">
      <xs:annotation>
        <xs:documentation xml:lang="en">RJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">R A I L
JET  </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Rail
Jet</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="213">
      <xs:annotation>
        <xs:documentation xml:lang="en">AZ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">DB
Autozug </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">DB
Autozug</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">14</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="214">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Berlin-
Warszawa-Express </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Berlin-
Warszawa-Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="215">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Railpromo Austria Express/Treski</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Austria
Express/Treski</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="216">
      <xs:annotation>
        <xs:documentation xml:lang="en"> </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">PRECIOS
MERCADO</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Precios
Mercado</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">9</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="219">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="223">
      <xs:annotation>
        <xs:documentation xml:lang="en">FB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">FB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">FernBus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="224">
      <xs:annotation>
        <xs:documentation xml:lang="en">ICB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Intercitybus</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="merits description">ÖBB-
Intercitybus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="225">
      <xs:annotation>
        <xs:documentation xml:lang="en">TLK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">TLK
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Yours Rail
Lines</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="226">
      <xs:annotation>
        <xs:documentation xml:lang="en">A</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">RailBus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">RailBus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="227">
      <xs:annotation>
        <xs:documentation xml:lang="en">BUS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Replacement bus for Regional Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Replacement
bus for Regional Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="228">
      <xs:annotation>
        <xs:documentation xml:lang="en">IR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">InterREGIO train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">InterREGIO
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="229">
      <xs:annotation>
        <xs:documentation xml:lang="en">IRB</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Replacement bus for InterRegio train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Replacement
bus for InterRegio train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="230">
      <xs:annotation>
        <xs:documentation xml:lang="en">MP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Fast
International Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Fast
International Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="231">
      <xs:annotation>
        <xs:documentation xml:lang="en">MR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">musicREGIO train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">musicREGIO
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="232">
      <xs:annotation>
        <xs:documentation xml:lang="en">Os</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Stopping Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Stopping
Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="233">
      <xs:annotation>
        <xs:documentation xml:lang="en">P</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Fast
Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Fast
Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="234">
      <xs:annotation>
        <xs:documentation xml:lang="en">R</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">REGIO
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">REGIO
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="235">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">RE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">REGIOekspres train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">REGIOekspres
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="236">
      <xs:annotation>
        <xs:documentation xml:lang="en">VR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">viaREGIO train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">viaREGIO
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="237">
      <xs:annotation>
        <xs:documentation xml:lang="en">TK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">TurKol</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">TurKol</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">11</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="238">
      <xs:annotation>
        <xs:documentation xml:lang="en">EIP</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">EIC
Premium</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">High-speed
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="239">
      <xs:annotation>
        <xs:documentation xml:lang="en">SKM</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">PKP SKM
w Trojmiescie</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">PKP SKM w
Trojmiescie</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">12</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="240">
      <xs:annotation>
        <xs:documentation xml:lang="en">SA</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">SAPSAN</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="merits description">High speed
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="242">
      <xs:annotation>
        <xs:documentation xml:lang="en">STR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">STRIZH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Strizh night
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="243">
      <xs:annotation>
        <xs:documentation xml:lang="en">STR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">STRIZH</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Strizh
interregional</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="244">
      <xs:annotation>
        <xs:documentation xml:lang="en">NJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">NJ</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">NJ Night
Jet</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="245">
      <xs:annotation>
        <xs:documentation xml:lang="en">CAR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">AUTOCAR</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">French
regional buses (not sold via Hermes)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="246">
      <xs:annotation>
        <xs:documentation xml:lang="en">RJX</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">RJX</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">RJX railjet
xpress</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="247">
      <xs:annotation>
        <xs:documentation xml:lang="en">CJX</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">CJX</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">CJX cityjet
xpress</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="248">
      <xs:annotation>
        <xs:documentation xml:lang="en"/>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Night
train BC </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Night train
BC </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="249">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">TGV
INOUI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV
INOUI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="250">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">TGV
INOUI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">TGV INOUI
DUPLEX (double decker TGV)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">8</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="251">
      <xs:annotation>
        <xs:documentation xml:lang="en">ALI</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Aare
Linth</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Aare Linth
(Panorama Train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="252">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">TGO</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">Treno
Gottardo</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Treno
Gottardo (Panorama Train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="253">
      <xs:annotation>
        <xs:documentation xml:lang="en">VAE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">Voralpen-Express</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Voralpen-
Express (Panorama Train)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">10</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="254">
      <xs:annotation>
        <xs:documentation xml:lang="en">LK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">FRECCIALINK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits
description">FRECCIALINK</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">32</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="255">
      <xs:annotation>
        <xs:documentation xml:lang="en">FRN</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text
reservation">FRECCIAROSSA NOTTE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">FRECCIAROSSA
NOTTE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">13</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="256">
      <xs:annotation>
        <xs:documentation xml:lang="en">ABS</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">ANEK –
SUPERFAST JOINT VENTURE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Domestic
routes Crete</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">33</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="257">
      <xs:annotation>
        <xs:documentation xml:lang="en">ASF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">ANEK –
SUPERFAST JOINT VENTURE</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="merits
description">International Lines Italy-Greece and V.V.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">33</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="258">
      <xs:annotation>
        <xs:documentation xml:lang="en">BSF</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">BLUE
STAR FERRIES MARITIME SA  CO JOINT  VENTURE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Domestic
routes Greece</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">33</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="259">
      <xs:annotation>
        <xs:documentation xml:lang="en">HSW</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="ticket text reservation">BLUE
STAR FERRIES MARITIME SA  CO JOINT  VENTURE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="merits description">Domestic
routes Greece</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="servicemode
code">33</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type7009ServiceModeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	final list base xs:string
facets	Kind / Value / Annotation minLength 1 maxLength 3 enumeration 3 documentation: Plane; documentation: Service mode; documentation: 0 enumeration 8 documentation: high speed train; documentation: long distance train formed by a unit capable for high speed running on high speed or normal lines most modern train unit highest quality service very restricted stopping pattern; documentation: Service mode; documentation: 0 enumeration 9 documentation: Intercity; documentation: long distance train formed by a unit capable for high speed or not running on high speed or normal lines modern train unit high quality service restricted stopping pattern; documentation: Service mode

			documentation 0
	enumeration	10	documentation Interregional documentation regional train running in more than one region documentation Service mode documentation 0
	enumeration	11	documentation Regional documentation regional train organised by the regional government even if formed by a unit capable for high speed running on high speed lines documentation Service mode documentation 0
	enumeration	12	documentation (sub)Urban documentation regional train organised by the regional government public transport in and around cities, running on ist own freeways underground or overground, operational running with signals documentation Service mode documentation 0
	enumeration	13	documentation Night train documentation long distance train running overnight offering sleeping facilities (beds and or couchettes) documentation Service mode documentation 0
	enumeration	14	documentation Motor rail documentation service transporting passenger's motor vehicle passengers are admitted either with vehicle only or with or without vehicle documentation Service mode documentation 0
	enumeration	15	documentation Mountain train documentation Local train adapted for running in mountain railway lines documentation Service mode documentation 0
	enumeration	16	documentation Historic train documentation Local train providing historical characteristics documentation Service mode documentation 0
	enumeration	31	documentation Coach group documentation Group of railway coaches that can be attached to and detached from one or more trains during a journey documentation Service mode documentation 0
	enumeration	32	documentation Bus documentation

	Bus documentation Service mode documentation 0 enumeration 33 documentation Ship documentation Ship documentation Service mode documentation 0 enumeration 34 documentation Ordered and shared taxi documentation Taxi to be ordered and shared among users documentation Service mode documentation 0 enumeration 35 documentation Tram documentation Tram documentation Service mode documentation 0 enumeration 36 documentation Underground documentation Underground train documentation Service mode documentation 0 enumeration 37 documentation Train documentation General indication of train as transport mode documentation Service mode documentation 0
annotation	documentation Code list for the service mode (B.4.7009) appinfo <dc:title>Code list for the service mode</dc:title> <dc:source>B.2.3,B.3.3,B.4.7009</dc:source>
source	<xs:simpleType name="type7009ServiceModeCodeList" final="list"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the service mode (B.4.7009)</xs:documentation> <xs:appinfo> <dc:title>Code list for the service mode</dc:title> <dc:source>B.2.3,B.3.3,B.4.7009</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="3"/> <xs:enumeration value="3"> <xs:annotation> <xs:documentation xml:lang="en">Plane</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description"/> <xs:documentation xml:lang="en" doc:docType="Remark">Service mode</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation>

```
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">high speed train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">long distance train
formed by a unit capable for high speed running on high speed or normal lines most
modern train unit highest quality service very restricted stopping
pattern</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Intercity</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">long distance train
formed by a unit capable for high speed  or not running on high speed or normal lines
modern train unit high quality service restricted stopping pattern</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Interregional</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">regional train
running in more than one region</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Regional</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">regional train
organised by the regional government even if formed by a unit capable for high speed
running on high speed lines</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">(sub)Urban</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">regional train
organised by the regional government  public transport in and around cities, running
on ist own freeways underground or overground,              operational running with
signals</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">Night train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">long distance train
running overnight offering sleeping facilities (beds and or
couchettes)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
```

```
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motor rail</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">service
transporting passenger's motor vehicle passengers are admitted either with vehicle
only or with or without vehicle</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mountain train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Local train adapted
for running in mountain railway lines</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Historic train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Local train
providing historical characteristics</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en">Coach group</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Group of railway
coaches that can be attached to and detached from one or more trains during a
journey</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bus</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Bus</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="33">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ship</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Ship</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation xml:lang="en">Ordered and shared taxi</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Taxi to be ordered
and shared among users</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="35">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tram</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Tram</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="36">
      <xs:annotation>
        <xs:documentation xml:lang="en">Underground</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Underground
train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="37">
      <xs:annotation>
        <xs:documentation xml:lang="en">Train</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">General indication
of train as transport mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Service
mode</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type7037CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
used by	element **TypeofService/CharacteristicDescriptionCode**

facets

Kind	Value	Annotation
maxLength	17	
enumeration	6	documentation First class documentation First class accommodation documentation 0
enumeration	7	documentation Second class documentation

			Second class accommodation
			documentation
			0
	enumeration	11	documentation
			Reservation possible
			documentation
			Reservation is possible
			documentation
			0
	enumeration	12	documentation
			With supplement
			documentation
			A supplement is charged
			documentation
			0
	enumeration	13	documentation
			Reservation compulsory
			documentation
			Reservation is compulsory
			documentation
			0
	enumeration	14	documentation
			Reservation advised
			documentation
			Reservation is recommended
			documentation
			0
	enumeration	15	documentation
			Reservation compulsory for parties
			documentation
			Reservation is compulsory for parties
			documentation
			0
	enumeration	16	documentation
			Reservation compulsory in first-class
			documentation
			Reservation is compulsory in first-class
			documentation
			0
	enumeration	17	documentation
			Group booking restricted
			documentation
			Booking by groups restricted
			documentation
			0
	enumeration	18	documentation
			Groups not allowed
			documentation
			Groups of travellers are not allowed
			documentation
			0
	enumeration	19	documentation
			No reservation
			documentation
			Reservation is not possible
			documentation
			0
	enumeration	20	documentation
			Reservation in first class only
			documentation
			Reservation is only possible in first
			documentation
			0
	enumeration	21	documentation
			Reservation compulsory from origin station
			documentation
			Reservation compulsory from origin station
			documentation
			0
	enumeration	22	documentation
			Reservation allowed for certain classes/products
			documentation
			Reservation possible for some booking classes/products

	documentation 0 enumeration 23 documentation Reservation in second class only documentation Reservation is only possible in second class. documentation 0 enumeration 24 documentation Not available documentation The product is not available documentation 0 enumeration 25 documentation Non-bookable documentation The product is not bookable documentation 0 enumeration 26 documentation Bookable through an international reservation system documentation Bookable through an international reservation system documentation 0 enumeration 27 documentation Bookable through a national reservation system documentation Bookable through a national reservation system documentation 0 enumeration 28 documentation Bookable manually on the RU selling point documentation Bookable manually on the RU selling point documentation 0
annotation	documentation Code list for the chracteristic description code (B.4.7037) appinfo <dc:title>Code list for the chracteristic description code</dc:title> <dc:source>B.4.7037</dc:source>
source	<xs:simpleType name="type7037CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the chracteristic description code (B.4.7037)</xs:documentation> <xs:appinfo> <dc:title>Code list for the chracteristic description code</dc:title> <dc:source>B.4.7037</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="17"/> <xs:enumeration value="6"> <xs:annotation> <xs:documentation xml:lang="en">First class</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">First class accommodation</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation xml:lang="en">Second class</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">Second class accommodation</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/>

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation possible</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation is
possible</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">With supplement</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">A supplement is
charged</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation compulsory</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation is
compulsory</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation advised</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation is
recommended</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation compulsory for
parties</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation is
compulsory for parties</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation compulsory in first-
class</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation is
compulsory in first-class</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="17">
      <xs:annotation>
        <xs:documentation xml:lang="en">Group booking restricted</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Booking by groups
restricted</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation xml:lang="en">Groups not allowed</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Groups of
travellers are not allowed</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
      <xs:annotation>
        <xs:documentation xml:lang="en">No reservation</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation is not
possible</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="20">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation in first class
only</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation is only
possible in first </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation compulsory from origin
station</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation
compulsory from origin station</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation allowed for certain
classes/products</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation
possible for some booking classes/products</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation in second class
only</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Reservation is only
possible in second class.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">Not available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The product is not
available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non-bookable</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The product is not
bookable</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bookable through an international reservation
system</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bookable through an
international reservation system</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="27">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bookable through a national reservation
system</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bookable through a
national reservation system</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bookable manually on the RU selling
point</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bookable manually
on the RU selling point</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type7139CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind / Value / Annotation maxLength 3 enumeration 1 documentation: NRT documentation: NRT tariff is applicable for the given travel service (NRT = non-reservation tariff, ordinary tariff for travellers) documentation

	0 enumeration 2 documentation (Global price) All inclusive tariff documentation All-inclusive tariff is applicable for the given travel service. documentation 0 enumeration 3 documentation East-West tariff documentation Tariff used for East-West traffic documentation 0 enumeration 4 documentation Train with NRT and Market Price documentation The service can be sold at market price and NRT. documentation 0 enumeration 5 documentation No published tariff documentation There is no published price for the service. documentation 0
annotation	documentation Code list for the product characteristic identification code (B.4.7139) appinfo <dc:title>Code list for the product characteristic identification code</dc:title> <dc:source>B.4.7139</dc:source>
source	<xs:simpleType name="type7139CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the product characteristic identification code (B.4.7139)</xs:documentation> <xs:appinfo> <dc:title>Code list for the product characteristic identification code</dc:title> <dc:source>B.4.7139</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="3"/> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">NRT</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">NRT tariff is applicable for the given travel service (NRT = non-reservation tariff, ordinary tariff for travellers)</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">(Global price) All inclusive tariff</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">All-inclusive tariff is applicable for the given travel service.</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation xml:lang="en">East-West tariff</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">Tariff used for East-West traffic</xs:documentation>

```
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Train with NRT and Market
Price</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The service can be
sold at market price and NRT.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">No published tariff</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">There is no
published price for the service.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type7161CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
used by	element **TypeofService/SpecialServiceDescriptionCode**

facets

Kind	Value	Annotation
maxLength	3	
enumeration	00	documentation Alternative service documentation The journey planner algorithm should look for an alternative Service documentation 0
enumeration	3	documentation Additional loading documentation Additional loading of vehicles on a train of accompanied motorcars documentation 0
enumeration	4	documentation Additional unloading documentation Additional unloading of vehicles from a train of accompanied motorcars documentation 0
enumeration	5	documentation Breakfast documentation Breakfast documentation 0
enumeration	6	documentation Dinner documentation Dinner documentation 0
enumeration	7	documentation

			Loading documentation Loading of vehicles on a train of accompanied motorcars documentation 0
	enumeration	8	documentation Lunch documentation Lunch documentation 0
	enumeration	9	documentation Unloading documentation Unloading of vehicles from a train of accompanied motorcars documentation 0
	enumeration	11	documentation Child documentation Services for children documentation 0
	enumeration	21	documentation Cold buffet documentation Cold buffet service documentation 0
	enumeration	22	documentation Restaurant in 1st class only documentation Restaurant service in 1st class only documentation 0
	enumeration	23	documentation Hot buffet documentation Hot buffet service documentation 0
	enumeration	24	documentation Meal included for 1st class passengers documentation Meal service included for 1st class passengers documentation 0
	enumeration	25	documentation Trolley documentation Trolley service (beverage and food cart) documentation 0
	enumeration	26	documentation Snack documentation Snack documentation 0
	enumeration	27	documentation Disabled documentation Services for disabled persons documentation 0
	enumeration	28	documentation Movies documentation Movies documentation 0
	enumeration	29	documentation Business

			documentation
			Services for business people
			documentation
			0
	enumeration	30	documentation
			Nursery
			documentation
			Nursery service
			documentation
			0
	enumeration	31	documentation
			Buffet
			documentation
			Buffet
			documentation
			0
	enumeration	32	documentation
			Special services for military
			documentation
			Special services for army families
			documentation
			0
	enumeration	33	documentation
			Boarding possible 2 hours before departure
			documentation
			Boarding is possible 2 hours before departure
			documentation
			0
	enumeration	34	documentation
			Alighting possible until 2 hours after arrival
			documentation
			Alighting is possible up to 2 hours after arrival
			documentation
			0
	enumeration	35	documentation
			Boarding possible 30 minutes before departure
			documentation
			Boarding is possible 30 minutes before departure
			documentation
			0
	enumeration	36	documentation
			Alighting possible until 30 minutes after arrival
			documentation
			Alighting is possible up to 30 minutes after arrival
			documentation
			0
	enumeration	37	documentation
			Postal services
			documentation
			Postal services available
			documentation
			0
	enumeration	38	documentation
			Meal at the seat
			documentation
			Meal is provided at the seat
			documentation
			0
	enumeration	39	documentation
			Self service
			documentation
			Self service meals
			documentation
			0
	enumeration	40	documentation
			Overnight stay
			documentation
			Overnight stay possible on board
			documentation
			0
	enumeration	41	documentation
			Luggage transport
			documentation

	Luggage transport offered documentation 0 enumeration 42 documentation Luggage transport excluded documentation Luggage transport is not offered documentation 0 enumeration 43 documentation Music documentation Music documentation 0 enumeration 44 documentation Check-in documentation Time at which the traveller checks in documentation 0 enumeration 45 documentation Check-out documentation Time at which the traveller checks out documentation 0 enumeration 46 documentation Free WiFi on board documentation Free WiFi service on board available documentation 0 enumeration 47 documentation WiFi on board documentation WiFi service on board available documentation 0 enumeration 48 documentation Warning! Service may be affected by strike action documentation Warning! Service may be affected by strike action documentation 0
annotation	documentation Code list for the special services (B.4.7161) appinfo <dc:title>Code list for the special services</dc:title> <dc:source>B.4.7161</dc:source>
source	<xs:simpleType name="type7161CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the special services (B.4.7161)</xs:documentation> <xs:appinfo> <dc:title>Code list for the special services</dc:title> <dc:source>B.4.7161</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="3"/> <xs:enumeration value="00"> <xs:annotation> <xs:documentation xml:lang="en">Alternative service</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">The journey planner algorithm should look for an alternative Service</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration>

```
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Additional loading</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Additional loading
of vehicles on a train of accompanied motorcars</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Additional unloading</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Additional
unloading of vehicles from a train of accompanied motorcars</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Breakfast</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Breakfast</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Dinner</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Dinner</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Loading</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Loading of vehicles
on a train of accompanied motorcars</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Lunch</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Lunch</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Unloading</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Unloading of
vehicles from a train of accompanied motorcars</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Child</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Services for
children</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cold buffet</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Cold buffet
service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation xml:lang="en">Restaurant in 1st class
only</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Restaurant service
in 1st class only</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation xml:lang="en">Hot buffet</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Hot buffet
service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation xml:lang="en">Meal included for 1st class
passengers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Meal service
included for 1st class passengers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation xml:lang="en">Trolley</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Trolley service
(beverage and food cart)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation xml:lang="en">Snack</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Snack</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="27">
      <xs:annotation>
        <xs:documentation xml:lang="en">Disabled</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Services for
disabled persons</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation xml:lang="en">Movies</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Movies</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="29">
      <xs:annotation>
        <xs:documentation xml:lang="en">Business</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Services for
business people</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en">Nursery</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Nursery
service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en">Buffet</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Buffet</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation xml:lang="en">Special services for
military</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Special services
for army families</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="33">
      <xs:annotation>
        <xs:documentation xml:lang="en">Boarding possible 2 hours before
departure</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Boarding is
possible 2 hours before departure</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation xml:lang="en">Alighting possible until 2 hours after
arrival</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Alighting is
possible up to 2 hours after arrival</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="35">
      <xs:annotation>
        <xs:documentation xml:lang="en">Boarding possible 30 minutes before
departure</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Boarding is
possible 30 minutes before departure</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="36">
      <xs:annotation>
        <xs:documentation xml:lang="en">Alighting possible until 30 minutes after
arrival</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Alighting is
possible up to 30 minutes after arrival</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="37">
      <xs:annotation>
        <xs:documentation xml:lang="en">Postal services</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Postal services
available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="38">
      <xs:annotation>
        <xs:documentation xml:lang="en">Meal at the seat</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Meal is provided at
the seat</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="39">
      <xs:annotation>
        <xs:documentation xml:lang="en">Self service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Self service
meals</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation xml:lang="en">Overnight stay</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Overnight stay
possible on board</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
```

```
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="41">
      <xs:annotation>
        <xs:documentation xml:lang="en">Luggage transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Luggage transport
offered</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="42">
      <xs:annotation>
        <xs:documentation xml:lang="en">Luggage transport excluded</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Luggage transport
is not offered</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="43">
      <xs:annotation>
        <xs:documentation xml:lang="en">Music</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Description">Music</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44">
      <xs:annotation>
        <xs:documentation xml:lang="en">Check-in</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time at which the
traveller checks in</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="45">
      <xs:annotation>
        <xs:documentation xml:lang="en">Check-out</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Time at which the
traveller checks out</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="46">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free WiFi on board</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Free WiFi service
on board available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="47">
      <xs:annotation>
        <xs:documentation xml:lang="en">WiFi on board</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">WiFi service on
board available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
```

```
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="48">
      <xs:annotation>
        <xs:documentation xml:lang="en">Warning! Service may be affected by strike
action</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Warning! Service
may be affected by strike action</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type8015CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation maxLength 3 enumeration 1 documentation Stop only for boarding documentation Travel service stops at the given location, only to pick-up travellers documentation 0 enumeration 2 documentation Stop only for alighting documentation Travel service stops at the given location, only for alighting documentation 0 enumeration 3 documentation Technical stop, without boarding or alighting documentation Location where a travel service makes a technical stop wihtout allowing passengers to board or to disembark documentation 0 enumeration 4 documentation Passage documentation Travel service stops at the given location without stopping documentation 0
annotation	documentation Code list for Traffic restriction code (B.4.8015) appinfo <dc:title>Code specifying a traffic restriction</dc:title> <dc:source>B.4.8015</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>

source

```
<xs:simpleType name="type8015CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for Traffic restriction code
(B.4.8015)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code specifying a traffic restriction</dc:title>
      <dc:source>B.4.8015</dc:source>
      <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder>
      <dc:source>UNTDID/UNCL</dc:source>
    </xs:appinfo>
  </xs:annotation>
```

```
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Stop only for boarding</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Travel service
stops at the given location, only to pick-up travellers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Stop only for alighting</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Travel service
stops at the given location, only for alighting</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Technical stop, without boarding or
alighting</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Location where a
travel service makes a technical stop wihtout allowing passengers to board or to
disembark</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Passage</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Travel service
stops at the given location without stopping</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type9039CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
used by	element **TypeofService/FacilityTypeDescriptionCode**

facets

Kind	Value	Annotation
maxLength	3	
enumeration	2	documentation First-class sleepers documentation First-class sleepers documentation 0
enumeration	3	documentation Standard class sleepers documentation Standard class (second class) sleepers documentation

			0
	enumeration	4	documentation First-class seats documentation First-class seats documentation 0
	enumeration	5	documentation Second-class seats documentation Second-class seats documentation Also: standard, etc. documentation 0
	enumeration	6	documentation First-class couchettes documentation First-class couchettes documentation 0
	enumeration	7	documentation Second-class couchettes documentation Second-class couchettes documentation 0
	enumeration	8	documentation Sleeperette documentation Sleeperette or reclining seat documentation 0
	enumeration	9	documentation Restaurant documentation Restaurant facility documentation 0
	enumeration	11	documentation First-class sleeper, single documentation First-class sleeper, single documentation 0
	enumeration	12	documentation First-class sleeper, special documentation First-class sleeper, special documentation 0
	enumeration	13	documentation First-class sleeper, double documentation First-class sleeper, double documentation 0
	enumeration	14	documentation Vehicle transport documentation Facilities for vehicle transport etc. Not bicycles. documentation Cars, boats, trailers, motorbikes, documentation 0
	enumeration	15	documentation Second-class, sleeper, T2 documentation Second-class sleeper, T2 (two-bed compartment) documentation 0
	enumeration	16	documentation Second-class sleeper, T3

			documentation
			Second-class sleeper, T3 (three-bed compartment)
			documentation
			0
	enumeration	17	documentation
			Second-class sleeper T4
			documentation
			Second-class sleeper, T4 (four-bed compartment)
			documentation
			0
	enumeration	18	documentation
			First-class sleeper, single, shower
			documentation
			First-class sleeper, single with shower
			documentation
			0
	enumeration	19	documentation
			First-class sleeper, double, shower
			documentation
			First-class sleeper, double with shower
			documentation
			0
	enumeration	20	documentation
			Non-smoker service
			documentation
			The travel service is non-smoking
			documentation
			0
	enumeration	21	documentation
			Heavily disabled
			documentation
			Facilities for heavily disabled persons available
			documentation
			0
	enumeration	24	documentation
			Baby room
			documentation
			Baby care facilities available
			documentation
			0
	enumeration	26	documentation
			Bicycle transport
			documentation
			Facility for bicycle transport available
			documentation
			0
	enumeration	28	documentation
			Wheelchair access
			documentation
			Access for wheelchairs possible
			documentation
			0
	enumeration	33	documentation
			Video coach
			documentation
			Video coach available
			documentation
			0
	enumeration	34	documentation
			Mini-bar
			documentation
			Mini-bar available
			documentation
			0
	enumeration	36	documentation
			Panorama coach
			documentation
			Panorama coach available
			documentation
			0
	enumeration	44	documentation
			Telephone
			documentation

			Telephone service is available
			documentation
			0
	enumeration	45	documentation
			Power supply
			documentation
			Service provides power supply sockets
			documentation
			0
	enumeration	46	documentation
			Pullmann coach
			documentation
			Pullman car seats
			documentation
			0
	enumeration	47	documentation
			Bar
			documentation
			A bar is available
			documentation
			0
	enumeration	48	documentation
			Family compartment
			documentation
			Family compartment(s) available
			documentation
			0
	enumeration	50	documentation
			Buffet machine
			documentation
			Buffet machine available
			documentation
			0
	enumeration	54	documentation
			Premium class
			documentation
			A class with comfort level higher than first class Business, etc
			documentation
			Includes Comfort, Club, Pullman,
			documentation
			0
	enumeration	55	documentation
			Preferente
			documentation
			Spanish first class on long distance trains
			documentation
			RENFE
			documentation
			0
	enumeration	56	documentation
			Turista
			documentation
			Spanish second class on long distance trains
			documentation
			RENFE
			documentation
			0
	enumeration	57	documentation
			First-class sleeper, single, shower, WC
			documentation
			First-class sleeper, single with shower and WC
			documentation
			RENFE
			documentation
			0
	enumeration	58	documentation
			First-class sleeper, double shower, WC
			documentation
			First-class sleeper, double with shower and WC
			documentation
			RENFE
			documentation
			0

	enumeration	59	documentation Second class sleeper, T3, shower, WC documentation Second class sleeper, T3, shower, WC documentation 0
	enumeration	60	documentation Second class sleeper double documentation Second class sleeper for two documentation 0
	enumeration	61	documentation Second class sleeper double shower/toilets documentation Second class sleeper for two with shower and toilets documentation 0
	enumeration	62	documentation Second-class, couchette, two-bed, C2 documentation Second class compartment with 2 couchettes documentation 0
	enumeration	63	documentation Second-class, couchette, four-bed, C4 documentation Second class compartment with 4 couchettes documentation 0
	enumeration	64	documentation Second-class, couchette, six-bed, C6 documentation Second class compartment with 6 couchettes documentation 0
	enumeration	65	documentation Second class couchette wheelchair documentation Second class couchette with wheelchair space documentation 0
	enumeration	66	documentation Executive class documentation A class with comfort level higher than first class documentation Trenitalia documentation 0
	enumeration	67	documentation Business class documentation First class documentation Trenitalia documentation 0
	enumeration	68	documentation Premium class documentation A second class with comfort level higher than normal second class documentation Trenitalia documentation 0
	enumeration	69	documentation Standard class documentation Trenitalia's normal second class documentation Trenitalia documentation

			0
	enumeration	70	documentation Unified class documentation For services with no class differentiation. A service with only one class documentation UIC documentation 0
	enumeration	71	documentation Medical-grade masks documentation Medical-grade masks must be worn documentation 0
	enumeration	72	documentation Mask obligation according to legal regulation documentation Mask obligation according to legal regulation documentation 0
	enumeration	101	documentation Metro connection documentation Metro, subway, underground connection documentation Only used in TSDUPD documentation 0
	enumeration	102	documentation Taxi connection documentation Taxi connection documentation Only used in TSDUPD documentation 0
	enumeration	103	documentation Bus connection documentation Bus connections available documentation Used only in TSDUPD documentation 0
	enumeration	104	documentation Tram connection documentation Tram connections available documentation Used only in TSDUPD documentation 0
	enumeration	105	documentation 2nd Class couchette five beds C5 documentation 2nd Class couchette five beds C5 documentation DB Nachtzug documentation 0
	enumeration	106	documentation Vaccinated, tested, recovered rule applied documentation Vaccinated, tested, recovered rule applied documentation Vaccinated, tested, recovered rule applies on trains, valid proof must be presented documentation 0
	enumeration	107	documentation Dedicated toilet and place for wheelchair documentation Dedicated toilet and place for wheelchair

	documentation Dedicated toilet together with dedicated space for wheelchair documentation 0
annotation	documentation Code list for the facility type description (B.2.10,B.3.1,B.3.4,B.4.9039) appinfo <dc:title>Code list for the facility type description</dc:title> <dc:source>B.2.10,B.3.1,B.3.4,B.4.9039</dc:source>
source	

```
<xs:simpleType name="type9039CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the facility type description
(B.2.10,B.3.1,B.3.4,B.4.9039)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the facility type description</dc:title>
      <dc:source>B.2.10,B.3.1,B.3.4,B.4.9039</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class sleepers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
sleepers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Standard class sleepers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Standard class
(second class) sleepers</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class seats</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
seats</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second-class seats</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second-class
seats</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Also: standard,
etc.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class couchettes</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
couchettes</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second-class couchettes</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second-class
couchettes</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sleeperette</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Sleeperette or
reclining seat</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Restaurant</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Restaurant
facility</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class sleeper,
single</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
sleeper, single</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class sleeper,
special</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
sleeper, special</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class sleeper,
double</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
sleeper, double</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vehicle transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Facilities for
vehicle transport etc. Not bicycles.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Cars, boats, trailers,
```

```
motorbikes, </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second-class, sleeper, T2</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second-class
sleeper, T2 (two-bed compartment)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second-class sleeper, T3</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second-class
sleeper, T3 (three-bed compartment)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="17">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second-class sleeper T4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second-class
sleeper, T4 (four-bed compartment)</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class sleeper, single,
shower</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
sleeper, single with shower</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class sleeper, double,
shower</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
sleeper, double with shower</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="20">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non-smoker service</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The travel service
is non-smoking</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation xml:lang="en">Heavily disabled</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Facilities for
```

```
heavily disabled persons available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation xml:lang="en">Baby room</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Baby care
facilities available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bicycle transport</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Facility for
bicycle transport available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation xml:lang="en">Wheelchair access</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Access for
wheelchairs possible</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="33">
      <xs:annotation>
        <xs:documentation xml:lang="en">Video coach</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Video coach
available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mini-bar</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Mini-bar
available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="36">
      <xs:annotation>
        <xs:documentation xml:lang="en">Panorama coach</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Panorama coach
available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="44">
      <xs:annotation>
        <xs:documentation xml:lang="en">Telephone</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Telephone service
is available</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="45">
      <xs:annotation>
        <xs:documentation xml:lang="en">Power supply</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Service provides
power supply sockets</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="46">
      <xs:annotation>
        <xs:documentation xml:lang="en">Pullmann coach</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Pullman car
seats</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="47">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bar</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">A bar is
available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="48">
      <xs:annotation>
        <xs:documentation xml:lang="en">Family compartment</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Family
compartment(s) available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="50">
      <xs:annotation>
        <xs:documentation xml:lang="en">Buffet machine</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Buffet machine
available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="54">
      <xs:annotation>
        <xs:documentation xml:lang="en">Premium class</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">A class with
comfort level higher than first class Business, etc</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Includes Comfort, Club,
Pullman, </xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="55">
      <xs:annotation>
        <xs:documentation xml:lang="en">Preferente</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Spanish first class
on long distance trains</xs:documentation>
```

```
        <xs:documentation xml:lang="en" doc:docType="Remark">RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="56">
      <xs:annotation>
        <xs:documentation xml:lang="en">Turista</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Spanish second
class on long distance trains</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="57">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class sleeper, single, shower,
WC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
sleeper, single with shower and WC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="58">
      <xs:annotation>
        <xs:documentation xml:lang="en">First-class sleeper, double shower,
WC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First-class
sleeper, double with shower and WC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">RENFE</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="59">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second class sleeper, T3, shower,
WC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second class
sleeper, T3, shower, WC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="60">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second class sleeper
double</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second class
sleeper for two</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="61">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second class sleeper double
shower/toilets</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second class
sleeper for two with shower and toilets</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Second-class, couchette, two-bed,
C2</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second class
compartment with 2 couchettes</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="63">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second-class, couchette, four-bed,
C4</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second class
compartment with 4 couchettes</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="64">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second-class, couchette, six-bed,
C6</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second class
compartment with 6 couchettes</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="65">
      <xs:annotation>
        <xs:documentation xml:lang="en">Second class couchette
wheelchair</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Second class
couchette with wheelchair space</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="66">
      <xs:annotation>
        <xs:documentation xml:lang="en">Executive class</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">A class with
comfort level higher than first class</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Trenitalia</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="67">
      <xs:annotation>
        <xs:documentation xml:lang="en">Business class</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">First
class</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Trenitalia</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="68">
      <xs:annotation>
        <xs:documentation xml:lang="en">Premium class</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">A second class with
comfort level higher than normal second class</xs:documentation>
```

```
        <xs:documentation xml:lang="en"
doc:docType="Remark">Trenitalia</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="69">
      <xs:annotation>
        <xs:documentation xml:lang="en">Standard class</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Trenitalia's normal
second class</xs:documentation>
        <xs:documentation xml:lang="en"
doc:docType="Remark">Trenitalia</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="70">
      <xs:annotation>
        <xs:documentation xml:lang="en">Unified class</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">For services with
no class differentiation. A service with only one class</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">UIC</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="71">
      <xs:annotation>
        <xs:documentation xml:lang="en">Medical-grade masks</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Medical-grade masks
must be worn</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="72">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mask obligation according to legal
regulation</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Mask obligation
according to legal regulation</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="101">
      <xs:annotation>
        <xs:documentation xml:lang="en">Metro connection</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Metro, subway,
underground connection</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Only used in
TSDUPD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="102">
      <xs:annotation>
        <xs:documentation xml:lang="en">Taxi connection</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Taxi
connection</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Only used in
TSDUPD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="103">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Bus connection</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Bus connections
available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Used only in
TSDUPD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="104">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tram connection</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Tram connections
available</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Used only in
TSDUPD</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="105">
      <xs:annotation>
        <xs:documentation xml:lang="en">2nd Class couchette five beds
C5</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">2nd Class couchette
five beds C5</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">DB
Nachtzug</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="106">
      <xs:annotation>
        <xs:documentation xml:lang="en">Vaccinated, tested, recovered rule
applied</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">Vaccinated, tested,
recovered rule applied</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Vaccinated, tested,
recovered rule applies on trains, valid proof must be presented</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="107">
      <xs:annotation>
        <xs:documentation xml:lang="en"> Dedicated toilet and place for
wheelchair</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description"> Dedicated toilet
and place for wheelchair</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Dedicated toilet
together with dedicated space for wheelchair</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type9141CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation maxLength 3

	enumeration 13 documentation Association documentation The relation applies to an association documentation 0
annotation	documentation Code list for the relationship type code qualifier (B.4.9141) appinfo <dc:title>Relationship code qualifier code list</dc:title> <dc:source>B.4.9141</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source>
source	<xs:simpleType name="type9141CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the relationship type code qualifier (B.4.9141)</xs:documentation> <xs:appinfo> <dc:title>Relationship code qualifier code list</dc:title> <dc:source>B.4.9141</dc:source> <dcterms:rightsHolder>UN/EDIFACT</dcterms:rightsHolder> <dc:source>UNTDID/UNCL</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="3"/> <xs:enumeration value="13"> <xs:annotation> <xs:documentation xml:lang="en">Association</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">The relation applies to an association</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **type9143CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind Value Annotation maxLength 3 enumeration 6 documentation Connecting to documentation The specified object connects to the related object documentation 0 enumeration 7 documentation Timing between services documentation The object (service) enables connection with the related object (service) within a specified timespan documentation 0 enumeration 8 documentation Joining to documentation The specified object joins with the related object documentation 0 enumeration 9 documentation Join from

	documentation The specified object joins from the related object documentation 0 enumeration 10 documentation Splitting to documentation The specified object splits to the related object documentation 0 enumeration 11 documentation Splitting from documentation The specified object splits from the related object documentation 0 enumeration 12 documentation Identification number change documentation The specified object contains an identification number replacing the identification number of the related one documentation 0 enumeration 13 documentation Disconnect from documentation The specified object disconnects from the related one documentation The travel service is detached from the related one that has a separate identifier (train number) and acquires another identifier. This code entry may not be used for coach groups. documentation 0 enumeration 14 documentation Child documentation The specified object is a child (belongs to, is part of) the related one documentation Example: the station belongs to a tariff zone documentation 0
annotation	documentation Relationship description code (B.4.9143) documentation Code list should be aligned to EDIFACT Working Group TT&L code list appinfo <dc:title>Relationship description code code list</dc:title> <dc:source>B.4.9143</dc:source>
source	<xs:simpleType name="type9143CodeList"> <xs:annotation> <xs:documentation xml:lang="en">Relationship description code (B.4.9143)</xs:documentation> <xs:documentation doc:docType="Remark">Code list should be aligned to EDIFACT Working Group TT&L code list</xs:documentation> <xs:appinfo> <dc:title>Relationship description code code list</dc:title> <dc:source>B.4.9143</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="3"/> <xs:enumeration value="6"> <xs:annotation> <xs:documentation xml:lang="en">Connecting to</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Description">The specified object connects to the related object</xs:documentation> <xs:documentation xml:lang="en" doc:docType="Remark"/> <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation> </xs:annotation> </xs:enumeration>

```
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Timing between services</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The object
(service) enables connection with the related object (service) within a specified
timespan</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Joining to</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The specified
object joins with the related object</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Join from</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The specified
object joins from the related object</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Splitting to</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The specified
object splits to the related object</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation xml:lang="en">Splitting from</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The specified
object splits from the related object</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation xml:lang="en">Identification number
change</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The specified
object contains an identification number replacing the identification number of the
related one</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark"/>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="13">
      <xs:annotation>
        <xs:documentation xml:lang="en">Disconnect from</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The specified
object disconnects from the related one</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">The travel service is
detached from the related one that has a separate identifier (train number) and
```

```
acquires another identifier. This code entry may not be used for coach
groups.</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">Child</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Description">The specified
object is a child (belongs to, is part of) the related one</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Remark">Example: the station
belongs to a tariff zone</xs:documentation>
        <xs:documentation xml:lang="en" doc:docType="Status">0</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **type9321CodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:string**
properties	base xs:string
facets	Kind: maxLength — Value: 8 — Annotation:
annotation	documentation Code specifying an application error (B.4.9321) documentation This Code list must be defined (comment within B.4-document) appinfo <dc:title>Code list for error codes</dc:title> <dc:source>B.4.9321</dc:source>

source

```
<xs:simpleType name="type9321CodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code specifying an application error
(B.4.9321)</xs:documentation>
    <xs:documentation doc:docType="Remark">This Code list must be defined (comment
within B.4-document)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for error codes</dc:title>
      <dc:source>B.4.9321</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:string">
    <xs:maxLength value="8"/>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TypeOfCoachTypeAllocatedCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind — Value — Annotation minInclusive — 00 maxInclusive — 99 totalDigits — 2 enumeration — 00 — documentation: Not significant

	enumeration	01	documentation In a side-corridor coach
	enumeration	02	documentation In a central-gangway coach
	enumeration	03	documentation In a coach with central-gangway and side corridor
	enumeration	04	documentation In a coach with meals at seat
	enumeration	05	documentation Seat at table in the central-gangway coach
	enumeration	06	documentation wheelchair places with an additional seat
	enumeration	14	documentation In air-conditioned couchette or sleeping car
	enumeration	16	documentation In panorama coach
	enumeration	17	documentation In compartment with shower and WC
	enumeration	18	documentation In compartment with shower
	enumeration	19	documentation In Sleeperette
	enumeration	21	documentation Manager compartment/business
	enumeration	22	documentation Video compartment
	enumeration	23	documentation Conference room
	enumeration	24	documentation Bicycle compartment (including seat)
	enumeration	25	documentation EURAFFAIRES
	enumeration	26	documentation Sleeping car with shower
	enumeration	27	documentation Club
	enumeration	28	documentation Preferente
	enumeration	29	documentation Tourist
	enumeration	30	documentation pram space including a seat
	enumeration	31	documentation pram space
	enumeration	32	documentation Only bicycle storage space
	enumeration	33	documentation Cabin8
	enumeration	34	documentation Places in a coach with self-service bistro
	enumeration	35	documentation Only tandem-bicycle storage space
	enumeration	39	documentation Cabin-couchette coach
	enumeration	40	documentation Mini Suite
	enumeration	52	documentation Silence
	enumeration	53	documentation Office
	enumeration	56	documentation wheelchair places without an additional seat
	enumeration	60	documentation Classic (place in a historic coach)
	enumeration	61	documentation Restaurant (place in a dining car)
	enumeration	62	documentation Front view place
	enumeration	63	documentation Excellence Class
annotation			documentation Code list for the type of the coach (B.5.51.1) appinfo

<dc:title>Code list for the allocated type of the coach</dc:title>
<dc:source>B.5.51.1</dc:source>

source

```
<xs:simpleType name="TypeOfCoachTypeAllocatedCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the type of the coach
(B.5.51.1)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the allocated type of the coach</dc:title>
      <dc:source>B.5.51.1</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="2"/>
    <xs:minInclusive value="00"/>
    <xs:maxInclusive value="99"/>
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation xml:lang="en">In a side-corridor coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation xml:lang="en">In a central-gangway coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="03">
      <xs:annotation>
        <xs:documentation xml:lang="en">In a coach with central-gangway and side
corridor</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="04">
      <xs:annotation>
        <xs:documentation xml:lang="en">In a coach with meals at
seat</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="05">
      <xs:annotation>
        <xs:documentation xml:lang="en">Seat at table in the central-gangway
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="06">
      <xs:annotation>
        <xs:documentation xml:lang="en">wheelchair places with an additional
seat</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">In air-conditioned couchette or sleeping
car</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">In panorama coach</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="17">
      <xs:annotation>
        <xs:documentation xml:lang="en">In compartment with shower and
WC</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation xml:lang="en">In compartment with shower</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
      <xs:annotation>
        <xs:documentation xml:lang="en">In Sleeperette</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation xml:lang="en">Manager
compartment/business</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation xml:lang="en">Video compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation xml:lang="en">Conference room</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bicycle compartment (including
seat)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation xml:lang="en">EURAFFAIRES</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sleeping car with shower</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="27">
      <xs:annotation>
        <xs:documentation xml:lang="en">Club</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation xml:lang="en">Preferente</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="29">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tourist</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en">pram space including a
seat</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en">pram space</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation xml:lang="en">Only bicycle storage space</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="33">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cabin8</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation xml:lang="en">Places in a coach with self-service
bistro</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="35">
      <xs:annotation>
        <xs:documentation xml:lang="en">Only tandem-bicycle storage space
</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="39">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cabin-couchette coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation xml:lang="en">Mini Suite</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="52">
      <xs:annotation>
        <xs:documentation xml:lang="en">Silence</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="53">
      <xs:annotation>
        <xs:documentation xml:lang="en">Office</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="56">
      <xs:annotation>
        <xs:documentation xml:lang="en">wheelchair places without an additional
seat</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="60">
      <xs:annotation>
        <xs:documentation xml:lang="en">Classic (place in a historic
coach)</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="61">
      <xs:annotation>
        <xs:documentation xml:lang="en">Restaurant (place in a dining
car)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
      <xs:annotation>
        <xs:documentation xml:lang="en">Front view place</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="63">
      <xs:annotation>
        <xs:documentation xml:lang="en">Excellence Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TypeOfCoachTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
minInclusive	00	
maxExclusive	99	
totalDigits	2	
enumeration	00	documentation Not significant
enumeration	01	documentation Definitely side-corridor coach
enumeration	02	documentation Definitely central-gangway coach
enumeration	03	documentation If possible side-corridor coach
enumeration	04	documentation If possible central-gangway coach
enumeration	05	documentation If possible seats at table in central-gangway coach
enumeration	06	documentation wheelchair places with an additional normal place
enumeration	14	documentation Air-conditioned couchette or sleeping car
enumeration	16	documentation Panorama
enumeration	17	documentation Compartment with shower and WC
enumeration	18	documentation Compartment with shower
enumeration	19	documentation Sleeperette (reclining seat)
enumeration	21	documentation Manager compartment/business
enumeration	22	documentation Video compartment
enumeration	23	documentation Conference room
enumeration	24	documentation Bicycle compartment (including seat)
enumeration	25	documentation EURAFFAIRES
enumeration	26	documentation Sleeping car with shower
enumeration	27	documentation

			Club
	enumeration	28	documentation
			Preferente
	enumeration	29	documentation
			Tourist
	enumeration	30	documentation
			pram space including a seat
	enumeration	31	documentation
			pram space
	enumeration	32	documentation
			Only bicycle storage space
	enumeration	33	documentation
			Cabin8
	enumeration	34	documentation
			Places in a coach with self-service bistro
	enumeration	35	documentation
			Only tandem-bicycle storage space
	enumeration	39	documentation
			Cabin-couchette coach
	enumeration	40	documentation
			“Mini Suite” - single person couchette compartment
	enumeration	52	documentation
			Silence
	enumeration	53	documentation
			Office
	enumeration	56	documentation
			wheelchair places without an additional seat
	enumeration	60	documentation
			Classic (place in a historic coach)
	enumeration	61	documentation
			Restaurant (place in a dining car)
	enumeration	62	documentation
			Front view place
	enumeration	63	documentation
			Excellence Class

annotation

documentation
Code list for the type of the coach (B.5.37.1)
appinfo
<dc:title>Code list for the type of the coach</dc:title>
<dc:source>B.5.37.1</dc:source>

source

```
<xs:simpleType name="TypeOfCoachTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the type of the coach
(B.5.37.1)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the type of the coach</dc:title>
      <dc:source>B.5.37.1</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="2"/>
    <xs:minInclusive value="00"/>
    <xs:maxExclusive value="99"/>
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation xml:lang="en">Definitely side-corridor
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Definitely central-gangway
coach</xs:documentation>
      </xs:annotation>
```

```
    </xs:enumeration>
    <xs:enumeration value="03">
      <xs:annotation>
        <xs:documentation xml:lang="en">If possible side-corridor
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="04">
      <xs:annotation>
        <xs:documentation xml:lang="en">If possible central-gangway
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="05">
      <xs:annotation>
        <xs:documentation xml:lang="en">If possible seats at table in central-gangway
coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="06">
      <xs:annotation>
        <xs:documentation xml:lang="en">wheelchair places with an additional normal
place</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="14">
      <xs:annotation>
        <xs:documentation xml:lang="en">Air-conditioned couchette or sleeping
car</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation xml:lang="en">Panorama</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="17">
      <xs:annotation>
        <xs:documentation xml:lang="en">Compartment with shower and
WC</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation xml:lang="en">Compartment with shower</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="19">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sleeperette (reclining
seat)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="21">
      <xs:annotation>
        <xs:documentation xml:lang="en">Manager
compartment/business</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="22">
      <xs:annotation>
        <xs:documentation xml:lang="en">Video compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
```

```
    <xs:enumeration value="23">
      <xs:annotation>
        <xs:documentation xml:lang="en">Conference room</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation xml:lang="en">Bicycle compartment (including
seat)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation xml:lang="en">EURAFFAIRES</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation xml:lang="en">Sleeping car with shower</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="27">
      <xs:annotation>
        <xs:documentation xml:lang="en">Club</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="28">
      <xs:annotation>
        <xs:documentation xml:lang="en">Preferente</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="29">
      <xs:annotation>
        <xs:documentation xml:lang="en">Tourist</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="30">
      <xs:annotation>
        <xs:documentation xml:lang="en">pram space including a
seat</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="31">
      <xs:annotation>
        <xs:documentation xml:lang="en">pram space</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="32">
      <xs:annotation>
        <xs:documentation xml:lang="en">Only bicycle storage space</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="33">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cabin8</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="34">
      <xs:annotation>
        <xs:documentation xml:lang="en">Places in a coach with self-service
bistro</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="35">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Only tandem-bicycle storage
space</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="39">
      <xs:annotation>
        <xs:documentation xml:lang="en">Cabin-couchette coach</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="40">
      <xs:annotation>
        <xs:documentation xml:lang="en">“Mini Suite“ - single person couchette
compartment</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="52">
      <xs:annotation>
        <xs:documentation xml:lang="en">Silence</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="53">
      <xs:annotation>
        <xs:documentation xml:lang="en">Office</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="56">
      <xs:annotation>
        <xs:documentation xml:lang="en">wheelchair places without an additional
seat</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="60">
      <xs:annotation>
        <xs:documentation xml:lang="en">Classic (place in a historic
coach)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="61">
      <xs:annotation>
        <xs:documentation xml:lang="en">Restaurant (place in a dining
car)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="62">
      <xs:annotation>
        <xs:documentation xml:lang="en">Front view place</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="63">
      <xs:annotation>
        <xs:documentation xml:lang="en">Excellence Class</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TypeOfMessageCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets	Kind Value Annotation enumeration 1 documentation Request enumeration 2 documentation Reply enumeration 3 documentation Non-solicited message and listing message
annotation	documentation Code list for the type of the message (B.5.5) appinfo <dc:title>Code list for the type of the message</dc:title> <dc:source>B.5.5</dc:source>
source	<xs:simpleType name="TypeOfMessageCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the type of the message (B.5.5)</xs:documentation> <xs:appinfo> <dc:title>Code list for the type of the message</dc:title> <dc:source>B.5.5</dc:source> </xs:appinfo> </xs:annotation> <xs:restriction base="xs:nonNegativeInteger"> <xs:enumeration value="1"> <xs:annotation> <xs:documentation xml:lang="en">Request</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation xml:lang="en">Reply</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation xml:lang="en">Non-solicited message and listing message</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType>

simpleType **TypeOfPriceCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation totalDigits 1 enumeration 1 documentation Ticket price + reservation
annotation	documentation Code list for type of price (B.5.67) appinfo <dc:title>Code list for type of price</dc:title> <dc:source>B.5.67</dc:source>
source	<xs:simpleType name="TypeOfPriceCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for type of price (B.5.67)</xs:documentation> <xs:appinfo> <dc:title>Code list for type of price</dc:title> <dc:source>B.5.67</dc:source> </xs:appinfo>

```
    </xs:annotation>
    <xs:restriction base="xs:nonNegativeInteger">
      <xs:totalDigits value="1"/>
      <xs:enumeration value="1">
        <xs:annotation>
          <xs:documentation xml:lang="en">Ticket price + reservation</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
    </xs:restriction>
  </xs:simpleType>
```

simpleType **TypeOfServiceCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation enumeration 0 documentation: Free enumeration 1 documentation: Reservation enumeration 2 documentation: Complete cancellation enumeration 3 documentation: Partial cancellation enumeration 4 documentation: Exchange enumeration 5 documentation: Correction messages (reservation or partial cancellations confirmation) enumeration 6 documentation: Final listing enumeration 7 documentation: Provisional listing enumeration 8 documentation: 918E message enumeration 9 documentation: Protocol message
annotation	documentation Code list for the type of service (B.5.6) appinfo <dc:title>Code list for the type of service</dc:title> <dc:source>B.5.6</dc:source>

source

```
<xs:simpleType name="TypeOfServiceCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the type of service
(B.5.6)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the type of service</dc:title>
      <dc:source>B.5.6</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
```

```
        <xs:documentation xml:lang="en">Complete cancellation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Partial cancellation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">Exchange</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Correction messages (reservation or partial
cancellations confirmation)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Final listing</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Provisional listing</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">918E message</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="9">
      <xs:annotation>
        <xs:documentation xml:lang="en">Protocol message</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TypeOfSupplementTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger

facets

Kind	Value	Annotation
totalDigits	1	
enumeration	1	documentation Free
enumeration	2	documentation EC/IC supplement
enumeration	3	documentation Other supplement
enumeration	4	documentation TGV
enumeration	5	documentation ICE
enumeration	6	documentation EURAFFAIRES
enumeration	7	documentation AVE

	enumeration 8 documentation X2000
annotation	documentation Code list for the type of supplement (B.5.59) appinfo <dc:title>Code list for the type of supplement</dc:title> <dc:source>B.5.59</dc:source>
source	

```
<xs:simpleType name="TypeOfSupplementTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the type of supplement
(B.5.59)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the type of supplement</dc:title>
      <dc:source>B.5.59</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">EC/IC supplement</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Other supplement</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
      <xs:annotation>
        <xs:documentation xml:lang="en">TGV</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">ICE</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">EURAFFAIRES</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">AVE</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">X2000</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **TypeOfTextCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation totalDigits 2 enumeration 00 documentation Not significant enumeration 01 documentation Reservation enumeration 02 documentation Complete cancellation of Reservation enumeration 03 documentation Partial cancellation of Reservation enumeration 04 documentation Exchange Reservation enumeration 05 documentation Correction of Reservation enumeration 06 documentation Listing enumeration 07 documentation Free enumeration 08 documentation Free enumeration 09 documentation Free enumeration 10 documentation Distribution Message Descriptor (DMD) enumeration 11 documentation Timetable information enumeration 12 documentation Availability enumeration 13 documentation Price information enumeration 14 documentation General information enumeration 15 documentation Free enumeration 16 documentation Free enumeration 17 documentation Free enumeration 18 documentation Free enumeration 19 documentation Free enumeration 20 documentation Free enumeration 21 documentation Ticket enumeration 22 documentation Complete cancellation of Ticket enumeration 23 documentation Partial cancellation of Ticket enumeration 24 documentation Modification of Ticket enumeration 25 documentation Correction of Ticket enumeration 26 documentation Confirmation of issue of ticket
annotation	documentation Code list for the type of a text (B.5.18) appinfo <dc:title>Code list for the type of text</dc:title> <dc:source>B.5.18</dc:source>
source	<xs:simpleType name="TypeOfTextCodeList"> <xs:annotation> <xs:documentation xml:lang="en">Code list for the type of a text (B.5.18)</xs:documentation>

```
    <xs:appinfo>
      <dc:title>Code list for the type of text</dc:title>
      <dc:source>B.5.18</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="2"/>
    <xs:enumeration value="00">
      <xs:annotation>
        <xs:documentation xml:lang="en">Not significant</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="01">
      <xs:annotation>
        <xs:documentation xml:lang="en">Reservation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="02">
      <xs:annotation>
        <xs:documentation xml:lang="en">Complete cancellation of
Reservation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="03">
      <xs:annotation>
        <xs:documentation xml:lang="en">Partial cancellation of
Reservation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="04">
      <xs:annotation>
        <xs:documentation xml:lang="en">Exchange Reservation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="05">
      <xs:annotation>
        <xs:documentation xml:lang="en">Correction of Reservation</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="06">
      <xs:annotation>
        <xs:documentation xml:lang="en">Listing</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="07">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="08">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="09">
      <xs:annotation>
        <xs:documentation xml:lang="en">Free</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="10">
      <xs:annotation>
        <xs:documentation xml:lang="en">Distribution Message Descriptor
(DMD)</xs:documentation>
      </xs:annotation>
```

```
      </xs:enumeration>
      <xs:enumeration value="11">
        <xs:annotation>
          <xs:documentation xml:lang="en">Timetable information</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="12">
        <xs:annotation>
          <xs:documentation xml:lang="en">Availability</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="13">
        <xs:annotation>
          <xs:documentation xml:lang="en">Price information</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="14">
        <xs:annotation>
          <xs:documentation xml:lang="en">General information</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="15">
        <xs:annotation>
          <xs:documentation xml:lang="en">Free</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="16">
        <xs:annotation>
          <xs:documentation xml:lang="en">Free</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="17">
        <xs:annotation>
          <xs:documentation xml:lang="en">Free</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="18">
        <xs:annotation>
          <xs:documentation xml:lang="en">Free</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="19">
        <xs:annotation>
          <xs:documentation xml:lang="en">Free</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="20">
        <xs:annotation>
          <xs:documentation xml:lang="en">Free</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="21">
        <xs:annotation>
          <xs:documentation xml:lang="en">Ticket</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="22">
        <xs:annotation>
          <xs:documentation xml:lang="en">Complete cancellation of
Ticket</xs:documentation>
        </xs:annotation>
      </xs:enumeration>
      <xs:enumeration value="23">
        <xs:annotation>
```

```
        <xs:documentation xml:lang="en">Partial cancellation of
Ticket</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="24">
      <xs:annotation>
        <xs:documentation xml:lang="en">Modification of Ticket</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="25">
      <xs:annotation>
        <xs:documentation xml:lang="en">Correction of Ticket</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="26">
      <xs:annotation>
        <xs:documentation xml:lang="en">Confirmation of issue of
ticket</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

simpleType **UndertakingProvidingServiceTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind / Value / Annotation totalDigits 1 enumeration 0 documentation: Non-pool enumeration 1 documentation: Pool (currently not used)
annotation	documentation Code list for the undertaking providing sleeping car service (B.5.65) appinfo <dc:title>Code list for the undertaking providing sleeping car service</dc:title> <dc:source>B.5.65</dc:source>

source

```
<xs:simpleType name="UndertakingProvidingServiceTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for the undertaking providing sleeping
car service (B.5.65)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for the undertaking providing sleeping car
service</dc:title>
      <dc:source>B.5.65</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation xml:lang="en">Non-pool</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Pool (currently not used)</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
```

	</xs:simpleType>

simpleType **VehicleCategoryTypeCodeList**

namespace	http://www.era.europa.eu/schemes/TAPTSI/1.4
type	restriction of **xs:nonNegativeInteger**
properties	base xs:nonNegativeInteger
facets	Kind Value Annotation totalDigits 1 enumeration 1 documentation Motor vehicle or boat less than 3,81 m in length and with a roof width up to 1,35 m enumeration 2 documentation Motor vehicle or boat between 3,81 m up to 4,42 m in length and with a roof width up to 1,35 m. enumeration 3 documentation Motor vehicle or boat between 4,42 m up to 5,30 m more than 4,42 m in length and with a roof width up to 1,35 m enumeration 4 documentation Motorcycle enumeration 5 documentation Motorcycle and sidecar enumeration 6 documentation Motor vehicle or boat less than 3,81 m in length and with a roof width between 1,36 m and 1,55 m enumeration 7 documentation Motor vehicle or boat between 3,81 m and 4,42 m in length and with a roof width between 1,36 m and 1,55 m enumeration 8 documentation Motor vehicle or boat between 4,42 m up to 5,30 m more than 4,42 m in length and with a roof width between 1,36 m and 1,55 m
annotation	documentation Code list for vehicle category type (B.5.29) appinfo <dc:title>Code list for vehicle category type</dc:title> <dc:source>B.5.29</dc:source>

source

```
<xs:simpleType name="VehicleCategoryTypeCodeList">
  <xs:annotation>
    <xs:documentation xml:lang="en">Code list for vehicle category type
(B.5.29)</xs:documentation>
    <xs:appinfo>
      <dc:title>Code list for vehicle category type</dc:title>
      <dc:source>B.5.29</dc:source>
    </xs:appinfo>
  </xs:annotation>
  <xs:restriction base="xs:nonNegativeInteger">
    <xs:totalDigits value="1"/>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motor vehicle or boat less than 3,81 m in
length and with a roof width up to 1,35 m</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motor vehicle or boat between 3,81 m up to
4,42 m in length and with a roof width up to 1,35 m.</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="3">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motor vehicle or boat between 4,42 m up to
5,30 m more than 4,42 m in length and with a roof width up to 1,35
m</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="4">
```

```
      <xs:annotation>
        <xs:documentation xml:lang="en">Motorcycle</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="5">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motorcycle and sidecar</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="6">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motor vehicle or boat less than 3,81 m in
length and with a roof width between 1,36 m and 1,55 m</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="7">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motor vehicle or boat between 3,81 m and 4,42
m in length and with a roof width between 1,36 m and 1,55 m</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="8">
      <xs:annotation>
        <xs:documentation xml:lang="en">Motor vehicle or boat between 4,42 m up to
5,30 m more than 4,42 m in length and with a roof width between 1,36 m and 1,55
m</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```

XML Schema documentation generated by **XMLSpy** Schema Editor **http://www.altova.com/xmlspy**