

PRACTICE CHECKLIST:

SELECT

*

From

Where - condition clause, row wise

Or, And, Not/!

Between

Distinct

Is, In

Like, %, _

Order By, Asc, Desc

Limit

Lower, Upper, Year functions

Aggregate functions- min, max, sum, avg, count



Group By

Having - condition clause, group wise

Subqueries/nested queries

Any/All

Joins (Inner)

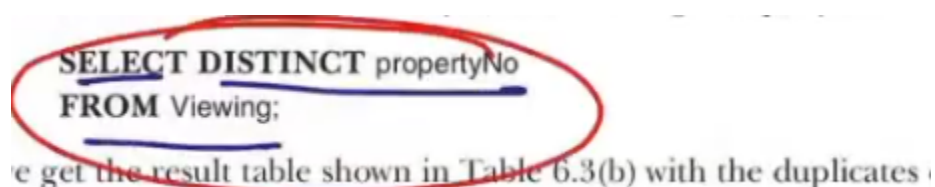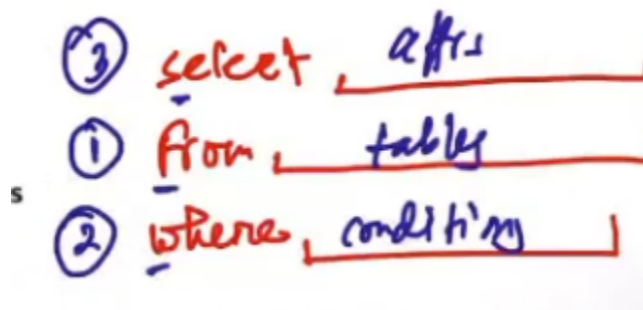

Distinct always attribute er age

Where onekta for loop er moto kaj kore

=	equals	!=	is not equal to (allowed in some dialects)
<>	is not equal to (ISO standard)	<=	is less than or equal to
<	is less than	>=	is greater than or equal to
>	is greater than		

EXAMPLE 6.7 Range search condition (**BETWEEN/NOT BETWEEN**)

List all staff with a salary between £20,000 and £30,000.

```
SELECT staffNo, fName, lName, position, salary
FROM Staff
WHERE salary BETWEEN 20000 AND 30000;
```

EXAMPLE 6.8 Set membership search condition (**IN/NOT IN**)

List all managers and supervisors.

```
SELECT staffNo, fName, lName, position
FROM Staff
WHERE position IN ('Manager', 'Supervisor');
```

2 in (2, 3, 5) step
7 in

For this query, we must search for the string 'Glasgow' appearing somewhere within the address column of the PrivateOwner table. SQL has two special pattern-matching symbols:

- The % percent character represents any sequence of zero or more characters (*wildcard*).
- The _ underscore character represents any single character.

All other characters in the pattern represent themselves. For example:

- address LIKE 'H%' means the first character must be *H*, but the rest of the string can be anything.
- address LIKE 'H___' means that there must be exactly four characters in the string, the first of which must be an *H*.
- address LIKE '%e' means any sequence of characters, of length at least 1, with the last character an *e*.
- address LIKE '%Glasgow%' means a sequence of characters of any length containing *Glasgow*.
- address NOT LIKE 'H%' means the first character cannot be an *H*.

Sum (col)

Count (x) —> intg return kore

EXAMPLE 6.14 Use of COUNT(DISTINCT)

How many different properties were viewed in May 2013?

```
SELECT COUNT(DISTINCT propertyNo) AS myCount
FROM Viewing
WHERE viewDate BETWEEN '1-May-13' AND '31-May-13';
```

Every hole —> Group by

Execution of order a select always last a hobe