

# **Get your dataset ready**

**Using R and GIS**

Rosa Félix

Gabriel Valença

Rafael Pereira

2024-09-08

# Table of contents

<b>1</b>	<b>Introduction</b>	<b>5</b>
1.1	Mobility data . . . . .	5
Why R and GIS . . . . .	7	
1.2	Course objectives . . . . .	7
Introduce R Programming Basics . . . . .	7	
Teach Data Manipulation Techniques . . . . .	7	
Spatial Data Visualization . . . . .	8	
Perform Basic Spatial Analysis . . . . .	8	
1.3	Target audience . . . . .	8
1.4	Recommended readings . . . . .	8
<b>2</b>	<b>Course Structure</b>	<b>9</b>
2.1	Day 1 . . . . .	9
Morning . . . . .	9	
Afternoon . . . . .	9	
2.2	Day 2 . . . . .	9
Morning . . . . .	9	
Afternoon . . . . .	10	
<b>3</b>	<b>Detailed schedule (TBC)</b>	<b>11</b>
<b>4</b>	<b>Location</b>	<b>13</b>
<b>5</b>	<b>Resources</b>	<b>14</b>
<b>I</b>	<b>Day 1</b>	<b>15</b>
<b>6</b>	<b>Software</b>	<b>16</b>
6.1	R . . . . .	16
6.1.1	Windows . . . . .	16
6.1.2	Mac . . . . .	16
6.1.3	Ubuntu . . . . .	17
6.2	RStudio . . . . .	17
6.2.1	Windows 10/11 . . . . .	17
6.2.2	MacOS . . . . .	18

6.2.3	Ubuntu . . . . .	18
6.3	R packages . . . . .	18
6.4	r5r . . . . .	19
6.4.1	Java Development Kit . . . . .	19
6.4.2	Windows and MacOS . . . . .	20
6.4.3	Ubuntu . . . . .	20
6.5	Open Route Service . . . . .	20
<b>7</b>	<b>R basics</b>	<b>21</b>
7.1	Math operations . . . . .	21
7.1.1	Sum . . . . .	21
7.1.2	Subtraction . . . . .	21
7.1.3	Multiplication . . . . .	21
7.1.4	Division . . . . .	21
7.1.5	Round the number . . . . .	22
7.2	Basic shortpaths . . . . .	22
7.2.1	Perform Combinations . . . . .	22
7.2.2	Create a comment with <code>ctrl + shift + m</code> . . . . .	22
7.2.3	Create a table . . . . .	23
7.3	Practical exercise . . . . .	23
7.3.1	Import dataset . . . . .	23
7.3.2	Take a first look at the data . . . . .	24
7.3.3	Explore the data . . . . .	25
7.3.4	Modify original data . . . . .	26
7.3.5	Export data . . . . .	27
7.3.6	Import data . . . . .	27
<b>8</b>	<b>Data manipulation</b>	<b>28</b>
8.1	Select variables . . . . .	28
8.1.1	Using pipes! . . . . .	29
8.2	Filter observations . . . . .	30
8.3	Create new variables . . . . .	30
8.4	Change data type . . . . .	30
8.4.1	Factors . . . . .	31
8.5	Join data tables . . . . .	32
8.6	group_by and summarize . . . . .	34
8.7	Arrange data . . . . .	36
8.8	All together now! . . . . .	36
8.9	Other dplyr functions . . . . .	37
<b>9</b>	<b>Introduction to spatial data</b>	<b>40</b>
9.1	Import vector data . . . . .	40
9.1.1	Projected vs Geographic Coordinate Systems . . . . .	41

9.2	Join geometries to data frames . . . . .	42
9.3	Create spatial data from coordinates . . . . .	43
9.4	Visuzlize spatial data . . . . .	44
9.5	Export spatial data . . . . .	47
<b>10</b>	<b>Interactive maps</b>	<b>48</b>
10.1	Mapview . . . . .	49
10.1.1	Export . . . . .	51
10.2	Rmarkdown . . . . .	52
<b>II</b>	<b>Day 2</b>	<b>54</b>
<b>11</b>	<b>Centroids of transport zones</b>	<b>55</b>
11.1	Geometric centroids . . . . .	55
11.2	Weighted centroids . . . . .	57
11.3	Compare centroids in a map . . . . .	59
11.3.1	Interactive map . . . . .	59
11.3.2	Static map . . . . .	59
<b>12</b>	<b>OD pairs and desire lines</b>	<b>61</b>
12.1	Desire lines with od_2_sf . . . . .	61
12.1.1	Filtering desire lines . . . . .	62
12.2	Oneway desire lines . . . . .	64
12.3	Using population centroids . . . . .	66
<b>13</b>	<b>Open transportation data</b>	<b>68</b>
13.1	Road Networks . . . . .	68
13.1.1	OpenStreetMap . . . . .	68
13.1.2	HOT Export Tool . . . . .	68
13.1.3	OSM in R . . . . .	70
13.2	Transportation Services' Data . . . . .	71
13.2.1	GTFS . . . . .	71
13.2.2	National Access Points . . . . .	71
<b>14</b>	<b>Urban Accessibility with R</b>	<b>72</b>
	About the instructor . . . . .	72
<b>References</b>		<b>74</b>

# 1 Introduction

Materials for the course delivered at the **EIT Doctoral Training Network Annual Forum**, in Gent (Belgium), 19th and 20th September 2024.



Co-funded by the  
European Union



This course aims to provide tools to deal with exploring and treating transportation datasets using R programming, an open-source and widely used tool for data analytics in urban mobility.

Additionally, this course provides guidance towards the use of reproducible methods to deal with large datasets that require manipulation and/or spatial analysis.

The course has a **hands-on** approach, where participants will learn the basics of **coding**, **data manipulation**, and **spatial analysis** for urban mobility and transportation.

## 1.1 Mobility data

There is an emerging increase in mobility data, through new forms of technology, which result in very large and diverse datasets.

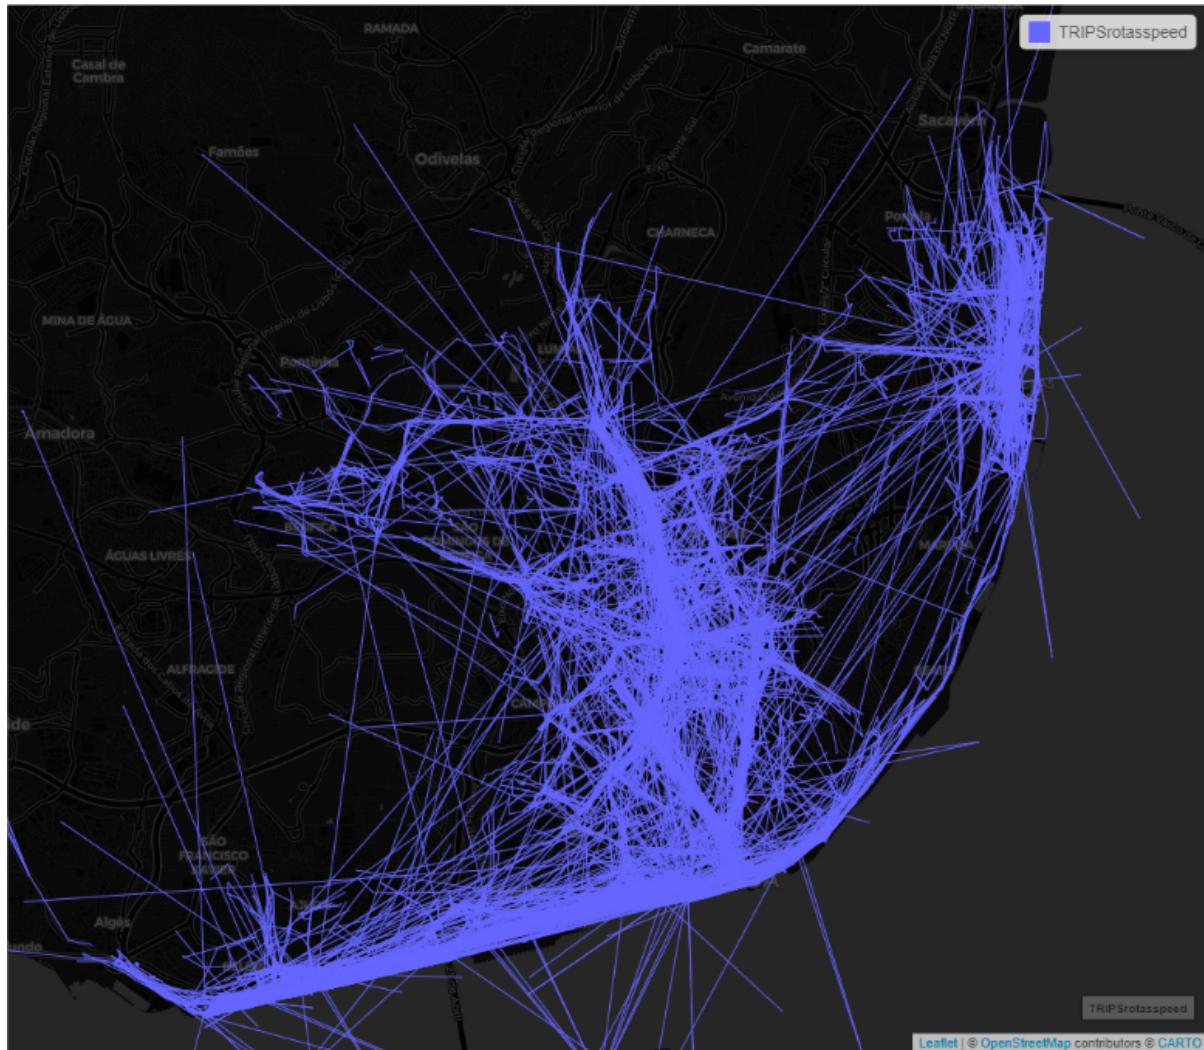


Figure 1.1: E-Scooter trip data in Lisbon. How to deal with it?

Knowing how to get, treat and analyze complex datasets with the up-to-date technologies is extremely relevant for academia, policy makers and start-ups, since it allows them to:

1. acquire critical view on urban mobility based on data;
2. spatially identify locations in the city that require policy priorities;
3. and improve the efficiency of data analysis processes.

## **Why R and GIS**

Most academic programs focus on teaching modelling and deep analysis of data. However, there is a need to learn how to explore and prepare a dataset for modelling. The use of **programming and GIS** techniques have enormous advantages, including their flexibility; reproducibility; and transparency and understanding the step-by-step process.

The use of GIS techniques in transportation is, traditionally, not considered in transportation learning programs, despite being of enormous relevance when doing accessibility analysis or dealing with georeferenced transportation data, such as bike sharing route trips' datasets, origin-destination flows datasets, home/work locations, GTFS public transit data, and so on. There is a need to learn how to locate these open datasets, how to explore them and how to integrate them into transportation and urban analysis. Additionally, the use of open source software and datasets allows researchers to perform methods that are reproducible and transparent.

### **TLDR**

- Open-source tools widely used in data analytics and spatial analysis
- Flexibility and reproducibility in data manipulation and visualization
- Critical for urban mobility and transportation research, with spatial relevance
- Large transportation datasets are becoming increasingly common

## **1.2 Course objectives**

### **Introduce R Programming Basics**

- Equip participants with foundational skills in R programming
- Emphasize reproducible research practices to ensure transparency and replicability in analyses

### **Teach Data Manipulation Techniques**

- Use key R packages for data cleaning, manipulation, and summarization of datasets
- Enable participants to efficiently handle large and complex transportation datasets

## **Spatial Data Visualization**

- Introduce methods for quick and effective spatial data visualization using R and GIS tools
- Provide hands-on experience with creating interactive maps and visualizations

## **Perform Basic Spatial Analysis**

- Teach participants how to perform spatial analysis of transportation datasets using GIS techniques with R
- Cover practical applications such as georeferencing data, accessibility analysis, and routing ODs
- Utilize real-world transportation data for practical, hands-on learning

### **1.3 Target audience**

- Ph.D. candidates from DTN and other researchers
- Policy makers and practitioners in urban mobility
- Beginners to intermediate R users, no prior experience needed

### **1.4 Recommended readings**

- Engel, Claudia A (2023) [Introduction to R](#)
- Lovelace, Robin, Nowosad, Jakub & Muenchow, Johannes (2023) [Geocomputation with R](#)
- Pereira, Rafael H. M. & Herszenhut, Daniel (2023) [Introduction to urban accessibility: a practical guide with R](#). Ipea - Institute of Applied Economic Research

## 2 Course Structure

The course consists of an in-person 2-day course, taking place during the EIT DTN Annual Meeting on the **19th and 20th September 2024**.

The first day will focus on learning the basics of R programming and how to treat and explore datasets. The second day will focus on analyzing spatial datasets, and routing origins to destinations.

### 2.1 Day 1

#### Morning

- Introduction to **programming** techniques and **data structures**
- Introduction to R, and RStudio: **software installation** and main packages
- **R base and basics:** examples and exercises

#### Afternoon

- **Data manipulation:** using the dplyr package to select, filter, left-join, group and summarize
- Introduction to **GIS** and **spatial data:** import and visualize vector data
- R markdown and **interactive maps**

### 2.2 Day 2

#### Morning

- **Desire lines** from OD and transport zones
- **Georeference** coordinates: examples from surveys
- **Routing:** from euclidean distances to road networks

## **Afternoon**

- **Open Transportation data:** where to find it
- **Accessibility analysis with R:** *r5r demo* (Rafael Pereira)
- Group **exercise**

### 3 Detailed schedule (TBC)

---

#### Day 1

---

9.30	Introductions and Presentation of the course contents
10.00	Introduction to programming techniques and data structures
10.30	Introduction to R and RStudio: hands-on to install software and main packages
11.00	<i>Coffee break</i>
11.15	(cont.)
11.30	R basics: examples and exercises
12.30	<i>Lunch break</i>
13.30	Data manipulation: examples and exercises (select, filter, left-join, group and summarize, using dplyr package)
15.30	<i>Coffee break</i>
15.45	Introduction to GIS and spatial data: import create vector data
16.30	View and export interactive maps
17.00	<i>End of day 1</i>

---

---

#### Day 2

---

9.30	Centroids of transport zones
10.15	Desire-lines from OD pairs and transport zones
11.00	<i>Coffee break</i>
11.15	(cont.)
11.30	Euclidean and routing distances with sf and r5r
12.30	<i>Lunch break</i>
13.30	Open Transportation data: where to find it (OSM and GTFS)
14.00	Accessibility analysis with r5r
16.00	<i>Coffee break</i>
16.15	Using your data: manipulation and spatial analysis methods and further applications

---

Day 2

---

16.45

Survey and feedback from participants

17.00

*End of day 2*

---

## 4 Location

The course will take place at Campus Sterre, Building S8, room 2.4.

```
Campus_S8_coord = c(3.7105372, 51.0241258)
Campus_S8 = sf::st_sfc(sf::st_point(Campus_S8_coord)) # create point
Campus_S8 = sf::st_as_sf(Campus_S8, crs = 4326) # assign crs

mapview::mapview(Campus_S8, map.types = "OpenStreetMap") # quick map view
```



## 5 Resources

- Your laptop, with any OS
- Github repository with all the materials (data, code and guidelines)
- Survey datasets, school locations and public transport operator datasets

**Part I**

**Day 1**

# 6 Software

In this chapter we will guide you through the installation of R, RStudio and the packages you will need for this course.

R and RStudio<sup>1</sup> are separate downloads.

## 6.1 R

You will need R installed on your computer. R stats (how it is also known) is a programming language and free software environment for statistical computing and graphics supported by the R Foundation for Statistical Computing.

The download links live at [The Comprehensive R Archive Network](#) (aka CRAN). The most recent version is 4.4.1, but you can use >= 4.1.x if you already have it installed.

### 6.1.1 Windows

[Download R-4.4.1 for Windows](#) and run the executable file.

You will also need to install Rtools, which is a collection of tools necessary to build R packages in Windows.

### 6.1.2 Mac

[Download R-4.4.1 for MacOX](#). You will have to choose between the arm64 or the x86-64 version.

Download the .pkg file and install it as usual.

---

<sup>1</sup>We will use RStudio, although if you already use other studio such as VScode, that's also fine.

### 6.1.3 Ubuntu

These are instructions for Ubuntu. If you use other linux distribution, please follow the instructions on [The Comprehensive R Archive Network - CRAN](#).

You can look for R in the Ubuntu **Software Center** or install it via the terminal:

```
# sudo apt update && sudo apt upgrade -y  
sudo apt install r-base
```

Or, if you prefer, you can install the latest version of R from CRAN:

```
# update indices  
sudo apt update -qq  
# install two helper packages we need  
sudo apt install --no-install-recommends software-properties-common dirmngr  
# add the signing key (by Michael Rutter) for these repos  
wget -qO- https://cloud.r-project.org/bin/linux/ubuntu/marutter_pubkey.asc | sudo tee -a /etc/apt/trusted.gpg.d/marutter.gpg  
# add the R 4.0 repo from CRAN -- adjust 'focal' to 'groovy' or 'bionic' as needed  
sudo add-apt-repository "deb https://cloud.r-project.org/bin/linux/ubuntu $(lsb_release -cs)/r stable"
```

Then run:

```
sudo apt install r-base r-base-core r-recommended r-base-dev
```

[Optional] To keep up-to-date r version and packages, you can follow the instructions at [r2u](#)

After this installation, you don't need to open R base. Please proceed to install RStudio.

## 6.2 RStudio

RStudio Desktop is an integrated development environment (IDE) for R. It includes a console, syntax-highlighting editor that supports direct code execution, as well as tools for plotting, history, debugging and workspace management.

RStudio is available for free download from [Posit RStudio](#).

### 6.2.1 Windows 10/11

[Download RStudio 2024.04](#) and run the executable file.

## 6.2.2 MacOS

Download RStudio 2024.04 and install it as usual.

## 6.2.3 Ubuntu

These are instructions for Ubuntu 22 / Debian 12. If you use other linux distribution, please follow the instructions on [Posit RStudio](#).

Install it via the terminal:


```
sudo apt install libssl-dev libclang-dev
wget https://download1.rstudio.org/electron/jammy/amd64/rstudio-2024.04.2-764-amd64.deb
sudo dpkg -i rstudio*
rm -v rstudio*
```

If you already use Ubuntu 24, please check and replace the correct url from [RStudio Dailies](#)

## 6.3 R packages

You will need to install some packages to work with the data and scripts in this course.

You can install them in RStudio by searching for them in the **Packages** tab:

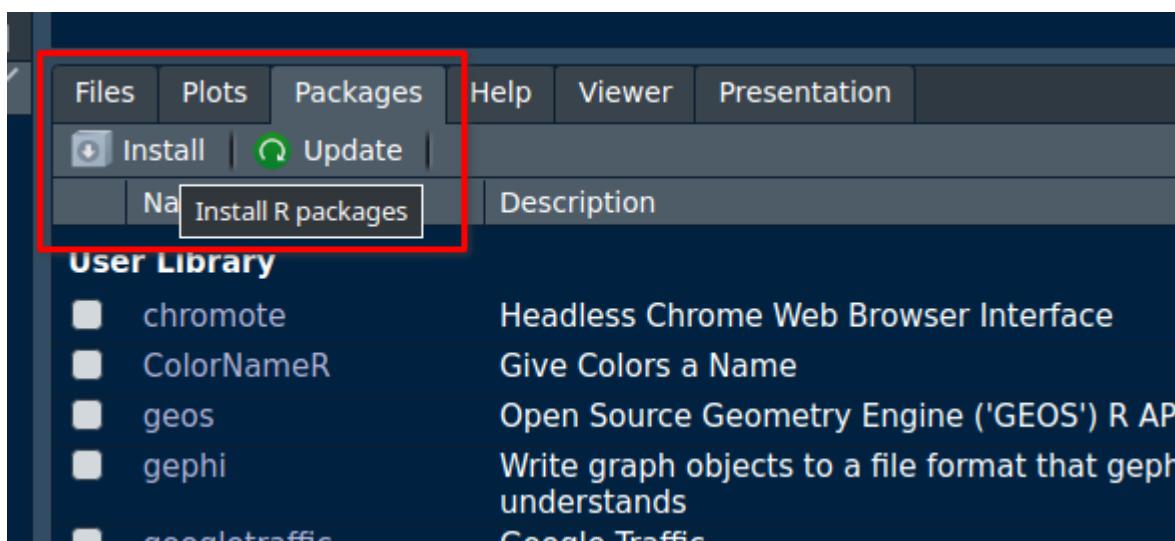

or by running the following code in the console:

```
install.packages("tidyverse")
install.packages("readxl")

install.packages(c("remotes", "devtools", "usethis")) # optional
install.packages("sf")
install.packages("mapview")
install.packages("rmarkdown")
install.packages("centr")
install.packages("od")
install.packages("osmextract")
```

## 6.4 r5r

The workshop “**A crash course on urban accessibility with R**” uses a few R packages that need to be installed on your machine. The simplest way to do this is running the code below. This might take a few minutes if this is the first time you install these packages.

```
pkgs = c("r5r", "accessibility", "rJavaEnv", "h3jsr")

install.packages(pkgs)
```

### 6.4.1 Java Development Kit

To use the `{r5r}` package (version v2.0 or higher), you will need to have *Java Development Kit (JDK) 21* installed on your computer. There are numerous open-source JDK implementations. The easiest way to install JDK is using the new `{rJavaEnv}` package in R.

```
# check version of Java currently installed (if any)
rJavaEnv::java_check_version_rjava()

## if this is the first time you use {rJavaEnv}, you might need to run this code
## below to consent the installation of Java.
# rJavaEnv::rje_consent(provided = TRUE)

# install Java 21
rJavaEnv::java_quick_install(
  version = 21,
  distribution = 'Corretto')
```

```
# check if Java was successfully installed  
rJavaEnv::java_check_version_rjava()
```

Alternatively, you can manually download and install JDK 21.

#### 6.4.2 Windows and MacOS

Go to [Java Development Kit 21](#), download the latest 21 build corresponding to your operating system and run the executable file.

#### 6.4.3 Ubuntu

Install it via the terminal:

```
sudo apt install -y openjdk-21-jdk openjdk-21-jre  
java -version
```

### 6.5 Open Route Service

[Sign up for an account](#) and create a token. Copy your API.

In RStudio console, run:

```
# install.packages("openrouteservice")  
openrouteservice::ors_api_key("YOUR-API-KEY")
```

This will store your key on your `.Renviron` file, meaning that every time you open RStudio, you won't need to run this command again.

This is useful also to write your `openrouteservice` scripts without sharing your key with others.

# 7 R basics

In this chapter we will introduce to the R basics and some exercises to get familiar to how R works.

## 7.1 Math operations

### 7.1.1 Sum

```
1+1
```

```
[1] 2
```

### 7.1.2 Subtraction

```
5-2
```

```
[1] 3
```

### 7.1.3 Multiplication

```
2*2
```

```
[1] 4
```

### 7.1.4 Division

```
8/2
```

```
[1] 4
```

### 7.1.5 Round the number

```
round(3.14)
```

```
[1] 3
```

```
round(3.14, 1) # The "1" indicates to round it up to 1 decimal digit.
```

```
[1] 3.1
```

You can use help `?round` in the console to see the description of the function, and the default arguments.

## 7.2 Basic shortpaths

### 7.2.1 Perform Combinations

```
c(1, 2, 3)
```

```
[1] 1 2 3
```

```
c(1:3) # The ":" indicates a range between the first and second numbers.
```

```
[1] 1 2 3
```

### 7.2.2 Create a comment with `ctrl + shift + m`

```
# Comments help you organize your code. The software will not run the comment.
```

### 7.2.3 Create a table

A simple table with the number of trips by car, PT, walking, and cycling in a hypothetical street segment at a certain period.

#### Define variables

```
modes <- c("car", "PT", "walking", "cycling") # you can use "=" or "<-"  
Trips = c(200, 50, 300, 150) # uppercase letters modify
```

#### Join the variables to create a table

```
table_example = data.frame(modes, Trips)
```

#### Take a look at the table

Visualize the table by clicking on the “Data” in the “Environment” page or use :

```
View(table_example)
```

## 7.3 Practical exercise

**Dataset:** the number of trips between all municipalities in the Lisbon Metropolitan Area, Portugal (INE 2018).

### 7.3.1 Import dataset

You can click directly in the file under the “Files” pan, or:

```
data = readRDS("data/TRIPSmode.Rds")
```

 After you type " you can use **tab** to navigate between folders and files and **enter** to autocomplete.

### 7.3.2 Take a first look at the data

#### Summary statistics

```
summary(data)
```

Origin	Destination	Total	Walk
Length:315	Length:315	Min. : 7	Min. : 0
Class :character	Class :character	1st Qu.: 330	1st Qu.: 0
Mode :character	Mode :character	Median : 1090	Median : 0
		Mean : 16825	Mean : 4033
		3rd Qu.: 5374	3rd Qu.: 0
		Max. : 875144	Max. : 306289
Bike	Car	PTransit	Other
Min. : 0.00	Min. : 0	Min. : 0.0	Min. : 0.0
1st Qu.: 0.00	1st Qu.: 263	1st Qu.: 5.0	1st Qu.: 0.0
Median : 0.00	Median : 913	Median : 134.0	Median : 0.0
Mean : 80.19	Mean : 9956	Mean : 2602.6	Mean : 152.4
3rd Qu.: 0.00	3rd Qu.: 4408	3rd Qu.: 975.5	3rd Qu.: 62.5
Max. : 5362.00	Max. : 349815	Max. : 202428.0	Max. : 11647.0

#### Check the structure of the data

```
str(data)
```

```
'data.frame': 315 obs. of 8 variables:
 $ Origin      : chr  "Alcochete" "Alcochete" "Alcochete" "Alcochete" ...
 $ Destination: chr  "Alcochete" "Almada" "Amadora" "Barreiro" ...
 $ Total       : num  20478 567 188 867 114 ...
 $ Walk        : num  6833 0 0 0 0 ...
 $ Bike         : num  320 0 0 0 0 0 0 91 0 ...
 $ Car          : num  12484 353 107 861 114 ...
 $ PTransit    : num  833 0 81 5 0 ...
 $ Other        : num  7 214 0 0 0 0 0 0 0 ...
```

#### Check the first values of each variable

```
data
```

```
head(data, 3) # first 3 values
```

	Origin	Destination	Total	Walk	Bike	Car	PTransit	Other
1	Alcochete	Alcochete	20478	6833	320	12484	833	7
2	Alcochete	Almada	567	0	0	353	0	214
3	Alcochete	Amadora	188	0	0	107	81	0

Check the number of rows (observations) and columns (variables)

```
nrow(data)
```

[1] 315

```
ncol(data)
```

[1] 8

Open the dataset

```
View(data)
```

### 7.3.3 Explore the data

Check the total number of trips

Use \$ to select a variable of the data

```
sum(data$Total)
```

[1] 5299853

Percentage of car trips related to the total

```
sum(data$Car)/sum(data$Total) * 100
```

[1] 59.17638

Percentage of active trips related to the total

```
(sum(data$Walk) + sum(data$Bike)) / sum(data$Total) * 100
```

```
[1] 24.44883
```

### 7.3.4 Modify original data

Create a column with the sum of the number of trips for active modes

```
data$Active = data$Walk + data$Bike
```

Filter by condition (create new tables)

Filter trips only with origin from Lisbon

```
data_Lisbon = data[data$Origin == "Lisboa",]
```

Filter trips with origin **different** from Lisbon

```
data_out_Lisbon = data[data$Origin != "Lisboa",]
```

Filter trips with origin **and** destination in Lisbon

```
data_in_Out_Lisbon = data[data$Origin == "Lisboa" & data$Destination == "Lisboa",]
```

**Remove a column**

Look at the first row

```
data[1,] #rows and columns start from 1
```

	Origin	Destination	Total	Walk	Bike	Car	PTransit	Other	Active
1	Alcochete	Alcochete	20478	6833	320	12484	833	7	7153

Look at first row and column

```
data[1,1]
```

```
[1] "Alcochete"
```

Remove the first column

```
data = data[ , -1] #first column
```

Create a table only with origin, destination and walking trips

There are many ways to do the same operation.

```
names(data)
```

```
[1] "Destination" "Total"      "Walk"       "Bike"       "Car"  
[6] "PTransit"    "Other"      "Active"
```

```
data_walk2 = data[ ,c(1,2,4)]
```

```
data_walk3 = data[ ,-c(3,5:9)]
```

### 7.3.5 Export data

Save data in .csv and .Rds

```
write.csv(data, 'data/dataset.csv', row.names = FALSE)  
saveRDS(data, 'data/dataset.Rds') #Choose a different file.
```

### 7.3.6 Import data

```
csv_file = read.csv("data/dataset.csv")  
rds_file = readRDS("data/dataset.Rds")
```

# 8 Data manipulation

In this chapter we will use some very useful `dplyr` functions to handle and manipulate data.

You can load the `dplyr` package directly, or load the entire tidy universe (`tidyverse`).

```
# library(tidyverse)
library(dplyr)
```

Using the same dataset as in [R basics](#) but with slightly differences<sup>1</sup>.

We will do the same operations but in a simplified way.

```
TRIPS = readRDS("data/TRIPSSorigin.Rds")
```

! Important

Note that it is very important to understand the R basics, that's why we started from there, even if the following functions will provide the same results.

You don't need to know everything! And you don't need to know by heart. The following functions are the ones you will probably use most of the time to handle data.

? There are several ways to reach the same solution. Here we present only one of them.

## 8.1 Select variables

Have a look at your dataset. You can open using `View()`, look at the information at the "Environment" panel, or even print the same information using `glimpse()`

```
glimpse(TRIPS)
```

---

<sup>1</sup>This dataset includes the number of trips with origin in each neighborhood, divided by mode of transport, and inter or intra municipal trips.

We will create a new dataset with *Origin*, *Walk*, *Bike* and *Total*. This time we will use the `select()` function.

```
TRIPS_new = select(TRIPS, Origin, Walk, Bike, Total) # the first argument is the dataset
```

The first argument, as usually in R, is the dataset, and the remaining ones are the columns to select.

With most of the `dplyr` functions you don't need to refer to `data$...` you can simply type the variable names (and even without the "...")!. This makes coding in R simpler :)

You can also remove columns that you don't need.

```
TRIPS_new = select(TRIPS_new, -Total) # dropping the Total column
```

### 8.1.1 Using pipes!

Now, let's introduce pipes. Pipes are a rule as: “**With this, do this.**”

This is useful to skip the first argument of the functions (usually the dataset to apply the function).

Applying a pipe to the `select()` function, we can write as:

```
TRIPS_new = TRIPS |> select(Origin, Walk, Bike, Total)
```

Two things to **note**:

1. The pipe symbol can be written as `|>` or `%>%`. <sup>2</sup> To write it you may also use the `ctrl+shift+m` shortcut.
2. After typing `select()` you can press `tab` and the list of available variables of that dataset will show up! `Enter` to select. With this you prevent typo errors.

---

<sup>2</sup>You can change this in RStudio > Tools > Global Options > Code.

## 8.2 Filter observations

You can filter observations based on a condition using the `filter()` function.

```
TRIPS2 = TRIPS[TRIPS$Total > 25000,] # using r-base, you cant forget the comma  
TRIPS2 = TRIPS2 |> filter(Total > 25000) # using dplyr, it's easier
```

You can have other conditions inside the condition.

```
summary(TRIPS$Total)
```

Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
361	5918	17474	22457	33378	112186

```
TRIPS3 = TRIPS |> filter(Total > median(Total))
```

Other filter conditions:

- `==` equal, `!=` different
- `<` smaller, `>` greater, `<=` smaller or equal, `>=` greater or equal
- `&` and, `|` or
- `is.na`, `!is.na` is not NA
- `%in%`, `!%in%` not in

## 8.3 Create new variables

You can also try again to create a variable of Car percentage using pipes! To create a new variable or change an existing one (overwriting), you can use the `mutate()` function.

```
TRIPS$Car_perc = TRIPS$Car/TRIPS$Total * 100 # using r-base  
  
TRIPS = TRIPS |> mutate(Car_perc = Car/Total * 100) # using dplyr
```

## 8.4 Change data type

Data can be in different formats. For example, the variable *Origin* is a character, but we can convert it to a numeric variable.

```

class(TRIPS$Origin)

[1] "character"

TRIPS = TRIPS |>
  mutate(Origin_num = as.integer(Origin)) # you can use as.numeric() as well
class(TRIPS$Origin_num)

[1] "integer"

```

Most used data types are:

- integer (`int`)
- numeric (`num`)
- character (`chr`)
- logical (`logical`)
- date (`Date`)
- factor (`factor`)

### 8.4.1 Factors

Factors are useful to deal with categorical data. You can convert a character to a factor using `as.factor()`, and also use labels and levels for categorical ordinal data.

We can change the `Lisbon` variable to a factor, and `Internal` too.

```

TRIPS = TRIPS |>
  mutate(Lisbon_factor = factor(Lisbon, labels = c("No", "Yes")),
         Internal_factor = factor(Internal, labels = c("Inter", "Intra")))

```

But how do we know which levels come first? A simple way is to use `table()` or `unique()` functions.

```
unique(TRIPS$Lisbon) # this will show all the different values
```

```
[1] 0 1
```

```
table(TRIPS$Lisbon) # this will show the frequency of each value
```

```
0    1  
188  48
```

```
table(TRIPS$Lisbon_factor)
```

```
No Yes  
188 48
```

The first number to appear is the first level, and so on.

## 8.5 Join data tables

When having relational tables - *i.e.* with a common identifier - it is useful to be able to join them in a very efficient way.

`left_join` is a function that joins two tables **by a common column**. The **first table is the one that will be kept**, and the **second one will be joined to it**. How `left_join` works:

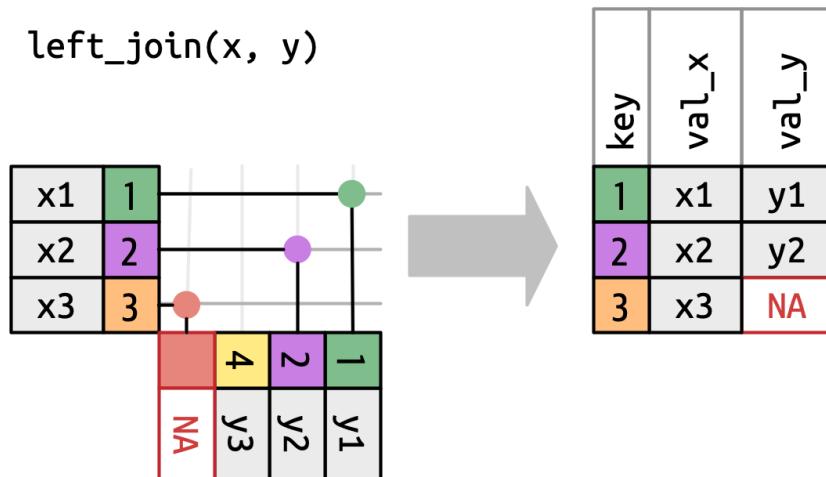


Figure 8.1: A visual representation of the left join where every row in x appears in the output. Source: R for Data Science.

Let's **join** the **municipalities** to this table with a supporting table that includes all the **relation** between neighbourhoods and municipalities, and the respective names and codes.

```
Municipalities = readRDS("data/Municipalities_names.Rds")
```

```
head(TRIPS)
```

```
# A tibble: 6 x 13
  Origin Total Walk Bike Car PTransit Other Internal Lisbon Car_perc
  <chr>   <dbl> <dbl> <dbl> <dbl>    <dbl> <dbl>    <dbl> <dbl>    <dbl>
1 110501 35539 11325 1309 21446     1460     0      0     0     60.3
2 110501 47602 3502  416 37727     5519    437     1     0     79.3
3 110506 37183 12645  40 22379     2057    63      0     0     60.2
4 110506 42313 1418   163 37337     3285   106     1     0     88.2
5 110507 30725 9389  1481 19654     201     0      0     0     64.0
6 110507 54586 2630  168 44611     6963   215     1     0     81.7
# i 3 more variables: Origin_num <int>, Lisbon_factor <fct>,
#   Internal_factor <fct>
```

```
tail(Municipalities)
```

	Mun_code	Neighborhood_code	Municipality
113	1109	110913	Mafra
114	1114	111409	Vila Franca de Xira
115	1109	110918	Mafra
116	1109	110904	Mafra
117	1502	150202	Alcochete
118	1109	110911	Mafra
			Neighborhood
113			Santo Isidoro
114			Vila Franca de Xira
115	União das freguesias de Azueira e Sobral da Abelheira		
116			Encarnação
117			Samouco
118			Milharado

We can see that we have a common variable: `Origin` in `TRIPS` and `Neighborhood_code` in `Municipalities`.

To join these two tables we need to specify the common variable in each table, using the `by` argument.

```
TRIPSjoin = TRIPS |> left_join(Municipalities, by = c("Origin" = "Neighborhood_code"))
```

If you prefer, you can mutate or rename a variable so both tables have the same name. When **both tables have the same name**, you don't need to specify the `by` argument.

```
Municipalities = Municipalities |> rename(Origin = "Neighborhood_code") # change name
TRIPSjoin = TRIPS |> left_join(Municipalities) # automatic detects common variable
```

As you can see, both tables don't need to be the same length. The `left_join` function will keep all the observations from the first table, and join the second table to it. If there is no match, the variables from the second table will be filled with NA.

## 8.6 group\_by and summarize

We have a very large table with all the neighbourhoods and their respective municipalities. We want to know the total number of trips with origin in each municipality.

To make it easier to understand, let's keep only the variables we need.

```
TRIPSredux = TRIPSjoin |> select(Origin, Municipality, Internal, Car, Total)
head(TRIPSredux)
```

```
# A tibble: 6 x 5
  Origin Municipality Internal   Car Total
  <chr>   <chr>        <dbl> <dbl> <dbl>
1 110501 Cascais        0 21446 35539
2 110501 Cascais        1 37727 47602
3 110506 Cascais        0 22379 37183
4 110506 Cascais        1 37337 42313
5 110507 Cascais        0 19654 30725
6 110507 Cascais        1 44611 54586
```

We can group this table by the `Municipality` variable and summarize the number of trips with origin in each municipality.

```
TRIPSSum = TRIPSredux |>
  group_by(Municipality) |> # you won't notice any change with only this
  summarize(Total = sum(Total))
head(TRIPSSum)
```

```
# A tibble: 6 x 2
  Municipality     Total
  <chr>           <dbl>
1 Alcochete       36789
2 Almada          289834
3 Amadora         344552
4 Barreiro        133658
5 Cascais         373579
6 Lisboa          1365111
```

We summed the total number of trips in each municipality.

If we want to group by more than one variable, we can add more `group_by()` functions.

```
TRIPSsum2 = TRIPSredux |>
  group_by(Municipality, Internal) |>
  summarize(Total = sum(Total),
            Car = sum(Car))
head(TRIPSsum2)
```

```
# A tibble: 6 x 4
# Groups:   Municipality [3]
  Municipality Internal Total     Car
  <chr>           <dbl> <dbl>   <dbl>
1 Alcochete         0    16954   9839
2 Alcochete         1    19835  15632
3 Almada            0   105841  49012
4 Almada            1   183993 125091
5 Amadora           0   117727  33818
6 Amadora           1   226825 142386
```

We summed the total number of trips and car trips in each municipality, **separated by** inter and intra municipal trips.

 It is a good practice to use the `ungroup()` function after the `group_by()` function. This will remove the grouping. If you don't do this, the grouping will be kept and you may have unexpected results in the next time you use that dataset.

## 8.7 Arrange data

You can **sort** a dataset by one or more variables.

For instance, `arrange()` by Total trips, ascending or descending order.

```
TRIPS2 = TRIPSSum2 |> arrange(Total)
TRIPS2 = TRIPSSum2 |> arrange(-Total) # descending

TRIPS2 = TRIPSSum2 |> arrange(Municipality) # alphabetic

TRIPS4 = TRIPS |> arrange(Lisbon_factor, Total) # more than one variable
```

This is not the same as opening the view table and click on the arrows. When you do that, the order is not saved in the dataset. If you want to save the order, you need to use the `arrange()` function.

## 8.8 All together now!

This is the pipes magic. It takes the last result and applies the next function to it. “With this, do this.”. You can chain as many functions as you want.

```
TRIPS_pipes = TRIPS |>
  select(Origin, Internal, Car, Total) |>

  mutate(Origin_num = as.integer(Origin)) |>
  mutate(Internal_factor = factor(Internal, labels = c("Inter", "Intra"))) |>

  filter(Internal_factor == "Inter") |>

  left_join(Municipalities) |>

  group_by(Municipality) |>
  summarize(Total = sum(Total),
            Car = sum(Car),
            Car_perc = Car/Total * 100) |>
  ungroup() |>

  arrange(desc(Car_perc))
```

With this code we will have a table with the total number of intercity trips, by municipality, with their names instead of codes, arranged by the percentage of car trips.

### TRIPS\_pipes

```
# A tibble: 18 x 4
  Municipality     Total     Car Car_perc
  <chr>        <dbl>    <dbl>     <dbl>
1 Mafra           65811   46329     70.4
2 Sesimbra        49370   31975     64.8
3 Cascais         161194  96523     59.9
4 Palmela          66428   39688     59.7
5 Alcochete       16954    9839      58.0
6 Setúbal          129059  70318     54.5
7 Montijo          57164   30900     54.1
8 Seixal           120747  63070     52.2
9 Sintra            237445 123408     52.0
10 Oeiras           134862  66972     49.7
11 Almada          105841  49012     46.3
12 Loures           132310  60478     45.7
13 Barreiro          52962   24160     45.6
14 Odivelas          93709  39151     41.8
15 Vila Franca de Xira 115152  47201     41.0
16 Moita             51040   17394     34.1
17 Amadora           117727  33818     28.7
18 Lisboa            280079  69038     24.6
```

## 8.9 Other dplyr functions

You can explore other `dplyr` functions and variations to manipulate data in the [dplyr cheat sheet](#):

# Data transformation with dplyr :: CHEATSHEET




dplyr functions work with pipes and expect **tidy data**. In tidy data:



## Summarize Cases

Apply **summary functions** to columns to create a new table of summary statistics. Summary functions take vectors as input and return one value (see back).



## Group Cases

Use **group\_by(data, ..., .add = FALSE, .drop = TRUE)** to create a "grouped" copy of a table grouped by columns in ... dplyr functions will manipulate each "group" separately and combine the results.



Use **rowwise(data, ...)** to group data into individual rows. dplyr functions will compute results for each row. Also apply functions to list-columns. See tidyverse cheat sheet for list-column workflow.








**ungroup(x, ...)** Returns ungrouped copy of table.  
g\_mtcars <- mtcars > group\_by(cyl)  
ungroup(g\_mtcars)



## Manipulate Cases


### EXTRACT CASES

Row functions return a subset of rows as a new table.



See ?base::Logic and ?Comparison for help.

### ARRANGE CASES



### ADD CASES




Table 8.1: OD matrix in long format

Origins	Destinations	Trips
A	B	20
A	C	45
B	A	10
C	C	5
C	A	30

## Manipulate Variables

### EXTRACT VARIABLES

Column functions return a set of columns as a new vector or table.




Use these helpers with **select()** and **across()**

e.g. mtcars > select(mpg:cyl)  
contains(match) num\_range(prefix, range); e.g., mpg:cyl  
ends\_with(match) all\_of(x)/any\_of(x, ..., vars); e.g., gear  
starts\_with(match) matches(match) everything()

### MANIPULATE MULTIPLE VARIABLES AT ONCE

df <- tibble(x\_1 = c(1, 2), x\_2 = c(3, 4), y = c(4, 5))



### MAKE NEW VARIABLES

Apply **vectorized functions** to columns. Vectorized functions take vectors as input and return vectors of the same length as output (see back).

#### vectorized function



**rename**(data, ...) Rename columns. Use **rename\_with**() to rename with a function.

mtcars > rename(miles\_per\_gallon = mpg)

Table 8.2: OD matrix in wide format

Trips	A	B	C
A	NA	20	45
B	10	NA	NA
C	30	NA	5

# 9 Introduction to spatial data

Spatial data is **data that is associated with a geometry**. This geometry can be a point, a line, a polygon, or a grid.

Spatial data can be represented in many ways, such as vector data and raster data. In this tutorial, we will learn how to work with spatial data in R.

We will use the **sf** package to work with vector data, and the **dplyr** package to manipulate data.

```
library(sf)
library(dplyr)
```

The **sf** package is a powerful package for working with spatial data in R. It includes hundreds of **functions** to deal with spatial data (Pebesma and Bivand 2023).

## 9.1 Import vector data

Download and open `Municipalities_geo.gpkg` under [EITcourse/data](#) repository.

Within the **sf** package, we use the `st_read()` to read spatial features.

```
Municipalities_geo = st_read("data/Municipalities_geo.gpkg")
```

```
Reading layer `Municipalities_geo' from data source
  `D:\GIS\EITcourse\data\Municipalities_geo.gpkg' using driver `GPKG'
Simple feature collection with 18 features and 1 field
Geometry type: MULTIPOLYGON
Dimension:      XY
Bounding box:  xmin: -9.500527 ymin: 38.40907 xmax: -8.490972 ymax: 39.06472
Geodetic CRS:  WGS 84
```



You can also open directly from url from github. Example:

```
Municipalities_geo = st_read("https://github.com/U-Shift/EITcourse/raw/main/data/Municipalities.gpkg")
```

### 9.1.1 Projected vs Geographic Coordinate Systems

A **projected coordinate system** is a flat representation of the Earth's surface. A **geographic coordinate system** is a spherical representation of the Earth's surface.

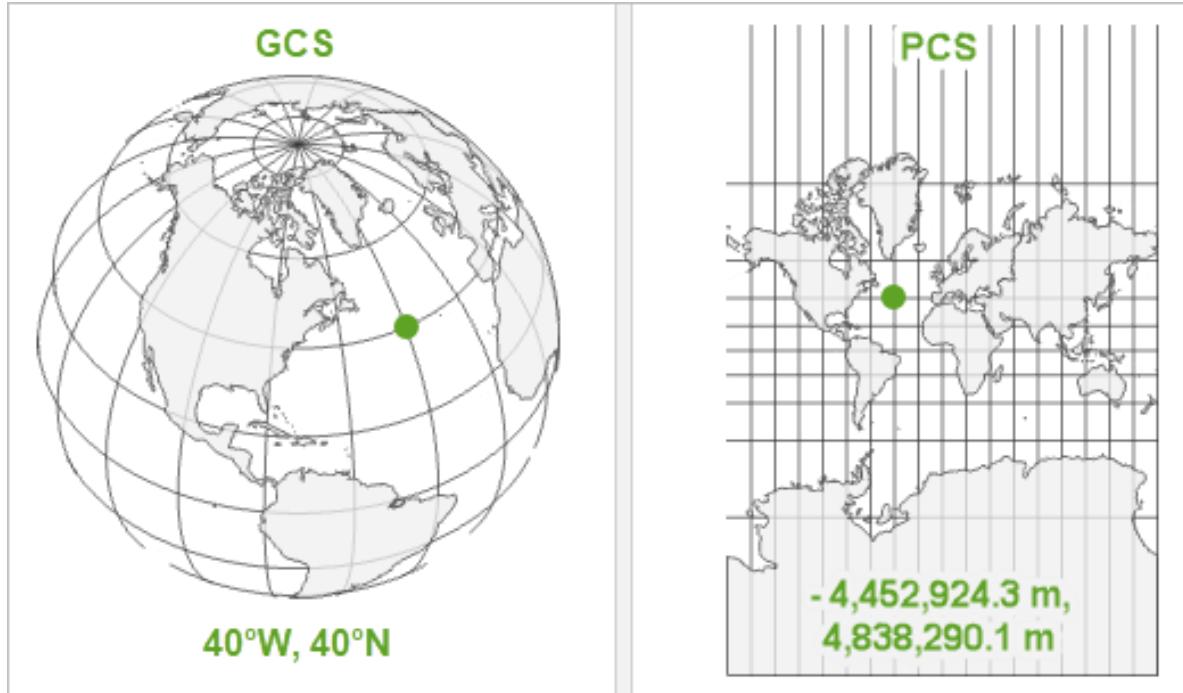


Figure 9.1: Source: ESRI

The `st_crs()` function can be used to check the **coordinate reference system** of a spatial object.

```
st_crs(Municipalities_geo)
```

```
Coordinate Reference System:  
User input: WGS 84  
wkt:  
GEOGCRS["WGS 84",  
    ENSEMBLE["World Geodetic System 1984 ensemble",  
        MEMBER["World Geodetic System 1984 (Transit)"],  
        MEMBER["World Geodetic System 1984 (G730)"],  
        MEMBER["World Geodetic System 1984 (G873)"],  
        MEMBER["World Geodetic System 1984 (G1150)"],  
        MEMBER["World Geodetic System 1984 (G1674)"],
```

```

MEMBER["World Geodetic System 1984 (G1762)"] ,
MEMBER["World Geodetic System 1984 (G2139)"] ,
ELLIPSOID["WGS 84",6378137,298.257223563,
    LENGTHUNIT["metre",1]],
ENSEMBLEACCURACY[2.0],
PRIMEM["Greenwich",0,
    ANGLEUNIT["degree",0.0174532925199433]],
CS[ellipsoidal,2,
    AXIS["geodetic latitude (Lat)",north,
        ORDER[1],
        ANGLEUNIT["degree",0.0174532925199433]],
    AXIS["geodetic longitude (Lon)",east,
        ORDER[2],
        ANGLEUNIT["degree",0.0174532925199433]],
USAGE[
    SCOPE["Horizontal component of 3D system."],
    AREA["World."],
    BBOX[-90,-180,90,180]],
ID["EPSG",4326]

```

WGS84 is the most common geographic coordinate system, used in GPS, and [EPSG:4326](#) is code for it.

If we want to project the data to a projected coordinate system, to use **metric units** instead of degrees, we can use the `st_transform()` function.

In this case, the [EPSG:3857](#) is the code for the Pseudo-Mercator coordinate system.

```
Municipalities_projected = st_transform(Municipalities_geo, crs = 3857)
```

Now see the differences when calling `Municipalities_geo` and `Municipalities_projected`.

## 9.2 Join geometries to data frames

Import `TRIPSmun.Rds` file and check data class-

```
TRIPSmun = readRDS("data/TRIPSmun.Rds")
class(TRIPSmun)
```

```
[1] "data.frame"
```

```
class(Municipalities_geo)
```

```
[1] "sf"           "data.frame"
```

To join the geometries from the `Municipalities_geo` to the data frame, we can use the `left_join()` function from the `dplyr` package.

```
TRIPSgeo =  
  TRIPSmun |>  
  left_join(Municipalities_geo)  
  
class(TRIPSgeo)
```

```
[1] "data.frame"
```

As you can see, this **does not make the object a spatial feature**. To do this, we need to use the `st_as_sf()` function.

```
TRIPSgeo = TRIPSgeo |> st_as_sf()  
class(TRIPSgeo)
```

```
[1] "sf"           "data.frame"
```

Now we have a spatial feature with the data frame.

## 9.3 Create spatial data from coordinates

The `st_as_sf()` function can also be used to create a spatial feature from a data frame with coordinates. In that case, we need to specify the columns with the coordinates.

We will use survey data (in `.txt`) with the participants' home latitude/longitude coordinates to create a spatial feature.

```
SURVEY = read.csv("data/SURVEY.txt", sep = "\t") # tab delimiter  
class(SURVEY)
```

```
[1] "data.frame"
```

```
SURVEYgeo = st_as_sf(SURVEY, coords = c("lon", "lat"), crs = 4326) # create spatial feature  
class(SURVEYgeo)
```

```
[1] "sf"           "data.frame"
```


We can also set the **crs** of the spatial feature on the fly.

Check the differences between both data variables.

## 9.4 Visuzlize spatial data


Represent Transport Zones with Total and Car, using `plot()`.

```
plot(TRIPSgeo) # all variables
```

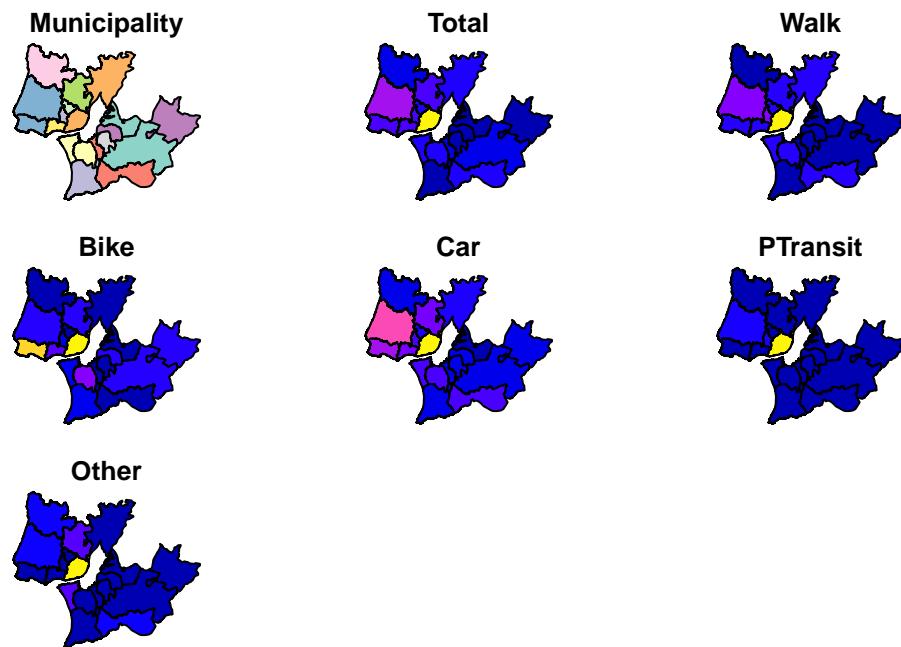


```
plot(TRIPSgeo["Municipality"])
```

## Municipality

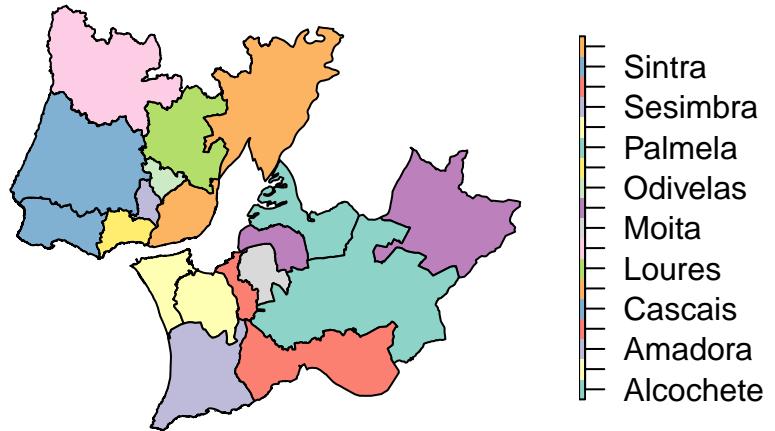


```
plot(TRIPSgeo["Total"])
```

## Total

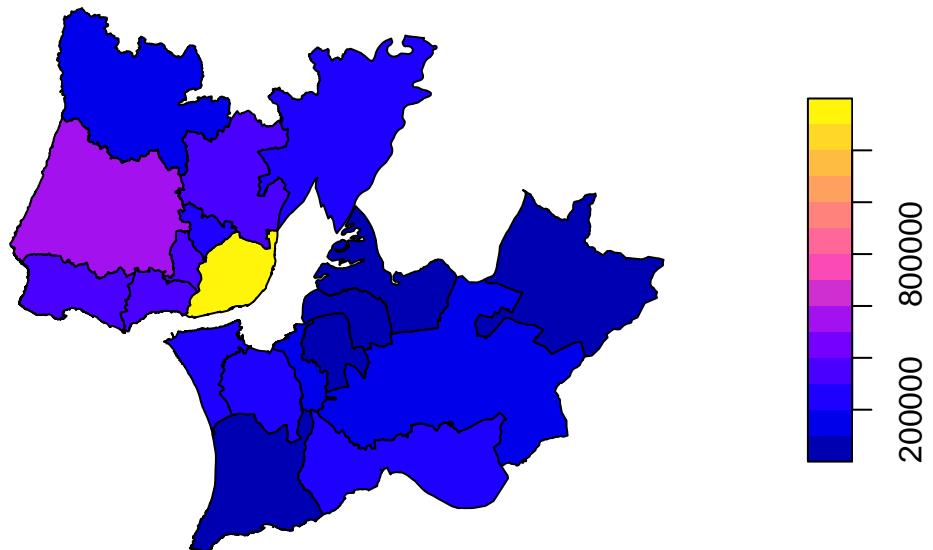


```
plot(TRIPSgeo["Car"])
```

**Car**

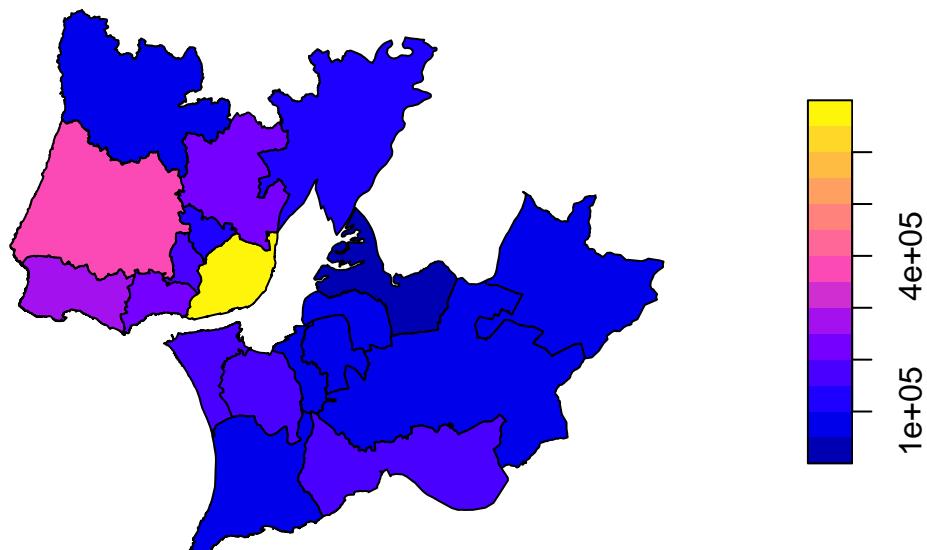

```
# plot pointy data  
plot(SURVEYgeo)
```

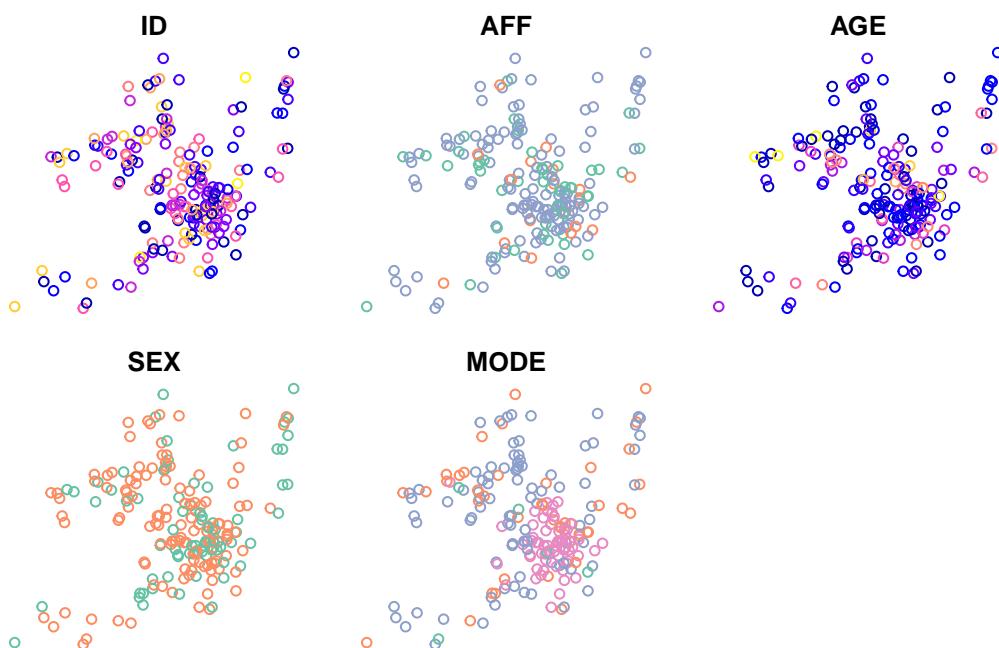

**i** In the next chapter we will learn how to create interactive maps.

## 9.5 Export spatial data

You can save your spatial data in different formats using the function `st_write()`, such as shapefiles (ESRI), GeoJSON, and GeoPackage.

This is also useful to convert spatial data between formats.

```
st_write(TRIPSgeo, "data/TRIPSgeo.gpkg") # as geopackage  
st_write(TRIPSgeo, "data/TRIPSgeo.shp") # as shapefile  
st_write(TRIPSgeo, "data/TRIPSgeo.geojson") # as geojson  
st_write(TRIPSgeo, "data/TRIPSgeo.csv", layer_options = "GEOMETRY=AS_WKT") # as csv, with WK
```

 If you already have a file with the same name, you can use the `delete_dns = TRUE` argument to overwrite it.


# 10 Interactive maps

You can plot a static map using `plof(sf)`, but you can also create interactive maps.

```
library(sf)
TRIPSgeo = st_read("data/TRIPSgeo.gpkg")
```

```
Reading layer `TRIPSgeo' from data source `D:\GIS\EITcourse\data\TRIPSgeo.gpkg' using driver
Simple feature collection with 18 features and 7 fields
Geometry type: MULTIPOLYGON
Dimension:     XY
Bounding box:  xmin: -9.500527 ymin: 38.40907 xmax: -8.490972 ymax: 39.06472
Geodetic CRS:  WGS 84
```

```
plot(TRIPSgeo)
```

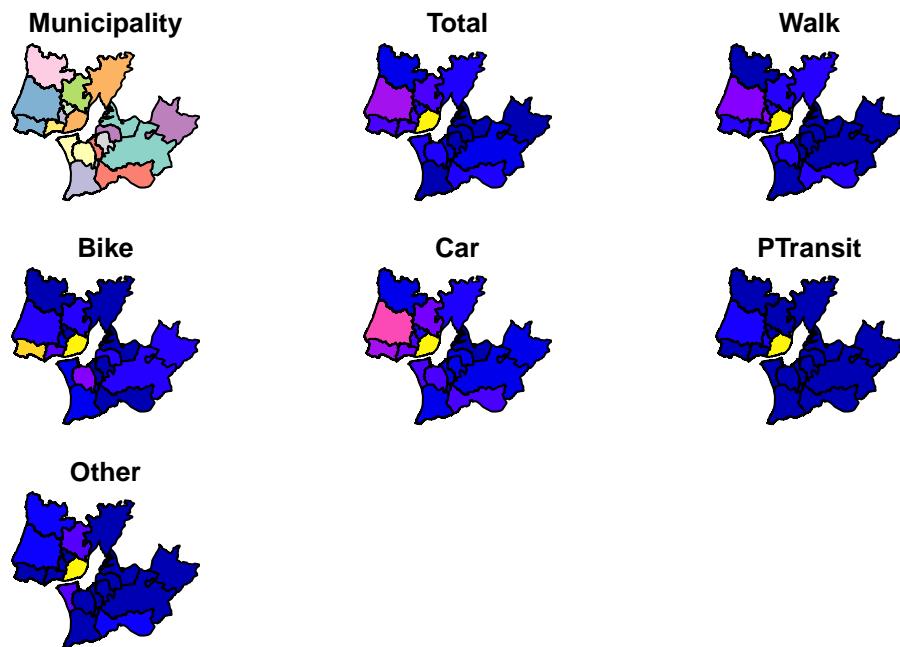


Interactive maps are useful to explore the data, as you can zoom in and out, and click on the points to see the data associated with them.

There are several R packages to create interactive maps. For instance, the `tmap` package, the `leaflet` package, and the `mapview` package.

## 10.1 Mapview


Mapview allows to create quick interactive maps, only by declaring the function `mapview()`.

```
library(mapview)
mapview(TRIPSgeo)
```

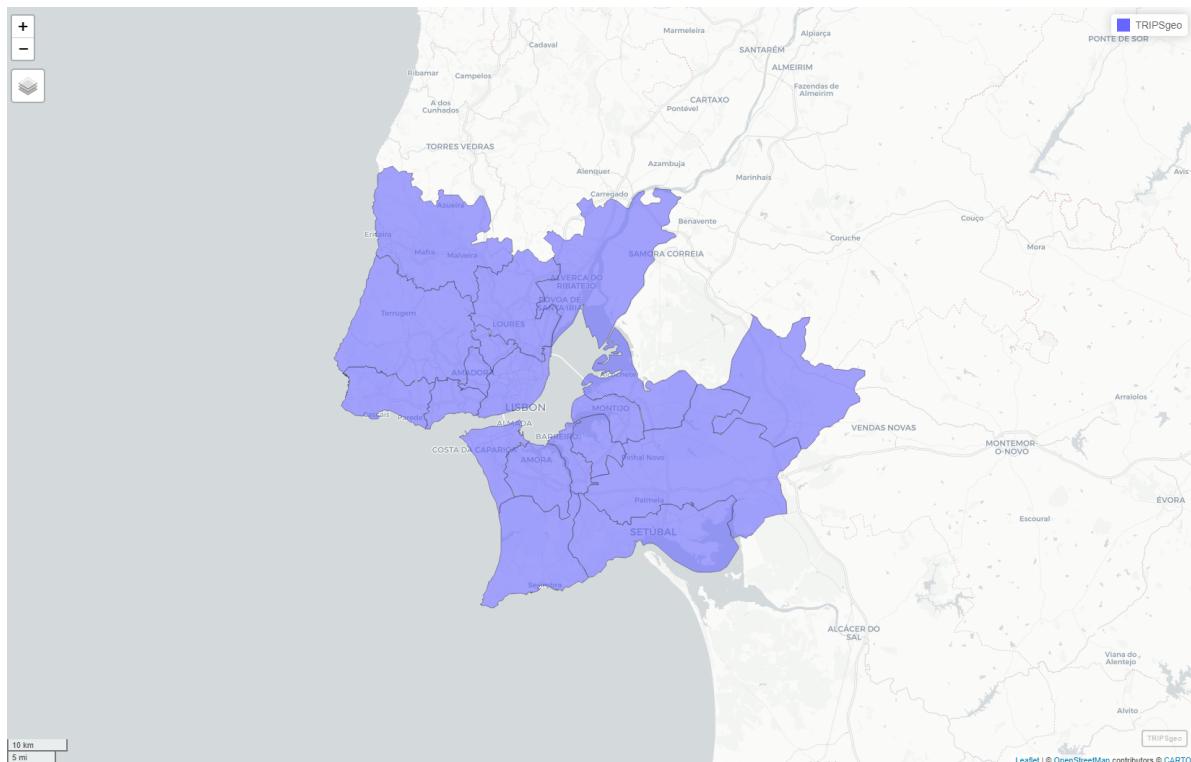

To color the points by a variable, you can use the `zcol` argument.

```
mapview(TRIPSgeo, zcol = "Total")
```

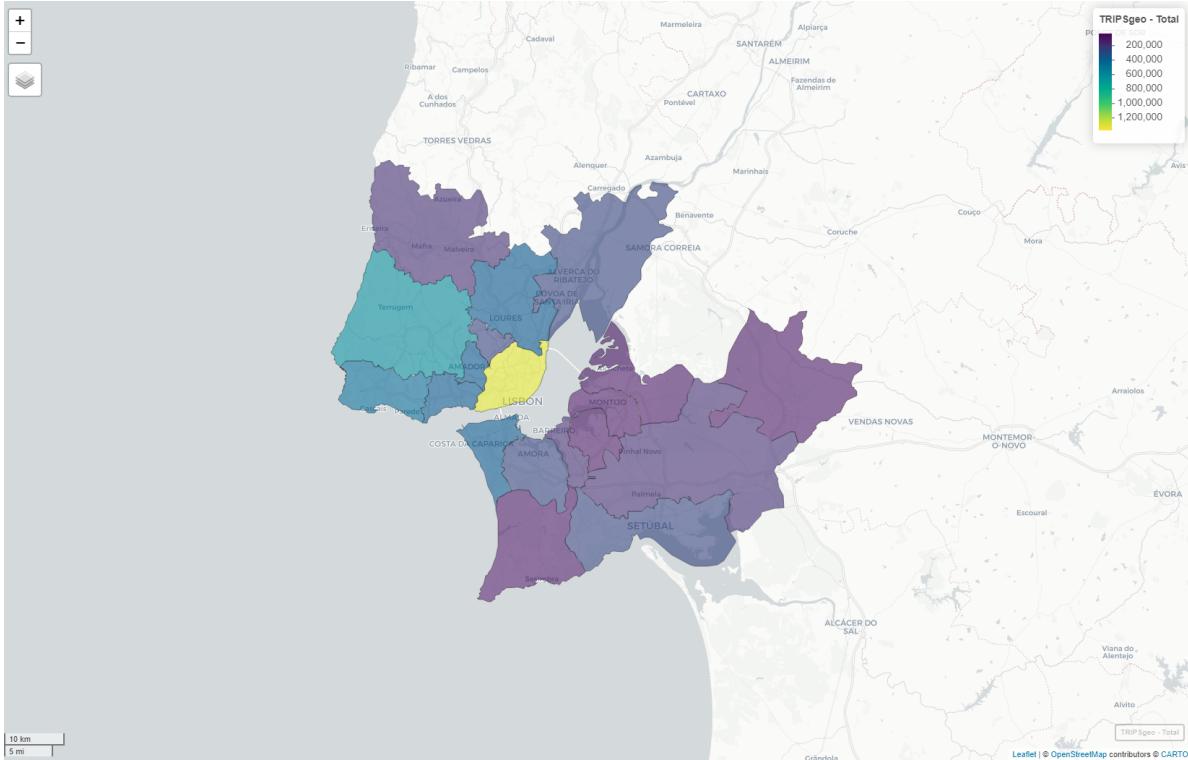


As you can see, a color palette is automatically assigned to the **continuous variable**.

Try to use a **categorical variable**.

```
mapview(TRIPSgeo, zcol = "Municipality", alpha.regions = 0.4) # also add transparency)
```

### **i** Note


Note that you can change the **basemap**, and click on the geometries to **see the data** associated with them.

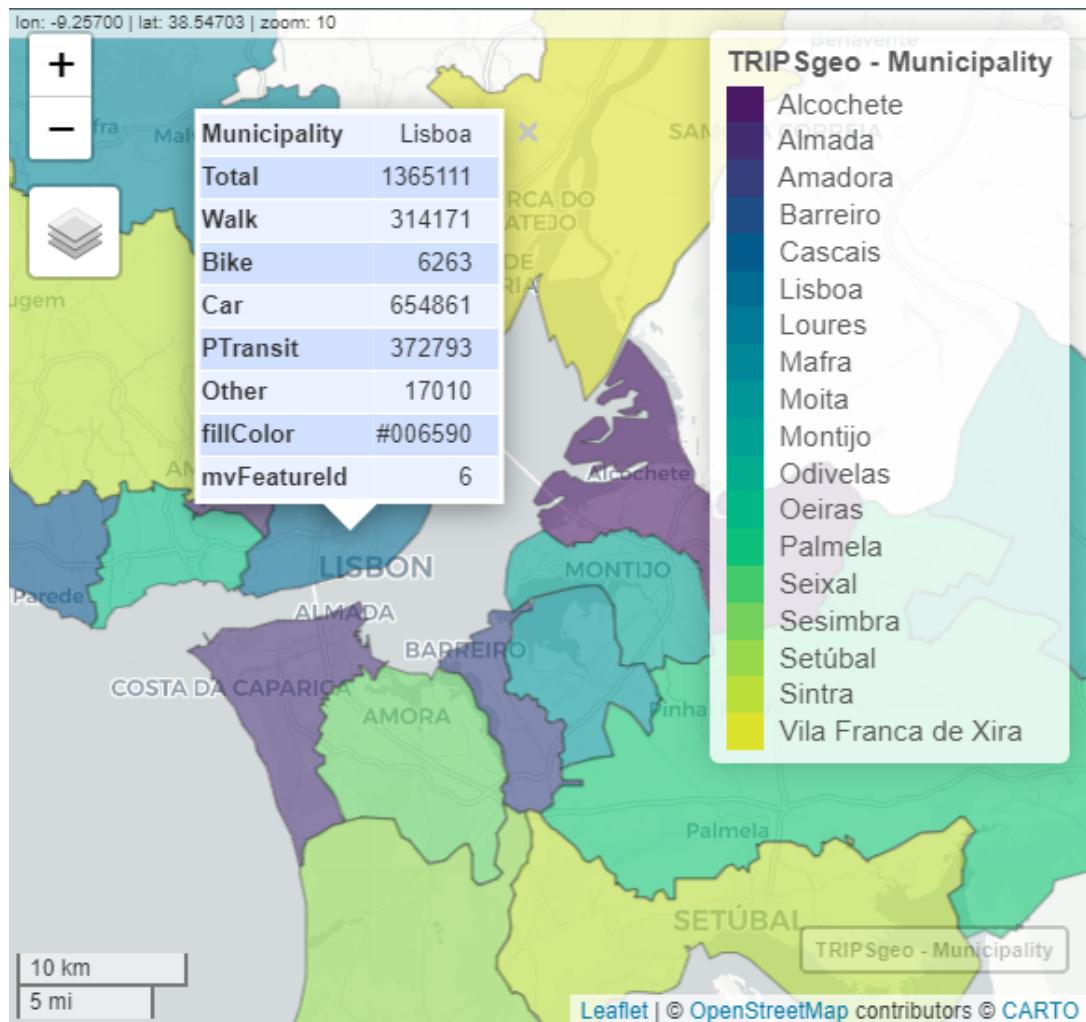

You can go crazy with all the options that `mapview` offers. Please refer to the [documentation](#) to see all the options.

### 10.1.1 Export

You can directly export the map as an `html` file or image, using the Viewer panel.

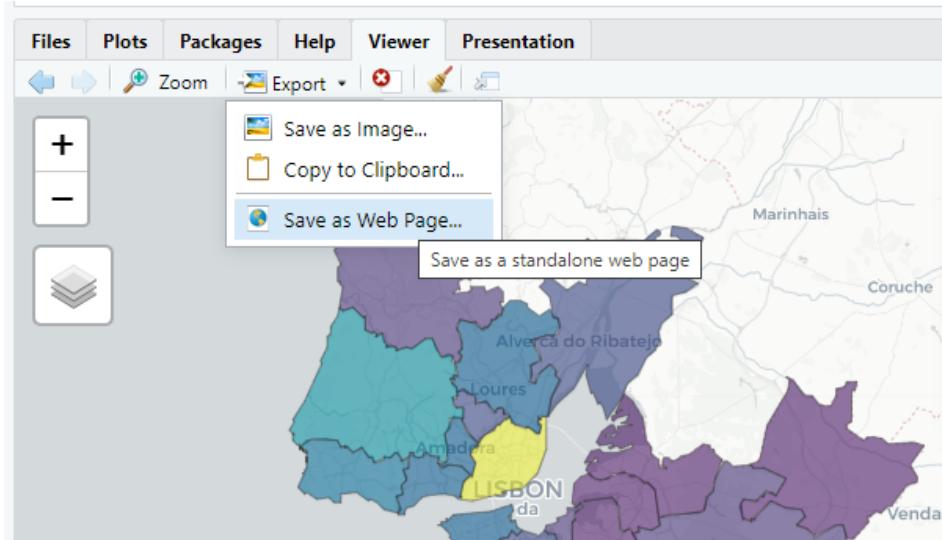

This is the most straightforward solution.

You can also export a map as an html file or image using code.


```
# install.packages("webshot2") # you will need this

map = mapview(TRIPSgeo, zcol = "Total") # first create a object with the desired map

mapshot2(map, "data/map.html") # as webpage
mapshot2(map, file = "data/map.png") # as image
```

## 10.2 Rmarkdown

To include a map on a report, website, paper (any type), you can create an Rmarkdown file.

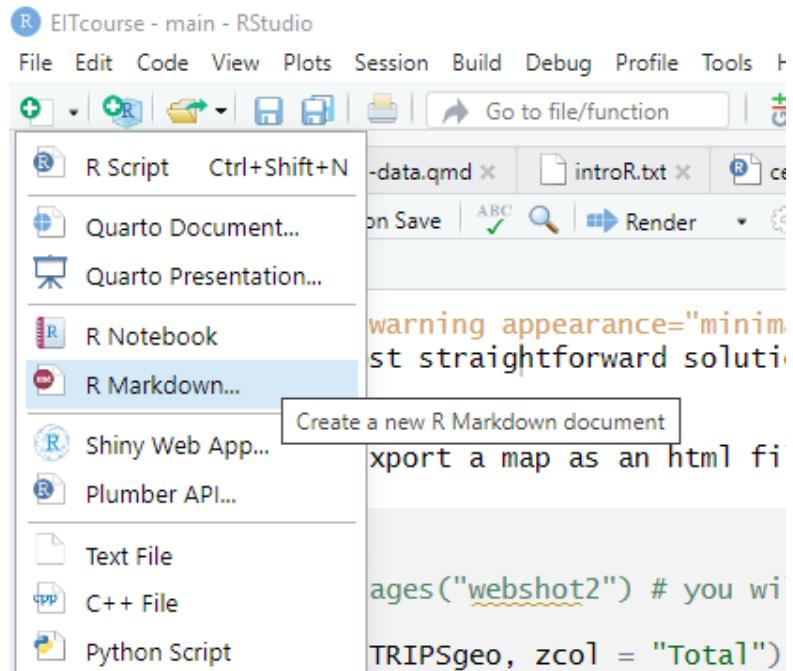

And include a R code chunk (**ctrl + alt + i**) with a map. If the output is html, you will get an interactive map on your document!

**Part II**

**Day 2**

# 11 Centroids of transport zones

In this section we will calculate the geometric and the weighted centroids of transport zones.

## 11.1 Geometric centroids

Taking the `Municipalities_geo` data from the previous section, we will calculate the geometric centroids, using the `st_centroid()` function.


```
library(dplyr)
library(sf)
library(mapview)

Municipalities_geo = st_read("data/Municipalities_geo.gpkg", quiet = TRUE)


Centroids_geo = st_centroid(Municipalities_geo)
```

This creates points at the geometric center of each polygon.

```
mapview(Centroids_geo)
```

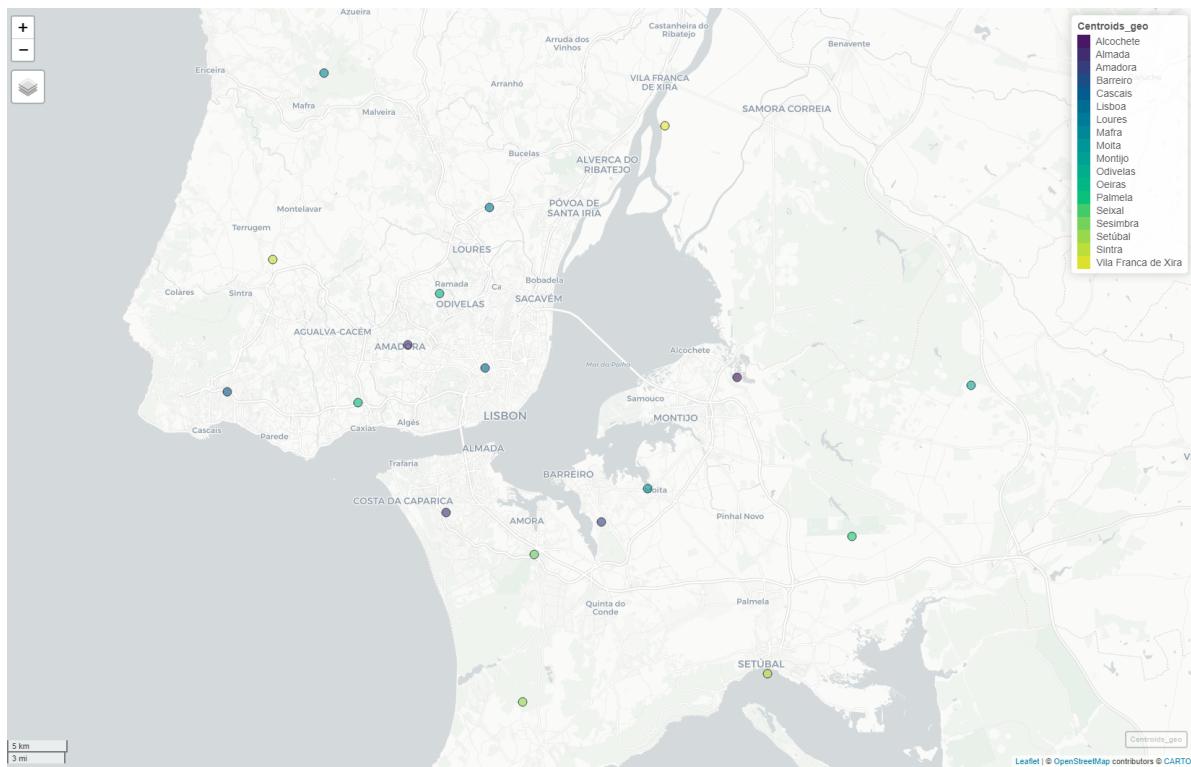

```
mapview(Centroids_geo) + mapview(Municipalities_geo, alpha.regions = 0) # both maps, with fu
```

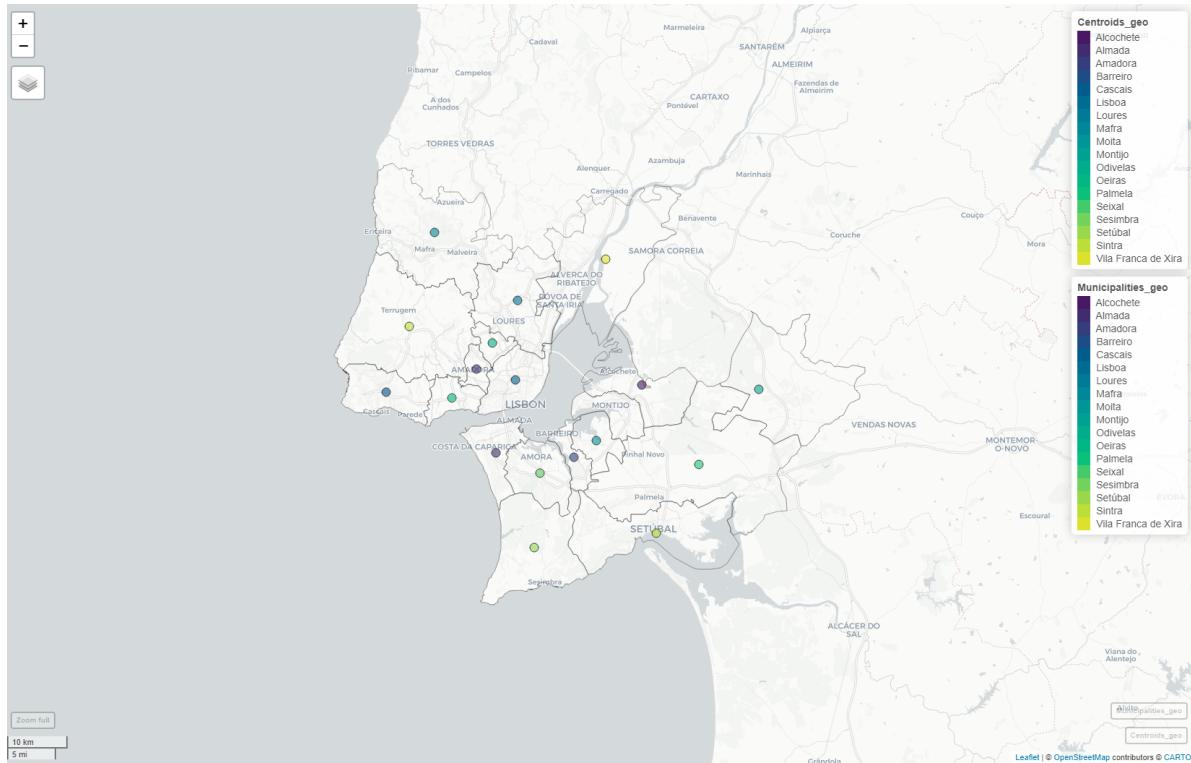

But... is this the best way to represent the center of a transport zone?

These results may be biased by the shape of the polygons, and not represent where activities are. Example: lakes, forests, etc.

To overcome this, we can use **weighted centroids**.


## 11.2 Weighted centroids

We will weight centroids of transport zones by population and by number of buildings.

For this, we will need the census data (INE 2022).

```
Census = st_read("data/census.gpkg", quiet = TRUE)

mapview(Census |> filter(Municipality == "Lisboa"), zcol = "Population")
```

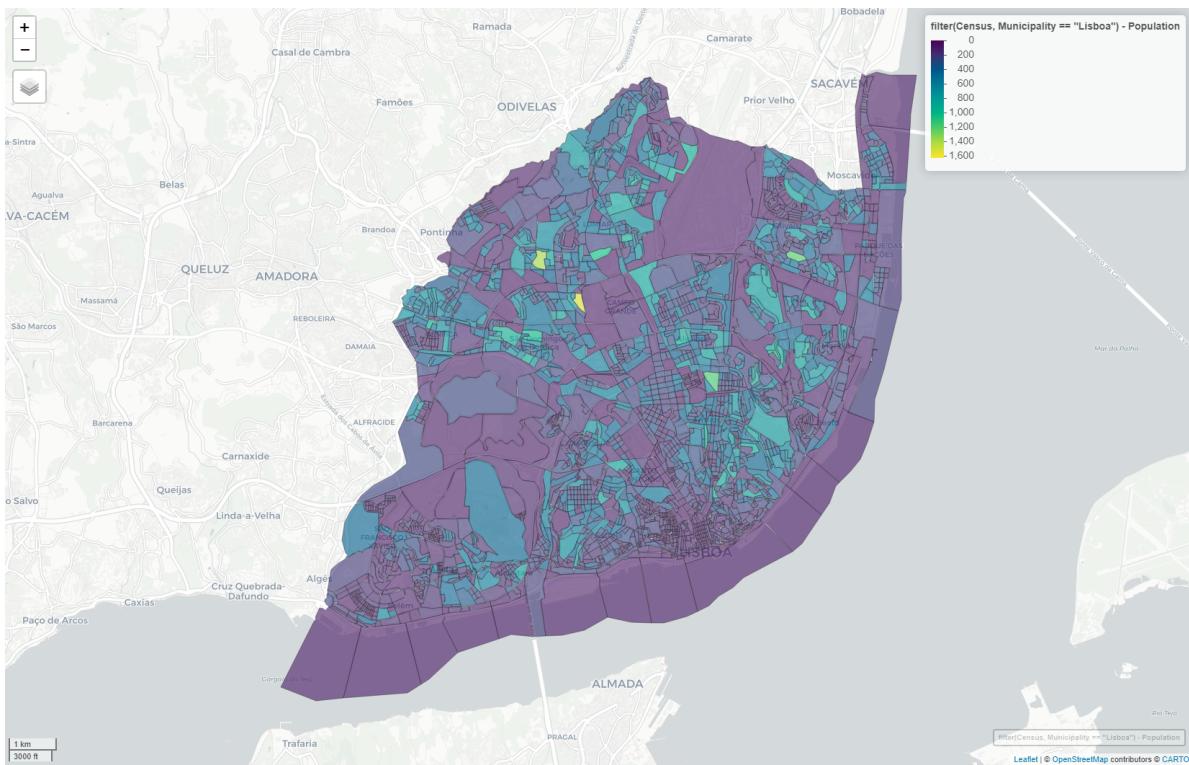

It was not that easy to estimate weighted centroids with R, as it is with GIS software. But there is this new package [centr](#) that can help us (Zomorrodi 2024).

We need to specify the **group** we want to calculate the **mean centroids**, and the **weight variable** we want to use.

```
# test
library(centr)
Centroid_pop = Census |>
  mean_center(group = "Municipality", weight = "Population")
```


We can do the same for buildings.

```
Centroid_build = Census |>
  mean_center(group = "Municipality", weight = "Buildings")
```

## 11.3 Compare centroids in a map

### 11.3.1 Interactive map

```
mapview(Centroids_geo, col.region = "blue") +  
  mapview(Centroid_pop, col.region = "red") +  
  mapview(Centroid_build, col.region = "black") +  
  mapview(Municipalities_geo, alpha.regions = 0) # polygon limits
```

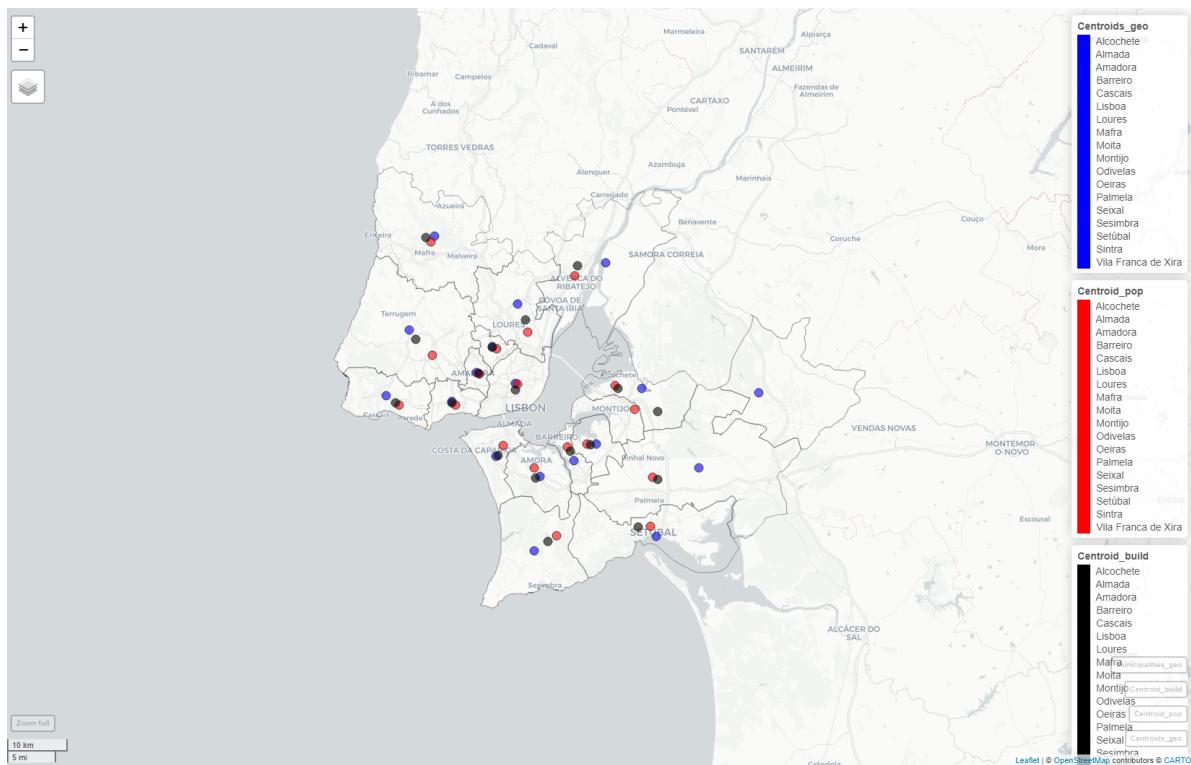

See how the building, population and geometric centroids of Sintra are apart, from closer to Tagus, to the rural area.

### 11.3.2 Static map

To produce the same map, using only `plot()` and `st_geometry()`, we need to make sure that the geometries have the same crs.

```
st_crs(Centroids_geo) # 4326 WGS84  
st_crs(Centroid_pop) # 3763 Portugal TM06
```


So, we need to transform the geometries to the same crs.

```
Centroid_pop = st_transform(Centroid_pop, crs = 4326)  
Centroid_build = st_transform(Centroid_build, crs = 4326)
```

Now, to use `plot()` we incrementally add layers to the plot.

```
# Plot the Municipalities_geo polygons first (with no fill)  
plot(st_geometry(Municipalities_geo), col = NA, border = "black", main = "Map of different C  
  
# Add the Centroids_geo points in blue  
plot(st_geometry(Centroids_geo), col = "blue", pch = 16, add = TRUE) # add!  
  
# Add the Centroid_pop points in red  
plot(st_geometry(Centroid_pop), col = "red", pch = 16, add = TRUE)  
  
# Add the Centroid_build points in black  
plot(st_geometry(Centroid_build), col = "black", pch = 16, add = TRUE)
```

## Map of different Centroids of Municipalities

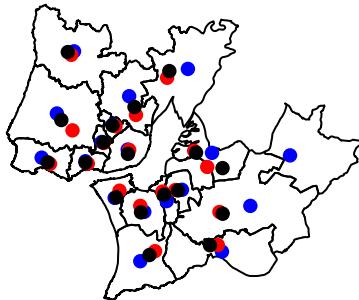

In the next section we will use these centroids to calculate the desire lines between them.

# 12 OD pairs and desire lines

Desire lines are a way to represent the flow of people or goods between two points. They are often used in transport planning to represent the flow of trips between zones.

The `stplanr` package is a collection of functions for sustainable transport planning with R, and it is built on top of the `sf` package (Robin Lovelace and Richard Ellison 2018).

In this workshop, we will use the `od` package, a lightweight package with a few functions from `stplanr`, namely the ones to create desire lines from origin-destination (OD) pairs (Lovelace and Morgan 2024).

## 12.1 Desire lines with `od_2_sf`

To create desire lines, we need a dataset with OD pairs **and** other dataset with the corresponding transport zones (spatial data).

The `TRIPSmode.Rds` dataset includes origins, destinations and number of trips between municipalities.

```
TRIPSmode = readRDS("data/TRIPSmode.Rds")
```

The `Municipalities_geo.gpkg` dataset includes the geometry of the transport zones.

```
library(sf)
Municipalities_geo = st_read("data/Municipalities_geo.gpkg", quiet = TRUE) # suppress message
```

Then, we need to load the `od` package. We will use the `od_to_sf()` function to create desire lines from OD pairs.

```
# install.packages("od")
library(od)

TRIPSdlines = od_to_sf(TRIPSmode, z = Municipalities_geo) # z for zones
```

For this magic to work smoothly, the first two columns of the `TRIPSmode` dataset must be the **origin** and **destination** zones, and these zones need to correspond to the first column of the `Municipalities_geo` dataset (with an associated geometry).

See more options with the `?stplanr::od2line` function.

Now we can visualize the desire lines using the `mapview` function.

```
library(mapview)
mapview(TRIPSdlines, zcol = "Total")
```



As you can see, this is too much information to be able to understand the flows.

### 12.1.1 Filtering desire lines

Filter **intrazonal** trips.


```
library(dplyr)
TRIPSdlines_inter = TRIPSdlines |>
```

```

filter(Origin != Destination) |> # remove intrazonal trips
filter(Total > 5000) # remove noise

mapview(TRIPSdlines_inter, zcol = "Total", lwd = 5)

```

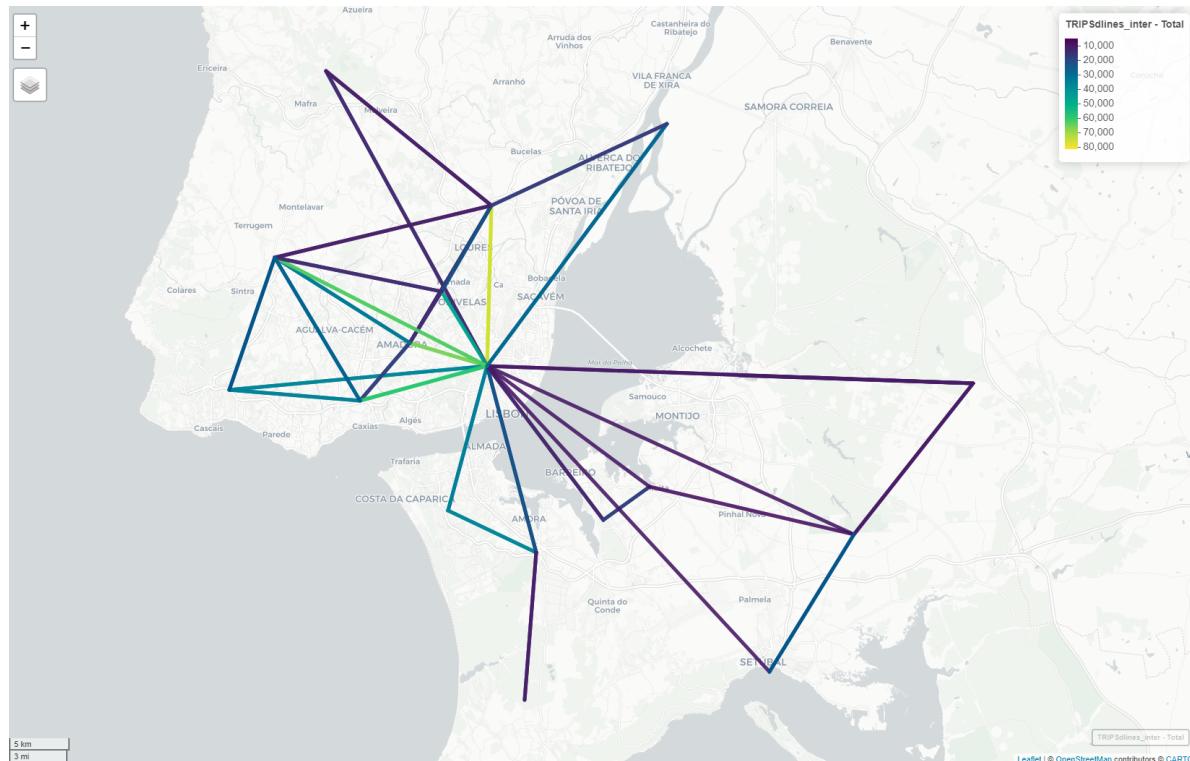


Filter trips with origin or destination **not** in Lisbon.

```

TRIPSdL_noLX = TRIPSdlines_inter |>
  filter(Origin != "Lisboa", Destination != "Lisboa")

mapview(TRIPSdL_noLX, zcol = "Total", lwd = 8) # larger line width

```

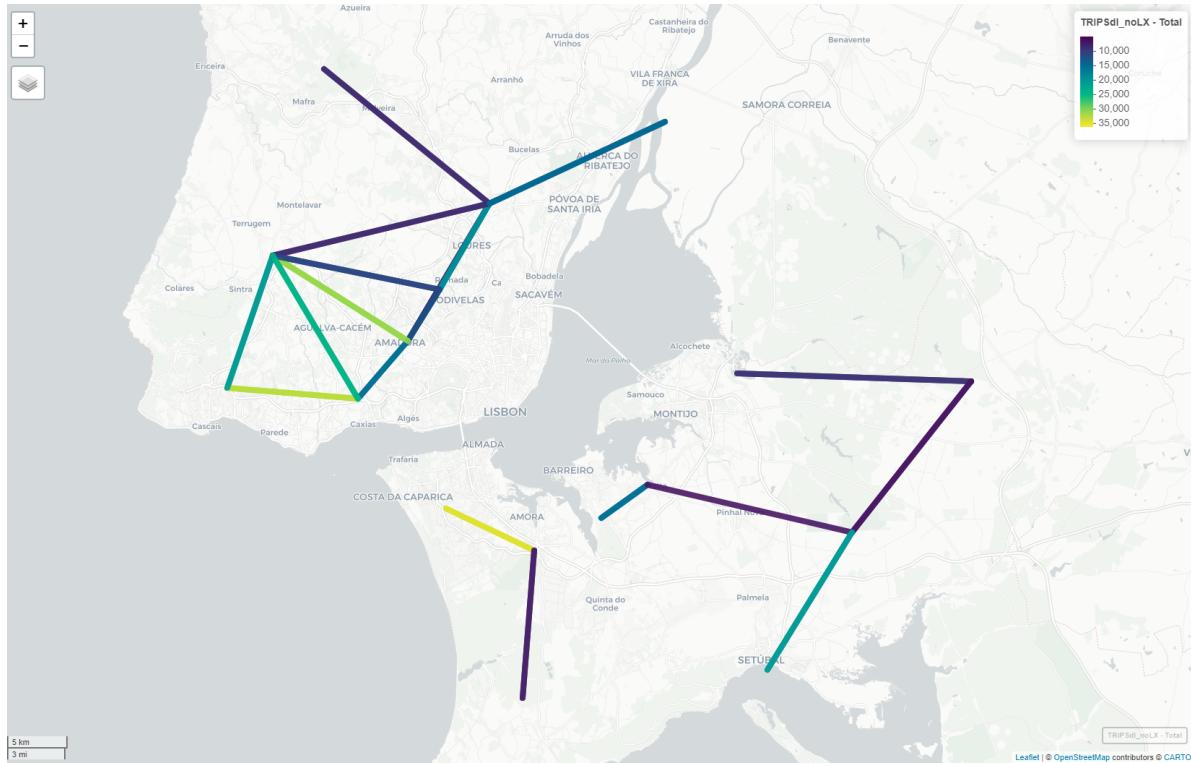

Try to replace the Total with other variables, such as Car, PTransit, and see the differences.

## 12.2 Oneway desire lines

Note that the `od_to_sf()` function creates bidirectional desire lines. This can be not the ideal for visualization / representation purposes, as you will have 2 lines overlapping.

The function `od_oneway()` aggregates oneway lines to produce bidirectional flows.

By default, it returns the sum of each numeric column for each bidirectional origin-destination pair.

```
nrow(TRIPSdlines)
```

```
[1] 315
```

```
TRIPSdlines_oneway = od_oneway(TRIPSdlines)
nrow(TRIPSdlines_oneway)
```

```
[1] 168
```

Note that for the last municipalities you have less combinations now. Nevertheless, all the possible combinations are represented.

```
head(TRIPSdlines_oneway[,c(1,2)]) # just the first 2 columns

Simple feature collection with 6 features and 2 fields
Attribute-geometry relationships: identity (2) (with 3 geometries empty)
Geometry type: LINESTRING
Dimension: XY
Bounding box: xmin: -9.229502 ymin: 38.63562 xmax: -8.91588 ymax: 38.75981
Geodetic CRS: WGS 84
      o          d           geometry
1 Alcochete Alcochete      LINESTRING EMPTY
2 Alcochete     Almada LINESTRING (-8.91588 38.735...
3     Almada     Almada      LINESTRING EMPTY
4 Alcochete     Amadora LINESTRING (-8.91588 38.735...
5     Almada     Amadora LINESTRING (-9.193069 38.63...
6     Amadora     Amadora      LINESTRING EMPTY
```


```
tail(TRIPSdlines_oneway[,c(1,2)])
```

```
Simple feature collection with 6 features and 2 fields
Attribute-geometry relationships: identity (2) (with 1 geometry empty)
Geometry type: LINESTRING
Dimension: XY
Bounding box: xmin: -9.357651 ymin: 38.4949 xmax: -8.806644 ymax: 38.92211
Geodetic CRS: WGS 84
      o          d           geometry
163     Palmela Vila Franca de Xira LINESTRING (-8.806644 38.61...
164     Seixal Vila Franca de Xira LINESTRING (-9.108801 38.60...
165     Sesimbra Vila Franca de Xira LINESTRING (-9.120124 38.49...
166     Setúbal Vila Franca de Xira LINESTRING (-8.887481 38.51...
167     Sintra Vila Franca de Xira LINESTRING (-9.357651 38.82...
168 Vila Franca de Xira Vila Franca de Xira      LINESTRING EMPTY
```

Example of visualization with Public Transit trips in both ways.

```
TRIPSdlines_oneway_noLX = TRIPSdlines_oneway |>
  filter(o != d) |> # remove intrazonal trips
  filter(PTransit > 5000) # reduce noise

mapview(TRIPSdlines_oneway_noLX, zcol = "PTransit", lwd = 8)
```

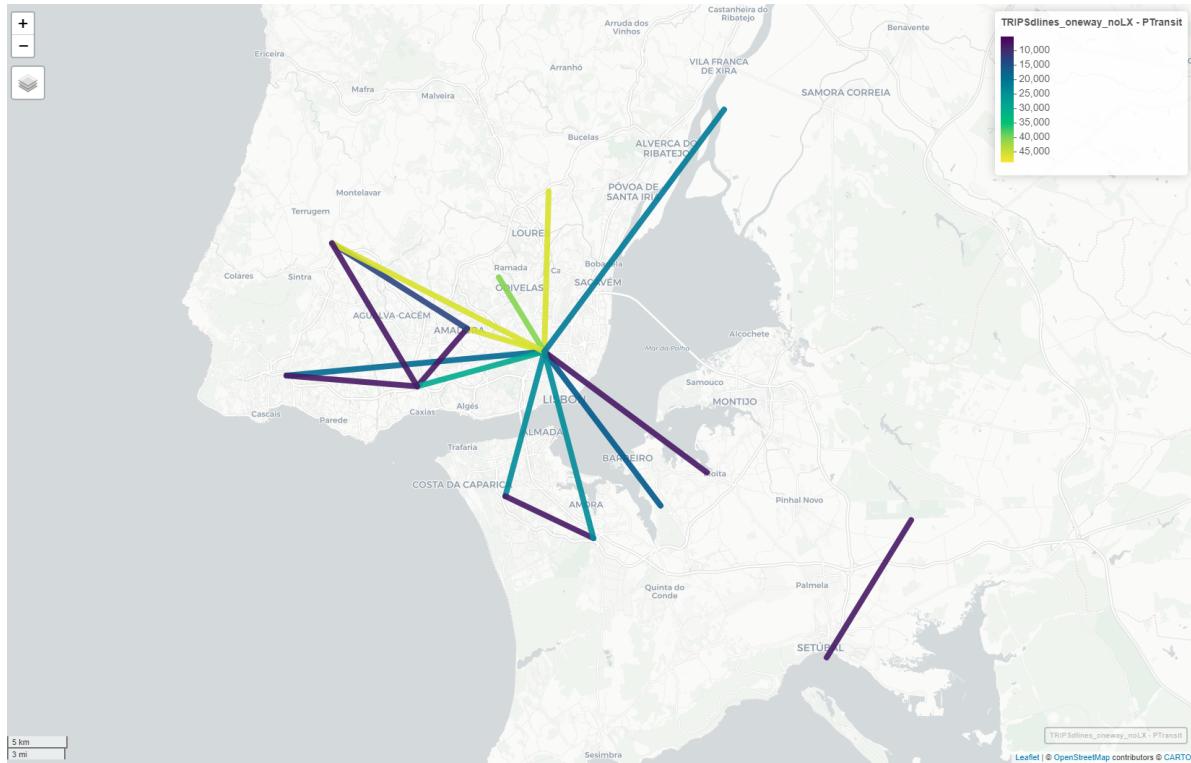

## 12.3 Using population centroids

The `od_to_sf()` function uses the geometric center of the zones to create the desire lines. But if we replace those zones by the weighted centroids, we can have a more realistic representation of the flows.


```
# Centroid_pop = st_read("data/Centroid_pop.gpkg")

TRIPSdlines_pop = od_to_sf(TRIPSmode, z = Centroid_pop) |> # works the same way
  od_oneway() # oneway
```

Check differences of lines with trips from/to Lisbon:

```
TRIPSdlines_geo_LX = TRIPSdlines_oneway |>
  filter(o == "Lisboa" | d == "Lisboa") # or condition
TRIPSdlines_pop_LX = TRIPSdlines_pop |>
  filter(o == "Lisboa" | d == "Lisboa")

mapview(TRIPSdlines_geo_LX, color = "blue") + mapview(TRIPSdlines_pop_LX, color = "red")
```

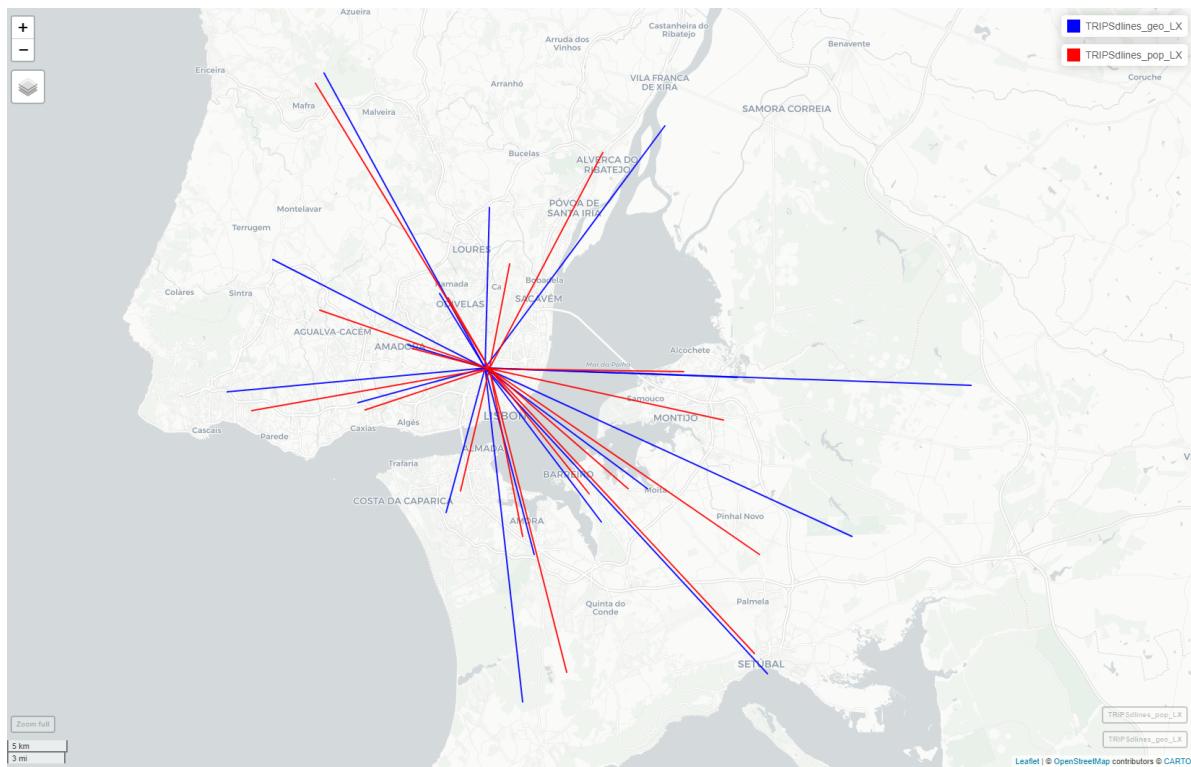

The next step will be estimating the **euclidean distances** between these centroids, and compare them with the **routing distances**.

# 13 Open transportation data

In this chapter we will guide you through sources of open data for transportation analysis: road networks and public transportation information.

## 13.1 Road Networks

### 13.1.1 OpenStreetMap

The OpenStreetMap is a collaborative online mapping project that creates a free editable map of the world.

This is the most used source of road network data for transportation analysis in academia, since it is available almost **everywhere in the world**, is open and free to use.



Although it can be not 100% accurate, OSM is a good source of data for most of the cases.

You can access its visualization tool at [www.openstreetmap.org](http://www.openstreetmap.org). To edit the map, you can use the [Editor](#), once you register.

If you want to **download** the data, you can use the following tools.

- [Overpass API](#)
- [Geofabrik](#)

These websites include all the OSM data, with **much more information than you need**.

### 13.1.2 HOT Export Tool

This interactive tool helps you to select the **region** you want to extract, the type of **information** to include, and the output data **format**.


Access via [export.hotosm.org](http://export.hotosm.org). You need an OSM account to use it.

The screenshot shows the HOT Export Tool interface. On the left, there's a sidebar with a tree view of categories: Government, Healthcare, Land Use, Localities, Natural, Power, Public, Sport, Transportation (selected), Water, and Language. Under Transportation, sub-options like Airport, Ferry Terminal, Train Station, Bus Station, Footpath, Road (selected), Railway, Parking, and Barrier are listed. A 'Where:' dropdown contains the query 'highway IS NOT NULL'. Below the sidebar is a section titled 'Buildings' with a note about OpenStreetMap building data. A 'Next' button is at the bottom right of this section.

After the export, you can read in R using the `sf` package:

```
Gent = sf::st_read("data/Gent_center.gpkg", quiet = TRUE)

mapview::mapview(Gent, zcol = "highway")
```

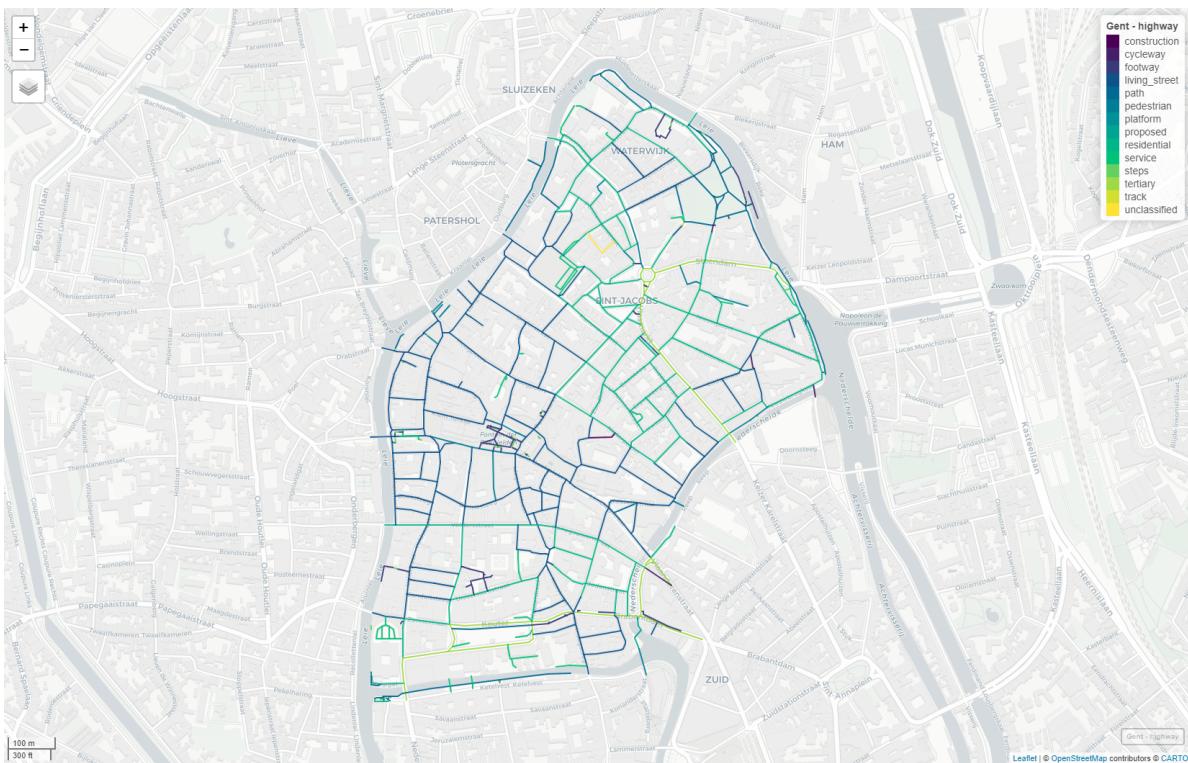

### 13.1.3 OSM in R

There are also some R packages that can help you to download and work with OpenStreetMap data, such as:

- [osmdata](#)
- [osmextract](#)


This is an example of how to download OpenStreetMap road network data using the `osmextract` package:

```
library(osmextract)
OSM_Malta = oe_get_network(place = "Malta") # it will geocode the place

Malta_main_roads = OSM_Malta |>
  filter(highway %in% c("primary", "secondary", "tertiary", "trunk"))

plot(Malta_main_roads[["highway"]])
```

**highway**

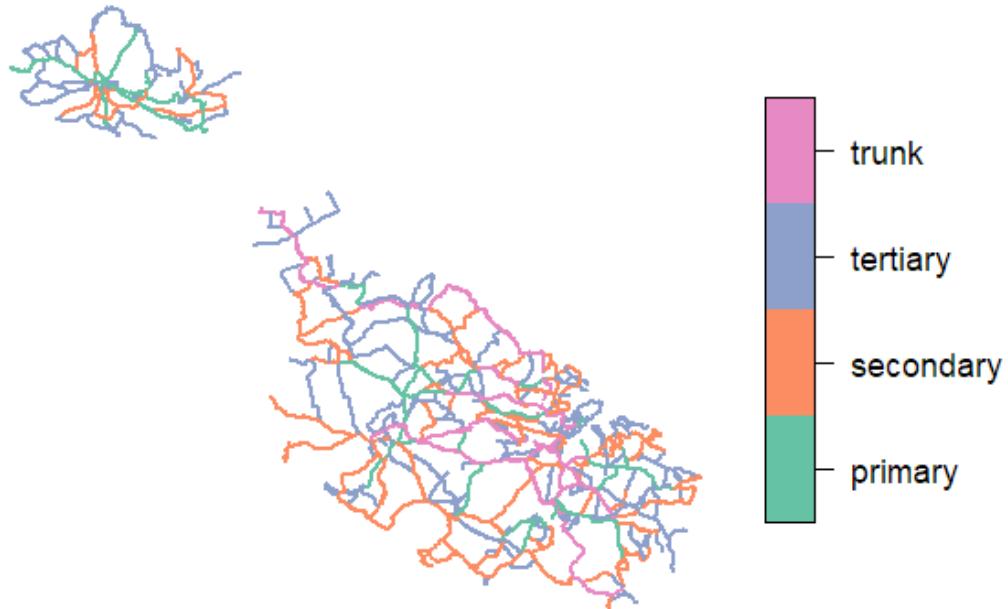

## 13.2 Transportation Services' Data

### 13.2.1 GTFS

#### 13.2.2 National Access Points

The European Union has a directive that requires the member states to provide access to transportation data. Data includes not only **Public Transportation** data, but also **road networks**, car **parking**, and other transportation-related information.

List of the European Union members states with National Access Points for Transportation data

Example of Bus services data in Belgium:

The screenshot shows the TransportData.BE website interface. At the top, there is a navigation bar with links for Datasets, Organizations, News, About, and a search bar. The main content area is titled "Datasets" and shows a search bar with the placeholder "Search datasets...". Below the search bar, it says "40 datasets found" and "Order by: Relevance". A filter sidebar on the left is expanded to show categories like NAP type, Dataset Type, Transportation modes, and more. Under "Transportation modes", "Bus" is selected, showing 40 datasets. Other categories like Tram (28), Metro (18), Car (14), Shuttle bus (11), Truck (11), Motorcycle (9), Taxi (9), Car-sharing (8), and Trolleybus (8) are listed. The main content area displays three dataset entries: 1) "De Lijn - NeTEx Timetables and planning" by De Lijn, marked as "METADATA CHECKED & VERIFIED", available in XML format. 2) "De Lijn - GTFS Realtime" by De Lijn, with a note about API limits and a "Protocol buffers" link. 3) "De Lijn - Open Data API search operations" by De Lijn, with a note about address input and a "JSON" link. 4) "De Lijn - GTFS Static" by De Lijn, with a note about static API and a "Other" link.

Figure 13.1: Source: Transport Data Belgium

# 14 Urban Accessibility with R

The module “**A crash course on urban accessibility with R**”, lectured by [Rafael H. M. Pereira](#), has its own website with materials.

**i** Please access it here: [https://ipeagit.github.io/access\\_workshop\\_eit\\_2024/](https://ipeagit.github.io/access_workshop_eit_2024/)

A crash course on urban accessibility with R

R

1. Intro to the workshop

2. Getting started

Installation

Data requirements

3. Calculating accessibility

Quick approach

Flexible approach

Equity measures

## 1. Intro to the workshop

This website provides the supporting material for the Workshop “A crash course on urban accessibility with R”. The Workshop is part of the course “[Get your dataset ready! Using R and GIS](#)”, delivered at the [EIT Doctoral Training Network Annual Forum](#), in Gent (Belgium), 19th and 20th September 2024. The workshop is sponsored by the [EIT Urban Mobility](#).

Co-funded by the European Union

### Workshop Summary:

Routing and accessibility analyses are increasingly used in urban and transport research and planning. In this workshop, you will learn how to estimate travel time matrices and perform accessibility analyzes in multimodal transport networks using the [\(r5r\)](#) and [\(accessibility\)](#) packages in the [R](#) programming language.

The workshop will also illustrate how to calculate different measures of *inequality* of access to opportunities and *accessibility poverty*, which are crucial to assess the accessibility impacts of transportation projects from a transportation equity perspective. The course is based on the book [“Introduction to urban accessibility: a practical guide with R”](#) (Pereira and Herszenhut 2023).

**ⓘ** [\(r5r\)](#) is an R package for rapid realistic routing on multimodal transport networks (walk, bike, public transport and car). It provides a simple and friendly interface to [R5, the Rapid Realistic Routing on Real-world and Reimagined networks](#).

Figure 14.1: Screenshot of the website for this learning module.

## About the instructor

**Rafael H. M. Pereira**  
*Head of Data Science*

Institute for Applied Economic Research (Ipea), Brazil  
[Website](#) | [Google Scholar](#) | [Twitter](#) | [Linkedin](#) |

#### **Short bio**

Rafael H. M. Pereira is a senior researcher in the fields of urban analytics, spatial data science and transport studies at the Institute for Applied Economic Research (Ipea), Brazil. His research looks broadly at how urban policies and technologies shape the spatial organization of cities, human mobility as well as their impacts on social and health inequalities. Some of his key contributions to the fields of urban analytics and planning involve the development of new methods and open-source computational tools to the study of urban systems and transportation networks. These contributions emerge from substantive interests around social justice and sustainability issues in urban development, with particular focus on transportation equity and inequalities in access to opportunities, and the environmental impacts of built environments and mobility patterns. With a background in Sociology and Demography, Dr. Pereira obtained his PhD in Geography from the Transport Studies Unit at Oxford University.

# References

- INE. 2018. “Mobilidade e Funcionalidade Do Território Nas Áreas Metropolitanas do Porto e de Lisboa: 2017.” Lisboa: Instituto National de Estatística. [https://www.ine.pt/xportal/xmain?xpid=INE&xpgid=ine\\_publicacoes&PUBLICACOESpub\\_boui=349495406&PUBLICACOESmodo=2&xlang=pt](https://www.ine.pt/xportal/xmain?xpid=INE&xpgid=ine_publicacoes&PUBLICACOESpub_boui=349495406&PUBLICACOESmodo=2&xlang=pt).
- . 2022. “Censos 2021- XVI Recenseamento Geral da População. VI Recenseamento Geral da Habitação.” Lisboa: Instituto National de Estatística. <https://censo.ine.pt/xurl/pub/65586079>.
- Lovelace, Robin, and Malcolm Morgan. 2024. *Od: Manipulate and Map Origin-Destination Data*. <https://github.com/itsleeds/od>.
- Pebesma, Edzer, and Roger Bivand. 2023. *Spatial Data Science: With Applications in R*. Boca Raton: Chapman; Hall/CRC. <https://doi.org/10.1201/9780429459016>.
- Robin Lovelace, and Richard Ellison. 2018. “Stplanr: A Package for Transport Planning.” *The R Journal* 10 (2): 10. <https://doi.org/10.32614/RJ-2018-053>.
- Zomorrodi, Ryan. 2024. *Centr: Weighted and Unweighted Spatial Centers*. <https://ryanzomorrodi.github.io/centr/>.