



# Advanced Programming

## Internationalization

## Localization

# i18n & l10n

- **Internationalization** (i18n) is the process of designing an application so that it can be adapted to various languages and regions without engineering changes.
  - Most applications should be designed for international use right from the start of the development.
- **Localization** (l10n) is the process of adapting software for a specific region or language by adding locale-specific components and translating text.
  - Country-specific data should be added without changing the code!

# Considerations

- With the addition of localized data, **the same executable can run worldwide** → adding support for new languages should not require recompilation.
- **Textual elements**, such as status messages and the GUI component labels, are not hardcoded in the program. Instead they are stored outside the source code and retrieved dynamically.
- Culturally-dependent data, such as **dates**, **numbers** and **currencies**, appear in formats that conform to the end user's region and language.
- Sorting collections of strings should take into consideration **the alphabet** specific to a language.
- The direction of writing, etc.

# The *Locale* Class

- A *Locale* object represents a specific geographical, political, or cultural region.
  - **Language**: ISO 639 alpha-2 or alpha-3 language code  
“en” → english, “ja” → japanese, “ro” → română
  - **Country**: ISO 3166 alpha-2 country code  
“US” → United States, “UK” → United Kingdom, “RO” → Romania
  - `Locale usLocale = Locale.US;`  
`Locale roLocale = new Locale("ro", "RO");`
- An operation that requires a *Locale* to perform its task is called *locale-sensitive*
  - `NumberFormat.getNumberInstance(roLocale).format(12345.99)`  
→ 12.345,99

# Available Locales

```
import java.util.Locale;

public class TestLocale {
    public static void main(String args[]) {
        System.out.println("Default locale:");
        localeInfo(Locale.getDefault());

        System.out.println("Available locales:");
        Locale available[] =
            Locale.getAvailableLocales();

        for(Locale locale : available) {
            locale.getDisplayCountry() + "\t" +
            locale.getDisplayLanguage(locale);
        }
    }
}
```

## **Default locale:**

English United States

## **Available locales:**

Albania shqip

Algeria العربية

Argentina español

Australia English

Austria Deutsch

Bahrain العربية

Belarus беларускі

Belgium français

Belgium Nederlands

Bolivia español

Bulgaria български

Canada français

Canada English

Chile español

China 中文

...

Romania română

...

# Where Are Locale Data Stored?

- **Resource bundles** contain locale-specific objects  
When your program needs a locale-specific resource, a String for example, your program can load it from the resource bundle that is appropriate for the current user's locale.

```
ResourceBundle resources =  
    ResourceBundle.getBundle("MyResources", someLocale);
```

- Resource bundles belong to families whose members share a common base name, but whose names also have additional components that identify their locales.
  - MyResources
  - MyResources\_ro
  - MyResources\_en\_US
- A resource bundle can be a **.class** or a **.properties** file
- **rt.jar** → sun.util.resources.  
LocaleData, LocaleNames, CurrencyNames, TimeZoneNames, ...

# Properties

- A **.properties** file is a text file containing pairs of type: **key = value**

config.properties

```
driver = com.mysql.jdbc.Driver
url = jdbc:mysql://localhost/test
user = dba
password = sql
```

- The **Properties** class represents a persistent set of properties. The Properties can be saved to a stream or loaded from a stream.

```
Properties props = new Properties();
props.load(new FileReader(path + "/database.properties"));
System.out.println(props.getProperty("driver"));
```

# ResourceBundles

- MyResources\_ro.properties

**hello**=Salut

**bye**=La revedere

**welcome**=Utilizatorul {0} s-a conectat la {1}

- MyResources\_fr.properties

hello=Bonjour

bye=Au Revoir

welcome=Utilisateur {0} est connecté à {1}

- MyResources.properties (default)

hello=Hello

bye=Goodbye

welcome=User {0} logged in at {1}



# Translating the User Interface

```
public static void displayMessages(Locale locale) {  
    String baseName = "com.example.MyResources";  
    ResourceBundle messages =  
        ResourceBundle.getBundle(baseName, locale);  
    System.out.println(messages.getString("hello"));  
    String pattern = messages.getString("welcome");  
    Object[] arguments = {"Duke", LocalDate.now()};  
    String welcome = new MessageFormat(pattern).format(arguments);  
    System.out.println(welcome);  
    System.out.println(messages.getString("bye"));  
}
```

```
public static void main(String args[]) throws IOException {  
    displayMessages(Locale.forLanguageTag("ro"));  
    //-> Salut, Utilizatorul Duke s-a conectat la 2016-05-03, La revedere  
    displayMessages(Locale.getDefault());  
    //-> Hello, User Duke logged in at 2016-05-03, Goodbye  
}
```

# ListResourceBundle

- Using a **class** instead of a **.properties** file

```
package com.example;
import java.util.ListResourceBundle;
public class MyResources_ro extends ListResourceBundle {

    private static final Object[][] contents = {
        {"hello", "Salut"},
        {"welcome", "Utilizatorul {0} s-a conectat la {1}"},
        {"bye", "La revedere"}
    };

    @Override
    public Object[][] getContents() {
        return contents;
    }
}
```

# Formatting Numbers

- **NumberFormat** helps you to format and parse numbers for any locale.
- Your code can be completely independent of the locale conventions for decimal points or thousands-separators.

```
double number = 12345.99;  
NumberFormat.getNumberInstance(Locale.US).format(number);  
    → 12,345.99  
NumberFormat.getNumberInstance(Locale.GERMANY).format(number);  
    → 12.345,99
```

- **Formatting currency**

```
double salary = 1_000_000d;  
Locale roLocale = Locale.forLanguageTag("ro-RO");  
NumberFormat.getCurrencyInstance(roLocale).format(salary);  
    → 1.000.000,00 LEI
```

# Formatting Dates

- **java.time.format.DateTimeFormatter**

```
LocalDateTime today = LocalDateTime.now();  
DateTimeFormatter formatter = DateTimeFormatter  
    .ofLocalizedDate(FormatStyle.FULL)  
    .withLocale(roLocale);  
System.out.println("Date: " + today.format(formatter));  
// → Date: 03 mai 2016
```

- **Format Styles:**

- SHORT
- MEDIUM
- LONG
- FULL

# Comparing Strings

- The **Collator** class performs locale-sensitive String comparison.

```
String words[] =  
    {"ramură", "rămurică", "răţuscă", "repede", "rîu"};
```

```
Arrays.sort(words) ;
```

```
System.out.println(Arrays.toString(words));  
//[ramură, repede, rîu, rămurică, răţuscă]
```

```
Locale roLocale = Locale.forLanguageTag("ro");
```

```
Collator collator = Collator.getInstance(roLocale) ;
```

```
Arrays.sort(words, (w1,w2) -> collator.compare(w1, w2)) ;
```

```
System.out.println(Arrays.toString(words));  
//[ramură, rămurică, răţuscă, repede, rîu]
```

# Internationalization Layer

- **Separate the internationalization code** from the rest of the application
  - **encapsulate** your i18n code
- You may want to use the default Java I18N features, or you may use another API.
- Every input from the user should be **parsed** according to the rules defined by the I18N layer
- Every output to the user should be **formatted** according to the rules defined by the I18N layer

# Bibliography

- **Java Tutorial**

<https://docs.oracle.com/javase/tutorial/i18n/TOC.html>



# Java Technologies

## Java EE - Introduction



# First of All – Course Information

- The Goal
- The Motivation
- Teaching / Learning
- Bibliography
- Evaluation
  - Lab: problems, personal projects, essays → **easy**
  - Exam: written test / quiz → **hard**
  - **Research Projects**

# Labs

- Each week a problem will be proposed, related to the current course.
- The solution to the problem must be presented within **3 (three) weeks**, during the classes.
- A solution may receive **1 to 5 points**.
- Teams are **not** allowed.
- You must create a private GIT repository, where you will store your projects.
- Before each lab, you must send an email containing a short description of your work on the current problem (along with the git url).

# Projects

- The topic of the project will be announced (approved) in the first half of the semester.
- The projects will be presented and evaluated in the last week of the semester.
- A project may receive up to **30 points**.
- **Teams are allowed.**
- If the project is presented in the form of a scientific article and prepared to be sent to a conference, it may receive an additional 10 points and may be continued as a dissertation thesis (contact me for details).

# Exam

- **Entry:** 30 points at lab + project
- 10 points for participation
- 20 short-answer questions, each worth 1 point
- On-site?
- No documentation :)
- Grand total: 70% lab + project, 30% exam

# The Context

- We are in the situation of developing a **complex, large-scale, portable, scalable, reliable, secure, transactional, distributed system**.
- *Who is the customer?* A HUGE bank, a chain of hypermarkets, a Fortune 500 company, etc.
- *What do we know?* **Programming languages** (Java, Groovy, Scala, Kotlin, etc.), **various protocols** (TCP, UDP, HTTP, SOAP, etc.), specifications, etc.
- *What do we want?* **A framework** that will make our lives as easy as possible.
- *When do we want it?*



# Java Enterprise Edition (Java EE)

*“The aim of the Java EE platform is to provide developers with a powerful set of APIs while shortening development time, reducing application complexity, and improving application performance.”*

- **Specifications**

Java EE API describes how an enterprise application should be created, what components should contain, etc.

- **Implementations** → **Application Servers**

- GlassFish (reference implementation), Payara
- WebLogicServer, JBoss Application Server / WildFly, IBM WebSphere, Apache Tomcat / Geronimo / TomEE, etc.

- **Portability**

# J2EE to Jakarta EE

- J2EE (1999) 1.2, 1.3, 1.4
- Java EE (2006) 5,6,7,8

*In 2017, Oracle decided to give away the rights for Java EE to the Eclipse Foundation.*

- **Jakarta EE (2019) 8,9**



# <https://jakarta.ee/about/>

- **The Future of Cloud Native Java**

For many years, Java EE has been a major platform for mission-critical enterprise applications. In order to accelerate business application development for a cloud-native world, leading software vendors collaborated to move Java EE technologies to the Eclipse Foundation where they will evolve under the Jakarta EE brand.

- **What is Jakarta EE?**

Jakarta EE is a set of specifications that enables the world wide community of java developers to work on java enterprise applications. The specifications are developed by well known industry leaders that instills confidence in technology developers and consumers. Jakarta EE specifications are either grouped into a platform specification (Full or Web Platform) or can be an individual specification.

- **APIs and Specification**
- **Technology Compatibility Kit (TCK)** - used for testing the code implemented based on the APIs and Specification document
- **Compatible Implementation** - implementation that successfully passes the TCK
- **Community-based specification process**



# Eclipse MicroProfile

- Optimizing Enterprise Java for a **Microservices Architecture**
- A collection of Java EE APIs and technologies which together form a core baseline microservice that aims to deliver application portability across multiple runtimes.
- REST, JSON, JAX-RS, CDI.
- **Standard**
- Switching from TomEE to Payara Micro to OpenLiberty to Quarkus does only require changes in the configuration.

# Downloads

- **NetBeans IDE**

- Bundle: *Java EE* or *All*
- Includes Tomcat and GlassFish Application Servers
- Free

- **Eclipse IDE for Java EE Developers**

- An application server must be installed separately
- Free

- **IntelliJ IDEA Ultimate Edition**

- Free 30 day trial / Free for students and teachers

# Admin Console (Glassfish)

The screenshot displays the Glassfish Admin Console web interface. The browser address bar shows `localhost:4848/common/index.jsf`. The page header includes navigation links for [Home](#), [About...](#), and [Help](#). Below the header, the user information is displayed: **User: admin** | **Domain: domain1** | **Server: localhost**. The main title is **GlassFish™ Server Open Source Edition**.

On the left, a **Tree** view shows the navigation structure. The **Applications** node is selected and expanded, showing sub-nodes: **HelloWorld**, **Lifecycle Modules**, **Monitoring Data**, **Resources** (with sub-nodes: **Concurrent Resources**, **Connectors**, **JDBC**, **JMS Resources**, **JNDI**, **JavaMail Sessions**, **Resource Adapter Configs**), and **Configurations** (with sub-nodes: **default-config**, **server-config**).

The main content area is titled **Applications** and contains the following text: "Applications can be enterprise or web applications, or various kinds of modules. Restart an application or module by clicking on the reload link, this action will apply only to the targets that the application or module is enabled on."

Below this text is a section titled **Deployed Applications (1)**. It includes a toolbar with buttons: **Deploy...**, **Undeploy**, **Enable**, **Disable**, and a **Filter:** dropdown. Below the toolbar is a table with the following data:

| Select                   | Name       | Deployment Order | Enabled | Engines | Action                                                                     |
|--------------------------|------------|------------------|---------|---------|----------------------------------------------------------------------------|
| <input type="checkbox"/> | HelloWorld | 100              | ✓       | web     | <a href="#">Launch</a>   <a href="#">Redeploy</a>   <a href="#">Reload</a> |

# Java EE Technologies

- **Servlets**
- **JSP** Java Server Pages
- **JSF** Java Server Faces
- **JNDI** Java Naming and Directory Interface
- **JPA** Java Persistence API
- **EJB** Enterprise Java Beans
- **JAX-WS, JAX-RS** Web Services
- **CDI** Context and Dependency Injection
- **JMS, JTA, ...**


# Client- vs Server Centric Web Frameworks

- In both cases, the bussiness logic is implemented using server-side components (or services)
- **Server - Centric** (JavaEE approach)
  - The UI component tree is stored on the server and rendered to the client upon page requests.
  - Binding UI components and server-side data is easy, (client and server are synchronized)
- **Client – Centric** (Angular, React, Vue + Services)
  - The UI is written in JavaScript (or TypeScript, etc) and runs on the client (browser)
  - UI communicates with server-side services in order to receive and send data

# A Note about Spring Framework

- JavaEE is *a set of specifications* supervised by The Eclipse Foundation (having various implementations) / Spring is an *application framework* developed by PivotalSoftware.
- Both **depend on the same core** APIs (Servlet, JPA, JMS, BeanValidation etc).
- They **look and behave pretty similar** to each other.
- Spring is more “friendly” to beginners, offering a lot of ready-to-use tools (like SpringBoot, for example).
- JavaEE offers “heavy guns” (like EJB, for example) for achieving scalability in a standard manner
- Both are “relevant”, being used in large projects and are here to stay for a long time.

# Distributed Multitiered Applications

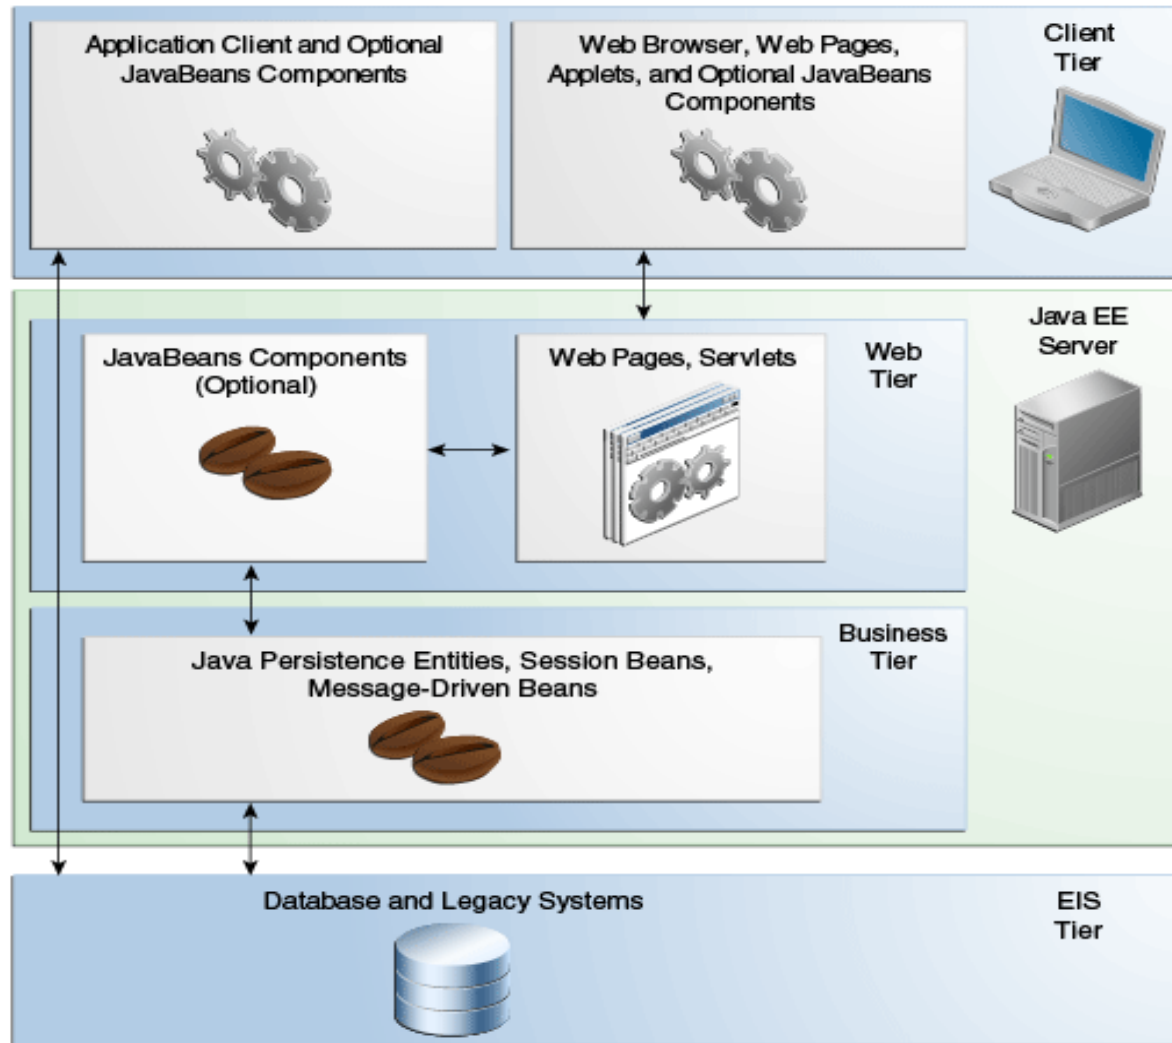

Application logic is divided into **components** according to function, and the application components that make up a Java EE application are installed on various machines depending on the tier in the multitiered Java EE environment to which the application component belongs.

# Java EE Components

- Java EE applications are made up of components.
- A Java EE component is a **self-contained functional software unit** that is assembled into an application at a **specific tier** and **communicates with other components**.
- **Client Tier:** application clients, applets
- **Web Tier:** Java Servlet, JavaServer Faces, and JavaServer Pages (JSP) technology components, HTML, XHTML, CSS, etc
- **Business Tier:** EJB components (enterprise beans)
- **Model Tier:** The entity beans or any other beans :)



# Containers

***“Containers are the interface between a component and the low-level platform-specific functionality that supports the component. Before a web, enterprise bean, or application client component can be executed, it must be assembled into a Java EE module and deployed into its container.”***

- **Web containers** manages the execution of web pages, servlets, etc. Implemented in most application servers, such as Tomcat: “Apache Tomcat™ is an open source software implementation of the Java Servlet, JavaServer Pages, Java Expression Language and Java WebSocket technologies. The Java Servlet, JavaServer Pages, Java Expression Language and Java WebSocket specifications”
- **Java EE containers** manages the execution of EJB, JMS, etc. and are implemented in the “heavy” Java EE servers, such as Glassfish: “GlassFish is the reference implementation of Java EE and as such supports Enterprise JavaBeans, JPA, JavaServer Faces, JMS, RMI, JavaServer Pages, servlets, etc.”

# Application Lifecycle

- **Develop** the components code and the application deployment descriptors, if necessary.
- **Compile** the application components and helper classes referenced by the components.
- **Package** the application into a deployable unit.  
→ **war, ear**
- **Deploy** the application into dedicated containers, using the application server tools.
- **Access a URL** that references the web application.

# Organizing the Components

- **Source Level: *Java EE blueprints***
- **Build Level**

**\MyApplication**

Web Pages

Resources

**\WEB-INF**

*web.xml*

Configuration files

web.xml = the deployment descriptor file:  
determines how URLs map to components,  
which URLs require authentication, etc.

**\classes**

.class, .properties

**\lib**

.jar

A "web application" is a collection of  
servlets and content installed under a  
specific subset of the server's URL  
namespace such as /MyApplication and  
installed via a .war file

# Sample *web.xml* File

## **<web-app>**

```
<display-name>HelloWorld Application</display-name>
<description>
    This is a complex, large-scale web application
</description>

<session-timeout>30</session-timeout>

<welcome-file-list>
    <welcome-file>index.html</welcome-file>
</welcome-file-list>

<servlet>
    <servlet-name>HelloServlet</servlet-name>
    <servlet-class>examples.Hello</servlet-class>
</servlet>

<servlet-mapping>
    <servlet-name>HelloServlet</servlet-name>
    <url-pattern>/hello</url-pattern>
</servlet-mapping>
```

## **</web-app>**

Most of these metadata will be specified using **annotations**.  
Sometimes, the web.xml file may not be required.

# Bibliography

- The Java EE Tutorial
- The Java EE API
- ...