


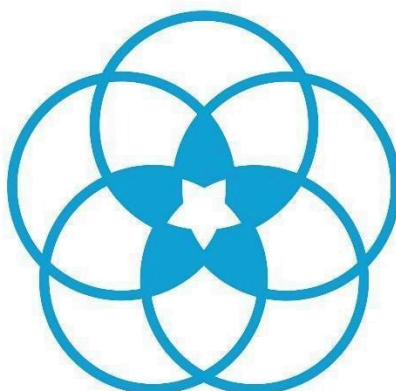

Health Information System Program Middle East and North Africa (HISP MENA)

Integration Documentation: Healthmap
Integration API Documentation

Confidentiality Notice: This document and the information contained within are strictly confidential and intended solely for the use of the designated recipient(s). Unauthorized use, distribution, or duplication of this document or any part of its content is prohibited and may be subject to legal action. If you are not the intended recipient, please notify the sender immediately by email and delete this document from your system.

Document No.: ID-202510-1

Version: 1.1

Date: Oct 30, 2025

Table 1: Version control

Version	Date	Description of Changes
1.0	2025-10-30	Initial creation of the document.
1.1	2025-11-05	Added clarification on OU filtering, improved response example formatting, and refined error descriptions for better testing reference.

Table of Contents

- 1. Purpose..... 3
- 2. Endpoint & Transport..... 3
- 3. Authorization..... 3
- 4. How Healthmap Gets the Token..... 3
- 5. Inputs..... 4
 - 5.1 HTTP Headers..... 4
 - 5.2 Required Query Parameters..... 5
- 6. Outputs..... 5
 - 6.1 HTTP Status Codes..... 5
 - 6.2 Response Body (example)..... 6
- 7. Examples..... 6
- 8. Error Scenarios & Fixes..... 7

1. Purpose

This document describes a single HTTP GET endpoint that returns HealthMap analytics for one or more periods and one or more organisation units (OUs). Everything else is intentionally removed.

2. Endpoint & Transport

Property	Value
Method	GET
URL (template)	http://<middleware-host>/camel/HealthCenter?transactionUUID=<uuid>&pe=<yyyyMM>&ou=<UID>
Protocol	HTTP/HTTPS
Sorting	Rows are sorted ASC by period (pe) and by OU (ouName) as Levels
Complete example call	http://<middleware-host>/camel/HealthCenter?transactionUUID={{\$guid}}&pe=202505;202507&ou=FKE8yFr2PKg;fcAX51tsDmQ

3. Authorization

Field	Value
Type	Bearer Token
Header	Authorization: Bearer <token>

4. How Healthmap Gets the Token

Steps:

- Send a POST request to:

http://<middleware-host>/api/auth/system-user-token?days=7

Parameter	Type	Required	Description
days	integer	yes	Number of days before the token expires. Used to control token lifetime.

Body (JSON):

```
{
  "email": "healthmap@mail.com",
  "password": "Ss123@231"
}
```

- The response will return a token like this:

```
{
  "token": "eyJhbGciOiJIUzI1NiJ9...."
}
```

- Use this token in all uploads by adding it to the header:

Authorization: Bearer <token>

5. Inputs

5.1 HTTP Headers

Header	Required	Value	Notes
Authorization	Yes	Bearer <token>	Access control
Accept	Yes	application/json	Response expected as JSON

5.2 Required Query Parameters

Name	Required	Type / Format	Multi-value	Description
transactionUUID	Yes	UUID v4	No	Unique request ID used for tracking/idempotency.
pe	required	Period code(s): yyyyMM yyyyQn yyyy	Yes (';separator)	One or more reporting periods. Example: pe=202505;202507.
ou	required	OU selector(s): UID LEVEL-n	Yes (';separator)	Filter by specific OU(s) or by OU levels. Examples: ou=FKE8yFr2PKg;fcAX51tsDm Q ou=LEVEL-2;LEVEL-3;LEVEL -4.

6. Outputs

6.1 HTTP Status Codes

Code	Meaning
200	OK : data returned successfully.
400	Bad Request : missing/invalid parameters.
401	Unauthorized : invalid or missing token.
403	Forbidden: no access
404	Not Found : no data for the given filters.
500	Internal Server Error : processing failure.

6.2 Response Body (example)

```
{
  "rows": [{
    "ou": "fQa9PpK9pWS",
    "ouName": "م.صحي الطيبة / اربد",
    "ouDetails": {
      "code": "D1930", "name": "Al-Taibeh/ Irbid", "shortName": "Al-Taibeh/ Irbid",
      "displayName": "م.صحي الطيبة / اربد", "openingDate": "1930-01-01T00:00:00.000",
      "parent": {"code": "210800011", "name": "Al Taybeh", "displayName": "الطيبة"}
    },
    "period": "May 2025",
    "attributes": [
      {"name": "diseasesOfTheBloodConstituentOrgansAndImmuneDisorders", "value":
"84"},
      {"name": "from5To14YearsVisitors", "value": "160.0"},
      {"name": "totalVisitors", "value": "937.0"}
    ]
  }]
}
```

7. Examples

You can specify the **ou** (organisation unit) and **pe** (period) parameters directly in your request.

GET

<http://<host>/camel/HealthCenter?transactionUUID=<uuid>&pe=202505&ou=fQa9PpK9pWS>

In this example:

- pe=202505 → the period you want to query
- ou=fQa9PpK9pWS → the organisation unit you want to request data for

You can change these values based on the data you need.

8. Error Scenarios & Fixes

Case	Resolution
Missing transactionUUID	Add transactionUUID=<uuid> to the query string.
Invalid period (pe) format	Use yyyyMM / yyyyQn / yyyy, e.g., 202505.
Unauthorized	Set Authorization header to a valid Bearer token.
No data found	Verify orgUnit filters and that data exists for the period.