

Automatic detection of Landfills with Sentinel 2 data using YOLOv5

Brian Ament, Sonya Chen, Prakhar Maini, Lalit Vedula, Michael Zhu

UC Berkeley School of Information

{brian.ament, sonyasonya345, prakhar.maini, lalitv1, michael.zhu}@berkeley.edu

Abstract

*Methane is a heavily potent greenhouse gas with 16% contribution towards global greenhouse emissions⁹. Methane is estimated¹⁰ to have ~30x stronger greenhouse effect than CO₂. Thus removing Methane is expected to be more effective at reducing temperature. One of the major sources of Methane are landfills, (17% of Methane emissions in the US in 2019¹¹). With the advent of readily available satellite data through EPA's Copernicus and other programs, there have been some efforts^{6,7} to perform automatic detection of landfills and Methane leaks^{8,17}. However, in our literature survey we found that most of these attempts have either been largely qualitative⁷ or didn't utilize the state of the art techniques⁶. In our work, we used Sentinel - 2 data¹³ in the visual band and used modern computer vision models^{2,3,4} to develop an automated pipeline for landfill detection. We also created a manually tagged set of landfill image data covering 2147 landfills across the globe which can be used for both landfill detection and landfill localization tasks. We created a three step pipeline (image extraction, landfill detection, landfill localization) with landfill detection (using Resnet-50) ROC-AUC as **0.yy** and landfill localization (using YOLO-v5) average precision as **0.zz**. Our dataset and code can be accessed from <https://github.com/UCB MethaneTracker>.*

Keywords: Sentinel 2, Object Detection, YOLO-v5, Resnet-50, Methane Emissions, Climate change

1 Introduction

Convolutional neural networks have been really successful in recent times in detection of real world phenomenon using satellite imagery. In recent times, they

have been tried in many real world contexts (e.g. detecting demolished buildings after natural hazard¹⁴, Inundation assessment of Typhoons¹⁵). Our motivation was to detect the Methane emissions directly. However, the sparsity of Sentinel-5P methane collection data inhibited our attempts to create a global Methane detection model. Instead we focused our attention to detection of landfills in the wild given their large contributions to Methane emissions and unavailability of structured landfill location data especially in the developing world.

We hypothesize that a system capable of automatically sweeping a large geographical region and localize landfills will be helpful in controlling Methane emissions in two fundamental ways:

1. The resulting localizations can be used as focal points for more advanced remote sensing equipment (e.g. Sentinel-5P) for better estimation of Methane emissions
2. In places with lack of tracking of solid waste disposal sites, this system can act as an early detection system. The signals generated by this system can help authorities to manage the waste management practices better and plan for Methane capture

In order to motivate more research, we released our manually tagged dataset which should result in improvement in performance of these systems.

2 Project Overview

2.1 Background

Proposing methods to reduce Methane emissions is the primary motivation for this work. Sentinel 5 consists of a Methane data product¹⁶. However,

Geospatial coverage of this data is very sparse. At present, Methane concentration data from Sentinel 5 is being used for anecdotal ¹⁷ reports of Methane gas leaks but it can't be used effectively to detect Methane emissions across the globe with high fidelity. As landfills are one of the large contributors to methane emissions ¹¹ and organic waste management is typically more problematic in evolving nations, we decided to come up with an algorithm for automatic detection of landfills.

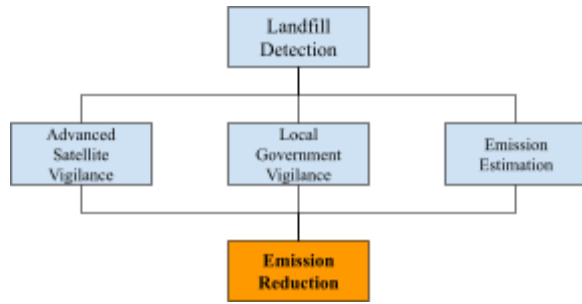


Figure 1: Proposed Action Mechanism

As showcased above, we propose that our algorithm can be used as a first step towards:

- More localized usage of Sentinel 5 based Methane & other GHG concentration vigilance
- Vigilance from local government to control
- Estimate Methane and other GHG estimation from landfill sites

We hypothesize that this added vigilance should result in better capture of Methane and consequently significant reduction in Methane emissions from landfills.

2.2 Datasets

In our literature survey, we could not find any curated data sets consisting of Sentinel 2 visual bands focusing on landfill locations. Thus, one of the contributions we make to this problem is the hand curated data set that we generated with landfill images. We started with 2299 US based landfill ¹⁸ locations provided by EPA. We augmented this data by adding 507 more landfill locations from around the globe. After further data cleaning and pruning, we were left with 2147 landfill locations which we divided into train, validation and test. We further generated negative samples

from locations around the landfills by taking a constant offset of 0.4 in both latitude and longitude in both directions. This way we tried to maintain a 1:4 positive to negative ratio across our dataset. After data cleaning & manual validation of images, we ended up with the following full dataset:

Data Type	Positive	Negative	Total
Training	1732	5829	7561
Validation	165	501	666
Test (Unseen)	250	776	1026

Table 1: Distribution of data across Train, Validation and Test

2.3 Data Processing

We have discussed our data collection methodology in section 2.2 where we indicated that we started with 2299 + 507 (= 2806) landfill locations. We used Google Earth Engine API ²⁰ for image extraction. Given the latitude and longitude coordinates of a landfill, we used following filters to extract relevant Sentinel 2 images:

1. We looked at the timeframe between 2020-09-01 and 2021-09-21 for image extraction
2. We focused on Bands B4, B3 and B2 representing blue, green & red colors respectively
3. We focused on a square bounding box of side length 0.024 centered on given latitude and longitude of landfill
4. We selected the least cloudy available image from the selected time period
5. We clipped the image to get a 512x512 pixel final image

Please refer to the function `get_ee_image_S2()` in our training data pipeline for a more elaborate look. We added a small perturbation to positive (i.e. with landfill) images so that we can reduce the center bias from our models.

In the next step, we manually went through all the landfill images to locate the landfill area using a bounding box ²¹. In this step, we faced many challenges and had to perform a lot of data pruning

which resulted in 23.5% reduction in the baseline data. Major themes included:

1. Latitude and longitude associated with the landfill didn't generate image with landfill
2. The generated image had a lot of cloud cover thus landfill wasn't visible

While tagging the bounding boxes, we also indicated the other metadata (e.g. terrain, presence of water body etc.). The distribution across the training + validation and test set is as following:

Type	Barren	Green Cover	Water body	Residential
Train + Validation	60%	40%	5%	13%
Test	59%	41%	7%	17%

Table 2: Distribution of landfill image metadata

2.4 Approach

As our north star goal, we want to make it easy and affordable to sweep a large land area using satellite imagery and detect landfills. In line with this north star goal, our approach to landfill detection consists of three major elements

2.4.1 Automated data extraction & processing

We developed a data pipeline that utilizes Google Earth Engine API ²⁰ and can be utilized to sweep large land masses and extract Sentinel 2 images given latitude and longitude information. It has built-in filters that enable clean data extraction. At present, we support local image downloads but this can easily be changed to a central repository (e.g. Google Drive) for a more scalable solution.

2.4.2 Landfill detection model

In the next step, we use a fine-tuned classification model ⁴ to detect presence of landfill in the extracted Sentinel 2 visual image. Using our training data, we obtained a probability threshold that enables us to do binary classification with landfill (1) / no-landfill (0) classes. At the end of this step, we are in a position to

detect if a landfill exists somewhere in the picture. However, in order to localize the landfill within the image, we move on to the final element of our analytical pipeline

2.4.3 Landfill localization model

In the final step, we start with the images which receive higher than threshold probability of containing a landfill in the previous step. We run our fine tuned YOLO-v5 ¹ model on these images to localize the landfills within the image using a bounding box. This also helps us understand the actual size of the landfill using the size of the resulting bounding box and the geo spatial zoom of the base image.

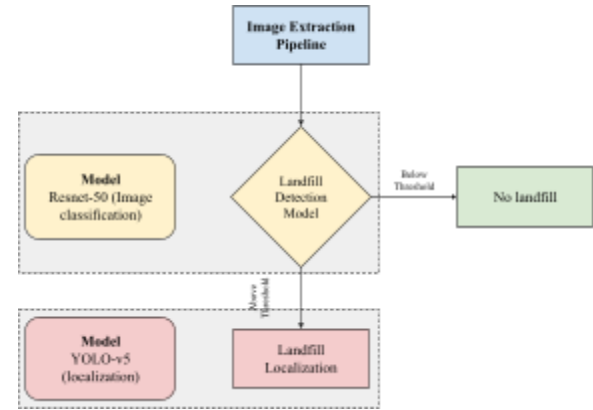


Figure 2: Approach for Landfill Detection & Localization

2.5 Evaluation Method

To evaluate the performance of our classification model, we will look at the ROC-AUC of our fine-tuned model and F1-score on the unseen test set. Similarly, to evaluate the performance of our localization model, we will look at Average Precision @0.5 on the unseen test set. **To further validate the generalizability of our results, we performed a systematic sweep across a city in Nigeria and showcased the results of our model in section 4.3.**

3 Model

3.1 Landfill Classification Model

Deeper neural networks naturally integrate low/ mid/ high level features and classifiers in end-to-end multi layer fashion and the levels of features can be

enriched by the number of stacked layers (i.e. depth). The main problems achieving convergence in deep networks are

- Exploding / vanishing gradient
- Saturation and degradation of accuracy

The exploding and vanishing gradient problem is addressed by either normalized initialization^{23, 24} or Batch Normalization²⁵. In order to solve the degradation problem He et. al. (2015) proposed⁴ deep residual learning framework.

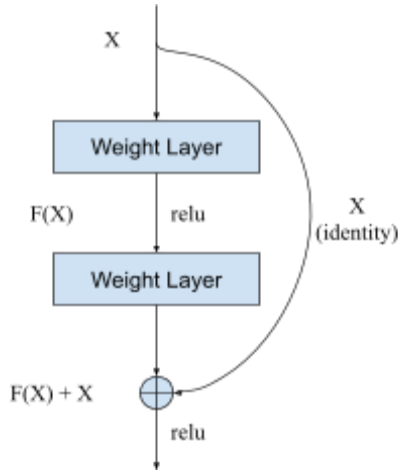


Figure 3: Residual Learning: a building block

Authors hypothesize that it is easier to optimize the residual mapping than to optimize the original, unreferenced mapping. Formally, denoting the desired underlying mapping as $\mathcal{H}(x)$, we let the stacked non linear layers fit another mapping $\mathcal{F}(x) = \mathcal{H}(x) - x$. The original mapping is recast into $\mathcal{F}(x) + x$ which is realized by feedforward neural networks with short-cut connections. The experiments we ran on landfill classification resulted in us selecting Resnet-50 as our champion model (Refer to section 4.1).

3.2 Landfill Localization Model

YOLO was introduced² as a unified model for object detection. Unlike classifier-based approaches, YOLO is trained on loss function that directly corresponds to detection performance and the entire model is trained jointly. Many fundamental improvements²⁶ were proposed by Redmon et. al. which enabled the next iteration YOLOv2 to outperform state-of-the-art met-

hods (76.5 mAP at 40 FPS) while being one of the fastest models and being able to run at varying sizes. Bochkovskiy et. al. offered YOLOv4 which is a state-of-the-art detector faster and more accurate²⁷ than all available alternative detectors. For our localization task, we selected YOLOv5³ which is PyTorch implementation of YOLOv4.

Many state-of-the-art approaches repurpose classifiers to perform detections. More recent approaches like R-CNN use region proposal methods to first generate bounding boxes in an image and then run a classifier on these proposed boxes. After classification, post processing is used to refine, dedup and rescore boxes based on other objects in the scene. YOLO, on the other hand, reframes object detection as a single regression problem (thus you only look once at an image to predict what objects are present and where they are). Detection is framed as regression, hence:

- YOLO is very fast (there is no need for complex detection pipelines)
- YOLO reasons globally about the image

YOLOv5 consists of three parts²⁷:

1. **Backbone:** It uses CSPDarknet53²⁸ as the backbone trained on Imagenet
2. **Neck:** It uses SPP²⁹ as the additional block and PAN³⁰ as path aggregation block collecting feature maps from different stages
3. **Head:** It uses the YOLOv3³¹ head for one stage dense prediction

The system divides the input image in a grid ($S \times S$) and for each grid cell predicts B bounding boxes, confidence for those boxes and C class probabilities. Each bounding box consists of 5 predictions ($x, y, w, h, confidence$). The (x, y) represent the center of the box relative to the center of the grid cell. Width (w) and height (h) are predicted relative to the whole image and confidence represents the IOU (Intersection Over Union) between the predicted box and any ground truth label. Overall, predictions are encoded as an $S \times S \times (B * 5 + C)$ tensor.

Bounding boxes are predicted using dimension clusters as anchor boxes. To improve the priors to facilitate quick learning, YOLOv5 runs k-means clus-

tering ($k=5$) on training set bounding boxes with distance metric $d(box, centroid) = 1 - IOU(box, centroid)$ as we really want priors that lead to good IOU scores.

3.3 Experimental Set-up

In this section, we discuss the nuances of model training for both classification and localization models. This should include,

- Hyperparameters (lr, epochs etc.) for each
- Processor power and compute environment
- Other important elements needed to recreate our results

4 Results

4.1 Discussion of classification results

In this section we present the table of results from our experiments with classification model training. We also showcase the ROC curves and note the final probability threshold that we used for testing the outputs on the unseen test set.

Note: The probability threshold should be calculated based on validation data and should be applied to the test data as is without any perturbation.

4.2 Discussion of localization results

In this section we present the table of results from our experiments with localization model training.

4.3 Discussion of country / city sweep results

4.4 Discussion of Errors

In this section, we showcase the error analysis for both classification case and localization case. We provide some hypotheses for why the errors are happening.

4.5 Limitations & Future Work

It is important to note the key limitations of our existing approach which should pave the way for future work and improvements in this area

4.5.1 Sampling of negative images

In order to generate the negative sample images for the classification model, we used a constant offset of 0.4 and applied it to the latitude and longitude of the landfill. Our rationale was that such a large shift will ensure that landfill is not present in the negative images however the overall terrain will be similar to that of the landfill. This choice introduces a bias in our training data and as a potential solution, we can add randomly sampled images from landmass across continents to our training set to reduce bias and improve generalizability.

4.5.2 Restricting on only visual bands (B4, B3, B2)

Sentinel-2 provides us with 13 bands of data²² in the VNIR and SWIR range. For simplicity sake, we only utilize the visual bands B2, B3 & B4 only in our pipeline. There might be scope for significant improvement if we are able to synthesize more information using the remaining 10 bands.

4.5.3 Single bounding box prediction

To keep the manual tagging consistent, we chose to use a single bounding box per landfill image. However, we noticed that in many cases, the landfills were clearly segmented geographically. In order to remain consistent in our modeling, we restricted the YOLO-v5 to produce a single bounding box per prediction. In the future iterations, we may look to remove this constraint and estimate the impact on model accuracy.

5 Conclusion

In this paper, we explored the problem of landfill detection using satellite imagery. We showcased that using the Resnet-50 model, we can detect the presence of landfills in the Sentinel - 2 visual image with high F1-Score (**xx.xx%**). We showed that using the YOLO-v5 model, we can further improve upon our

output by localizing the landfills in the image and getting a sense of their size alongside position (AP@0.5 **xx.xx%**).

In addition, we created a manually tagged gold standard dataset that can be used by future researchers to improve upon our work. Overall, our key motivation was to be able to make it easy and affordable to sweep a large land area using satellite imagery and detect the Methane sources such as landfills. We demonstrated how to achieve this north star goal via our data pipelines.

6 Acknowledgement

We thank our instructors Alberto Todeschini and Fred Nugen for motivating us to work on this problem and useful discussions. We thank Colorado Reed for helping us debug our classification model and providing valuable feedback on running the classification experiments. We thank Daniel Cusworth from NASA Jet Propulsion Laboratory for helping us narrow down on our problem statement and providing valuable guidance.

References

- [1] M. B. Blaschko and C. H. Lampert. Learning to localize objects with structured output regression. In *Computer Vision–ECCV 2008*, pages 2–15. Springer, 2008
- [2] Redmon, J., Divvala, S., Girshick, R., and Farhadi, A. (2016). "You only look once: Unified, real-time object detection," in: *Proceedings of IEEE Conference on Computer Vision and Pattern Recognition*, Las Vegas, NV, USA, 779-788. DOI: 10.1109/CVPR.2016.91
- [3] Ultralytics-Yolov5. Available online: <https://github.com/ultralytics/yolov5>
- [4] K. He, X. Zhang, S. Ren, and J. Sun. Deep residual learning for image recognition. *CVPR*, 2016.
- [5] Y. Bengio, P. Simard, and P. Frasconi. Learning long-term dependencies with gradient descent is difficult. *IEEE Transactions on Neural Networks*, 5(2):157–166, 1994.
- [6] Skogsmo, M. (2020), "A Scalable Approach for Detecting Dumpsites using Automatic Target Recognition with Feature Selection and SVM through Satellite Imagery". Master's Thesis. Uppsala University.
- [7] E. G. Cadau, G. Laneve, G. Vingione, G. Palumbo (2017), "COPERNICUS SENTINELS EO-DATA FOR URBAN LANDFILLS DETECTION AND MONITORING". ISRSE 2017 - TSHWANE
- [8] https://www.esa.int/Applications/Observing_the_Earth/Satellites_detect_large_methane_emissions_from_Madrid_landfills
- [9] <https://www.epa.gov/ghgemissions/global-greenhouse-gas-emissions-data>
- [10] <https://www.epa.gov/ghgemissions/understanding-global-warming-potentials>
- [11] <https://www.epa.gov/ghgemissions/overview-greenhouse-gases>
- [12] Xu, R.; Lin, H.; Lu, K.; Cao, L.; Liu, Y. A Forest Fire Detection System Based on Ensemble Learning. *Forests* 2021, 12, 217. <https://doi.org/10.3390/f12020217>
- [13] <https://sentinel.esa.int/web/sentinel/missions/sentinel-2>
- [14] Vahid Rashidian, Laurie G. Baise, Magaly Koch and Babak Moaveni, Detecting Demolished Buildings after a Natural Hazard Using High Resolution RGB Satellite Imagery and Modified U-Net Convolutional Neural Networks. *Remote Sens.* 2021, 13(11), 2176; <https://doi.org/10.3390/rs13112176>
- [15] Liu W., Fuji K., Maruyama Y. and Yamazaki F. Inundation Assessment of the 2019 Typhoon Hagibis in Japan Using Multi-Temporal Sentinel-1 Intensity Images. *Remote Sens.* 2021, 13(4), 639; <https://doi.org/10.3390/rs13040639>
- [16] <https://sentinels.copernicus.eu/web/sentinel/missions/sentinel-5/data-products>
- [17] <https://www.themoscowtimes.com/2021/11/01/satellites-detect-massive-russia-methane-leak-bloomberg-a75410>
- [18] <https://www.epa.gov/lmop/project-and-landfill-data-state>
- [20] <https://developers.google.com/earth-engine>
- [21] <https://www.makesense.ai/>
- [22] https://sentinels.copernicus.eu/documents/247904/685211/Sentinel-2_User_Handbook
- [23] Y. LeCun, L. Bottou, G. B. Orr, and K.-R. Muller. Efficient backprop. " In *Neural Networks: Tricks of the Trade*, pages 9–50. Springer, 1998

- [24] X. Glorot and Y. Bengio. Understanding the difficulty of training deep feedforward neural networks. In AISTATS, 2010.
- [25] S. Ioffe and C. Szegedy. Batch normalization: Accelerating deep network training by reducing internal covariate shift. In ICML, 2015.
- [26] J. Redmon and A. Farhadi. Yolo9000: Better, faster, stronger. In Computer Vision and Pattern Recognition (CVPR), 2017 IEEE Conference on, pages 6517–6525. IEEE, 2017.
- [27] Alexey Bochkovskiy, Chien-Yao Wang, and HongYuan Mark Liao. Yolov4: Optimal speed and accuracy of object detection. arXiv preprint arXiv:2004.10934, 2020.
- [28] Chien-Yao Wang, Hong-Yuan Mark Liao, Yueh-Hua Wu, Ping-Yang Chen, Jun-Wei Hsieh, and I-Hau Yeh. CSPNet: A new backbone that can enhance learning capability of cnn. Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition Workshop (CVPR Workshop), 2020.
- [29] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Spatial pyramid pooling in deep convolutional networks for visual recognition. IEEE Transactions on Pattern Analysis and Machine Intelligence (TPAMI), 37(9):1904–1916, 2015.
- [30] Shu Liu, Lu Qi, Haifang Qin, Jianping Shi, and Jiaya Jia. Path aggregation network for instance segmentation. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR), pages 8759–8768, 2018.
- [31] Joseph Redmon and Ali Farhadi. YOLOv3: An incremental improvement. arXiv preprint arXiv:1804.02767, 2018.

Appendix

A1

A2