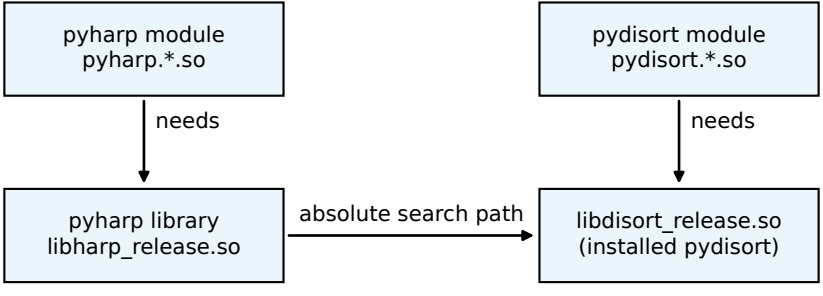one copy of libdisort is loaded; its type layout must match the headers pyharp was compiled against