

Example of Map Operator SciCumulus/C²

1. MAP 1

This document is responsible to present an example, which we modeled a concrete workflow in SCC XML format to represent the behavior of Map operator. For this modeled workflow, it is possible to execute SCC, if the requirements were corrected installed and some parameters on XML file were changed, accordingly to your machine. Also, this example is composed of two activities. Figure 1 presents the structure of this workflow.

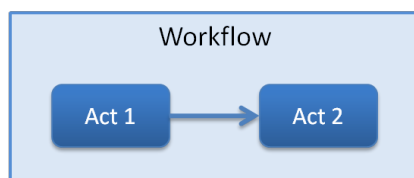


Figure 1. Default workflow structure for SCC example

1. Map

This example presents a workflow with two activities that are ruled by *Map* operator. The *Map* operator is characterized by production of a single tuple in the output relation from each tuple consumed in the input relation. The Figure 2 shows the input and output relations using a *Map* operator.

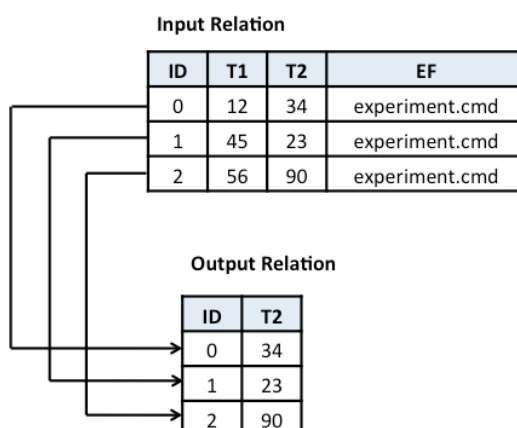


Figure 2. The input and output relations using *Map* operator