

# Supplementary Material for “Sampling-Based Techniques for Training Deep Neural Networks with Limited Computational Resources: A Scalability Evaluation”

Complementary Experimental Results

SANA EBRAHIMI, University of Illinois Chicago

RISHI ADVANI, University of Illinois Chicago

ABOLFAZL ASUDEH, University of Illinois Chicago

Table 1. Time (sec.) for different algorithms in a network with 3 hidden layers.

Dataset	ALSH-APPROX	MC-APPROX	DROPOUT	ADAPTIVE-DROPOUT	STANDARD
Fashion-MNIST	56332.4	2925.7	15758.7	13459.6	40108.1
NORB	58082.8	30000.0	3680.3	33968.9	42757.6

Table 2. Test accuracy of different algorithms w.r.t the # of hidden layers on MNIST

Hidden Layers	MC-APPROX	ALSH-APPROX	STANDARD	DROPOUT	ADAPTIVE-DROPOUT
1	92.71%	94.51%	98.01%	17.99%	97.68%
2	98.13%	90.33%	95.83%	93.16%	97.95%
3	98.10%	94.15%	96.05%	90.21%	98.06%
4	98.22%	88.74%	95.89%	78.35%	98.00 %
5	98.36%	70.07%	94.86%	49.90%	97.75%
6	97.69%	21.26%	94.36%	42.01%	98.02%
7	97.64%	25.14%	93.85%	43.54%	98.36%

Table 3. Training time (sec.) of different algorithms w.r.t the # of hidden layers on MNIST

Hidden Layers	MC-APPROX	ALSH-APPROX	STANDARD	DROPOUT	ADAPTIVE-DROPOUT
1	1210.5	9845.7	8337.3	11830.9	12156.1
2	1912.5	24840.4	13058.6	17077.2	15463.1
3	1740.0	40375.1	19161.5	56473.3	25292.1
4	2283.9	59389.0	26828.4	108273.7	103041.4
5	25794.2	88268.9	34859.2	40951.1	120156.6
6	31894.5	158226.1	42076.3	153658.0	155359.0
7	11493.1	486321.3	50520.5	164810.9	170182.9

Authors' addresses: Sana Ebrahimi, University of Illinois Chicago, sebrah7@uic.edu; Rishi Advani, University of Illinois Chicago, radvani2@uic.edu; Abolfazl Asudeh, University of Illinois Chicago, asudeh@uic.edu.

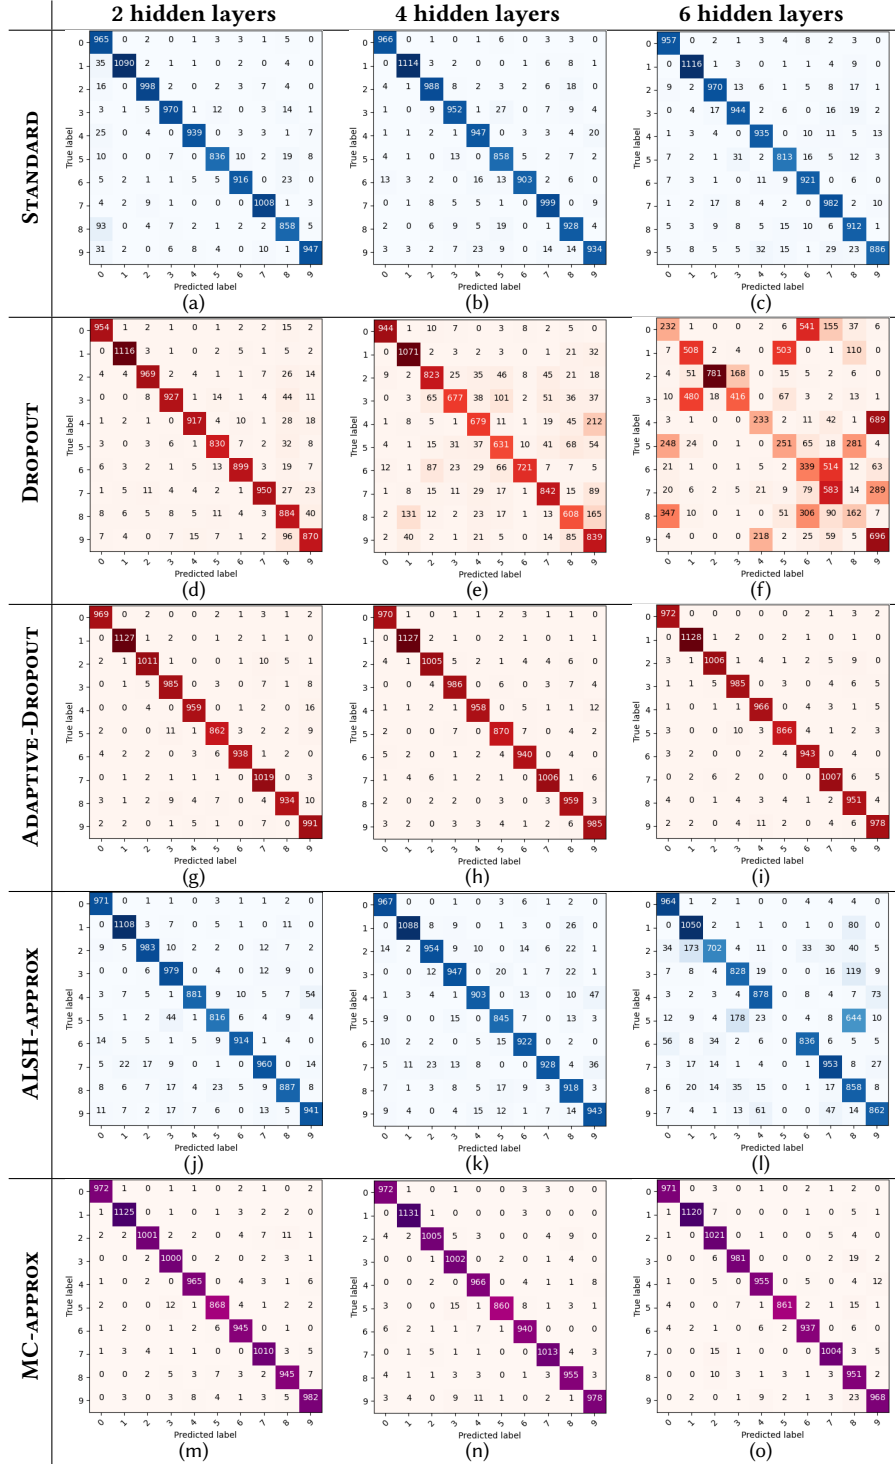


Fig. 1. Confusion matrices of different algorithms for different numbers of hidden layers. In all plots, x-axis and y-axis are the predicted and true labels (0 to 9), respectively.

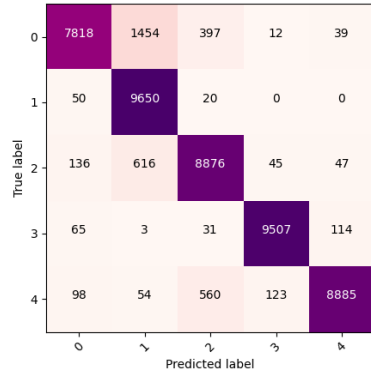


Fig. 2. MC-APPROX on NORB with 3 hidden layers

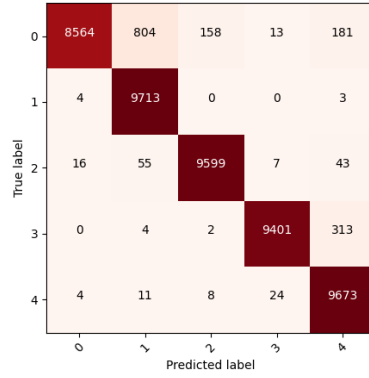


Fig. 3. ADAPTIVE-DROPOUT on NORB with 3 hidden layers

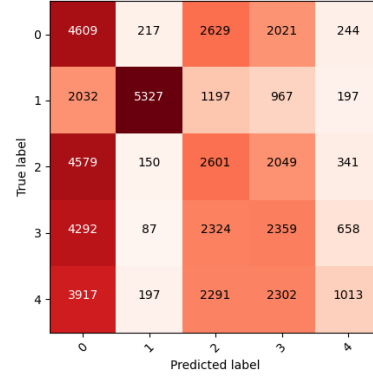


Fig. 4. DROPOUT on NORB with 3 hidden layers

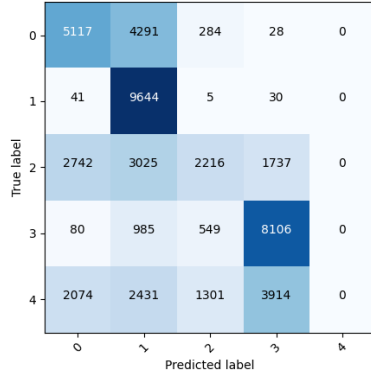


Fig. 5. STANDARD on NORB with 3 hidden layers

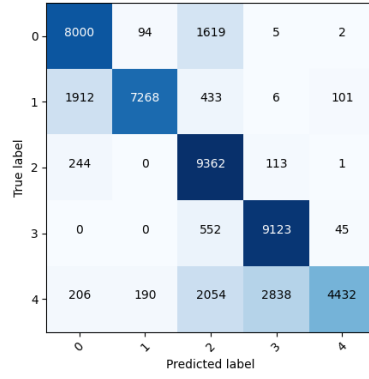


Fig. 6. ALSH-APPROX on NORB with 3 hidden layers

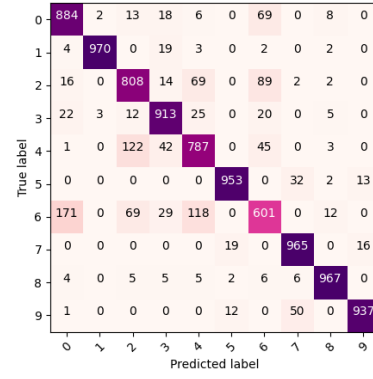


Fig. 7. MC-APPROX on Fashion-MNIST with 3 hidden layers

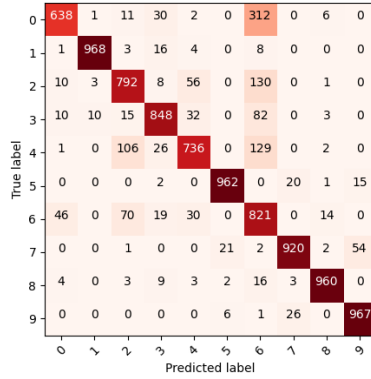


Fig. 8. ADAPTIVE-DROPOUT on Fashion-MNIST with 3 hidden layers

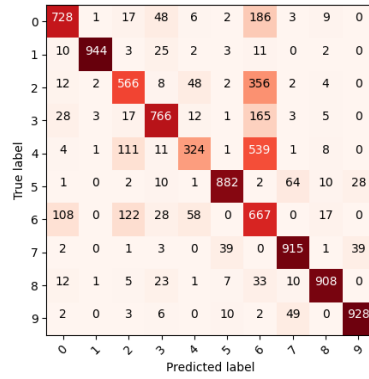


Fig. 9. DROPOUT on Fashion-MNIST with 3 hidden layers

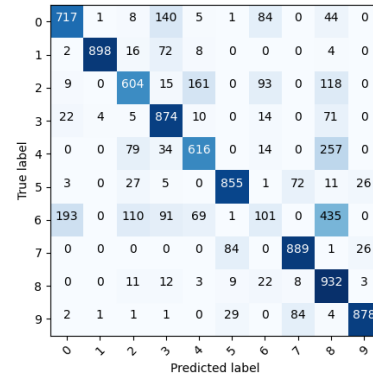


Fig. 10. STANDARD on Fashion-MNIST with 3 hidden layers

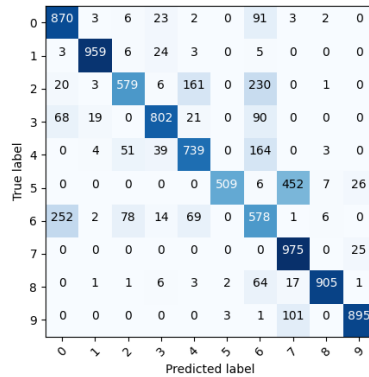


Fig. 11. ALSH-APPROX on Fashion-MNIST with 3 hidden layers