Supplementary Material for "Sampling-Based Techniques for Training Deep Neural Networks with Limited Computational Resources: A Scalability Evaluation"

Complementary Experimental Results

SANA EBRAHIMI, University of Illinois Chicago
RISHI ADVANI, University of Illinois Chicago
ABOLFAZL ASUDEH, University of Illinois Chicago

Table 1. Accuracy of different algorithms w.r.t the # of hidden layers on MNIST

Hidden Layers	MC-approx	ALSH-approx	Standard	Dropout	Adaptive-Dropout
1	92.71%	94.51%	98.01%	17.99%	97.68%
2	98.13%	90.33%	95.83%	93.16%	97.95%
3	98.10%	94.15%	96.05%	90.21%	98.06%
4	98.22%	88.74%	95.89%	78.35%	98.00 %
5	98.36%	70.07%	94.86%	49.90%	97.75%
6	97.69%	21.26%	94.36%	42.01%	98.02%
7	97.64%	25.14%	93.85%	43.54%	98.36%

Table 2. Training time (sec.) of different algorithms w.r.t the # of hidden layers on MNIST

Hidden Layers	MC-approx	ALSH-approx	Standard	Dropout	Adaptive-Dropout
1	1210.5	9845.7	8337.3	11830.9	12156.1
2	1912.5	24840.4	13058.6	17077.2	15463.1
3	1740.0	40375.1	19161.5	56473.3	25292.1
4	2283.9	59389.0	26828.4	108273.7	103041.4
5	25794.2	88268.9	34859.2	40951.1	120156.6
6	31894.5	158226.1	42076.3	153658.0	155359.0
7	11493.1	486321.3	50520.5	164810.9	170182.9

Authors' addresses: Sana Ebrahimi, University of Illinois Chicago, sebrah7@uic.edu; Rishi Advani, University of Illinois Chicago, radvani2@uic.edu; Abolfazl Asudeh, University of Illinois Chicago, asudeh@uic.edu.

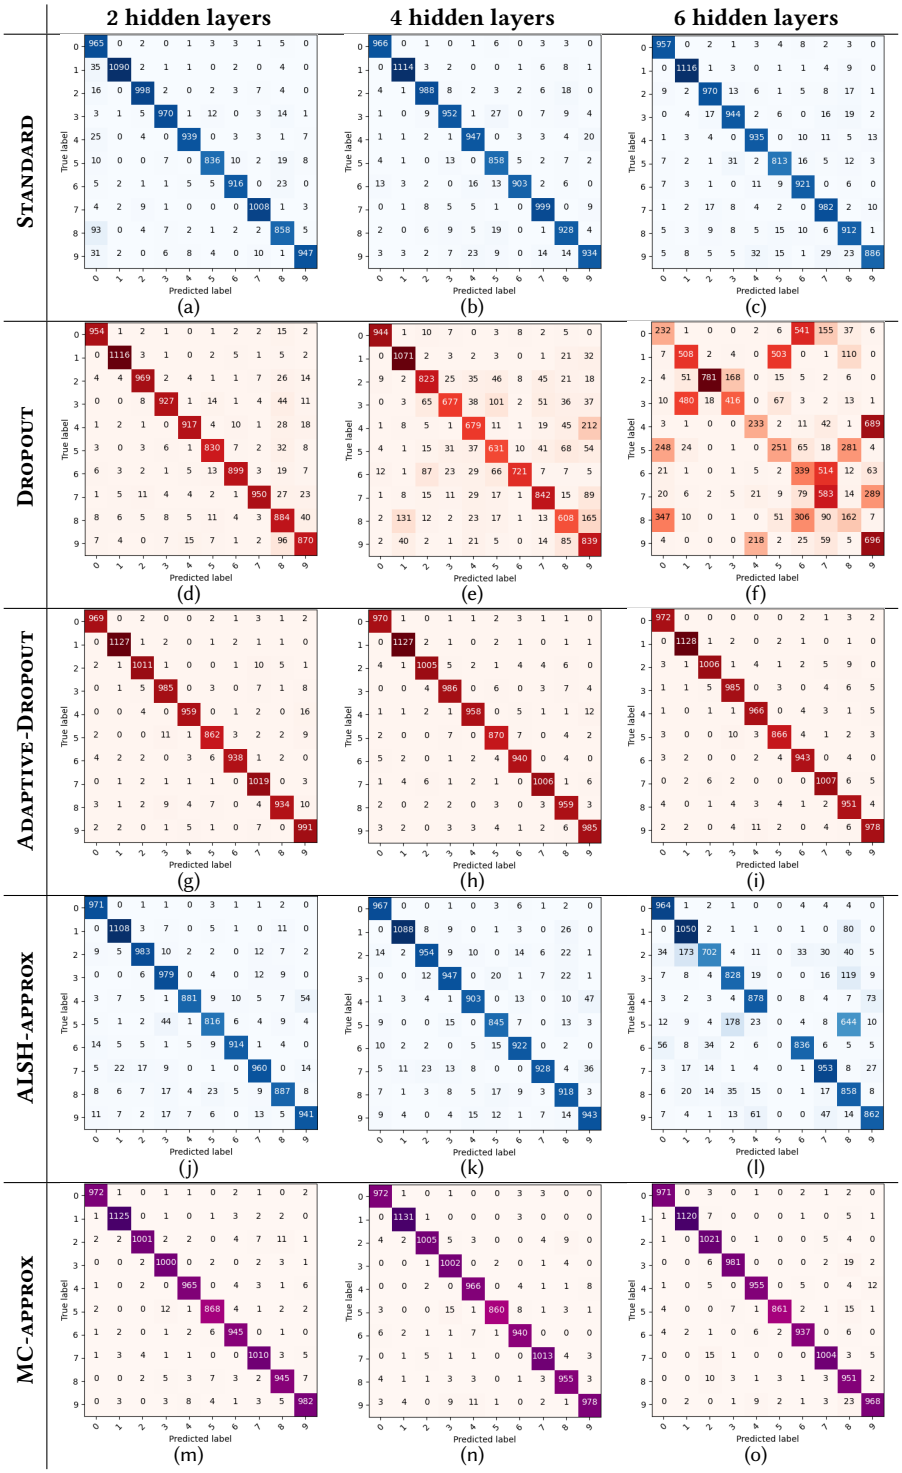

Fig. 1. Confusion matrices of different algorithms for different numbers of hidden layers. In all plots, x-axis and y-axis are the predicted and true labels (0 to 9), respectively.

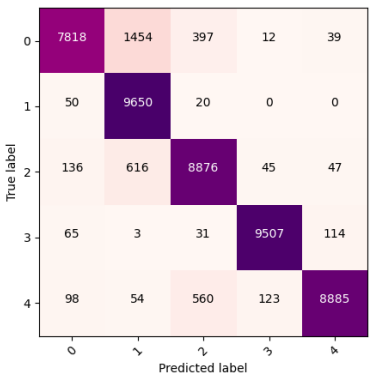

Fig. 2. MC-approx on NORB with 3 hidden layers

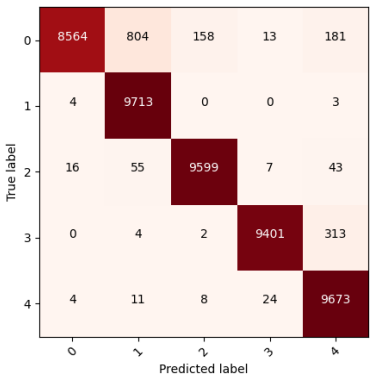

Fig. 3. Adaptive-Dropout on NORB with 3 hidden layers

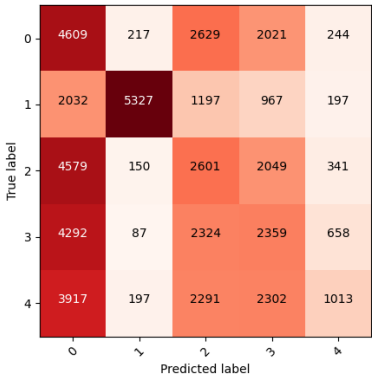

Fig. 4. Dropout on NORB with

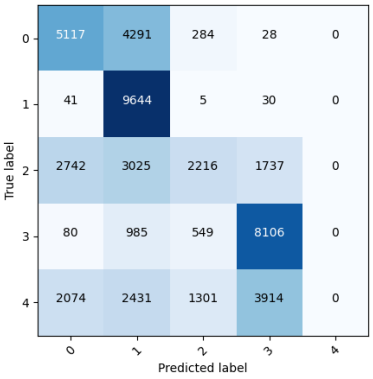

Fig. 5. Standard on NORB with 3 hidden layers

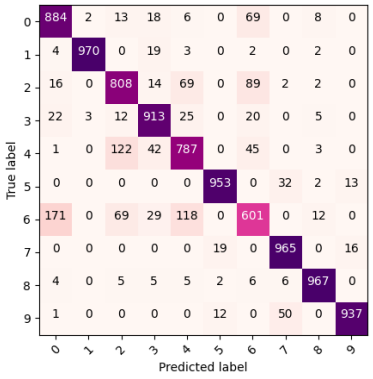

Fig. 6. MC-approx on Fashion-MNIST with 3 hidden layers

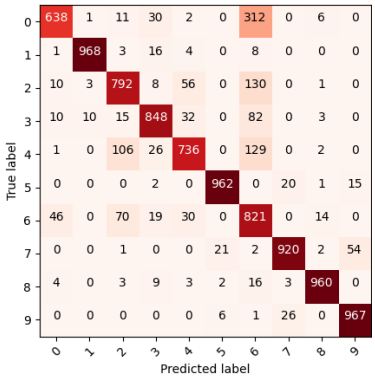

Fig. 7. Adaptive-Dropout on Fashion-MNIST with 3 hidden layers

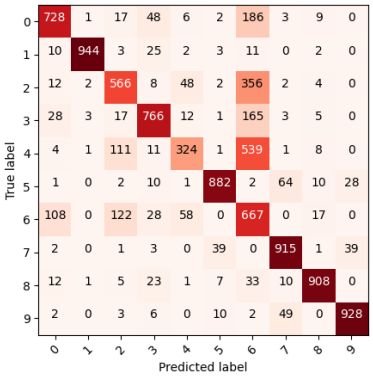

Fig. 8. Dropout on Fashion-MNIST with 3 hidden layers

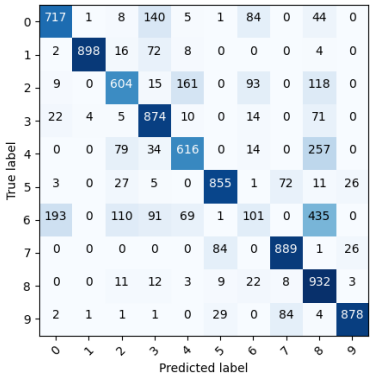

Fig. 9. Standard on Fashion-MNIST with 3 hidden layers

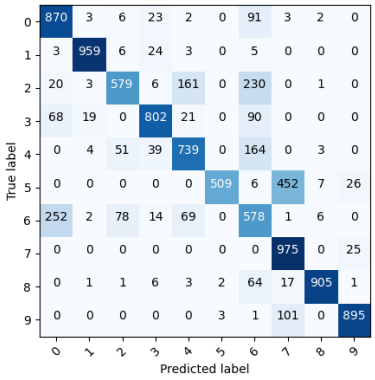

Fig. 10. ALSH-approx on Fashion-MNIST with 3 hidden layers