本文系一位 14 届 CST 的 IT 得 A 的同学在临考复习的时候整理的,笔者认为重点的内容这里都进行了加粗。当时是手写版,难免有错误,且每学期考试均有变化,因此本文的内容仅供大家参考。笔者个人感觉进制转换的部分写的有点乱。如果有疑问记得咨询你的 IT 老师或者助教,并以他们的说法为准~

2015年2月

### IT for Success of Everyday Work and Life – Lecture Topics

#### **BASIC CONCEPTS IN COMPUTER SCIENCE**

- 1 Introduction to Computers
  - 1.1 Computer Literacy (计算机知识)

    "Have knowledge and understanding of computers and their uses."
  - 1.2 Computer is an electronic machine (device) EXCUTING(执行)the INSTRUCTIONS in a program. 【执行程序中的指令】

"A computer can Accept (Data) → Process (Data) → Output (Results) → Store (Results) → Accept → ... "

- 1.3 Computer Hardware (计算机硬件)
  - 1.3.1 Input Devices ( $A \rightarrow D$ ): Mouse, Keyboard, Microphone, Camera, etc.
  - 1.3.2 Output Devices  $(D \rightarrow A)$ : Monitor, Speaker, Printer, etc.
  - 1.3.3 System Units: CPU, Mainboard, Memory(内存,不是硬盘)
  - 1.3.4 Storage Devices: HDD (Hard Disk Device, 硬盘), USB Disk, Floppy Disk (软盘), Optical Disk(光盘), Memory Card (SD, CF, etc.), etc.
- **1.4** Computer Software (计算机软件)

# Programs give INSTRUCTIONS to HARDWARE what to do and how to do. 【程序给予指令】

- 1.4.1 *Software includes* Application Software(应用软件)
- 1.4.2 Software includes System Software(系统软件)


E.g. DOS, Windows, OS X, Linux

Manage hardware resources; provide common services for other software.

1.5 WHY COMPUTER POWERFUL Speed, Accuracy, Storage, Communication

- 2 Algorithm (算法) and History
  - 2.1 Definition and Features
    - 2.1.1 Finiteness (有限性): Must terminate after (very) finite number of steps.
    - 2.1.2 Definiteness (确定性): Each steps must be precisely defined (rigorous, unambiguous).
    - 2.1.3 Effectiveness (高效性): Operations must be sufficiently basic they can be done exactly and in a finite length of time.
  - 2.2 Computer History
    - 2.2.1 Charles Babbage's difference engine (差分机)
    - 2.2.2 Ada Lovelace: the first programmer.
    - 2.2.3 Boolean Logic (布林逻辑)
    - 2.2.4 Alan Turing: Universal Turing Machine (通用图灵机)
- 3 Number System
  - 3.1 Conversions between number systems
    - e.g. CONVERT decimal number (28)<sub>10</sub> to binary.

Divide 28 by 2 continuously

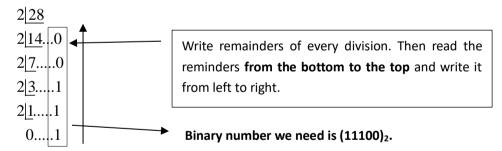

Use the same idea to convert decimal number to octal numbers or hexadecimal numbers.

3.2 Conversations Between Power-of-2 rule

The power of number 2:  $2^4 = 16$  and  $2^3 = 8$ 

Convert between **Binary and Hexadecimal or Octal**.

 $(2A9F)_{16} = 0010 \ 1010 \ 1001 \ 1111$ 

 $(4726)_8 = 100 111 010 110$ 

3.3 Basic Computation (基础运算)

\*Subtraction (减法)

1-0=1; 1-1=0; 0-0=0; 0-1=1...

3.4 Bit and Byte (位与字节)

Bit = **B**inary Digit = "0"/"1". The smallest unit of computer capacity.

Byte (字节) Basic unit of addressable (可寻址的) memory.

1 Byte = 8 bits

MSB = Most Significant Bit

MSB
-----

Last Significant Bit = LSB

IF this number represented by this byte is positive or zero, MSB = 0;

IF this number represented by this byte is negative, MSB = 1.

3.5 Binary Representation of Numbers (二进制数字表示)

Positive or zero (自然数)

- Directly convert numbers to binary.
- > Range from 1 to 127.
- $\triangleright$  E.g.  $(28)_{10} = (0001\ 1100)_2$  Keep the binary number has 8 digits.
- $(0)_{10} = (0000\ 0000)_2$

Negative Numbers(负数)

- ➤ Convert the **absolute value**(绝对值)to binary.
- $\triangleright$  Invert the digits.  $(1 \rightarrow 0; 0 \rightarrow 1)$
- > Add 1 from the right.
- 4 Data Representation
  - 4.1 Principles of representing data
    - 4.1.1 Capture the **ESSENCE** of the information.
    - 4.1.2 Convenient for computer to process.
  - 4.2 Two type of data
    - 4.2.1 Analogue (模拟) Continuous, actual.
    - 4.2.2 Digital (数字) Discrete (分离的), break information into separate

elements.

- 4.3 In general, n bits can represent 2<sup>n</sup> things.
- 4.4 Text representing
  - > To assign each characters a binary code.
  - ➤ Character sets (字符集):

ASCII (American Standard Code for Information Interchange).
Representing in 7-bits and 8-bits.

**Unicode** represents in 16-bits. Including Chinese, Japanese and other Asian languages.

- 4.5 Audio representing
  - Method: To **digitize** the audio signal periodically (周期性地) by measuring the voltage of the signal and record the appropriate numeric value. Known as sampling.

方法:周期性地测量音频信号的电压值,并取一个接近的数值记录这个时刻的音频信号的电压值。这个过程可以称为"采样"。

- ➤ Formats (格式): WAV, AU, AIFF, VQF, MP3, MP4...
- ➤ MP3 (MPEG 1 Layer 3) MPEG = Moving Picture Experts Group (运动图像专家组)

Lossy(有损的) compress by psychoacoustics(心理声学)

- 4.6 Color Representing
  - RGB value from 0-255
  - ➤ Color depth(色彩深度)number of bits that used to representing color.

Hi-color: 16-bits

True Color (真彩色) 24-bits, each number of RGB 8-bits.

- ➤ A digitized picture is a collection of individual "Pixels" (像素)
- ➤ The number of pixels used to represent a picture is called the "Resolution"(分辨率).
- Formats: BMP, GIF, JPEG [pixels-by-pixels, 基于像素的]
- 5 The Internet

- 5.1 Network from local to worldwide
  - 5.1.1 **Network**: a collection of computers and devices connected to share information and resources.
  - 5.1.2 LAN = Local Area Network (局域网): A network in a limited geographical area.
  - 5.1.3 WAN = Wide Area Network (广域网): A network covers a large geographical area.
  - 5.1.4 **Internet:** The network of computer worldwide. **Also called** Information highway, the net, and cyberspace.
- 5.2 History APRANET Advanced Research Project Agency NETwork.
- 5.3 Connect to the Internet
  - Wired
    - Phone Modem (调制解调器,俗称"猫")
    - DSL/ADSL (Asymmetric) Digital Subscriber Line, (非对称) 数字 用户线路
    - Cable Modem (有线电视"猫")
    - LAN
  - Wireless
    - Hotspots (无线热点)
  - Connect with ISP (Internet Service Provider, 网络运营商)
- 5.4 Composition of Internet (Sort by OSI Model)

\*The Open Systems Interconnection model (OSI Model) is a conceptual model that characterizes and standardizes the communication functions of a telecommunication or computing system without regard of their underlying internal structure and technology.

ТОР	Level	Level Name	Protocol Name			
1			Abbreviation	Full Title		
	7	Application	DNS	Domain Name Services 域名服务		
		应用层	FTP	File Transfer Protocol 文件传输协议 Hyper Text Transfer Protocol 超文本传输协议		
			НТТР			
		POP Post Office Protocol 邮局协议		Post Office Protocol 邮局协议(收件)		
			SMTP	Simple Mail Transfer Protocol		
				简单邮件传输协议(发件)		
			Telnet	一种访问远程计算机的协议		
	4	Transfer	ТСР	Transmission Control Protocol		
		传输层	UDP	User Datagram Protocol		
	3	Network	IP			
		网络层	IPv4 32bit	Internet Protocol		
			IPv6 128bit			
			Router	Determine the path between you and an		
Bottom		路由器	Internet server.			

## 6 Could Computing and Big Data

6.1 What is could computing?

Universal access → Scalable (可扩展的)Service → Elasticity (弹性的)

## 6.2 Three types of could services

Virtualization	Type Name		Fyerenles	Flexibility
虚拟化程度	Abbr.	Full Title	Examples	灵活程度
High	SaaS	Software as a Services	Google Apps	Low
<b>†</b>	3443	软件即服务	Office 365	
	PaaS	Platform as a Services	Sina App Engine	
		平台即服务	Ali Cloud ACE	
	laaS	Infrastructure as a Services	DigitalOcean, Ali	<b>↓</b>
Low		基础设施即服务	Cloud VPS	High

- 6.3 Advantages of could computing
  - > Lower computer hardware and software cost.
  - Instant software update.
  - Unlimited storage space.
  - Universal document access.
  - > Latest version availability.
- 6.4 Disadvantages of could computing
  - Require an Internet connection.
  - Privacy issues.
- 6.5 **3 "V" on big data**

Volume(体积); Velocity(速度); Variety(多样性)

- 7 E-commerce (电子商务)
  - 7.1 Types of e-commerce
    - B2B: Business to Business
    - ➤ B2C: Business to Consumer
    - > C2C: Consumer to Consumer
    - C2B: Consumer to Business
    - > 020: Online to Offline
- 8 Computer Security and Ethics