

Pre-lecture brain teaser

In the following languages, three are decidable and three are undecidable. Which are which?

- $A_{CFG} = \left\{ \langle G, w \rangle \mid G \text{ is a } CFG \text{ that generates string } w \right\}.$
- $E_{CFG} = \left\{ \langle G \rangle \mid G \text{ is a } CFG \text{ and } L(G) = \emptyset \right\}.$
- $ALL_{CFG} = \left\{ \langle G \rangle \mid G \text{ is a } CFG \text{ and } L(G) = \Sigma^* \right\}.$
- $A_{LBA} = \left\{ \langle M, w \rangle \mid M \text{ is a } LBA \text{ that generates string } w \right\}.$
- $E_{LBA} = \left\{ \langle M \rangle \mid M \text{ is a } LBA \text{ where } L(M) = \emptyset \right\}.$
- $ALL_{LBA} = \left\{ \langle M \rangle \mid M \text{ is a } LBA \text{ where } L(M) = \Sigma^* \right\}.$

ECE-374-B: Lecture 25 - Midterm 3 Review

Instructor: Nickvash Kani

University of Illinois at Urbana-Champaign

Pre-lecture brain teaser

In the following languages, three are decidable and three are undecidable. Which are which?

- $A_{CFG} = \left\{ \langle G, w \rangle \mid G \text{ is a } CFG \text{ that generates string } w \right\}.$
- $E_{CFG} = \left\{ \langle G \rangle \mid G \text{ is a } CFG \text{ and } L(G) = \emptyset \right\}.$
- $ALL_{CFG} = \left\{ \langle G \rangle \mid G \text{ is a } CFG \text{ and } L(G) = \Sigma^* \right\}.$
- $A_{LBA} = \left\{ \langle M, w \rangle \mid M \text{ is a } LBA \text{ that generates string } w \right\}.$
- $E_{LBA} = \left\{ \langle M \rangle \mid M \text{ is a } LBA \text{ where } L(M) = \emptyset \right\}.$
- $ALL_{LBA} = \left\{ \langle M \rangle \mid M \text{ is a } LBA \text{ where } L(M) = \Sigma^* \right\}.$

A_{CFG} decidable?

A_{CFG} decidable?

YES!

A_{CFG} decidable?

YES!

- $V = \{S\}$
- $T = \{0, 1\}$
- $P = \{S \rightarrow \epsilon \mid 0S0 \mid 1S1\}$
(abbrev. for $S \rightarrow \epsilon, S \rightarrow 0S0, S \rightarrow 1S1$)

YES!

Lemma

A CFG in Chomsky normal form can derive a string w in at most 2^n steps!

Knowing this, we can just simulate all the possible rule combinations for 2^n steps and see if any of the resulting strings matches w .

E_{CFG} decidable?

E_{CFG} decidable?

YES!

YES!

In this case, we just need to know if we can get from the start variable to a string with only terminal symbols.

1. Mark all terminal symbols in G
 2. Repeat until no new variables get marked:
 - 2.1 Mark any variable A where G has the rule $A \rightarrow U_1 U_2 \dots U_k$ where U_i is a marked terminal/variable
 3. If start variable is not marked, accept.
Otherwise reject.
- $V = \{S\}$
 - $T = \{0, 1\}$
 - $P = \{S \rightarrow \epsilon \mid 0S0 \mid 1S1\}$
(abbrev. for $S \rightarrow \epsilon, S \rightarrow 0S0, S \rightarrow 1S1$)

ALL_{CFG} decidable?

ALL_{CFG} decidable?

Nope

ALL_{CFG} decidable?

Nope

Proof requires computation histories which are outside the scope of this course.

A_{LBA} decidable?

A_{LBA} decidable?

YES!

A_{LBA} decidable?

YES!

Remember a **LBA** has a finite tapes. Therefore we know:

1. A tape of length n where each cell can contain g symbols, you have g^n possible configurations.
2. The tape head can be in one of n positions and has q states yielding a tape that can be in qn configurations.
3. Therefore the machine can be in qng^n configurations.

A_{LBA} decidable?

YES!

Remember a LBA has a finite tapes. Therefore we know:

1. A tape of length n where each cell can contain g symbols, you have g^n possible configurations.
2. The tape head can be in one of n positions and has q states yielding a tape that can be in qn configurations.
3. Therefore the machine can be in qng^n configurations.

Lemma

If an LBA does not accept or reject in qng^n then it is stuck in a loop forever.

A_{LBA} decidable?

Decider for A_{LBA} will:

1. Simulate $\langle M \rangle$ on w for qng^n steps.
 - 1.1 if accepts, then accept
 - 1.2 if rejects, then reject
2. If neither accepts or rejects, means it's in a loop in which case, reject.

E_{LBA} decidable?

E_{LBA} decidable?

Nope

E_{LBA} decidable?

Nope

Proof requires computational history trick, a story for another time.....

ALL_{LBA} decidable?

ALL_{LBA} decidable?

Nope

ALL_{LBA} decidable?

Nope

No standard proof for this, but let's look at a pattern:

Decidability across grammar complexities

	<i>DFA</i>	<i>CFG</i>	<i>PDA</i>	<i>LBA</i>	<i>TM</i>
A	D	D	D	D	U
E	D	D	D	U	U
ALL	D	U	U	U	U

Eventually problems get too tough....

ALL_{LBA} decidable?

Nope

No standard proof for this, but let's look at a pattern:

So we sort've know that ALL_{LBA} isn't decidable because we knew ALL_{CFG} wasn't (though intuition is never sufficient evidence).

Un-/decidability practice problems

Available Undecidable languages

- $L_{Accept} = \left\{ \langle M, w \rangle \mid M \text{ is a } TM \text{ and accepts } w \right\}.$
- $L_{HALT} = \left\{ \langle M \rangle \mid M \text{ is a } TM \text{ and halts on } \varepsilon \right\}.$

Practice 1: Halt on Input

Is the language:

$$L_{HaltOnInput} = \left\{ \langle M, w \rangle \mid M \text{ is a } TM \text{ and halts on } w \right\}.$$

Practice 2: L has fooling set


Is the language:

$$L_{HasFooling} = \left\{ \langle M \rangle \mid M \text{ is a } TM \text{ and } L(M) \text{ has a fooling set} \right\}.$$

NP-Complete practice problems


Practice: NP-Complete Reduction I

A centipede is an undirected graph formed by a path of length k with two edges (legs) attached to each node on the path as shown in the below figure. Hence, the centipede graph has $3k$ vertices. The **CENTIPEDE** problem is the following: given an undirected graph $G = (V, E)$ and an integer k , does G contain a centipede of $3k$ vertices as a subgraph? Prove that **CENTIPEDE** is **NP-Complete**.

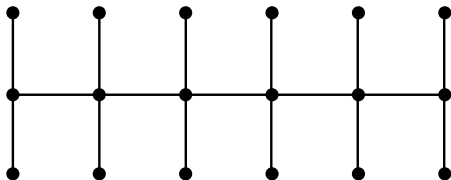


Practice: NP-Complete Reduction

What do we need to do to prove Centipede is NP-Complete?

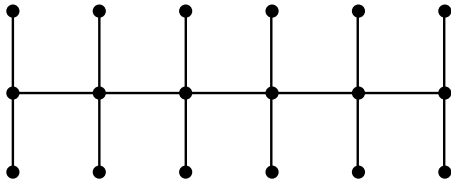


Practice: NP-Complete Reduction

Prove Centipede is in **NP**:

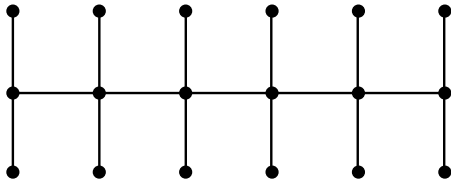


Practice: NP-Complete Reduction

Prove Centipede is in **NP-hard**:

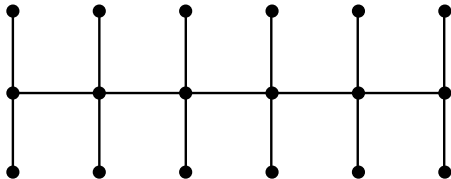

Practice: NP-Complete Reduction

Prove Centipede is in **NP-hard**:

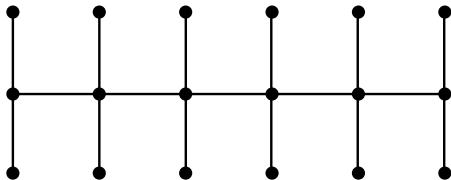

Hamiltonian Path: Given a graph G (either directed or undirected), is there a path that visits every vertex exactly once

$$HC \leq_P \text{Centipede}$$

Practice: NP-Complete Reduction I

A quasi-satisfying assignment for a 3CNF boolean formula Φ is an assignment of truth values to the variables such that at most one clause in Φ does not contain a true literal. Prove that it is NP-complete to determine whether a given 3CNF boolean formula has a quasi-satisfying assignment.

Practice: NP-Complete Reduction I

A quasi-satisfying assignment for a 3CNF boolean formula Φ is an assignment of truth values to the variables such that at most one clause in Φ does not contain a true literal. Prove that it is NP-complete to determine whether a given 3CNF boolean formula has a quasi-satisfying assignment.

Prove quasiSAT is in NP

Practice: NP-Complete Reduction I

A quasi-satisfying assignment for a 3CNF boolean formula Φ is an assignment of truth values to the variables such that at most one clause in Φ does not contain a true literal. Prove that it is NP-complete to determine whether a given 3CNF boolean formula has a quasi-satisfying assignment.

Prove quasiSAT is NP-hard

Practice: NP-Complete Reduction II

Prove quasiSAT is NP-hard

Practice: NP-Complete Reduction II

Prove quasiSAT is NP-hard

3SAT: Given a boolean formula in conjunctive normal form, with exactly three distinct literals per clause, does the formula have a satisfying assignment.

Good luck on the exam
