

Timing: these notes happen after we have introduced Jekyll in a lecture

Make sure you have all of these files in your github.io repository!!

Note: some of this review is covered in the README found here:

https://github.com/jnaiman/online_cv_public

Files and Folders


Before modifying anything major in our template, let's take a tour! In our template directory we see the following:

```
(base) lism01-jnaiman:jnaiman.github.io jnaiman$ ls
Gemfile          _config.yml      _example_projects/ _posts/          assets/
Gemfile.lock     _data/           _includes/        _projects/       pages/
LICENSE.md       _elements/       _layouts/         _sass/           python_notebooks/
README.md        _example_posts/  _plugins/         _site/
```

Each of these files/directories is a part of constructing our fully interactive webpage, so let's look at them one at a time.

README.md

This file is where you can give anybody that stumbles across the repository a bit more info about the source code. In a text editor, it will look something like:

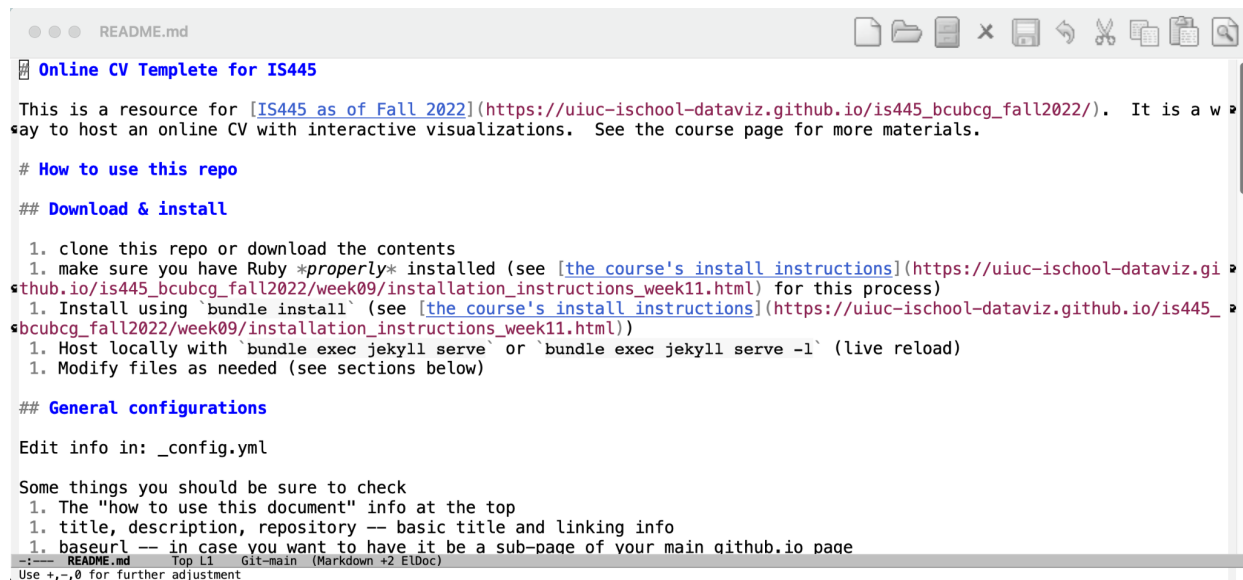

```
Online CV Template for IS445

This is a resource for [IS445 as of Fall 2022](https://uiuc-ischool-dataviz.github.io/is445_bcubcg_fall2022/). It is a way to host an online CV with interactive visualizations. See the course page for more materials.

# How to use this repo

## Download & install

1. clone this repo or download the contents
1. make sure you have Ruby *properly* installed (see [the course's install instructions](https://uiuc-ischool-dataviz.github.io/is445_bcubcg_fall2022/week09/installation_instructions_week11.html) for this process)
1. Install using `bundle install` (see [the course's install instructions](https://uiuc-ischool-dataviz.github.io/is445_bcubcg_fall2022/week09/installation_instructions_week11.html))
1. Host locally with `bundle exec jekyll serve` or `bundle exec jekyll serve -l` (live reload)
1. Modify files as needed (see sections below)

## General configurations


Edit info in: _config.yml

Some things you should be sure to check

1. The "how to use this document" info at the top
1. title, description, repository -- basic title and linking info
1. baseurl -- in case you want to have it be a sub-page of your main github.io page

-- README.md Top L1 Git-main (Markdown +2 EDoc)
Use +,-,0 for further adjustment
```

Which, if you go to the [online_cv GitHub repository](#) gets rendered to:

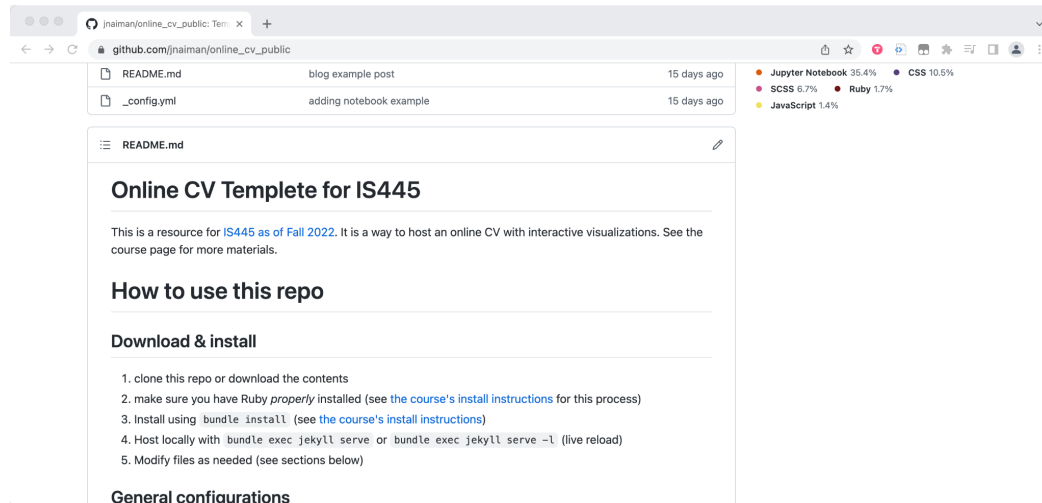

You will not generally have to modify anything in this file.

Gemfile

This file tells bundler what to install that is needed for our project. In this case, some jekyll stuff and some github pages stuff.

```
Gemfile

source "https://rubygems.org"

# Hello! This is where you manage which Jekyll version is used to run.
# When you want to use a different version, change it below, save the
# file and run `bundle install`. Run Jekyll with `bundle exec`, like so:
#
#   bundle exec jekyll serve
#
# This will help ensure the proper Jekyll version is running.
# Happy Jekylling!
gem "jekyll", "~> 3.9.0"
gem 'jekyll-archives'
gem 'jekyll-sitemap'
gem 'jekyll-paginate-v2'
gem 'mini_magick'
gem "kramdown-parser-gfm"

# This is the default theme for new Jekyll sites. You may change this to anything you like.
#gem "minima", "~> 2.0"

# If you want to use GitHub Pages, remove the "gem "jekyll"" above and
# uncomment the line below. To upgrade, run `bundle update github-pages`.
gem "github-pages", group: :jekyll_plugins

#gem "github-pages", '>=104', group: :jekyll_plugins
[]
gem 'webrick'
-:--- Gemfile      Top L26  Git-main  (Ruby +2)
Beginning of buffer
```

When you run “bundle install” bundler takes this file and creates a “Gemfile.lock” with all of the specific versions of packages that are installed (we won’t be looking at that but you can check yours out if you want).

You don’t need to generally modify this file, but if you create your own webpage not using the template, you might have to install other packages.

_config.yml

This file is the first file we’ll really start modifying. In this file you’ll see a lot of ways to modify the different parameters in your webpage.

```
_config.yml

### How to use this document
# 1. Fill in your info
# 2. Re-execute the build in the command line with: bundle exec jekyll serve
# 3. Push to github
# NOTE: it looks like you need to rebuild + repush everytime you update this _config.yml file


### Site Settings ###
title           : PossibleCorgi
description     : >-
                 I may or may not be a corgi.
baseurl        : "/online_cv_public" # Change to empty quotes if you are hosting your site at <your-username>.github.io directly,
#                                     otherwise will be hosted at <your-username>.github.io/{{base_url}}
repository     : jnaiman             # Change to <your-username>/<your-username>.github.io (or remove it if you don't need remote projects)
open_new_tab   : false               # Opens external URLs in new tab (works for posts, projects and navbar only)

### Plugins ###
plugins:
  - jekyll-archives
  - jekyll-sitemap
  - jekyll-paginate-v2
  - mini_magick

### To specify which port to host locally on — use if you have multiple sites you want to host
port: 4000
--- _config.yml      Top L1  Git-main  (Fundamental)
For information about GNU Emacs and the GNU system, type C-h C-a.
```

At the top you see some instructions of how to modify this page. What we will do is fill in your new info, re-build the webpage with “bundle exec jekyll serve” to see our new webpage and then push these changes to our github.io pages repository when we are happy with those changes.

Let’s try this by changing one thing first, the title – right now its PossibleCorg, but you probably want something different!

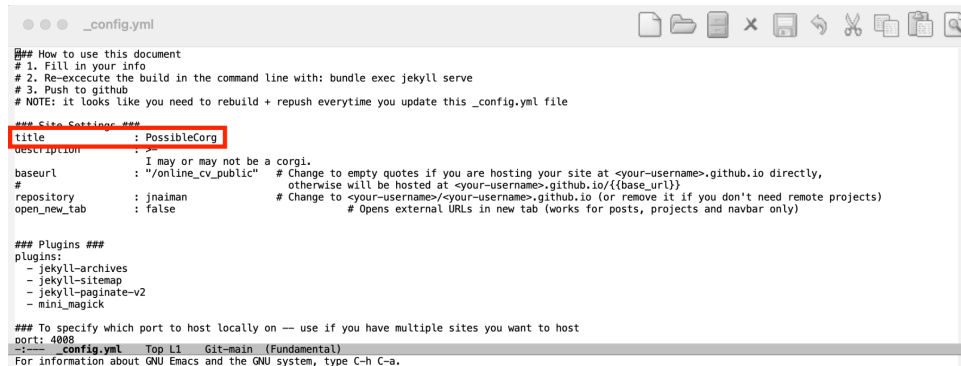

```
## How to use this document
# 1. Fill in your info
# 2. Re-execute the build in the command line with: bundle exec jekyll serve
# 3. Push to github
# NOTE: it looks like you need to rebuild + repush everytime you update this _config.yml file

### Site Settings ###
title       : PossibleCorg
description : "I may or may not be a corgi."
baseurl     : "/online_cv_public" # Change to empty quotes if you are hosting your site at <your-username>.github.io directly,
# otherwise will be hosted at <your-username>.github.io/{(base_url)}
repository : jnaiman             # Change to <your-username>.<your-username>.github.io (or remove it if you don't need remote projects)
open_new_tab : false             # Opens external URLs in new tab (works for posts, projects and navbar only)

### Plugins ###
plugins:
  - jekyll-archives
  - jekyll-sitemap
  - jekyll-paginate-v2
  - mini_magick

## To specify which port to host locally on -- use if you have multiple sites you want to host
port: 4008
_config.yml  Top LI  Git-main  (Fundamental)
For information about GNU Emacs and the GNU system, type C-h C-a.
```

We’ll walk through this, **but don’t do it yet** (we still need to update things for your page!)

- Change this to “<Last Name> Resume”
- Run “bundle exec jekyll serve” and see what happens locally
- Push to github, in the Terminal/Anaconda Prompt (make sure you have git installed!) do:
 - git pull (ONLY IF you have edited things online in your repo)
 - git status (to see changes)
 - git add -A (add all changes)
 - git commit -m “message” (commit changes)
 - git push (push all changes)
 - NOTE!!!: if you have edited things online you will get a merge warning, you need to download your repository (“git pull”) and merge (“git merge”) and then commit this (“git commit -m”) – it will be easier if you do everything locally instead of using the GUI!
- After some build time, your new Environment with your changes will be updated on your github.io page under the /online_cv_public sub-heading

So, this process takes a bit of a while to build to a full, hosted webpage, so generally, we’ll just host locally and check out some changes when we re-build and then we’ll push to our github.io repository when we have done enough changes. Also! We haven’t updated things to point to your specific github page! So this won’t work. Let’s work on that.

A few other items in this file that might be interesting to change:

```

    _config.yml

### How to use this document
# 1. Fill in your info
# 2. Re-execute the build in the command line with: bundle exec jekyll serve
# 3. Push to github
# NOTE: it looks like you need to rebuild + repush everytime you update this _config.yml file

### Site Settings ###
title       : PossibleCorg
description : >-
            I may or may not be a corgi.
baseurl     : "/online_cv_public" # Change to empty quotes if you are hosting your site at <your-username>.github.io directly,
#                                     otherwise will be hosted at <your-username>.github.io/{{base_url}}
repository : jnaiman             # Change to <your-username>/<your-username>.github.io (or remove it if you don't need remote projects)
open_new_tab : false             # Opens external URLs in new tab (works for posts, projects and navbar only)

```

Update the description to say a little bit about yourself.

```

    _config.yml

### How to use this document
# 1. Fill in your info
# 2. Re-execute the build in the command line with: bundle exec jekyll serve
# 3. Push to github
# NOTE: it looks like you need to rebuild + repush everytime you update this _config.yml file

### Site Settings ###
title       : PossibleCorg
description : >-
            I may or may not be a corgi.
baseurl     : "/online_cv_public" # Change to empty quotes if you are hosting your site at <your-username>.github.io directly,
#                                     otherwise will be hosted at <your-username>.github.io/{{base_url}}
repository : jnaiman             # Change to <your-username>/<your-username>.github.io (or remove it if you don't need remote projects)
open_new_tab : false             # Opens external URLs in new tab (works for posts, projects and navbar only)

```

Make sure this points to *your* GitHub page! This should be your user name (see the description).

Another thing you probably want to change in the future, is the link – if you want this as your main github.io page (i.e. where employers will “land” if they come to your github.io page) you can set the “baseurl” to just empty quotes “”:

```

    _config.yml

### How to use this document
# 1. Fill in your info
# 2. Re-execute the build in the command line with: bundle exec jekyll serve
# 3. Push to github
# NOTE: it looks like you need to rebuild + repush everytime you update this _config.yml file

### Site Settings ###
title       : PossibleCorg
description : >-
            I may or may not be a corgi.
baseurl     : "" # Change to empty quotes if you are hosting your site at <your-username>.github.io directly,
#                                     otherwise will be hosted at <your-username>.github.io/{{base_url}}
repository : jnaiman             # Change to <your-username>/<your-username>.github.io (or remove it if you don't need remote projects)
open_new_tab : false             # Opens external URLs in new tab (works for posts, projects and navbar only)

```

Since we are still working on things, we'll leave it as is and see that we need to add this part to the URL when we want to see our build on our github.io page.

Some other things we might want to change are our name, the image that we use for ourselves, and then any relevant links we want to appear as icons under our name:

```

    _config.yml

### Navbar Settings ###
nav_exclude:                                # The following paths are excluded from navbar
- pages/tags.html
- pages/404.html
- pages/index.md
- documentation/partial/**                  # For Documentation Only

### Author Info ###
author:
  name: A. P. Corgi
  image: https://dogtime.com/assets/uploads/gallery/pembroke-welsh-corgi-dog-breed-pictures/prance-8.jpg
  benance: your_username
# dribbble: your_username
  email: username@domain.com
  facebook: your_username
  github: jnaiman # JPN
# gitlab: your_username
# instagram: your_username
# kaggle: your_username
  linkedin: your_username
  medium: your_username
# soundcloud: your_username
# spotify: your_username
# stackoverflow: your_user_id
# tumblr: your_username.tumblr.com
  twitch: your_username
  twitter: your_username
  vimeo: your_username
  youtube: your_channel_name
# keybase: your_username
```

The last thing to check is that we are excluding files from our build that we don't want included in our webpage. You might have stuff stored in your github.io page other than this template and we don't want to accidentally build this in into your page:

```

    _config.yml

  layout: "page"
  - scope:                                # For Documentation Only
    path: ""                               # For Documentation Only
    type: "elements"                       # For Documentation Only
    values:                                # For Documentation Only
      layout: "element"                   # For Documentation Only
  - scope:
    path: ""
    type: "posts"
    values:
      comments: false                    # Set to true to enable Disqus comments

### Exclude from processing ###
## Add yours here if you have other stuff in your github.io page!!!**
exclude:
- README.md
- README.md~
- CONTRIBUTING.md
- LICENSE.md
- LICENSE.md~
- config.yml~
- "*.log"
- "*.ipynb"
- "python_notebooks/*"
```

What other files do we want to look at? Before modifying things extensively, we can check a few more out.

You can run an interactive version that will reload with your changes with “`bundle exec jekyll serve -l`” but it will crash if you have another interactive instance going. You can always do “`bundle exec jekyll serve`” and then manually refresh to see your changes.

`_plugins` (directory)

```
(base) lism01-jnaiman:online_cv_public jnaiman$ ls
Gemfile          _config.yml      _example_projects/ _posts/          assets/
Gemfile.lock     _data/           _includes/         _projects/       pages/
LICENSE.md       _elements/       _layouts/          _sass/           python_notebooks/
README.md        _example_posts/  _plugins/          _site/
(base) lism01-jnaiman:online_cv_public jnaiman$ ls _plugins/
gallery_generator.rb  lightgallery_links.rb  vegachart_tags.rb
json_featured.rb     thumbnail_generator.rb
```

Some other interesting files to know about (but that you don’t need to edit) is the `_plugins` – this is where the code to do interactive visualizations with vega-lite (like `vegachart_tags`). There are some other things listed here as well that we are really going to ignore. These plugins come from the [4dcu-be Jekyll template](#).

assets

Inside the assets folder there are a few folders that we will add things to. In particular, we will store any screenshots/images in `assets/pngs` and any vega-lite output JSON’s in the `json` folder. More on this when we get to making interactive plots on our webpage.

```
(base) lism01-jnaiman:online_cv_public jnaiman$ ls
Gemfile          _config.yml      _example_projects/ _posts/          assets/
Gemfile.lock     _data/           _includes/         _projects/       pages/
LICENSE.md       _elements/       _layouts/          _sass/           python_notebooks/
README.md        _example_posts/  _plugins/          _site/
(base) lism01-jnaiman:online_cv_public jnaiman$ ls assets
css/      favicon.ico  js/      json/      pngs/
```

python_notebooks

```
(base) lism01-jnaiman:online_cv_public jnaiman$ ls
Gemfile          _config.yml      _example_projects/ _posts/          assets/
Gemfile.lock     _data/           _includes/         _projects/       pages/
LICENSE.md       _elements/       _layouts/          _sass/           python_notebooks/
README.md        _example_posts/  _plugins/          _site/
(base) lism01-jnaiman:online_cv_public jnaiman$ ls python_notebooks/
README.md      test_generate_plots.ipynb
```

This is where you can store “loose” python notebooks. In theory, you will link to your analysis plots in whatever repositories are storing those analysis notebooks, but just in case you want to do something “quick and dirty” and link that notebook, you can put it here. Check out the [README](#) for updates, but that is the gist of this folder :)

_layouts (directory)

```
(base) lism01-jnaiman:online_cv_public jnaiman$ ls
Gemfile          _config.yml      _example_projects/ _posts/          assets/
Gemfile.lock     _data/           _includes/         _projects/       pages/
LICENSE.md       _elements/       _layouts/          _sass/           python_notebooks/
README.md        _example_posts/  _plugins/          _site/
(base) lism01-jnaiman:online_cv_public jnaiman$ ls _layouts/
default.html  element.html  page.html  post.html
```

Another set of files that we won't really mess with is the layouts in the `_layouts` folder. These are ways to define different layouts for different kinds of pages. How our different pages look is also modified by things in the...

_includes (directory)

This also includes some info about how different pages will look.

```
(base) lism01-jnaiman:online_cv_public jnaiman$ ls
Gemfile          _config.yml      _example_projects/ _posts/          assets/
Gemfile.lock     _data/           _includes/         _projects/       pages/
LICENSE.md       _elements/       _layouts/          _sass/           python_notebooks/
README.md        _example_posts/  _plugins/          _site/
(base) lism01-jnaiman:online_cv_public jnaiman$ ls _includes/
404.html          analytics.html  elements/          head.html        navbar.html      scripts.html
about/            blog/          footer.html        landing.html     projects/        social.html
```

For example, if we look in the `_includes/projects` folder:

```
(base) lism01-jnaiman:online_cv_public jnaiman$ ls _includes/projects/
index.html          project-card.html
```

We see how each project card will look is probably determined in the `project-card.html` file and the general projects page is determined with the `index.html`

_example_posts & _example_projects (directories)

```
(base) lism01-jnaiman:online_cv_public jnaiman$ ls _example_posts/
2015-09-25-how-to-undo-your-git-failure.md
2016-02-09-what-is-version-control.md
2016-04-17-do-not-go-gentle-into-that-good-night.md
2016-07-23-a-better-hello-world.md
2017-01-01-github-flow.md
2018-05-09-four-lessons-after-eleven-years-in-silicon-valley.md
2018-12-01-what-the-heck-is-a-callback.md
2018-12-10-clean-coding.md
2019-02-15-learn-react-js.md
2019-02-20-digital-minimalism.md
(base) lism01-jnaiman:online_cv_public jnaiman$ ls _example_projects/
(1) Placeholder Project.md  (3) Empty Project.md  (5) The Fabulous.md
(2) Awesome Project.md    (4) VVG on GitHub.md  (6) Dummy Project.md
```


These two folders contain some example projects and blog posts you can look at. Since we'll be building our own in a bit, we won't focus on these now, but they are there for you to come back to look at after we've started building our own to get some ideas.

_posts

```
(base) lism01-jnaiman:online_cv_public jnaiman$ ls _posts/
2022-08-22-hello-blog-world.md  2022-08-22-hello-blog-world.md~
```

This contains a placeholder blog post if you want to talk about new things in your life, i.e. in a blog style. Note the format of these with the filename starting with YYYY-MM-DD (year, month, date).

If you open this file up in a text editor, you'll see that its mostly markdown:

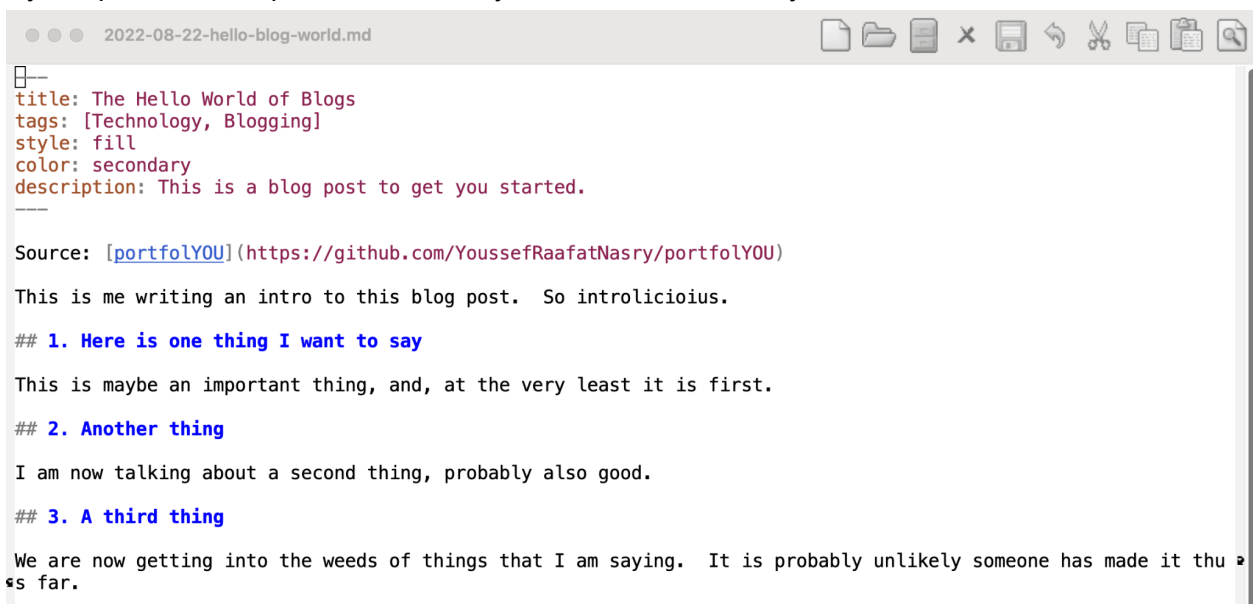

The screenshot shows a text editor window titled "2022-08-22-hello-blog-world.md". The content is a markdown template for a blog post. It starts with a frontmatter block in red text: `title: The Hello World of Blogs`, `tags: [Technology, Blogging]`, `style: fill`, `color: secondary`, and `description: This is a blog post to get you started.`. Below this is a source link: `Source: [portfolYOU] (https://github.com/YoussefRaafatNasry/portfolYOU)`. The main body of the post is in blue text, starting with `This is me writing an intro to this blog post. So introlicioius.` followed by three numbered sections: `## 1. Here is one thing I want to say`, `## 2. Another thing`, and `## 3. A third thing`. Each section has a corresponding paragraph of text. The post ends with `We are now getting into the weeds of things that I am saying. It is probably unlikely someone has made it thu` and `s far.`.


With some yaml lines at the top that give specific parameters for each blog post, like title, any tags, color, etc. See the _example_posts directory for more examples. We won't be focusing

on blog posts for this class, but you can certainly check out the examples to get started if you want to blog.

pages (directory)

```
(base) lism01-jnaiman:online_cv_public jnaiman$ ls
Gemfile          _config.yml      _example_projects/ _posts/          assets/
Gemfile.lock     _data/           _includes/         _projects/       pages/
LICENSE.md       _elements/       _layouts/          _sass/           python_notebooks/
README.md        _example_posts/  _plugins/          _site/
(base) lism01-jnaiman:online_cv_public jnaiman$ ls pages
404.html  blog.html  projects.html  tags.html
about.md   index.md   search.json
```

One small thing we might want to change in the pages directory – this is the projects.html file in which we can add github projects that are already *under our github name*.

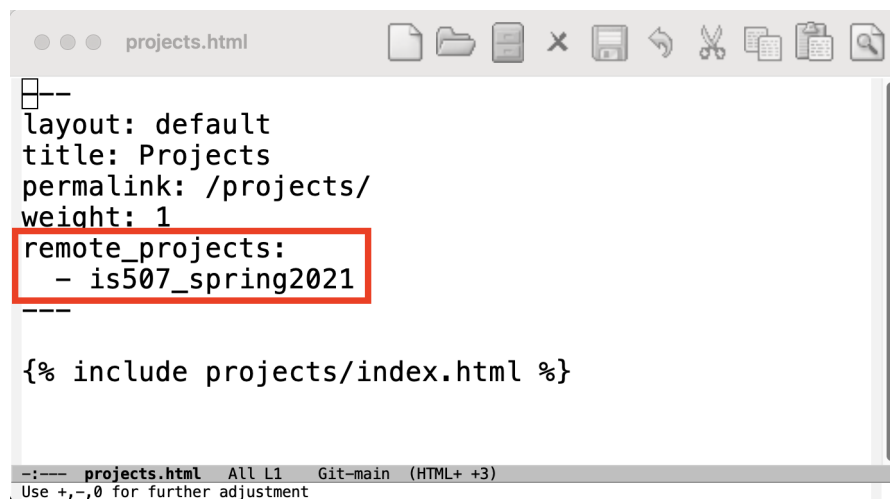

```
projects.html
[ ]--
layout: default
title: Projects
permalink: /projects/
weight: 1
remote_projects:
- is507_spring2021
---

{% include projects/index.html %}
```

In the example I've got the name of the repository that is associated with my main github page. For reference, the URL of this repo is:

https://github.com/jnaiman/is507_spring2021

This shows up as an “automatic” card under our projects folder. You won't see *my* repository, even though it is included in the template you are using since it is not related to your repo!

pages/about.md

Also in the pages directory is a file where you can modify some things for your “About” page. In particular, you can modify your description a that appears at the top by editing the about.md file in a text editor:

```
about.md
---
layout: page
title: About
permalink: /about/
weight: 3
---

# **About Me**

Hi I am **{{ site.author.name }}**, <br>
possibly a corgi, possibly not. Either way there are really neat things I am up to!

<div class="row">
{% include about/skills.html title="Programming Skills" source=site.data.programming-skills %}
{% include about/skills.html title="Other Skills" source=site.data.other-skills %}
</div>

<div class="row">
{% include about/timeline.html %}
</div>
```

In particular, you want to edit all the stuff above the <div class...> stuff (there are other files to edit for your skills section and your timeline!!).


_data

This folder includes some files that are useful for your “About” page as well.

```
((base) lism01-jnaiman:online_cv_public jnaiman$ ls
Gemfile          _config.yml      _example_projects/ _posts/          assets/
Gemfile.lock     _data/           _includes/         _projects/       pages/
LICENSE.md       _elements/       _layouts/          _sass/           python_notebooks/
README.md        _example_posts/  _plugins/          _site/
((base) lism01-jnaiman:online_cv_public jnaiman$ ls _data
other-skills.yml  programming-skills.yml  social-media.yml  timeline.yml
```

In particular:

`_data/programming-skills.yml`

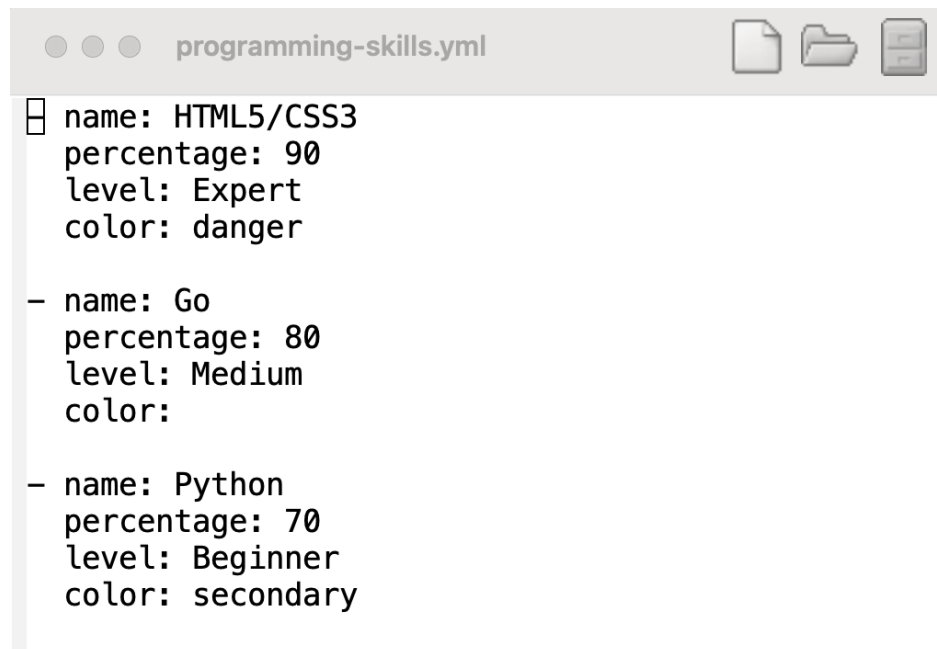


In this file, you can include your different *programming* skills along with your proficiency. There are a few options to add something new:

- Name of language
- Percentage of “skill” obtained – this is a bit fuzzy, but you can think of it as the % of the bar on the top that increases/decreases
- The level – this is the text that will show up on the top
- The color – what color you want to make this object
 - Where do these colors come from? Check out the file:

[`\_sass/\_variables.scss`](#)

_data/other-skills.yml

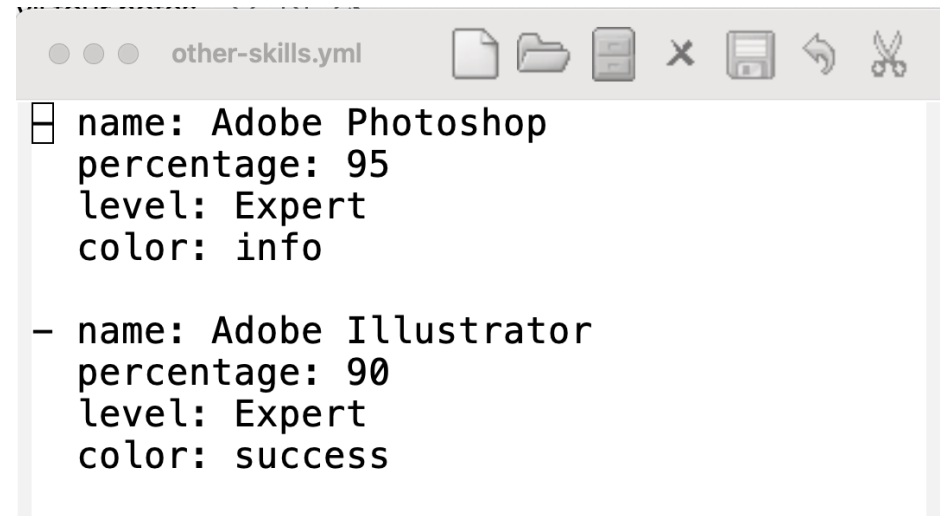


```
name: Adobe Photoshop
percentage: 95
level: Expert
color: info

- name: Adobe Illustrator
  percentage: 90
  level: Expert
  color: success
```

This file is very similar to the programming skills file, except it is a good place to list your various other skills.

_data/timeline.yml

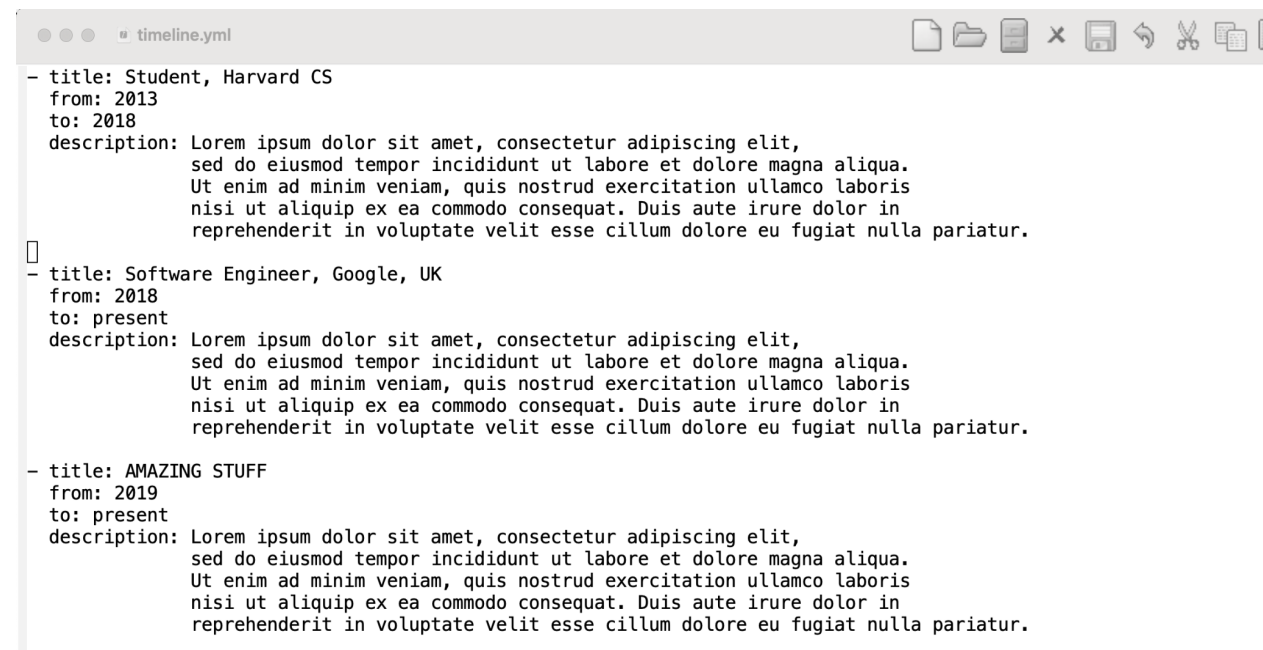

```
- title: Student, Harvard CS
  from: 2013
  to: 2018
  description: Lorem ipsum dolor sit amet, consectetur adipiscing elit,
    sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.
    Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris
    nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in
    reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

- title: Software Engineer, Google, UK
  from: 2018
  to: present
  description: Lorem ipsum dolor sit amet, consectetur adipiscing elit,
    sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.
    Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris
    nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in
    reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

- title: AMAZING STUFF
  from: 2019
  to: present
  description: Lorem ipsum dolor sit amet, consectetur adipiscing elit,
    sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.
    Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris
    nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in
    reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.
```

The final file you probably want to modify in this folder is your timeline. For each entry you need:

- The title (is it a job, if so, what kind? Are you a student, if so what major?)
- The start-end dates
- A description (right now, the “standard” placeholder text)

Note this is **ORDER DEPENDENT**. If we wanted our most recent position to be on top, we can re-order this to put that on top. Whatever order it is in this file is the order it will show up on your About page timeline.

projects (directory)

```
^C(base) lism01-jnaiman:online_cv_public jnaiman$ ls
Gemfile          _config.yml      _example_projects/ _posts/          assets/
Gemfile.lock     _data/           _includes/        _projects/       pages/
LICENSE.md       _elements/       _layouts/         _sass/           python_notebooks/
README.md        _example_posts/  _plugins/         _site/
(base) lism01-jnaiman:online_cv_public jnaiman$ ls _projects
1_Vega_lite_project.md
(base) lism01-jnaiman:online_cv_public jnaiman$
```

Finally, we have your projects directory – this is where we will spend the majority of our time. Here we will add projects that include interactive data visualizations. The template is project 1, which is a vega-lite example.

Note the formatting here – there is a 1_ to indicate we want this project to come first in our list as it shows up on our projects page!

If we open up this template file in a text editor:



```
1_Vega_lite_project.md
---
name: Vega Lite Example Project
tools: [Python, HTML, vega-lite]
image: assets/pngs/cars.png
description: This is a "showcase" project that uses vega-lite for interactive viz!
custom_js:
  - vega.min
  - vega-lite.min
  - vega-embed.min
  - justcharts
---

# Example including vega-lite

Example comes from this great blog post right here (https://blog.4dcu.be/programming/2021/05/03/Interactive-Visualizations.html) that was also used in our test import script (https://github.com/UIUC-iSchool-DataViz/is445_bcu/blob/main/week01/test_imports_week01.ipynb).

We can use a vegachart HTML tag like so:

<<<
<vegachart schema-url="{ { site.baseurl } }/assets/json/cars.json" style="width: 100%"></vegachart>
>>>

<vegachart schema-url="{ { site.baseurl } }/assets/json/cars.json" style="width: 100%"></vegachart>

In theory, you can also use Jekyll hooks (https://jekyllrb.com/docs/plugins/hooks/) to do it, but I haven't figured out a way that looks nice yet.
```

We see a few things. Like with the template blog post file, there are some yaml snippets at the top that change the name of the project, what tool tags you want to use, an image to show on the projects page and a description.

Of vital importance! If you are using vega-lite to make interactive plots, you MUST include the custom_js lines!!!

Other than those specifics, the rest of the file will be mostly written in markdown, with the occasional use of `<vegachart>` HTML tags that we will use to make interactive visualizations.

That is the end of our overview! Now we will dig a bit deeper into how to add projects and how to include vega-lite to make some interactive plots. To do this, start with the vega-editor to make a quick example, then move to Python to start translating some of the stuff we've done on Starboard into this format.

Vega-lite-ho!