

cdp-environments

.drone.yml

Uses docker-cdp-ci image

Runs deploy.sh using local deploy/kustomization.yaml

Runs test.sh using local test/kustomization.yaml


environments/<env>/...


deploy/kustomization.yaml

test/kustomization.yaml

cdp-version

conf.cfg

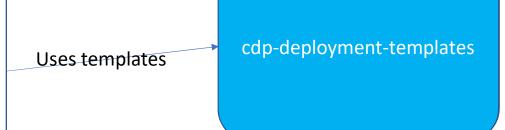

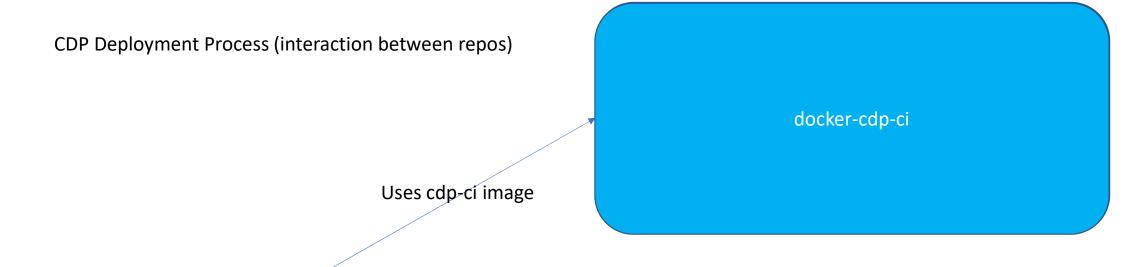

cdp-environments

.drone.yml

Uses docker-cdp-ci image

Runs deploy.sh using local deploy/kustomization.yaml

Runs test.sh using local test/kustomization.yaml


environments/<env>/...

deploy/kustomization.yaml -> defines what to run

test/kustomization.yaml -> defines what to test

cdp-version

conf.cfg

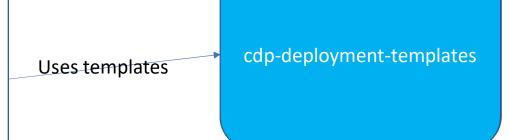

CDP Deployment Process (interaction between repos)

Uses cdp-ci image

docker-cdp-ci deploy.sh clones cdp-deployment-templates kustomize kubectl apply test.sh clones cdp-deployment-templates kustomize kubectl create (job running bzt)

cdp-environments

.drone.yml

Uses docker-cdp-ci image

Runs deploy.sh using local deploy/kustomization.yaml

Runs test.sh using local test/kustomization.yaml

environments/<env>/...

deploy/kustomization.yaml

test/kustomization.yaml

cdp-version

conf.cfg

Uses templates cdp-deployment-templates

CDP Deployment Process (interaction between repos)

Uses cdp-ci image

```
docker-cdp-ci
deploy.sh
clones cdp-deployment-templates
kustomize
kubectl apply
test.sh
clones cdp-deployment-templates
kustomize
kubectl create (job running bzt)
```

cdp-environments

.drone.yml

Uses docker-cdp-ci image

Runs deploy.sh using local deploy/kustomization.yaml

Runs test.sh using local test/kustomization.yaml

environments/<env>/...

deploy/kustomization.yaml

test/kustomization.yaml

cdp-version

conf.cfg -> vars/... overrides

Uses templates from cdp-version tag

cdp-deployment-templates

k8s-temlates/....

k8s-perf-tests/....

vars/....

conf-template/...

manifest/....