

READY 4 LEARNING

Frontend Style Visual Reference

A practical map of semantic variables, Angular Material controls, reusable layout classes, and the standard page template.

THEME AWARE

MATERIAL FIRST

MOBILE READY

The Styling Decision Order

Use the first available layer that solves the problem. Move down only when the earlier layer is not enough.

1

Angular Material

Choose the standard control and interaction behavior first.

2

Global app class

Compose the page with existing app-* layout and surface primitives.

3

Semantic variable

Use --app-* tokens for any custom color, spacing, radius, or shadow.

4

Feature SCSS





Add only structure or presentation unique to that feature.

One sentence to remember

Material owns behavior. styles.scss owns the design system. Component SCSS owns only the feature-specific composition.




Light Theme Token Map

The token name stays the same. Only its resolved value changes.

 --app-bg Application canvas 0XF7FAFC	 --app-surface Cards and panels 0XFFFFFFF	 --app-surface-muted Secondary surface 0XF0F3F5	 --app-primary Main action 0X2F6F9F
 --app-accent Secondary emphasis 0XF2B84B	 --app-success Positive state 0X2F7D4A	 --app-warn Error/destructive 0XB84242	 --app-tertiary Third category 0XF2B84B
 --app-text Primary text 0X183044	 --app-text-muted Supporting text 0X5F6F7C	 --app-border Dividers/outlines 0XD5E0E8	 --app-contrast Rare contrast 0X000000

Dark Theme Token Map

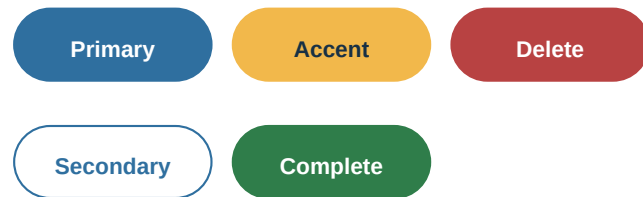
The token name stays the same. Only its resolved value changes.

 --app-bg Application canvas 0X121820	 --app-surface Cards and panels 0X202A35	 --app-surface-muted Secondary surface 0X2A3643	 --app-primary Main action 0X75ABD5
 --app-accent Secondary emphasis 0XFFD166	 --app-success Positive state 0X7BC399	 --app-warn Error/destructive 0XE18181	 --app-tertiary Third category 0XFFD166
 --app-text Primary text 0XF3F6F8	 --app-text-muted Supporting text 0XB8C2CB	 --app-border Dividers/outlines 0X3A4856	 --app-contrast Rare contrast 0XFFFFFF

Material Controls and Semantic Status

Use Material components for behavior, then use app classes only where Material has no semantic slot.

Buttons and feedback



Input plus action



Rule

Use app-field-action-row so adjacent actions align with the 56px Material field height.

Status badges

Current	Text keeps the meaning explicit
Secondary	Text keeps the meaning explicit
Completed	Text keeps the meaning explicit
Needs attention	Text keeps the meaning explicit
Third category	Text keeps the meaning explicit



No matching records

Explain what happened and provide one clear next action.

Clear Filters

Spacing, Surfaces, and Layout Primitives

A small shared vocabulary prevents every feature from inventing its own margins, cards, and breakpoints.

Spacing scale

--app-space-xs



--app-space-sm



--app-space-md



--app-space-lg



--app-space-xl



app-card

Strong framed surface for a real tool or repeated item.

app-panel-muted

Supporting context with lower visual weight.

32px

Responsive composition

app-grid-auto

Auto-fit cells

app-split

Opposing content

app-cluster

Wrapping controls

Standard Operational Page Template

Page Name

Primary Action

Short, task-focused description.

Feature controls

SEARCH

Search records

Clear

Responsive content

Responsive content

Starting markup

```
<section class="app-page-shell app-page-stack">
  <header class="app-page-header">
    <div>
      <h1 class="app-page-title">Page Name</h1>
      <p class="app-page-subtitle">What users do here.</p>
    </div>
    <div class="app-action-row">...</div>
  </header>

  <section class="app-panel app-stack-md">
    <div class="app-field-action-row">...</div>
  </section>
</section>
```

Before review

- Material controls used where available
- No component palette hex values
- Mobile and dark mode checked
- data-cy selectors are independent of styling