

-
-
-
-
-

Chapter 11

Utilities



Introduction to Accounts Receivable Utility Options

The Accounts Receivable application provides a number of utilities for database reorganisation and verification. Utility options are not required during normal operation.



Warning: Use all of the utility option procedures with caution. Some require a detailed technical understanding of the application. We recommend that these tasks be carried out with the advice of your accounts manager, computer manager, and/or software supplier.

- The Company options enable you to maintain companies and group companies.
- The Delete Redundant Data option enables you to take a security copy of period balance records and transactions before removing them from the system. These archived copies are restored for enquiry and report purposes only - no postings may be made to a restored system. The procedures are:
 - Save company data to an archive file.
 - Remove (purge) the data from the current system.
 - Restore archived data as and when required.
 - Enquire and report on restored archived data.
- Start or end the Accounts Receivable subsystem.
- Verify the database to confirm that data submitted to the application has been correctly processed - i.e. that period balances represent the sum of transactions.
- Rebuild account period balances from the transactions, if discrepancies are found in the verification procedure.
- De-allocate postings made in a session that failed.

Important

The Financials applications maintain balances using hidden programs known as subsystems.

Certain Utilities options also maintain these balances, and if you enter one of these options while a subsystem is active a message prevents you from using the option.

All subsystems must therefore be turned off before using such utility options.

Entering Details of Libraries

Many of the functions contained in this section require you to enter the names of certain libraries. The names of the following libraries are often required:

Program Library

This is the name of the library containing the Utility programs. The normal naming convention for this library will be OSLSLP3.

File Library

This library contains the database files for the application.

Work Library

This is the name of a general purpose library to which intermediate files may be copied during certain procedures - for example, when deleting a company. Most users would create a new, dedicated library for this task. After successful completion of the task/s to be performed, the library would be deleted. If you are uncertain which libraries apply to your particular system, or you are not authorised to create new libraries, you are strongly advised to consult your computer systems department or your software supplier.



Note: The Delete Redundant Data procedure requires you to enter a volatile files library and a non-volatile files library. The volatile files library contains the data files for deleting and archiving, while the non-volatile files library contains the display and printer files.

Template Companies

If you need to maintain several companies all in the same way, the easiest way to do this is to set up all the companies as a group, with another company defined in the General Ledger as a template company. When you maintain the template company, the related group companies will be updated in the way specified.

Create Company



1/ARU

This procedure enables you to create a new company by copying the contents of an existing company. The new company can be created in any library, not just in the same library as the existing company. Only the static data in a company can be copied; the copied data will not include items or balances.



Note that this facility will only copy companies. If you wish to create a separate company from scratch, this should be done using the Company Profile Maintenance option.

This initial screen asks you to enter the company codes of the existing and the new companies. When you have entered the companies, press **Enter**.

If you are simply copying one company to another, the Country Code field will then appear beneath the other two fields, and you can either leave this blank to pick up the country code of the company being copied, or you can enter a country code as required. Once entered, press **Enter** to complete a window screen.

If you are copying a template company to a group of companies, the country code will automatically be that of the template country, so the extra field is not displayed. Instead, the following fields will be displayed immediately:

Fields:

GL Co

Enter the General Ledger company to which the new company is to be attached.

Cm Co

Enter the Cash Management company to which the new company is to be attached.



Make your selection and press **Enter** to display the final screen in the process.

Create Company Screen



Select the from and to companies and press **Enter** to display the final screen in the process.

Enter details for the new company.

SL881	User ED3	29/03/94 16:11:42
Create Company		
From company . : Z1 To company . : NB		
Customer codes : _ (Enter '1' to select)		
Customer text : _		
Reason/dispute codes : _		
Letters/statement messages : _		
Interest charges : _		
Hierarchies : _		
F3=Exit F8=Confirm F12=Previous		

Fields:

Customer Codes

Enter 1 to have all customer codes copied from the existing company.

Customer Text

Enter 1 to have all customer text copied from the existing company.

Reason / Dispute Codes

Enter 1 to have all reason codes and disputed invoice reason codes copied from the existing company.

Letters / Statement Messages

Enter 1 to have all letters and statement messages copied from the existing company.

Interest Charges

Enter 1 to have all interest charge details copied from the existing company.

Hierarchies

Enter 1 to have all customer hierarchies copied from the existing company.



Warning: If the company being copied is in a different country to the new company, you may have to amend the currency. That is,

when the copy is done update the Currency field in the company profile.



When you have made your selection, press **F8** to create the new company.

Save Company



2/ARU

This procedure enables you to save a copy of a company into a separate library. However this is not the normal save mechanism. most users back up their file libraries en-mass on a daily basis using your computer's operating system save commands, this process can be automated as on overnight job using an auto day end routine.

Save a Company in a Different Library Screen 1



The initial screen allows you to specify where the program should look for the save programs and files when it performs the save procedure. However, the default values of *LIBL should suit any normal save procedure, and changing these should rarely be necessary.

The work library, however, must be specified. This should be the name of a general purpose library which the save procedure can use to store certain files while the save is going on. This will commonly be a new library created for the task, which will be deleted when the task is completed.

SLMENU-U	Sales Ledger Company Utilities	User ED3	28/04/94 11:00:16
Save a Company in a Different Library			
Libraries Selection			
Object....	*LIBL	E.g., utility program(s) to be run.	
Files.....	*LIBL	E.g., files from which to delete a company.	
Work.....	QSLSAVE	E.g., work library used during some utilities.	
F3=Exit			



Once you have pressed **Enter**, the next screen will ask you to enter the save libraries.

Save a Company in a Different Library Screen 2



Press **Enter** at the first screen.

Enter the save liveries.

SL950CLP	Sales Ledger Company Utilities	User ED3	28/04/94 11:00:31
Save a Company in a Different Library			
Enter the name of the library containing the A/R files..... <u>OSLSLF3</u>			
Enter the name of the library in which to save the company. <u>OSLSAVE</u>			
Enter the name of the message queue for messages... <u>VRTDSP05</u>			
Enter the name of the message queue library..... <u>*LIBL</u>			
F3=Exit			

Fields:

A/R Files Library

Enter the name of the library containing the Accounts Receivable files.

Library To Be Saved To

Enter the library to which the selected company is to be saved.

Message Queue

If the save job were to fail for any reason, a message would be sent to inform you of this fact. This message will be sent to the message queue specified here. The field defaults to the message queue of the person starting the job, but this may be changed.

Message Queue Library

If the save job were to fail for any reason, a message would be sent to inform you of this fact. This message will be sent to the message queue in the library specified here. The field defaults to your library list, but this may be changed.

When these fields are completed, press **Enter** to see the final screen in the procedure.

Save a Company in a Different Library

Screen 3

SL951	Sales Ledger Company Utilities	User ED3	28/04/94
			11:00:49

Save a Company in a Different Library

NOTE A maximum of ten companies can be saved in 1 run.

Company Code	Company Name
— A1	A1 Test Company
— A5	KB Test QA Company
— CM	Credit Manager Testing Co
— EG	EG Test Company - GBP
— GD	Gold Copy Company
— KB	KB Test QA Company
— MB	MB V3 TEST * STERLING
— NB	NB Test Company
— N2	OVRMSGF QUSERMSG SLMSGFZ1
— N3	OVRMSGF QUSERMSG SLMSGFN2
— N4	OVRMSGF QUSERMSG SLMSGFZ1
— N5	N5 Test Company
— PJ	RAC TEST COMPANY TO Z2
— SX	Z1 Sample Test Company

1=Save company
F3=Exit F8=Confirm companies selected F12=Previous



Enter 1 against each company you wish to save - up to a total of ten companies. Then press **F8=Confirm Companies Selected** to update.

Restore Company



3/ARU

This procedure enables the data from one or more companies to be restored from off-line storage to the live system. The restore will overwrite the company data existing on the live system, and it is recommended that a security back-up be taken before running this option. This option only restores data saved by the Save Company option discussed earlier and is not used to restore data saved using the SAVLIB or similar commands.



Warning: This procedure will delete data from your system. You are advised to take a security copy prior to running this procedure.



This initial screen allows you to specify where the program should look for the restore programs and files when it performs the restore procedure. However, the default values of *LIBL should suit any normal restore procedure, and changing these should rarely be necessary.

The work library, however, must be specified. This should be the name of a general purpose library which the restore procedure can use to store certain files while the restore is going on. This will commonly be a new library created for the task, which will be deleted when the task is completed.

Restore Saved Companies Screen 1

SLMENU-U	Sales Ledger Company Utilities	User ED3	28/04/94 11:03:18
Restore Saved Companies			
Libraries Selection			
Object....	*LIBL	E.g., utility program(s) to be run.	
Files.....	*LIBL	E.g., files from which to delete a company.	
Work.....	OSLSAVE	E.g., work library used during some utilities.	
F3=Exit			

Once you have pressed **Enter**, the screen will ask you to enter the restore libraries.

Restore Saved Companies Screen 2

SL960CLP	User ED3	27/04/94 16:08:40
Restore Saved Companies		
Enter the name of the library containing the saved companies..... _____		
Enter the name of the library to receive the restored companies... ARU _____		
Enter the name of the work library to be used during restoration.. _____		
Enter the name of the message queue to receive messages..... VRTDSP08 and library of this message queue..... *LIBL _____		
Do you want ALL companies in the receiving library cleared? (0/1). _		
F3=Exit		

Fields:

Saved Files Library

Enter the name of the library containing the saved files.

Library To Restore To

Enter the library to which the selected company is to be restored.

Message Queue

If the restore job were to fail for any reason, a message would be sent to inform you of this fact. This message will be sent to the message queue specified here. The field defaults to the message queue of the person starting the job, but this may be changed.

Message Queue Library

If the save job were to fail for any reason, a message would be sent to inform you of this fact. This message will be sent to the message queue in the library specified here. The field defaults to your library list, but this may be changed.

Clear All Companies

Enter 1 here if you want the restore job to delete all companies in the library specified as the receiving library. If you enter 0 or leave the field blank, the restore will delete only those companies being restored.

Delete Company

4/ARU

This procedure allows you to delete companies set up in Accounts Receivable.



Warning: Great care is needed while performing this procedure. Beforehand, as well as creating a security copy of the files library, you may wish to archive the data which you intend to delete. This could be achieved by using the Save Company procedure followed by a security backup.

Delete Company Screen



This initial screen allows you to specify where the program should look for the delete programs and files when it performs the delete procedure. However, the default values of **LIBL* should suit any normal delete procedure, and changing these should rarely be necessary.

The work library, however, must be specified. This should be the name of a general purpose library which the delete procedure can use to store certain files while the delete is going on. This will commonly be a new library created for the task, which will be deleted when the task is completed.

SLMENU-U	Sales Ledger Company Utilities	User ED3	28/04/94 11:03:54
Delete Companies			
Libraries Selection			
Object....	<u>*LIBL</u>	E.g., utility program(s) to be run.	
Files.....	<u>*LIBL</u>	E.g., files from which to delete a company.	
Work.....	<u>QSLSAVE</u>	E.g., work library used during some utilities.	
 It is strongly recommended that you take a back-up of the files library before running this option.			
F3=Exit			

Once you have specified which libraries to use, press **Enter** and the screen will display listing all the companies available for deletion.

Delete Companies Listing Screen

SL920	Accts.Receiv.Company Utilities		User ED3	27/04/94 16:18:13
Delete Companies				
4	Company	Company name	G/L Company	
-	A1	A1 Test Company		
-	A5	KB Test QA Company	KB	
-	CM	Credit Manager Testing Co	CM	
-	GD	Gold Copy Company		
-	KB	KB Test QA Company	KB	
-	MB	MB V3 TEST + STERLING		
4	NB	Test Company	Z1	
-	N2	OVMSGF QUSERMSG SLMSGFZ1		
-	N3	OVMSGF QUSERMSG SLMSGFN2		
-	N4	OVMSGF QUSERMSG SLMSGFZ1		
-	N5	N5 Test Company		
-	PJ	PJ Test Company	PJ	
-	SX	Z1 Sample Test Company	Z1	
-	SZ	Z1 Sample Test Company	Z1	+
4=Delete company F3=Exit				

Fields:

4

For each company to be deleted, enter 4 in the select column, up to a maximum of ten companies.



When you have selected the company or companies you wish to delete, press **Enter**, and you will be asked to confirm your choice by pressing **F11**.



Note: The deletion process involves copying the existing files to the work library and dropping off data for the companies no longer required. This process may take a long time and consume a lot of disk space for large databases.

The system will display status messages at the bottom of the screen as the files are being processed. When the deletion is complete it will show you a message stating this.

Maintain Company



5/ARU

This option enables you to maintain a single company or a group of companies under a template company.

Select the AR utility option Maintain (Company), and the first screen will ask you to enter the company codes of the company to be copied from, and the company to be maintained.



When you have entered the companies, press **Enter** for the next screen to display.

Maintain Company Screen

SL881	User ED3	27/04/94 16:03:08
Maintain Company		
From company . : Z1 To company . : NB		
Customer codes : - (Enter '1' to select) Customer text : - Reason/dispute codes : - Letters/statement messages : - Interest charges : - Hierarchies : -		
F3=Exit F8=Confirm F12=Previous		

Fields:

Customer Codes

Enter 1 to have all customer codes copied from the existing company.

Customer Text

Enter 1 to have all customer text copied from the existing company.

Reason / Dispute Codes

Enter 1 to have all reason codes and disputed invoice reason codes copied from the existing company.

Letters / Statement Messages

Enter 1 to have all letters and statement messages copied from the existing company.

Interest Charges

Enter 1 to have all interest charge details copied from the existing company.

Hierarchies

Enter 1 to have all customer hierarchies copied from the existing company.



When you have made your selection, press **F8** to update.

Balances



11/ARU

This procedure checks that the balances for the specified customer are correct. In particular it checks the total outstanding balance for the customer, as well as the period balances for the periods specified. It does this by adding together the transaction records for the customer and comparing the totals with the balance records. Its main use is to convert customer balance records where the transaction records do not equal its balance records due to some sort of system failure etc.



Select the AR utility option Balances.

Customer Balances Verification/Rebuild Screen

SL816	User ED3	27/04/94 16:19:10
-------	----------	----------------------

Customer Balances Verification/Rebuild

Verify/Rebuild customer balances 1 (1=Verify 2=Rebuild)

Select parameters:

Company Code NB

Customer Code _____ (Blank=All)

Start period _____

F3=Exit

Fields:

Verify / Rebuild Customer Balances

Enter 1 to verify customer balances, 2 to rebuild them.

Company Code

Enter the code of the company you want to use.

Customer Code

If you want to run the verification or rebuild over a specific customer, enter that customer here.

Leave this field blank to run the procedure over all customers.

Start Period

Enter the period at which the verification or rebuild is to start.



When you have made your selection, press **Enter**. If the data you have entered is accepted, the **F8** key will appear, enabling you to confirm your selection.

Name Scan Index



12/ARU

The search facility provided on customer names by the Accounts Receivable application is called the name scan. It works by cross-referencing every separate word in a customer description when that customer is entered on the system.

If a customer is not entered via the Accounts Receivable maintenance options (as may happen if customers are downloaded from a different system), then this procedure will update the name scan with all the new data, this option can also be used should the name scan index become corrupt for any reason.



Select the AR utility option *Name Scan Index*, and the first screen allows you to specify where the program should look for the programs and files when it performs the procedure. However, the default values of **LIBL* should suit any normal procedure, and changing these should rarely be necessary.

The work library, however, must be specified. This should be the name of a general purpose library which the utility can use to store certain files while the job is active. This will commonly be a new library created for the task, which will be deleted when the task is completed.

Rebuild Name Scan Index File Screen

When you have completed your Libraries Selection, press **Enter** to see the following field:

Fields:

Company Code

Enter the code of the company for which the rebuild is to take place.



Press **Enter**, then **F8** to confirm the rebuild.

Reconciliation

1... **2...** 13/ARU

This batch process is run to check the validation of one or all of the following:

- Balance file totals against the transaction file totals.
- Customer transactions summaries against the period balances.
- Allocations and discounts taken.
- Accounts receivable movements against General Ledger movements.

You are given the option to select validations for a range of customers and session numbers from a selected period. Any errors encountered will be included in an error report when the reconciliation is completed.



Select AR utility option Reconciliation
(Verification / Rebuild) to display the selection
screen.

SL891	Z1 - GB Demonstration Company	User GBJBASCR	25/04/97
			8:42:37
Reconciliation			
Select one or more of the following:			
Item to transaction			1
Transaction to balance			1
Optionally specify customer range for above:			
From	To		
And/or from period			9607
Allocations			1
AR to GL session			1
Optionally specify session range for above :			
From	To		
			0
F3=Exit			
08-45	82	MW	KS IM II EDN400A PET165S2

Fields:

Item To Transaction

You can enter the following options:

- 0 - Do not include a transaction check in the validation.
- 1 - If you wish to check the balance file totals against the transaction file totals.

Transaction To Balance

- 0 - Do not include a check of transactions to summary / period balances in the validation.
- 1 - If you wish the validation to check transactions posted against summary and cumulative period balances.

Optionally Specify Customer Range For Above - From

Your options are:

- Enter the first customer in the range of customers to be selected, or
- Leave blank to include all customers for the company.

Optionally Specify Customer Range For Above - To

Your options are:

- Enter the last customer in the range of customers to be selected, or
- Leave Blank and the first customer selected will be entered and the validation will be run for one customer only. If the first customer was also left blank then all customers in the company will be selected.

And/Or From Period

Enter a 'start from' period .

Allocations

0 - Do not include a check on the integrity of allocations

1 - If you wish allocations and also discounts taken to be checked for balance errors.

AR To GL Session

0 - Do not check and report errors on matching AR movements to GL movements.

1 - If you wish the balances of Accounts Receivable postings and GL control account postings to be checked.

Optionally Specify Session Range For Above - From

Your options are:

- Enter the first session number in the range of sessions to be selected.
- Leave blank to include all sessions in the period(s).

Optionally Specify Session Range For Above - To

Your options are:

- Enter the last session number in the range of sessions to be selected.
- Leave Blank. The first session number selected will be entered and the validation will be run for one session only. If the first session was also left blank then all sessions in the period(s) will be selected.



Press **Enter** to validate your screen entries, then select **F8=Submit Report** to begin the batch process.

An error report, listing any errors found is produced.

Unprocessed Transactions


1... 14/ARU **2...**

This batch process should be run as required, either from the (utilities) menu option, or, it may be scheduled to run overnight through Machine Manager.

A listing will be produced of accounts receivable transactions, which were posted before the system date, and, have not yet been updated in General Ledger. The listing will include full transaction details in session order.

 **Warning: It is recommended that this batch submission is run as an overnight job.**

 Select Unprocessed Transactions from the Verification / Rebuild area of the Accounts Receivable Utilities option to display the batch submission window.

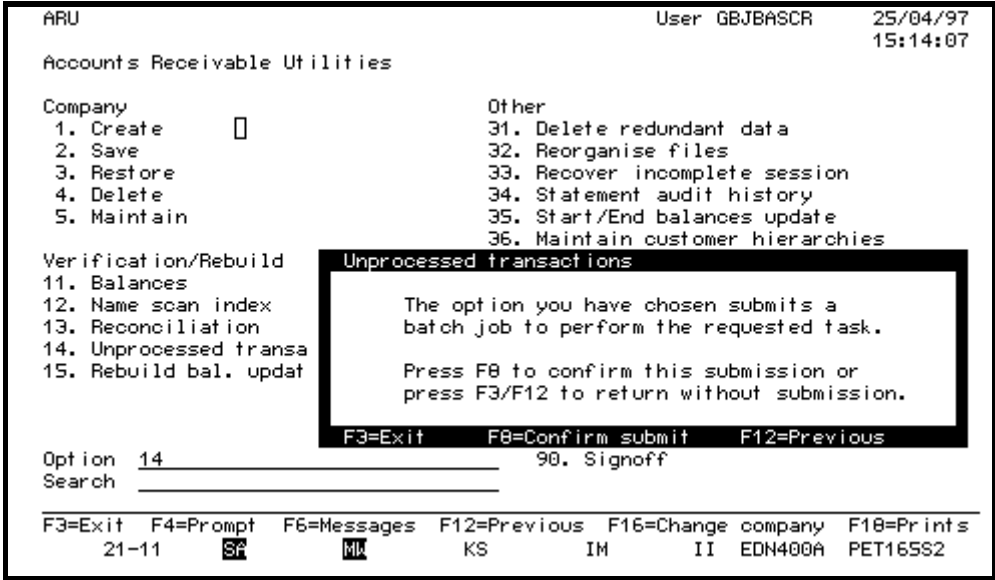

ARU User GBJBASCR 25/04/97 15:14:07

Accounts Receivable Utilities

Company

- 1. Create
- 2. Save
- 3. Restore
- 4. Delete
- 5. Maintain

Other

- 31. Delete redundant data
- 32. Reorganise files
- 33. Recover incomplete session
- 34. Statement audit history
- 35. Start/End balances update
- 36. Maintain customer hierarchies

Verification/Rebuild

- 11. Balances
- 12. Name scan index
- 13. Reconciliation
- 14. Unprocessed transa
- 15. Rebuild bal. updat

Option 14

Search

Unprocessed transactions

The option you have chosen submits a batch job to perform the requested task.

Press F8 to confirm this submission or press F3/F12 to return without submission.

F3=Exit F8=Confirm submit F12=Previous

90. Signoff

F3=Exit F4=Prompt F6=Messages F12=Previous F16=Change company F18=Prints

21-11 SP MK KS IM II EDN400A PET165S2

 Select **F8=Confirm Submit** to start the batch process.

Rebuild Bal. Update Data Queue



15/ARU

When a session is confirmed, it is written to a data queue which holds all unprocessed sessions. These sessions are then processed as a batch job. If for any reason the data queue were to become corrupted, the option to rebuild it will cause all unprocessed transactions to be checked, and all sessions with unprocessed transactions to be added to the data queue, where processing will then continue as normal.



Note: The process will not cause a transaction to be processed twice. If a session holds both a processed and an unprocessed transaction, only the latter will be processed.

The procedure requires no parameters to be specified, so no screen will be displayed.

Please note the most common cause of transactions not being processed is that the Start/End Balances Update Subsystem has not been started, see later in Product Information for details on this option.

Delete Redundant Data



31/ARU

This procedure enables you to delete redundant data in order to free storage space on the system. You can also choose to archive (save) it to an off-line medium from which it may be restored, as required, for enquiries and reports.

The main criteria for selecting redundant data is the Purge: No of Transactions and the Purge number of periods on the Accounts Receivable Company Profile.



Warning: WARNING! Before running this procedure, you are strongly advised to make a security copy of the files library.



Select the AR utility option *Delete Redundant Data* option, and the first screen allows you to specify where the program should look for the delete/archive programs and files when it performs the delete or archive procedure. However, the default values of **LIBL* should suit any normal delete/archive procedure, and changing these should rarely be necessary.

The work library, however, must be specified. This should be the name of a general purpose library which the delete/archive procedure can use to store certain files while the procedure is going on. This will commonly be a new library created for the task, which will be deleted when the task is completed.

Archive and Purge Redundant Data Screen

SLMENU-U	Sales Ledger Company Utilities	User ED3	28/04/94 11:11:31
----------	--------------------------------	----------	----------------------

Archive & Purge Redundant Data

Libraries Selection

Object.....	<u>*LIBL</u>	I.e.,programs for archiving.
Non-volatile files...	<u>OSLSLD3HLP</u>	I.e.,display & printer files for archiving.
Volatile files.....	<u>*LIBL</u>	I.e.,data files from which to purge.
Work.....	<u>OSLSAVE</u>	I.e.,work library.

F3=Exit

When you have pressed **Enter**, the next screen will ask you which types of data you wish to delete.

Delete Redundant Data Files Selection Screen

SL930	ACCOUNTS RECEIVABLE UTILITIES	User ED3	27/04/94 16:29:04
Delete Redundant Data - Files Selection			
Company Number : <u>Z1</u>			
Which types of data do you wish to delete? Enter 1 to select.			
Ledger items : -			
Names & Addresses : -			
Company profile audit . . . : -			
Names & addresses audit . . : -			
Reason codes audit : <u>1</u>			
If any audit files have been selected, enter a cut-off date . : <u>121293</u> and audit records created on or before this date will be deleted.			
F3=Exit			

Fields:

Company Number

Enter the two character company code for the company that you want to archive and purge.

Ledger Items

Enter a 1 if you want to delete ledger items.

Names and Addresses

Enter a 1 if you want to delete names and addresses.

Company Profile Audit

Enter a 1 if you want to delete company profile audit records. You must also enter the cut-off date.

Names and Addresses Audit

Enter a 1 if you want to delete names and addresses audit records. You must also enter the cut-off date.

Reason Codes Audit

Enter a 1 if you want to delete reason codes audit records. You must also enter the cut-off date.

Cut-Off Date

Enter the cut-off date for the deletion of audit files. Audit records prior to and including this date are deleted.



Once the archive criteria have been entered, press **Enter**. The entries are validated, then press **F8** to proceed with the purge.

Delete Redundant Data Batch Job Screen

SL930	ACCOUNTS RECEIVABLE UTILITIES	User ED3	28/04/94 11:11:43
Delete Redundant Data			
A batch job has been submitted to purge the Accounts Receivable as requested.			
The purged data will be saved in the library OSLSLA21020			
After completion of the batch job, please make TWO copies of this library on tape and label the tape clearly.			
Only then, delete the library.			
Press ENTER to continue.			

This screen includes the name of the library which is created as a result of archiving the purged data. Make a note of this library name, and then press **Enter**.

This utility generates library names for 1000 runs. If you exceed this number a further screen is displayed on which you enter the library name in which the archived data is stored.

The data is removed from the active fields and items are deleted if the following conditions are met:

- The item has an outstanding balance of zero.
- Its posting period is prior to the limit specified on the company profile.
- After the purge each customer must still retain the minimum number of transactions specified on the company profile.
- For any customer, a periods transactions must be completely cleared by meeting the above criteria, otherwise no transactions will be cleared at all for that period.

A customer will be deleted if it has a summary balance of zero and no items present on the active system, and is flagged for deletion on the customer maintenance file.

An audit record will be deleted if it is written on or before the cut-off date specified.

After the purge has completed the library quoted on the final screen of the purge can be saved onto magnetic media and deleted from your computer. Should you need to enquire/report on this library it can be restored and the historical data menu options can be used to interrogate it.

Reorganise Files



32/ARU

When data is deleted from an application using the maintenance options, the data is marked for deletion in the file, but is not actually deleted from the system. The Reorganise Files option removes such marked records from the files, freeing valuable storage space.

Files in other applications also need re-organising from time to time, it therefore makes good practise to re-organise files on a regular basis possibly from the auto day end option.



Select the AR utility option *Reorganise Files*, and the first screen allows you to specify where to look for the programs and files when it performs the procedure.

The work library, however, must be specified. This should be the name of a general purpose library which the utility can use to store certain files while the job is active. This will commonly be a new library created for the task, which will be deleted when the task is completed.

Reorganise Physical Files Screen

SLMENU-U	Sales Ledger Company Utilities	User ED3	28/04/94 11:12:39
----------	--------------------------------	----------	----------------------

Re-organize Physical Files

Libraries Selection

Object....	<u>*LIBL</u>	E.g., utility program(s) to be run.
Files.....	<u>*LIBL</u>	E.g., files from which to delete a company.
Work.....	<u>OSLSAVE</u>	E.g., work library used during some utilities.

F3=Exit



Press **Enter**, and the next screen asks you to confirm your decision to reorganise your files. Press **F8** to confirm, or **F3** to leave the option.

Recover Incomplete Session



33/ARU

If a session is reported as having failed to complete, it is important to deal with the failure either immediately or when you run the period close procedures. Session failure may result from an interruption to the power supply, etc., and the recovery process will restore the failed session to a state in which it can be completed in the normal way.



Select the AR utility option *Recover Incomplete Session*, and the first screen allows you to specify where the program should look for the programs and files when it performs the procedure. However, the default values of **LIBL* should suit any normal procedure, and changing these should rarely be necessary.

The work library, however, must be specified. This should be the name of a general purpose library which the utility can use to store certain files while the job is active. This will commonly be a new library created for the task, which will be deleted when the task is completed.

Recover Incomplete S/L Session Screen



When you have completed these fields, press **Enter** to see the next screen.

SLMENU-U	Sales Ledger Company Utilities	User ED3	28/04/94 11:12:58
Recover Incomplete S/L Session			
Libraries Selection			
Object....	*LIBL	E.g., utility program(s) to be run.	
Files.....	*LIBL	E.g., files from which to delete a company.	
Work.....	OSLSAVE	E.g., work library used during some utilities.	
F3=Exit			

Fields:

Company Code

Enter the company code that you require.

Enter Session Number

Enter the session number of the failed session that you want to recover.



When you have completed your entries press **Enter**. A second screen will display details of the failed session. Press **Enter** again. The procedure changes the status of a failed posting session to a complete session, and completes the postings to Accounts Receivable and to the General Ledger (as well as to Cash Management if this is a cash transaction).

A report is produced detailing any General Ledger transactions which could not be completed and were removed from the General Ledger.

Statement Audit History



34/ARU

This utility enables you to examine the details of any statement run produced during a period run routine.

Libraries Selection Screen



Select the AR utility option *Statement Audit History*, and the first screen allows you to specify where the program should look for the programs and files when it performs the procedure. However, the default values of **LIBL* should suit any normal procedure, and changing these should rarely be necessary.

The work library, however, must be specified. This should be the name of a general purpose library which the utility can use to store certain files while the job is active. This will commonly be a new library created for the task, which will be deleted when the task is completed.

SLMENU-U	Sales Ledger Company Utilities	User ED3	28/04/94 11:13:28
Libraries Selection			
Object....	<u>*LIBL</u>	E.g., utility program(s) to be run.	
Files.....	<u>*LIBL</u>	E.g., files from which to delete a company.	
Work.....	<u>QSLSAVE</u>	E.g., work library used during some utilities.	
F3=Exit			



When you have completed these fields press **Enter**. The audit history screen will display.

Statement Run Audit History Screen 1

SL880	User ED3	27/04/94 16:34:11
Statement Run Audit History		
Enter Company Code..... <u>Z1</u>		
F3=Exit		

Fields:

Company Code

Enter the company code that you require.



When you have entered the company, press **Enter** to see a list of all the statement runs available for that company.

Statement Run Audit History Screen 2

SL880	User	ED3	27/04/94					
			16:34:11					
Statement Run Audit History								
1	Run no.	Type	Date	User	Print codes selected	Printed	Rejected	Session
-	1	ZSL	10/02/94	FS2	ZSL0307 Reverse	17	5	48
-	2	ZSL	12/04/94	GBJBAIKM	ZSL0307 Reverse	23	8	128
-	3	ZSL	12/04/94	GBJBANIT	H	0	31	136
-	4	ZSL	12/04/94	GBJBANIT	H	0	31	137
-	5	ZSL	13/04/94	GBJBAESW	E	1	33	192
-	6	ZSL	13/04/94	GBJBAESW	E	1	33	195
-	7	ZSL	14/04/94	GBJBARJC	ZSL0307 Reverse	27	9	212
I	8	ZSL	21/04/94	GBJBANIT	N	1	74	310
-	9	ZSL	21/04/94	GBJBANIT	N	1	74	312
-	10	ZSL	21/04/94	GBJBANIT	N	1	74	313
-	11	ZSL	21/04/94	GBJBANIT	N	0	75	314
1=Full details								
F3=Exit								

Enter 1 against the run which you want to see in more detail, and press **Enter**.
The details screen will be shown.

Statement Run Audit History Screen 3

SL880	User ED3	27/04/94 16:34:11
-------	----------	----------------------

Statement Run Audit History

Full details of statement run no.. 8 Accts.Receiv.Session.. 310

Initiated by GBJBANIT at on 21/04/94 at 12:50:42 in period 9311

Run type.... ZSL0306 Status....

Print codes selected..... N

No.of statements printed..... 1

No.of statements rejected because...

...Acct is consolidated.....	5
...print code not selected.....	69
...no open or unprinted items.....	0
...only future items.....	0
...statement copies zero.....	0
Total rejected.....	74

F3=Exit



Press **F3** to return to the menu.

Start / End Balances Update



35/ARU

Balances within Accounts Receivable are updated using a background program called a subsystem. If the subsystem is inactive, balances are not updated, but queue up until the subsystem is activated. This includes all transactions waiting to be transferred to the General Ledger.

This procedure enables you to activate and deactivate the Accounts Receivable subsystem. This will often be done automatically as part of the day auto start and day end routines.



Select the AR utility option Start/End Balances Update.

Maintain Subsystem Parameters Screen

SL746	User ED3	27/04/94 16:35:05
Maintain Sub-system Parameters		
Sub-system.....	SLBACK3	* ACTIVE *
Messages sent to user..	QPGMR	
Job description user..	QPGMR	
F3=Exit	F5=Refresh	
F11=End sub-system	F18=Display sub-system	

Fields:

Messages Sent To User

Enter the user ID of the user who is to receive any messages sent by the sub-system.

Job Description User

Enter the user ID of the user to whom any sub-system reports are to be sent.



QPGMR is entered as default but as QPGMR is not normally a live user same other relevant user ID should be used.



The screen above shows that the subsystem is currently active. To deactivate it, press **F11**, then **F8** to confirm.



If the screen you see shows that the subsystem is inactive, and you wish to activate it, press **F10**, then **F8** to confirm. You can also see the subsystem details by pressing **F18**.

Work with Subsystem Jobs Subsystem Screen (F18)



When **F18** is selected on the Maintain Subsystem Parameters screen, the Work with Subsystem Jobs - Subsystem screen is displayed.

Work with Subsystem Jobs					STUDPTF
					27/04/94 16:35:27
Subsystem : SLBACK3					
Type options, press Enter.					
2=Change 3=Hold 4=End 5=Work with 6=Release 7=Display message					
8=Work with spooled files 13=Disconnect					
Opt	Job	User	Type	-----Status-----	Function
—	SLUPDATE	QPGMR	BATCH	ACTIVE	PGM-XA901CLP
					Bottom
Parameters or command					
==>					
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display schedule data					
F12=Cancel					

Accessing the Historical Data Facilities

Whichever historical data option you then select, the archive screen will be displayed.

Enquiry on Archived Items Screen

This lists the archive libraries restored to the computer, and allows you to select the one you wish to enquire on.

SL763	E1 - Demonstration Company	User ED3	22/04/94 12:56:50
Enquiry on Archived Items			
Opt	Archive Library	Purge of ab cde	Cut-off for audit Purges
—	OSLSLA3001	11 111	10/12/93
		User	Purge Date
		ED3	01/04/94
			Purge time
			11:41:34
F3=Exit			



To select the library that you want to use, enter 1 in the select column to the left of the appropriate line.



When you have made your selection, press **Enter** to carry out the required function.



Note: If the archive library selected does not exist on the machine, an explanatory message is displayed. In this case, contact your systems department to have the library restored to the application.

The column headed 'Purge of ab cde' indicates which type of purge has been undertaken in the archive library:

- a - Ledger items
- b - Names and addresses
- c - Company profile audit
- d - Names and addresses audit
- e - Reason codes audit

See the Utilities Delete Redundant Data option for more details.