

-
-
-
-
-

Chapter 9

Physical Files (appendix)



Why Read This?



Tip: This is an appendix. Only read this if you are interested in File layouts and Field details for:

- System Manager Physical Files
- EWM Files.

System Manager Physical Files

This section contains the following database file layouts:

- APG27PHY Application Manager Workflow Details
- WFP02 Environment Settings

APG27PHY Application Manager Workflow Details

System Manager sets up default information for each document under EWM control in this file. Much of it remains empty until populated by the Application itself. This data is then used to create the initial EWM records for use by the EWM Engine.

APG27PHY records are deleted when the initial EWM records are written.

Records found in this file signify that a document is being processed in a EWM active environment, but has yet to pass that information to the EWM Engine.

Field	Ref.	Size	Description
RLSL27	RLSL	2 A	Release level
CONO27	CONO	2 A	Company
JBNO27	JBNO	9,0 S	OSL generated job number
CUSC27	CUSC	3 A	Environment
RLCD27	RLCD	10 A	Role code
BPTC27	BUPC	10 A	Business Process
IOBJ27	IOBJ	10 A	Business Object
IOBR27	IOBR	50 A	Business Object reference
ACOD27	ACOD	10 A	Activity Code
EMOD27	EMOD	2 A	Execution mode
SCHR27	SCHR	5 A	Schedule rule
TSLT27	TSLT	1 A	Task list (0=No, 1=Yes)
USD127	USD1	256 A	User data 1
USD227	USD2	256 A	User data 2
USD327	USD3	256 A	User data 3
EBPR27	EBPR	10 A	Exploded Business Process
BPID27	BPID	9,0 P	Business Process ID
ELID27	ELID	9,0 P	Element ID
CPFN27	CPFN	6,0 P	CPF Number
JOBN27	JOBN	10 A	Job Name
USER27	USER	10 A	User
TERM27	TERM	10 A	Terminal ID

Logical File Name	Unique	Select/Omit	Keys:
APG27L00	*YES	*NO	JBNO27

WFP02 Environment Settings

Each EWM Files library is defined against the Environment Settings file WFP02 within System Manager. If active, the EWM files library for the current environment is placed in the System portion of the library list when entering the System 21 menu driver. Therefore, the relevant EWM file will be in the library list for the Workflow Engine and Application Activities to use.

Field	Ref.	Size	Description
VRSN02	VRSN	1 A	Environment
WFEB02	WFEB	1 A	Work Management Enabled Flag
LIBN02	LIBN	10 A	EWM Files Library

Logical File Name	Unique	Select/Omit	Keys:
WFP0201P	*YES	*NO	VRSN02 (A)

EWM Files


This section contains:

- An Entity Relationship Diagram showing the relationships (one to one, many to one, one to many) between the files of Constructor Master Data, Constructor Business Processes and the Transaction Data on the EWM Engine. Note that this diagram does not indicate the direction of flow.
- Layouts showing field details for the database files on the EWM Files Library.
 - EWM Master Data. These files are populated by a Constructor activation of a Business Process
 - EWM Transaction Data. These files are used by the EWM Engine
 - EWM Locks Data. When the EWM Engine or Scheduler are active, or any document is accepted for processing by these, a record is written to the EWM lock file.



Warning: No program outside of System Manager should update the EWM files library. All updates should be carried out via the EWM Interface (using the WMNABLE copysrc routine).

EWM Entity Relationship Diagram

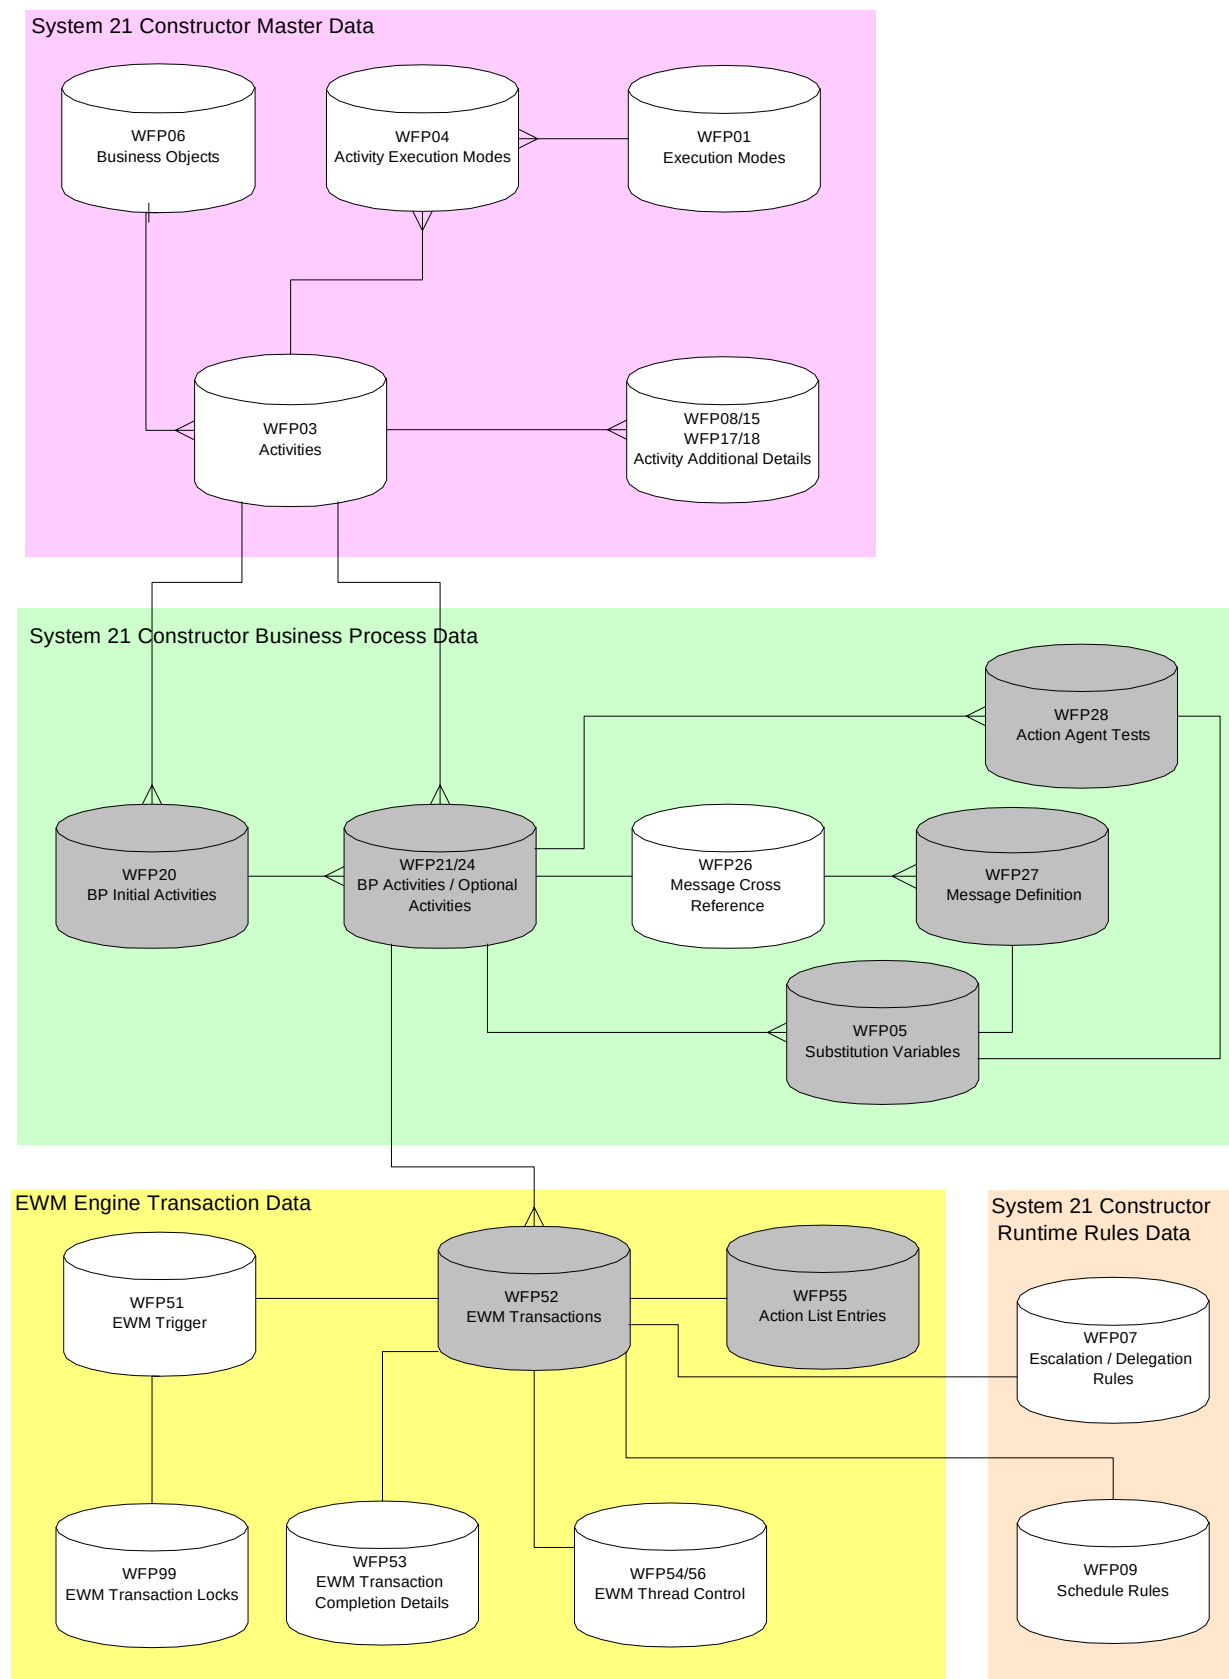

EWM Master Data

The data in these files must only be maintained via System 21 Constructor. The files are shipped as part of Application Manager, and are empty. They are populated by a Constructor Activation.

These are the files:

- WFP01 Modes Of Execution
- WFP03 Activities
- WFP04 Activity/Execution Mode
- WFP05 Substitutional Variables
- WFP06 Business Objects
- WFP07 Delegation And Escalation
- WFP08 Activity Groups
- WFP09 Schedule Rules
- WFP15 Activity Methods/Options
- WFP17 Activity Completion And Reason Codes
- WFP18 Activity Completion Codes
- WFP20 Business Process Initial Activities
- WFP21 Business Process Activities
- WFP24 Associated Activities
- WFP26 Business Process Activity Message
- WFP27 Message Definition
- WFP28 Business Process Data Determined Routes
- WFP98 Work Management Host Initialisation.

WFP01 Modes Of Execution

Field	Ref.	Size	Description
EMOD01	EMOD	2 A	Execution mode
DESC01	DESC	35 A	Description
SHDE01	SHDE	15 A	Short description
MDOC01	MDOC	1 A	Multiple document processing

Logical File Name	Unique	Select/Omit	Keys:
WFP01L01	*YES	*NO	EMOD01

WFP03 Activities

Field	Ref.	Size	Description
ACOD03	ACOD	10 A	Activity code
DESC03	DESC	35 A	Description
GLBL03	GLBL	1 A	Global Activity (0=No,1=Yes)
IOBJ03	BOBJ	10 A	Input Business Object
DBPC03	DBPC	10 A	Default Business Process
ACGP03	ACGP	10 A	Activity group
RLCD03	RLCD	10 A	Error role code

Logical File Name	Unique	Select/Omit	Keys:
WFP03L01	*YES	*NO	ACOD03 (A)

WFP04 Activity/Execution Mode

Field	Ref.	Size	Description
ACOD04	ACOD	10 A	Activity code
EMOD04	EMOD	2 A	Execution Mode
APRC04	APRC	30 A	Activity processor (program)
AFNC04	AFNC	30 A	Activity function
AVPT04	AVPT	4 A	Activity processor type

Logical File Name	Unique	Select/Omit	Keys:
WFP04L01	*YES	*NO	ACOD04 (A) EMOD04 (A)

WFP05 Substitutional Variables

Field	Ref.	Size	Description
OOBJ05	OOBJ	10 A	Business Object
VNAM05	VNAM	20 A	Variable Name
VTYP05	VTYP	1 A	Variable Type
USGE05	USGE	10 A	Usage
SEQN05	SEQN	3,0 P	Sequence Number
TTYP05	TTYP	1 A	Text Type
VINF05	VINF	256 A	Variable Retrieval Information
TYPE05	TYPE	1 A	Variable Type
VARL05	VARL	3,0 P	Variable Length
DECP05	DECP	3,0 P	Variable Decimal Places
DESC05	DESC	35 A	Description

Logical File Name	Unique	Select/Omit	Keys:
WFP05L01	*NO	*NO	OOBJ05 (A) VNAM05 (A) SEQN05 (A)

WFP06 Business Objects

Field	Ref.	Size	Description
BOBJ06	BOBJ	10 A	Business Object
DESC06	DESC	35 A	Business object description
SHDE06	SHDE	15 A	Short description
BSEC06	BSEC	10 A	Business sector
DTLC06	DTLC	7,0 P	Last changed date
TMLC06	TMLC	6,0 P	Last changed time
APRC06	APRC	30 A	Activity Processor
RLCD06	RLCD	10 A	Role Code

Logical File Name	Unique	Select/Omit	Keys:
WFP0601P	*YES	*NO	BOBJ06 (A)

WFP07 Delegation And Escalation

Field	Ref.	Size	Description
BPTC07	BUPC	1 A	Business Process
ACOD07	ACOD	10 A	Activity Code
ELID07	ELID	9,0 P	Element ID
RECT07	RECT	1 A	Recipient Type
RLCD07	RLCD	10 A	Role code
PRTY07	PRYT	2,0 S	Priority
TMLT07	TMLT	6,0 P	Time Limit
RRTP07	RRTP	1 A	Reassigned Recipient Type
RREC07	RREC	10 A	Reassigned Recipient
RREV07	RREV	20 A	Reassigned Recipient Variable
MAIL07	MAIL	80 A	Email Account
RPRT07	RPRT	2,0 S	Reassigned Priority
RPTV07	RPTV	20 A	Reassigned Priority Variable
RPRL07	RPRL	1 A	Reassigned priority rule

No logical files at this time.

WFP08 Activity Groups

Field	Ref.	Size	Description
ACGP08	ACGP	10 A	Activity group
DESC08	DESC	35 A	Description
IACT08	IACT	1 A	Initial activity
BOBJ08	BOBJ	10 A	Business Object

Logical File Name	Unique	Select/Omit	Keys:
WFP08L01	*YES	*NO	ACGP08 (A)

WFP09 Schedule Rules

Field	Ref.	Size	Description
SCHR09	SCHR	5 A	Schedule rule
RTYP09	RTYP	1 A	Rule type
DESC09	DESC	35 A	Rule description
TMSC09	TMSC	6,0 P	Schedule time
SCDM09	SCDM	7 A	Day mask
WEKM09	WEKM	53 A	Week mask
MONM09	MONM	13 A	Month mask
MNST09	MNST	6,0 P	First start time
MXST09	MXST	6,0 P	Last start time
LSRT09	LSRT	13,0 P	Last schedule run time
NSRT09	NSRT	13,0 P	Next schedule run time
ACTF09	ACTF	1 A	Active flag

Logical File Name	Unique	Select/Omit	Keys:
WFP09L01	*YES	*NO	SCHR09 (A)
WFP09L02	*NO	*NO	NSRT09 (A)

WFP15 Activity Methods/Options

Field	Ref.	Size	Description
ACOD15	ACOD	10 A	Activity code
MTCD15	MTCD	10 A	Method code
OPTC15	OPTC	2 A	Option Code

Logical File Name	Unique	Select/Omit	Keys:
WFP15L01	*YES	*NO	ACOD15 (A) MTCD15 (A)

WFP17 Activity Completion And Reason Codes

Field	Ref.	Size	Description
ACOD17	ACOD	10 A	Activity code
OOBJ17	BOBJ	10 A	Output Business Object
CPTC17	CPTC	2 A	Completion code
RSCD17	RSCD	2 A	Reason code
RSDC17	RSDC	50 A	Reason code description

Logical File Name	Unique	Select/Omit	Keys:
WFP17L01	*YES	*NO	ACOD17 (A) OOBJ17 (A) CPTC17 (A) RSCD17 (A)

WFP18 Activity Completion Codes

Field	Ref.	Size	Description
ACOD18	ACOD	10 A	Activity code
OOBJ18	BOBJ	10 A	Output business object
CPTC18	CPTC	2 A	Completion code
CPTD18	CPTD	50 A	Completion code description
CCTS18	CCTS	1 A	Completion action

Logical File Name	Unique	Select/Omit	Keys:
WFP1801P	*YES	*NO	ACOD17 (A) CPTC17 (A) OOBJ17 (A)

WFP20 Business Process Initial Activities

Field	Ref.	Size	Description
BPTC20	BUPC	10 A	Business Process
BPID20	BPID	9,0 P	Business Process ID
DESC20	DESC	35 A	Business process description
DTFR20	DTFR	7,0 P	Effective date from
DTTO20	DTTO	7,0 P	Effective date to
ACOD20	ACOD	10 A	Initial activity code
ELID20	ELID	9,0 P	Element ID
EMOD20	EMOD	2 A	Execution mode
SCHR20	SCHR	5 A	Schedule rule
APRC20	APRC	30 A	Activity processor
AFNC20	AFNC	30 A	Activity Function
AVPT20	AVPT	4 A	Activity processor type
MDOC20	MDOC	1 A	Multiple document processing
RECT20	RECT	1 A	Recipient Type
RLCD20	RLCD	10 A	Role code
DTLC20	DTLC	7,0 P	Last changed date
TMLC20	TMLC	6,0 P	Last changed time
ACTF20	ACTF	1 A	Active flag
EBPR20	EBPR	10 A	Exploded Business Process
DFCN20	DFCN	20 A	Constructor Definition Consultant
PVER20	PVER	4,0 P	Business Process Version Number

Logical File Name	Unique	Select/Omit	Keys:
WFP20L01	*YES	*NO	ACOD20 (A) BPTC20 (A)

WFP21 Business Process Activities

Field	Ref.	Size	Description
RCTP21	RCTP	1 A	Record type (1=Mandatory, 2=Optional)
EBPR21	EBPR	10 A	Exploded Business Process
BPTC21	BUPC	10 A	Business Process
BPID20	BPID	9,0 P	Business Process ID
PAC121	PAC1	10 A	Parent activity code
ELID21	ELID	9,0 P	Element ID
CPTC21	CPTC	2 A	Completion code
OOBJ21	BOBJ	10 A	Output business object
CBPT21	BUPC	10 A	Child business process code
CAC121	CAC1	10 A	Child activity code
CEID21	CEID	9,0 P	Child Element ID
RLCD21	RLCD	10 A	Role code
EMOD21	EMOD	2 A	Execution mode
SCHR21	SCHR	5 A	Schedule rule
APRC21	APRC	30 A	Activity processor (program)
AFNC21	AFNC	30 A	Activity function
AVPT21	AVPT	4 A	Activity processor type
MDOC21	MDOC	1 A	Multiple document processing
CNBP21	CNBP	10 A	Constructed Business Process
DTFR21	DTFR	7,0 P	Effective date from
DTTO21	DTTO	7,0 P	Effective date to
DTLC21	DTLC	7,0 P	Last changed date
TMLC21	TMLC	6,0 P	Last changed time
RECT21	RECT	1 A	Recipient Type
MAIL21	MAIL	80 A	Email Account
RRCD21	RRCD	20 A	Runtime Recipient Variable

PRTY21	PRTY	2,0 S	Priority
RPTY21	RPTY	20 A	Runtime Priority Variable
TDLO21	TDLO	50 A	Action List Title Override Reference
MTYP21	MTYP	1 A	Message Type
CPID21	CPID	9,0 P	Child Business Process

Logical File Name	Unique	Select/Omit	Keys:
WFP21L01	*YES	*NO	RCTP21 (A) BPTC21 (A) PAC121 (A) ELID21 (A) OOBJ21 (A) CPTC21 (A) CBPT21 (A) CAC121 (A) CEID21 (A) EMOD21 (A) SCHR21 (A)

WFP24 Associated Activities

Field	Ref.	Size	Description
RLSL24	RLSL	2 A	Release Level
BPGC24	BPGC	5 A	Business Process Group Code
BPTC24	BUPC	10 A	Business Process
ACOD24	ACOD	10 A	Activity code
TPGC24	TPGC	5 A	Target Business Process Group
TPTC24	TPTC	5 A	Target Business Process Type Code
TACO24	TACO	10 A	Target Activity
DESC24	DESC	35 A	Description
EMOD24	EMOD	2 A	Execution mode
SCHR24	SCHR	5 A	Schedule rule
APRC24	APRC	30 A	Activity processor
AFNC24	AFNC	30 A	Activity function
AVPT24	AVPT	4 A	Activity processor type
OACT24	OACT	1 A	Optional activity
MDOC24	MDOC	1 A	Multiple document processing
ACGP24	ACGP	10 A	Activity Group

No logical files at this time.

WFP26 Business Process Activity Message

Field	Ref.	Size	Description
RCTP26	RCTP	1 A	Record type (1=Mandatory, 2=Optional)
EBPR26	EBPR	10 A	Exploded Business Process
BPTC26	BUPC	10 A	Business Process
BPID26	BPID	9,0 P	Business Process ID
ACOD26	ACOD	10 A	Activity code
ELID26	ELID	9,0 P	Element ID
TYPE26	TYPE	1 A	Variable Type
TREF26	TREF	50 A	Text Reference

No logical files at this time.

WFP27 Message Definition

Field	Ref.	Size	Description
TTYP27	TTYP	1 A	Text Type
TREF27	TREF	50 A	Text Reference
SEQN27	SEQN	3,0 P	Sequence Number
VTYP27	VTYP	1 A	Variable Type
STXT27	STXT	80 A	Text Value
VNAM27	VNAM	20 A	Variable Name
SPAC27	SPAC	1 A	Space Required
FLG127	FLG1	1 A	General Purpose Flag
LBRK27	LBRK	1 A	Line Break

Logical File Name	Unique	Select/Omit	Keys:
WFP27L01	*NO	*NO	TTYP27 (A) TREF27 (A) SEQN27 (A)

WFP28 Business Process Data Determined Routes

Field	Ref.	Size	Description
RCTP28	RCTP	1 A	Record type (1=Mandatory, 2=Optional)
EBPR28	EBPR	10 A	Exploded Business Process
BPTC28	BUPC	10 A	Business Process
BPID28	BPID	9,0 P	Business Process ID
ACOD28	ACOD	10 A	Activity code
ELID28	ELID	9,0 P	Element ID
SEQN28	SEQN	3,0 P	Sequence Number
SSEQ28	SSEQ	3,0 P	Sub-Sequence
VTYP28	VTYP	1 A	Variable Type
VNAM28	VNAM	20 A	Variable Name
STXT28	STXT	80 A	Text Value
CDTN28	CDTN	2 A	Condition
CVTP28	CVTP	1 A	Comparison Variable Type
CVNM28	CVNM	20 A	Comparison Variable Name
CTXT28	CTXT	80 A	Comparison Text Value
BOOL28	BOOL	3 A	Boolean Logic Operator
CPTC28	CPTC	2 A	Completion Code

No logical files at this time.

WFP98 Work Management Host Initialisation

This file holds information to effectively soft-code parameters used by the Engine and Scheduler.

There are two types of data:

- Time limits which are used by the Error handler and Scheduler
- Job queues used by the Engine for job submission.

Please note that the job queues are shipped as follows:

- Automatic Immediate jobs - QINTER in QGPL
- Automatic & Scheduled Batch jobs - QBATCH in QGPL.



Note: These may be changed within Constructor but the settings chosen will indicate just how immediate any jobs will actually be.

Field	Ref.	Size	Description
HOST98	HOST	10 A	Host name
PATP98	PATP	5 A	Parameter type
PMRF98	PMRF	10 A	Parameter reference
PMIF98	PMIF	50 A	Parameter information
PVL198	PVL1	13,5 P	Parameter value 1
PVL298	PVL2	13,5 P	Parameter value 2

Logical File Name	Unique	Select/Omit	Keys:
WFP98L01	*YES	*NO	HOST27 (A) PATP27 (A) PMRF27 (A)

EWM Transaction Data

These files are accessed by certain EWM options within System Manager. The files are shipped as part of Application Manager, and are empty.

The data in these files is manipulated by the EWM Engine and Scheduler. This data is largely transitional, although some completed records may be considered historical.

These are the files:

- WFPWG Work Management Workfile
- WFP51 Workflow Trigger
- WFP52 Workflow Transactions
- WFP53 Workflow Transaction Completion Details
- WFP54 Workflow Thread/Activity Identification
- WFP55 Action Lists
- WFP56 Thread Cross References
- WFP97 Error References.

WFPWG Work Management Workfile

Field	Ref.	Size	Description
JBNOWG	JBNO	9,0 S	OSL generated job number
BPTCWG	BUPC	10 A	Business Process
IOBJWG	BOBJ	10 A	Input Business Object
IOBRWG	BOBR	10 A	Input Business Object Reference
TOCOWG	CONO	2 A	Target Company Code
OOBJWG	BOBJ	10 A	Output Business Object
OOWRWG	BOBR	10 A	Output Business Object Reference
CPTCWG	CPTC	2 A	Completion Code
RSCDWG	RSCD	2 A	Reason Code
MUTIWG	MUTI	15,0 P	Multi thread identifier
AVTOWG	AVTO	5,0 P	Activity Number
EBPRWG	EBPR	10 A	Exploded Business Process
BPIDWG	BPID	9,0 P	Business Process ID
ELIDWG	ELID	9,0 P	Element ID

Logical File Name	Unique	Select/Omit	Keys:
WFPWG01P	*YES	*NO	JBNOWG (A) EBPRWG (A) BPIDWG (A) ELIDWG (A) IOBJWG (A) IOBRWG (A) TOCOWG (A) OOBJWG (A) OOWRWG (A) CPTCWG (A)

WFP51 Workflow Trigger

Field	Ref.	Size	Description
CONO51	CONO	2 A	Company
RLCD51	RLCD	10 A	Role code
BPTC51	BUPC	10 A	Business Process
IOBJ51	BOBJ	10 A	Input business object
IOBR51	BOBR	50 A	Input business object reference
ACOD51	ACOD	10 A	Activity code
EMOD51	EMOD	2 A	Execution mode
SCHR51	SCHR	5 A	Schedule rule
CBPT51	BUPC	10 A	Child business process code
CAC151	CAC1	10 A	Child activity code
CEXM51	EMOD	2 A	Child execution mode
CSCH51	SCHR	5 A	Child schedule rule
CMD151	CMD1	7,0 P	Completion date (activity)
CPT151	CPT1	6,0 P	Completion time (activity)
RSCD51	RSCD	2 A	Reason code
CPTC51	CPTC	2 A	Completion code
TOCO51	CONO	2 A	Target Company code
OOBJ51	BOBJ	10 A	Output business object
OOBR51	BOBR	50 A	Output business object reference
MUTI51	MUTI	15,0 N	Multi thread identifier
AVTO51	AVTO	5,0 P	Activity Number
CPTF51	OPCP	1 A	Completion flag
EBPR51	EBPR	10 A	Exploded Business Process
ELID51	ELID	9,0 P	Element ID
CEID51	CEID	9,0 P	Child Element ID
RECT51	RECT	1 A	Recipient Type
MAIL51	MAIL	80 A	Email Account

PRTY51	PRTY	2,0 S	Priority
BPID51	BPID	9,0 P	Business Process ID

Logical File Name	Unique	Select/Omit	Keys:
WFP51L01	*NO	*NO	CON051 (A) IOBJ51 (A) IOBR51 (A) ACOD51 (A) CPTC51 (A) TOCO51 (A) OOBJ51 (A) OOBR51 (A) EBPR51 (A) ELID51 (A) BPID51 (A)

WFP52 Workflow Transactions



Note: Action Tracker performs various reports over this file.

Field	Ref.	Size	Description
CONO52	CONO	2 A	Company
RLCD52	RLCD	10 A	Role code
BPTC52	BUPC	10 A	Business Process
USER52	USER	10 A	User
IOBJ52	BOBJ	10 A	Input business object
IOBR52	BOBR	50 A	Input business object reference
ACOD52	ACOD	10 A	Activity code
EMOD52	EMOD	2 A	Execution mode: 10 User 20 Automatic Immediate 30 Automatic Batch 40 Scheduled Batch
MDOC52	MDOC	1 A	Multiple document processing
SCHR52	SCHR	5 A	Schedule rule
APRC52	APRC	30 A	Activity processor (program)
AFNC52	AFNC	30 A	Activity function
AVPT52	AVPT	4 A	Activity processor type
PRIN52	PRIN	1 A	Processed indicator: 1 = Pending 2 = Active 3 = Complete 5 = Escalated or Delegated 9 = Cancelled
PRVS52	PRVS	1 A	Previous status
DTCR52	DTCR	7,0 P	Creation date
TMCR52	TMCR	6,0 P	Creation time
MUTI52	MUTI	15,0 N	Multi thread identifier
AVTO52	AVTO	5,0 N	Activity number
CMD152	CMD1	7,0 P	Completion date

			(activity)
CPT152	CPT1	6,0 P	Completion time (activity)
LOOP52	LOOP	3,0 P	Failed execution count
EBPR52	EBPR	10 A	Exploded Business Process
BPID52	BPID	9,0 P	Business Process ID
ELID52	ELID	9,0 P	Element ID
CEID52	CEID	9,0 P	Child Element ID
RECT52	RECT	1 A	Recipient Type: R Role U User E Email
MAIL52	MAIL	80 A	Email Account
PRTY52	PRTY	2,0 S	Priority: 0-49 low (typically25) 50-74 medium (typically50) 75-99 high (typically 75)
DTS152	DTS1	7,0 P	Date stamp 1
TMS152	TMS1	6,0 P	Time stamp 1
DTS252	DTS2	7,0 P	Date stamp 2
TMS252	TMS2	6,0 P	Time stamp 2
AUSR52	AUSR	10 A	Audit User
AWRK52	AWRK	10 A	Audit Workstation

Logical File Name	Unique	Select/Omit	Keys:
WFP52L02	*NO	*NO	CONO52 (A) PRIN52 (A) BPTC52 (A) ACOD52 (A) EMOD52 (A) SCHR52 (A) IOBJ52 (A) IOBR52 (A) MUTI52 (A) AVTO52 (A) EBPR52 (A) BPID52 (A) ELID52 (A)
WFP5201P	*YES	*NO	MUT152 (A) AVTO52 (A)

WFP53 Workflow Transaction Completion Details

Field	Ref.	Size	Description
CONO53	CONO	2 A	Company
BPTC53	BUPC	10 A	Business process
BPID53	BPID	9,0 P	Business Process ID
ACOD53	ACOD	10 A	Activity code
IOBJ53	BOBJ	10 A	Input business object
IOBR53	BOBR	50 A	Input business object reference
RSCD53	RSCD	2 A	Reason code
CPTC53	CPTC	2 A	Completion code
TOCO53	CONO	2 A	Target Company code
OOBJ53	BOBJ	10 A	Output business object
OOBR53	BOBR	50 A	Output business object reference
MUTI53	MUTI	15,0 P	Multi thread identifier
AVTO53	AVTO	5,0 P	Activity number
CMD153	CMD1	7,0 P	Completion date (activity)
CPT153	CPT1	6,0 P	Completion time (activity)
CMDW53	CMDW	7,0 P	Completion date (workflow processor)
CPTW53	CPTW	6,0 P	Completion time (workflow processor)
EBPR53	EBPR	10 A	Exploded Business Process
ELID53	ELID	9,0 P	Element ID
DTS153	DTS1	7,0 P	Date stamp 1
TMS153	TMS1	6,0 P	Time stamp 1
DTS253	DTS2	7,0 P	Date stamp 2
TMS253	TMS2	6,0 P	Time stamp 2

Logical File Name	Unique	Select/Omit	Keys:
WFP5301P	*YES	*NO	CONO53 (A) BPTC53 (A) ACOD53 (A) IOBJ53 (A) IOBR53 (A) TOCO53 (A) OOBJ53 (A) OOBR53 (A) CPTC53 (A) MUTI53 (A) AVTO53 (A)

WFP54 Workflow Thread/Activity Identification

Field	Ref.	Size	Description
MUTI54	MUTI	15,0 P	Multi thread identifier
LUAN54	AVTO	5,0 P	Last used activity number

Logical File Name	Unique	Select/Omit	Keys:
WFP5401P	*YES	*NO	MUTI54 (D)

WFP55 Action Lists

Field	Ref.	Size	Description
RLCD55	RLCD	10 A	Role code
BPTC55	BUPC	10 A	Business process
BPID55	BPID	9,0 P	Business Process ID
ACOD55	ACOD	10 A	Activity code
ELID55	ELID	9,0 P	Element ID
EMOD55	EMOD	2 A	Execution mode
APRC55	APRC	30 A	Activity processor (program)
AFNC55	AFNC	30 A	Activity function
AVPT55	AVPT	4 A	Activity processor type
CONO55	CONO	2 A	Company
IOBJ55	BOBJ	10 A	Input business object
IOBR55	BOBR	50 A	Input business object reference
USER55	USER	10 A	User
SYST55	SYST	32 A	System
SRCE55	SRCE	20 A	Source
DATE55	DATE	7,0 P	Requested date
TIME55	TIME	6,0 P	Requested time
STAT55	STAT	1 A	Status
EBPR55	EBPR	10 A	Exploded Business Process
CEID55	CEID	9,0 P	Child Element ID
PRTY55	PRTY	2,0 S	Priority
RECT55	RECT	1 A	Recipient Type
MAIL55	MAIL	80 A	Email Account
STXT55	STXT	80 A	Text Value
TDET55	TDET	13,0 P	Action List effectivity time
TDRT55	TDRT	13,0 P	Action List Reassessment time
MTYP55	MTYP	7,0 P	Date stamp 2

Logical File Name	Unique	Select/Omit	Keys:
WFP5501P	*YES	*NO	RLCD55 (A) ACOD55 (A) BPTC55 (A) CONO55 (A) IOBJ55 (A) IOBR55 (A) EBPR55 (A) BPID55 (A) ELID55 (A)

WFP56 Thread Cross References

Field	Ref.	Size	Description
PTHD56	MUTI	15,0 P	Parent thread
CTHD56	MUTI	15,0 P	Child thread

Logical File Name	Unique	Select/Omit	Keys:
WFP5601P	*YES	*NO	PTHD56 (A) CTHD56 (A)

WFP97 Error References

Field	Ref.	Size	Description
ERRR97	ERRF	7,0 P	Error reference
SYST97	SYST	32 A	System
RLCD97	RLCD	10 A	Role code
USER97	USER	10 A	User
EBPR97	EBPR	10 A	Exploded Business Process
BPTC97	BUPC	10 A	Business process
BPID97	BPID	9,0 P	Business Process ID
ACOD97	ACOD	10 A	Activity code
ELID97	ELID	9,0 P	Element ID
EMOD97	EMOD	2 A	Execution mode
CONO97	CONO	2 A	Company code
IOBJ97	BOBJ	10 A	Business object
IOBR97	BOBR	50 A	Business object reference
ERCD97	ERCD	2 A	Error code
DATE97	DATE	7,0 P	Date logged
TIME97	TIME	6,0 P	Time logged
RECT97	RECT	1 A	Recipient Type
MAIL97	MAIL	80 A	Email Account
MSG197	MSGI	7 A	Message ID
MSGT97	MSGT	70 A	Message Text

Logical File Name	Unique	Select/Omit	Keys:
WFP9701P	*YES	*NO	CONO97 (A) RLCD97 (A) ERRR97 (A)

EWM Locks Data

When the EWM Engine or Scheduler are active, or any document is accepted for processing by these, a record is written to the EWM lock file. The records are cleared when the documents are no longer active, and when the EWM Engine or Scheduler are ended.

Records may be left on this file if the Engine or Scheduler are ended abnormally for any reason.

If there are records in this file for the Engine or Scheduler, then attempts to start either will be prevented. In cases of genuine start requests, where a previous abnormal end left record locks, the locks may be cleared using the EWM Transaction Purge / Unlock option in System Manager.

There is only one of these files: WFP99 Record Locking File.

WFP99 Record Locking File

Field	Ref.	Size	Description
CONO99	CONO	2 A	Company
FLID99	FLID	10 A	File identity
RCDK99	RCDK	100 A	Record key
USID99	USID	10 A	User identity
WSID99	WSID	10 A	Workstation ID
DTON99	DTON	7,0 P	Date locked
TMON99	TMON	6,0 P	Time locked

Logical File Name	Unique	Select/Omit	Keys:
WFP99L01	*YES	*NO	FLID99 (A) RCDK99 (A)