AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.11, AD-2.16, AD-2.21, AD-2.23

RPVB AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPVB - BACOLOD PRINCIPAL AIRPORT (Class 1)

RPVB AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	**ARP coordinates and site at AD**	104635.7744N 1230108.7677E.
2	**Direction and distance from (city)**	330º 44’ / 5.55KM from Silay.
3	**Elevation/Reference temperature**	26.174M (85.873FT).
4	**Geoid undulation at AD ELEV PSN**	60.5M (196.964FT).
5	**MAG VAR/Annual Change**	1.0°W (2014) / 2.6’ increasing.
6	**AD Operator, address, telephone, telefax, telex, AFS**	Civil Aviation Authority of the Philippines Bacolod Airport Brgy. Bagtic, Silay City 6116 Negros Occidental Tel. No.: (034) 435-2448
7	**Types of traffic permitted (IFR/VFR)**	IFR-VFR.
8	**Remarks**	Nil.

RPVB AD 2.3 OPERATIONAL HOURS

1	**AD Operator**	MON - FRI: 0000 - 0900.
2	**Customs and immigration**	Nil.
3	**Health and sanitation**	Nil.
4	**AIS Briefing Office**	Nil.
5	**ATS Reporting Office (ARO)**	H24.
6	**MET Briefing Office**	H24.
7	**ATS**	MON - FRI: 0000 - 0900.
8	**Fuelling**	On request.
9	**Handling**	During scheduled flights. On request for non-scheduled flights.
10	**Security**	H24.
11	**De-icing**	Nil.
12	**Remarks**	Airport Operations: H24.

RPVB AD 2.4 HANDLING SERVICES AND FACILITIES

1	**Cargo-handling facilities**	Available: Provided by airlines.
2	**Fuel/oil types**	Jet A1, AVGAS may be available on request by Petron.
3	**Fuelling facilities/capacity**	By refueler but with prior notice required.
4	**De-icing facilities**	Nil.
5	**Hangar space for visiting aircraft**	Nil.
6	**Repair facilities for visiting aircraft**	Nil.
7	**Remarks**	Nil.

RPVB AD 2.5 PASSENGER FACILITIES

1	**Hotels**	In Bacolod and Silay City.
2	**Restaurants**	In Bacolod and Silay City.
3	**Transportation**	Taxi, buses, jeepneys and rent-a-car.
4	**Medical facilities**	Clinic and hospitals in Bacolod and Silay City.
5	**Bank and Post Office**	In Bacolod and Silay City.
6	**Tourist Office**	In Bacolod and Silay City.
7	**Remarks**	Nil.

RPVB AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	**AD category for fire fighting**	CAT VIII.
2	**Rescue equipment**	Four (4) fire trucks [(2) IVECO MAGIRUS & (2) Oshkosh Striker 4x4].
3	**Capability for removal of disabled aircraft**	Removal of disabled aircraft is to be done by aircraft owner or operator.
4	**Remarks**	Nil.

RPVB AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	**Types of clearing equipment**	AD available throughout the year.
2	**Clearance priorities**	1. RWY; 2. TWY; 3. APRON; 4. RWY strip.
3	**Remarks**	Nil.

RPVB AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	**Apron surface and strength**	Surface: CONC. Strength: PCN 51 R/C/X/T.
2	**Taxiway width, surface and strength**	Width: 23M. Surface: CONC. Strength: PCN 51 R/C/X/T.
3	**Altimeter checkpoint location and elevation**	Location: At aircraft stands. Elevation: PB3A - 26.296M; PB3B - 26.236M.
4	**VOR checkpoints**	Nil.
5	**INS checkpoints**	Nil.
6	**Remarks**	Nil.

RPVB AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	**Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands**	Taxiing guidance signs at all intersections with TWY and RWY, and with taxi lane and apron guide lines.
2	**RWY and TWY markings and LGT**	RWY: Designation THR, center line and TDZ marked; THR and edges lighted. TWY: Center line marked, edges lighted.
3	**Stop bars**	Nil.
4	**Remarks**	Nil.

RPVB AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
03/TKOF	Terrain 1694M/5558FT	103953.5960N 1231045.1760E	Communication Antenna 1050.238M	103636.9162N 1230852.8608E	Nil
	Terrain 1557M/5108FT	104610.8250N 1231358.2260E	Communication Antenna 1046.365M	103628.6086N 1230849.7929E	Nil
	Terrain 1544M/5066FT	104649.1590N 1231342.1200E	Communication Antenna 1045.605M	103639.3791N 1230854.5182E	Nil
	Terrain 1464M/4803FT	104658.0690N 1231312.4570E	Communication Antenna 1043.554M	103628.8873N 1230850.8729E	Nil
	Terrain 1144M/3753FT	104059.1250N 1230906.2270E	Communication Antenna 1043.074M	103628.9866N 1230852.1009E	Nil
21/TKOF	Terrain 1896.02M/ 6221FT	103813.0170N 1231408.8222E	Communication Antenna 1039.213M	103638.5840N 1230851.8077E	Nil
	Terrain 1890.02M/ 6201FT	103812.9870N 1231143.4410E	Communication Antenna 1034.105M	103630.0656N 1230850.3652E	Nil
03/21 APCH	Smart Antenna 74M/243FT	104900.9540N 1230220.9820E	Communication Antenna 1033.339M	103638.8468N 1230853.0626E	Nil
	Communication Antenna 60.10M/197FT	104632.7450N 1230045.6100E	High Tension Power Line (TRANSCO power lines) 62.471M	104843.9829N 1230223.9725E	Nil
	Tree 57.30M/188FT	104734.2720N 1230141.2890E	High Tension Power Line (TRANSCO power lines) 60.918M	104858.1948N 1230228.8153E	Nil
03/21 LDG/TKOF	Terrain 7950FT	102435.9990N 1230747.9930E	High Tension Power Line (TRANSCO power lines) 59.396M	104805.5400N 1230222.0817E	Nil
	Terrain 7812FT	102538.9840N 1230829.9890E	High Tension Power Line (TRANSCO power lines) 55.758M	104817.4735N 1230220.5742E	Nil

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
	Terrain 6189FT	103815.0030N 1231408.9880E	High Tension Power Line (TRANSCO power lines) 55.568M	104905.9023N 1230235.5039E	Nil
	Terrain 5253FT	103953.5960N 1231045.1760E	Nil	Nil	Nil
	Terrain 4944FT	104610.8250N 1231358.2260E	Nil	Nil	Nil
	Terrain 3610FT	104100.5200N 1230907.1200E	Nil	Nil	Nil
	Terrain 3550FT	104824.5080N 1231402.7090E	Nil	Nil	Nil
	Antenna 3445FT	103636.9160N 1230852.8610E	Nil	Nil	Nil
	Terrain 860FT	103311.9950N 1223714.9680E	Nil	Nil	Nil
	Terrain 450FT	105511.9920N 1224153.9740E	Nil	Nil	Nil
	Victorias Church Belfry 229.7FT	105218.1660N 1230355.7530E	Nil	Nil	Nil

RPVB AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
03	030º GEO 030º MAG	2002M X 45M	PCN 51 R/C/X/T RWY: CONC SWY: CONC	104607.5404N 1230052.2979E (60.492M/ 198.464FT)	THR 26.061M/ 85.502FT TDZ 26.169M/ 85.856FT
21	210º GEO 210º MAG	2002M X 45M	PCN 51 R/C/X/T RWY: CONC SWY: CONC	104704.0084N 1230125.2375E (60.502M/ 198.497FT)	THR 25.707M/ 84.340FT TDZ 26.174M/ 85.873FT

Slope of RWY-SWY	SWY dimensions	CWY dimensions	Strip dimensions	OFZ	Remarks
7	8	9	10	11	12
0.0233% Downhill towards THR21	60M X 45M	640M X 300M	3400M X 315M	Nil	Nil
0.0233% Uphill towards THR03	60M X 45M	280M X 300M	3400M X 315M	Nil	Nil

RPVB AD 2.13 DECLARED DISTANCES

RWY Designator	TORA	TODA	ASDA	LDA	Remarks
1	2	3	4	5	6
03	2002M	2642M	2062M	2002M	Turning Pads at both ends: 60M x 67M.
21	2002M	2282M	2062M	2002M	

RPVB AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
03	PALS 900M LIH	Green w/ WBAR	PAPI Left 3.0°	Nil
21	SALS 420M LIH	Green	PAPI Left 3.0°	Nil

RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	2002M, 60M White/Yellow LIH	Red	60M Red	Path WID 0.6º, VIS RG >4NM DAY. VER OBST CLR >1º. Horizontal OBST CLNC ± 10º FM RWY CL.
Nil	2002M, 60M White/Yellow LIH	Red	60M Red	Path WID 0.3º, VIS RG >4NM DAY. VER OBST CLR >1º. Horizontal OBST CLR ± 10º FM RWY CL.

RPVB AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	**ABN/IBN location, characteristics and hours of operation**	Location: On top of TWR. Characteristics: ALTN FLG W G EV 2.5 seconds. HR OF OPS: Night time or during inclement WX.
2	**LDI location and LGT Anemometer location and LGT**	LDI: Nil. Anemometer: Not lighted (Obstruction light only).
3	**TWY edge and centre line lighting**	Edge: All TWY. Centre line: Nil.
4	**Secondary power supply/switch-over time**	Secondary power supply to all lighting at AD. Switch-over time 10 seconds.
5	**Remarks**	Nil.

RPVB AD 2.17 ATS AIRSPACE

1	**Designation and lateral limits**	BACOLOD AERODROME TRAFFIC ZONE (ATZ): A circle radius 5NM centered on 104635.7744N 1230108.7677E. BACOLOD CONTROL ZONE (CTR): A circle radius 10NM centered on 104631.0215N 1230113.9294E (BCD DVOR/DME). BACOLOD/ILOILO TERMINAL CONTROL AREAS (TMA): 110943.5168N 1222103.3856E - 112502.7139N 1230839.5182E - 105854.9206N 1232841.5486E thence along an arc 50NM radius centered on MCT DVOR/DME (101848.8430N 1235917.8660E) counter clockwise - 101607.1470N 1230838.9870E - 094725.8489N 1225906.2899E - 095955.6899N 1222305.0419E - 104555.5034N 1220405.0553E - 110943.5168N 1222103.3856E.
2	**Vertical limits**	ATZ: SFC up to but excluding 2000FT ALT. CTR: SFC up to 1500FT ALT. TMA: 1500FT to FL200 (exc ATS routes at FL130 & above). 1500FT to <FL130 (ATS routes inside TMA below FL130). FL130 to FL200 (ATS routes inside TMA at FL130 & above).
3	**Airspace classification**	ATZ - B; CTR - D; TMA - D; (exc ATS routes at FL130 & above; ATS routes inside TMA below FL130) and A (ATS routes inside TMA at FL130 & above).
4	**ATS unit call sign** **Languages(s)**	ATZ - Bacolod Control Tower. CTR/TMA - Bacolod Approach. In English.
5	**Transition altitude**	11000FT.
6	**Remarks**	Nil.

RPVB AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
TWR	Bacolod Tower	118.8MHZ	H24	PRI FREQ.
		5205KHZ		P/P PRI FREQ (Mactan Network).
		3872.5KHZ		P/P SRY FREQ.
		121.5MHZ		EMERG FREQ.
APP	Bacolod Approach	121.0MHZ		PRI FREQ.

RPVB AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
DVOR	BCD	115.3MHZ	H24	104631.0215N 1230113.9294E	Nil	Coverage: DVOR/DME-59NM at 8000FT R182. Output - 1KW.
DME	BCD	CH100X		104630.8256N 1230114.2257E	32.16M/ 105.512FT	
ILS RWY03						
LOC	IBCD	109.7MHZ	H24	104726.2951N 1230138.2384E	Nil	Coverage: 25NM (±10º); 17NM (±35º). Power Output 15W (Course), 7.5W (Clearance). WID 4.3º. 791.1M FM THR03.
GP		333.2MHZ		104614.6520N 1230101.0022E	Nil	Coverage: >10NM. Power Output 3W (Course SB1), 0.4W (Course SB2), 2.5W (Clearance). Path WID 0.75º. Path Angle 3.0º 120M FM RWY CL 320M FM THR of RWY03.
DME		CH34X		104614.6520N 1230101.0022E	39.368M/ 129.160FT	Coverage: >10NM. Power Output 100W.
Middle Marker		75MHZ		104541.4874N 1230037.1120E	Nil	Power Output 3W.

RPVB AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Taxiing to and from stands

1.1 Arrival

1.1.1 While taxiing, flight crew must contact Bacolod Tower for parking bay assignment.

1.1.2 In anticipation for taxi out with power on at parking bay 1 and/or 5, parking bays 2, 6 and/or parking bays 4, 7 must not be occupied respectively.

1.1.3 The solid yellow nose guide lines shall be used for all arrival aircraft.

1.1.4 All aircraft may taxi-in with power using Taxiway A or Taxiway B to the respective bay assignments and must be assisted by wing marshals/walkers.

1.2 Departure

1.2.1 Tower clearance must be obtained prior to maneuvering from the parking bays.

1.2.2 When jet aircraft is taxiing out with minimum power and maximum turning radius at parking bay 1, lead left hand (LH) side to taxiway. When taxiing out with power at parking bay 5 lead right hand (RH) side to taxiway.

1.2.3 Aircraft pushback and start engine on the designated S1 and S2 only.

1.2.4 All aircraft push back and tow out operations must be assisted by wing marshals/walkers.

1.2.5 When turbo propeller aircraft with minimum turning radius at parking bay 6, lead left hand (LH) side, at parking bay 7 lead right hand (RH) side to taxiway and must be assisted by wing marshals/ walkers.

2. Parking

2.1 Assignment of Parking Bays:

a. Parking bays 1, 2, 3, 4 and 5 are for A320 and smaller category aircraft.

b. Parking bay 3 is for A330 and smaller category aircraft.

c. Parking bays 6 and 7 are for turbo propeller aircraft with wing span and length of not more than 29M and 33M respectively.

RPVB AD 2.22 FLIGHT PROCEDURES

1. Arrival and Departure Procedures

1.1 VFR Procedures in RWY03

1.1.1 Departure

1.1.1.1 East bound (Cebu) aircraft shall turn Right north-eastward (Approximately along R060 of BCD) and report 5NM. Continue eastward to SOLAR FARM. Advise switching frequency.

1.1.1.2 South bound (Dumaguete/Sipalay) aircraft shall turn Left for a left downwind departure towards BREDCO. Continue flying on a southwest direction and report BAGO. Turn Left southward to SAN ENRIQUE. Report over HINIGARAN. Advise switching frequency.

a. West bound (Iloilo) aircraft shall turn Left for a left downwind departure towards BREDCO. Continue flying westward and report approaching BUENAVISTA. Advise switching frequency.

b. West bound (Iloilo) aircraft shall return Left towards SARABIA. Turn Left westward and report approaching BAROTAC. Advise switching to Iloilo Tower frequency.

1.1.1.3 North bound (Kalibo, Roxas, Caticlan and Sicogon) aircraft shall turn Left towards SARABIA. Continue northwest towards SAN RAFAEL. Advise switching frequency.

1.1.2 Arrival

1.1.2.1 From the Northeast: Report to Bacolod Approach over CADIZ. Continue north-westward to ABM LAKAWON. Turn left and continue south-westward to MANAPLA and report over VICTORIAS. Request to join left downwind RWY03 or proceed as instructed by ATC.

1.1.2.2 From the Southeast: Report to Bacolod Approach over ISABELA. Continue north towards LA CARLOTA. Turn right north-northeast towards MURCIA. Turn left north-eastward and report over SANMIG. Request to join Right Base of RWY03 or proceed as instructed by ATC.

1.1.2.3 From the North: Report to Bacolod Approach over AJUY. Continue on a southwest direction to CULASI. Turn left southeast and report over VICTORIAS. Request to join left downwind of RWY03 or proceed as instructed by ATC.

1.1.2.4 From the West: Report to Bacolod Approach over DUMANGAS. Continue eastward and report over BALARING. Request to join left downwind of RWY03 or proceed as instructed by ATC.

1.2 VFR Procedures in RWY21

1.2.1 Departure

1.2.1.1 East bound (Cebu) aircraft shall turn Left for a left downwind departure and proceed north-eastward (Approximately along R060 of BCD) and report 5NM. Continue eastward to SOLAR FARM. Advise switching frequency.

1.2.1.2 South bound (Dumaguete/Sipalay) aircraft shall turn Right towards BREDCO. Continue flying on a southwest direction and report over BAGO. Turn Left southward to SAN ENRIQUE and report over HINIGARAN. Advise switching frequency.

a. West bound (Iloilo) aircraft shall turn Right towards BREDCO. Turn Right on a southwest direction and report approaching BUENAVISTA. Advise switching frequency.
b. West bound (Iloilo) aircraft shall turn Right for a right downwind departure towards SARABIA. Turn Left westward and report approaching BAROTAC. Advise switching to Iloilo Tower frequency.

1.2.1.3 North bound (Kalibo, Roxas, Caticlan and Sicogon) aircraft shall turn Right for a right downwind departure towards SARABIA. Continue northwest towards SAN RAFAEL. Advise switching frequency.

1.2.2 Arrival

1.2.2.1 From the Northeast: Report to Bacolod Approach over CADIZ. Continue north-westward to ABM LAKAWON. Turn Left south-westward to MANAPLA and report over VICTORIAS. Request for straight-in approach RWY21 or proceed as instructed by ATC.

1.2.2.2 From the Southeast: Report to Bacolod Approach over ISABELA. Continue north towards LA CARLOTA. Turn Right noth-northeast towards MURCIA. Turn Left northeast ward and report over SANMIG. Request to join left downwind of RWY21 or proceed as instructed by ATC.

1.2.2.3 From the North: Report to Bacolod approach over AJUY. Continue on a southwest direction to CULASI. Turn Left south-eastward and report over VICTORIAS. Request for straight-in approach RWY21 or proceed as instructed by ATC.

1.2.2.4 From the West: Report to Bacolod Approach over DUMANGAS. Continue eastward and report over BALARING. Request to join right downwind of RWY21 or proceed as instructed by ATC.

2. Procedures for VFR Flights Bound for Iloilo

2.1 From the North: Report to Bacolod Approach over DUMARAO. Continue on a southwest direction and report over PASSI. Report approaching POTOTAN and request to switch to Iloilo Tower or proceed as instructed by ATC.

2.2 From the Northeast: Report to Bacolod Approach over CADIZ. Continue north-westward to ABM LAKAWON. Turn Left south-westward to MANAPLA and report over VICTORIAS. Turn Right westward to SARABIA. Continue westward and report approaching BAROTAC. Advise switching to Iloilo Tower or proceed as instructed by ATC.

2.3 From the Southeast: Report to Bacolod Approach over ISABELA. Continue on a northerly direction towards LA CARLOTA. Turn Left northwest towards BAGO and report approaching BUENAVISTA. Advise switching to Iloilo Tower or proceed as instructed by ATC.

2.4 From the Southwest: Report to Bacolod Approach over MIAG-AO. Continue on a north-westward direction and report approaching GUIMBAL. Advise switching to Iloilo Tower or proceed as instructed by ATC.

3. Procedures for VFR Departure from Iloilo

3.1 North bound (Kalibo, Caticlan and Roxas) aircraft shall report to Bacolod Approach over LAMBUNAO. Continue on a northwest direction and report ABM CALINOG. Advise switching frequency or proceed as instructed by ATC.

3.2 North bound aircraft shall report to Bacolod Approach over BAROTAC. Continue northeast towards SAN RAFAEL. Advise switching frequency or proceed as instructed to ATC.

3.3 Southeast bound (Dumaguete/Sipalay) aircraft shall report to Bacolod Approach over JORDAN PORT. Continue southeast towards NADULAO. Report over SAN ENRIQUE. Turn Right southward to HINIGARAN. Advise switching frequency or proceed as instructed by ATC.

3.4 Southwest bound aircraft shall report to Bacolod Approach approaching MIAG-AO. Advise switching frequency or proceed as instructed by ATC.

4. VFR Helicopter Operations

4.1 General

4.1.1 VFR helicopter flights shall be treated as fixed wing aircraft and will follow the same established VFR routes and procedures for Bacolod airport.

4.1.2 Except when clearance is obtained from Bacolod Control Tower, VFR helicopter flights shall not take-off/lift-off or land at the Bacolod airport or enter its aerodrome traffic zone (ATZ) when the:

a. ceiling is less than 150M (500FT);

b. ground visibility is less than 1500M (1 Mile).

4.1.3 Helicopters operating VFR may be allowed outside controlled airspace with flight visibility below 1500M (1 Mile) provided that:

a. the helicopter is clear of clouds and ground or water is in sight at all times;

b. the helicopter shall be maneuvered at a speed that will give adequate opportunity to observe other traffic or any obstruction to avoid collision.

5. List of VFR Reporting Points

DESIGNATOR	COORDINATES	DISTANCE (NM)	RELATIVE POSITION FROM ARP	DESCRIPTION
ABM CALINOG	110829.1700N 1222958.7600E	37.5	NW	Panay River west of Calinog Municipality
ABM LAKAWON	110008.2900N 1231202.8400E	17.0	NNE	Cadiz Viejo Port nearest to Lakawon Island
AQUINO INTERSECTION	104501.0000N 1223219.4600E	5.6	SE	Intersection of C-1 & Old Iloilo-Capiz Road
AJUY	111016.7000N 1230112.0400E	23.6	NW	Ajuy Municipal Building
ALIMODIAN	104716.3800N 1222550.7100E	4.6	SW	Alimodian-Leon Junction Road
BAGO	103214.4400N 1225007.5900E	18.0	SW	Manuel Torres Coliseum at Bago
BALARING	104941.5200N 1225658.1900E	5.0	NW	Coastal area of Barangay Balaring
BAROTAC	105344.2100N 1224215.4000E	20.0	W	Barotac Nuevo Parish Church Building
BREDCO	104129.0100N 1225609.8800E	7.0	SW	Bredco Port in Bacolod City
BUENAVISTA	104151.6000N 1223852.3000E	22.4	SW	Town Hall Building of Buenavista
CADIZ	105720.4500N 12318.37.9300E	20.0	NE	City Hall Building and Plaza of Cadiz
CULASI	110432.1200N 1225918.3300E	18.0	NW	Barangay Culasi Port Area
DUMANGAS	104914.1200N 1224245.8600E	18.3	W	Parish Church of Dumangas Municipality
DUMARAO	111544.3200N 12241.15.4300E	35.0	NW	Dumarao Church building

DESIGNATOR	COORDINATES	DISTANCE (NM)	RELATIVE POSITION FROM ARP	DESCRIPTION
GUIMBAL	103927.5800N 1221918.4800E	41.7	SW	Guimbal Town Fish Port
HINIGARAN	101615.8200N 1225102.8700E	31.8	SSW	Hinigaran Parish Church Building
ISABELA	101350.8900N 1225710.9800E	32.8	S	Old and New Bridge near the town of Isabela
JORDAN PORT	104002.4200N 1223519.6700E	26.2	SW	Jordan Jetty Port
LAMBUNAO	110319.0400N 1222828.6300E	36.2	NW	Town Hall Building and Plaza of Lambunao
LA CARLOTA	102336.4600N 1225611.9700E	23.4	SSW	La Carlota Milling in La Carlota City
LEON	104649.8900N 1222317.7500E	7.0	SW	Leon Town Plaza
MAASIN	105328.6200N 1222558.2600E	5.0	NW	Town Hall Building and Plaza of Maasin
MANAPLA	105733.5400N 1230727.0900E	12.5	N	Catholic Church Building of Manapla
MIAG-AO	103831.0000N 1221447.9600E	47.0	SW	Church in Miag-ao Municipality
MURCIA	103704.7500N 1230057.8200E	9.5	S	Tanduay Distillery in Murcia
NADULAO	103031.1300N 1224415.2900E	23.0	SW	Nadulao Island near Guimaras and Bacolod
NEW LUCENA	105241.3900N 1223549.1500E	6.7	NE	Circular Sports Building in the Town Plaza
PASSI	110702.3400N 1223846.4600	30.0	NW	Passi City Hall Building
PAVIA	104611.6500N 1223251.2400E	5.0	SE	Anilao Bridge, Near Diverging Flood Canal
POTOTAN	105636.9400N 1223809.1300E	24.7	WNW	Pototan Sports Complex / Municipality Plaza
SANMIG	103953.8800N 1230014.0100E	6.7	SSW	San Miguel Brewery near Santa Fe Resort
SAN ENRIQUE	102457.6600N 1225106.7400E	23.7	SW	San Enrique Parish Church Building
SAN RAFAEL	111028.1500N 1224943.4600E	26.3	NW	Iglesia ni Cristo Church in San Rafael
SARABIA	105244.8100N 1225841.9100E	6.5	NNE	E.B. Magalona Town Hall Building
STA. BARBARA	104939.7000N 1223156.3700E	2.3	E	Sta. Barbara Town Parish Church & Convent
SOLAR FARM	105531.8800N 1231758.4400E	18.8	NE	Solar Power Plant Farm in Cadiz
VICTORIAS	105253.7000N 1230350.4400E	6.8	N	Victorias Milling Compund
ZARRAGA	104924.8100N 1223635.3700E	6.9	E	Parish Church Building of Zarraga

VFR AREA CHART

AD ELEV 85.87 ft

APP - 121.0
TWR - 118.8

BACOLOD VFR AREA

SILAY/Bacolod (RPVB)

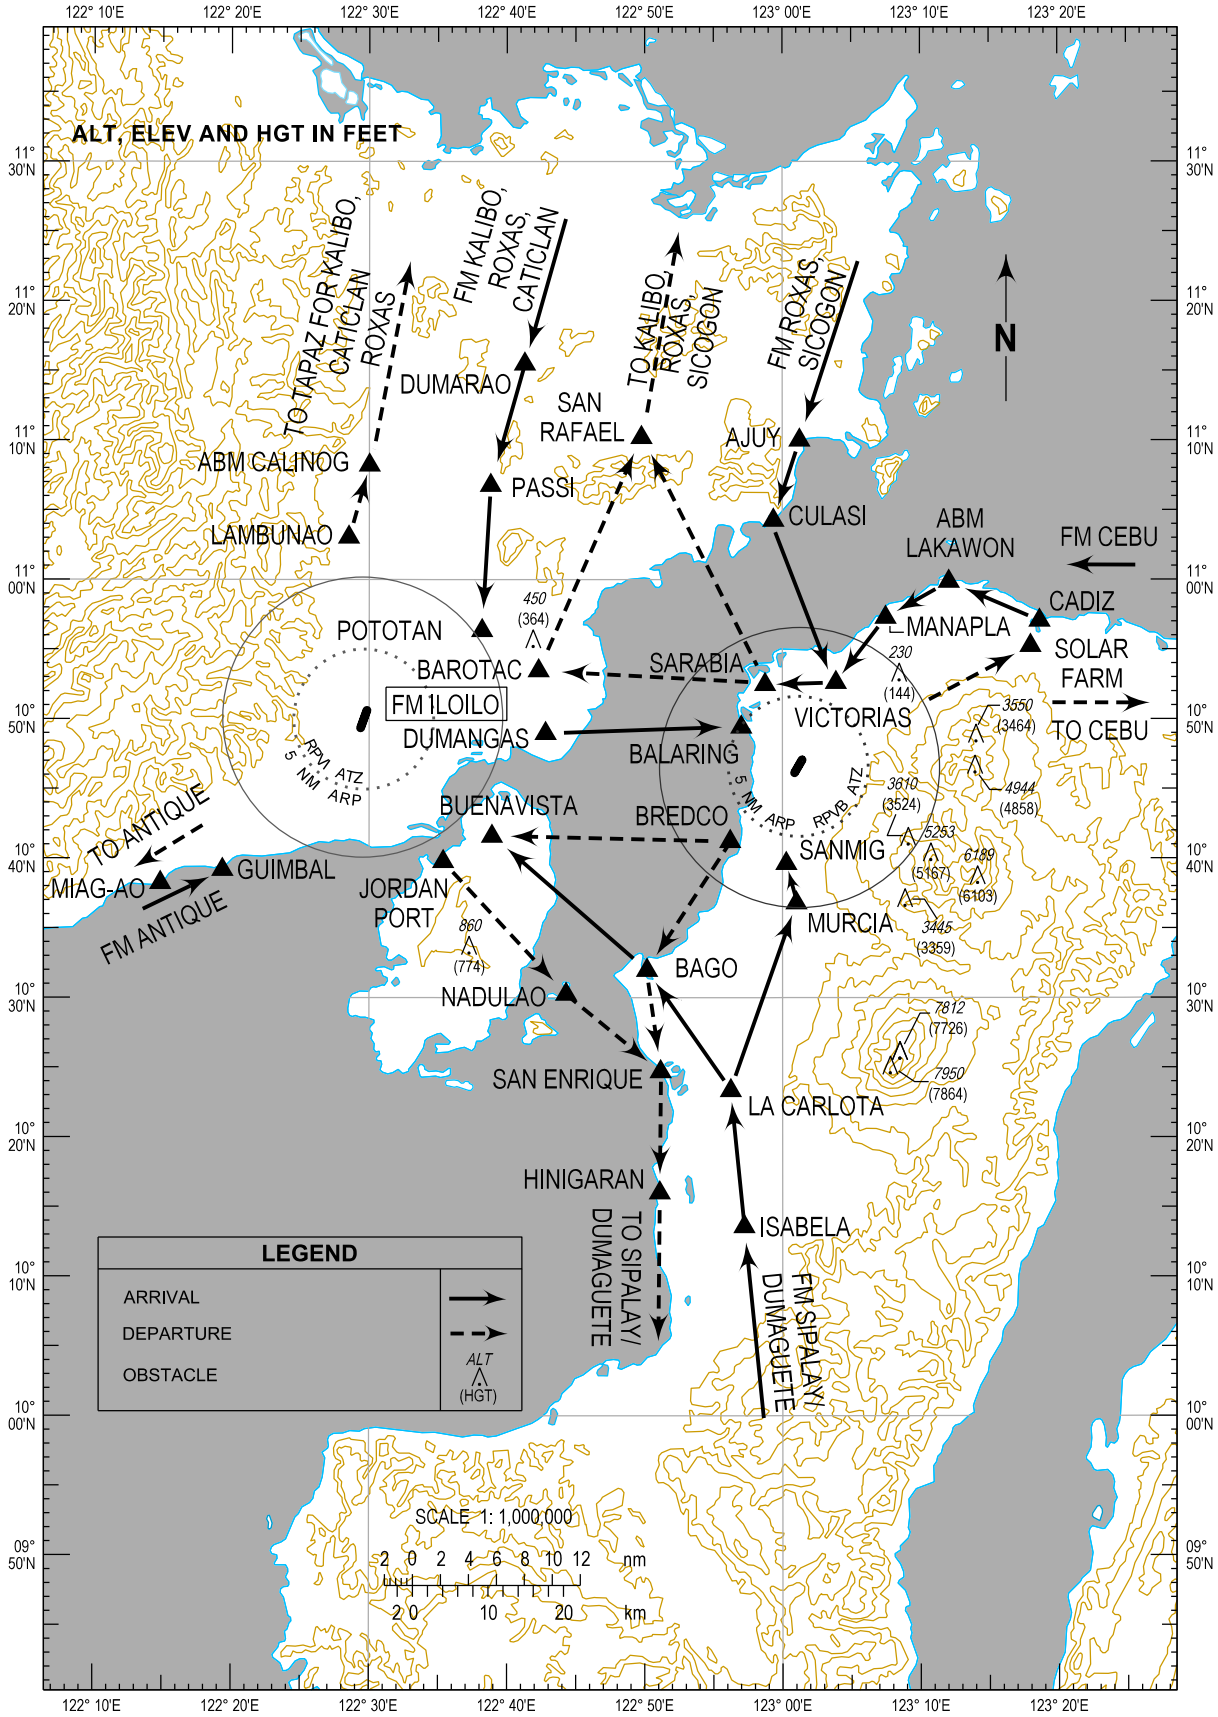

VFR AREA CHART

AD ELEV 85.87 ft

APP - 121.0
TWR - 118.8

BACOLOD-ILOILO VFR AREA

SILAY/Bacolod (RPVB)

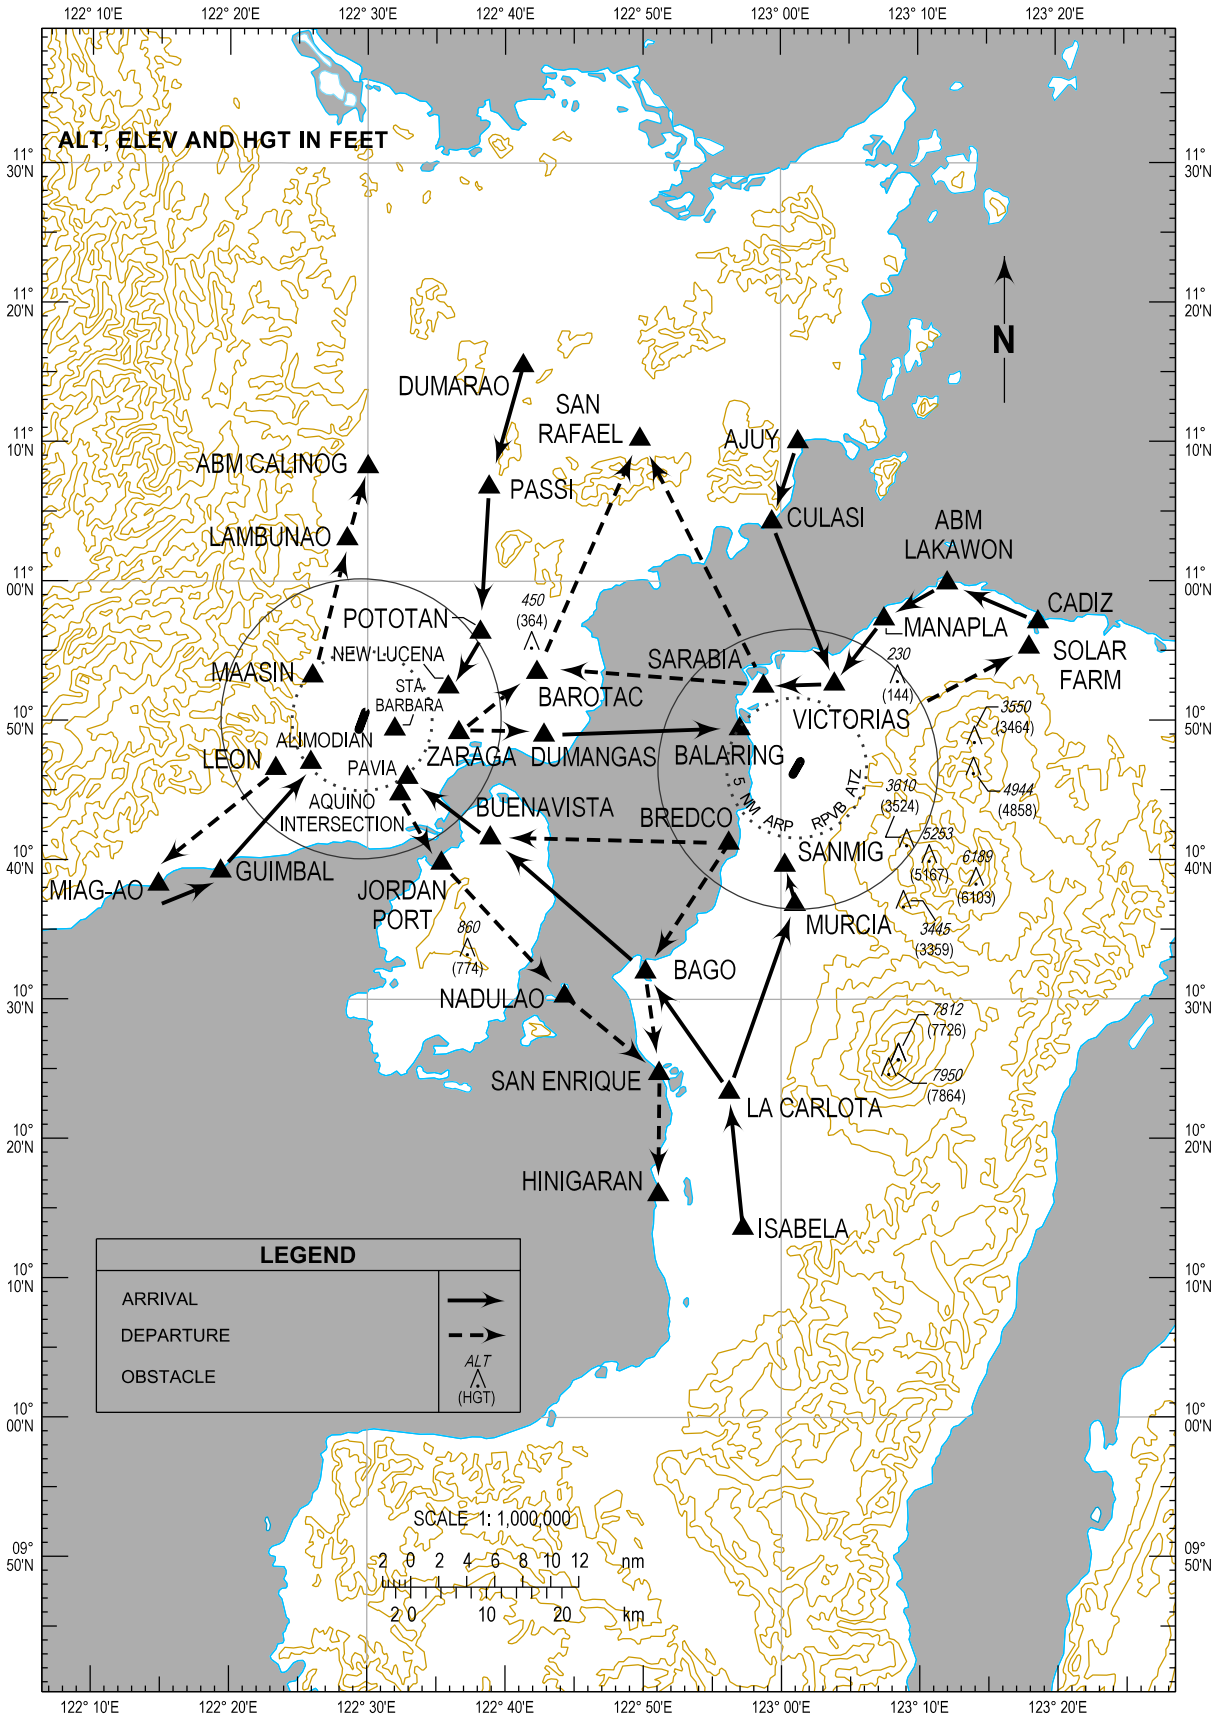

RPVB AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Aerodrome Chart - ICAO	RPVB AD 2 - 17
Aircraft Parking/Docking Chart - ICAO	RPVB AD 2 - 18
Aerodrome Ground Movement Chart - ICAO	RPVB AD 2 - 19
Aerodrome Obstacle Chart - ICAO Type A (for each runway)	RPVB AD 2 - 21
Area Chart (Departure, Arrival and Track Routes)	see RPVM Area Chart
Standard Departure Chart - Instrument - ICAO	RPVB AD 2 - 23
Standard Departure Chart - Instrument - ICAO (DEEPS 2A/2B)	RPVB AD 2 - 25
Standard Departure Chart - Instrument - (RNAV SID RWY03)	RPVB AD 2 - 27
Standard Departure Chart - Instrument - (RNAV SID RWY21)	RPVB AD 2 - 31
Standard Arrival Chart - Instrument - ICAO	RPVB AD 2 - 35
Standard Arrival Chart - Instrument - (RNAV STAR RWY03)	RPVB AD 2 - 37
Standard Arrival Chart - Instrument - (RNAV STAR RWY21)	RPVB AD 2 - 41
Tracking System within Bacolod/Iloilo, Kalibo and Mactan TMAs	RPVB AD 2 - 47
Instrument Approach Chart - ICAO (ILS or LOC RWY03)	RPVB AD 2 - 51
Instrument Approach Chart - ICAO (VOR RWY03)	RPVB AD 2 - 52
Instrument Approach Chart - ICAO (VOR RWY21)	RPVB AD 2 - 53
Instrument Approach Chart - ($RNAV_{(GNSS)}$ RWY03)	RPVB AD 2 - 55
Instrument Approach Chart - ($RNAV_{(GNSS)}$ RWY21)	RPVB AD 2 - 57
Traffic Circuit Chart (RWY03)	RPVB AD 2 - 59
Traffic Circuit Chart (RWY21)	RPVB AD 2 - 60